


abseil-cpp/absl/types
/bad_optional_access.h

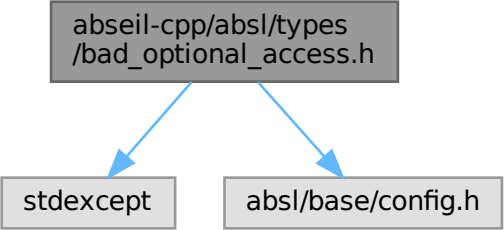

```
graph TD; A["abseil-cpp/absl/types  
/bad_optional_access.h"] --> B["stdexcept"]; A --> C["absl/base/config.h"]
```

The diagram illustrates the dependencies of the header file `abseil-cpp/absl/types/bad_optional_access.h`. It is represented as a box at the top with two blue arrows pointing downwards to two other boxes. The left box contains the text `stdexcept`, and the right box contains the text `absl/base/config.h`.

`stdexcept`

`absl/base/config.h`