


abseil-cpp/absl/random  
/internal/randen\_traits.h

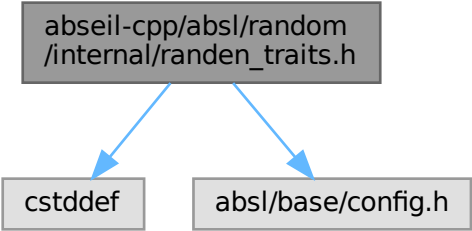

```
graph TD; A["abseil-cpp/absl/random<br/>/internal/randen_traits.h"] --> B["cstddef"]; A --> C["absl/base/config.h"]
```

The diagram illustrates the dependencies of the file `abseil-cpp/absl/random/internal/randen_traits.h`. It is represented as a box at the top, with two blue arrows pointing downwards to two other boxes. The left box contains the text `cstddef`, and the right box contains the text `absl/base/config.h`.

cstddef

absl/base/config.h