


abseil-cpp/absl/base  
/internal/throw\_delegate.h

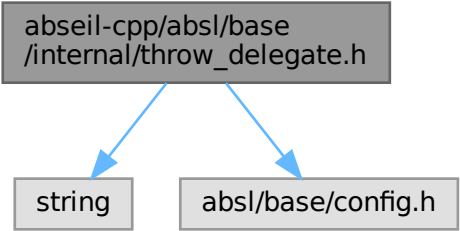

```
graph TD; A["abseil-cpp/absl/base<br>/internal/throw_delegate.h"] --> B["string"]; A --> C["absl/base/config.h"]
```

The diagram illustrates the dependencies of the file `abseil-cpp/absl/base/internal/throw_delegate.h`. It is represented by a dark gray box at the top. Two blue arrows point downwards from this box to two light gray boxes below it. The left arrow points to a box containing the text `string`. The right arrow points to a box containing the text `absl/base/config.h`.

string

absl/base/config.h