


OriginalStuff/abseil
-cpp/absl/types/bad_variant
_access.h

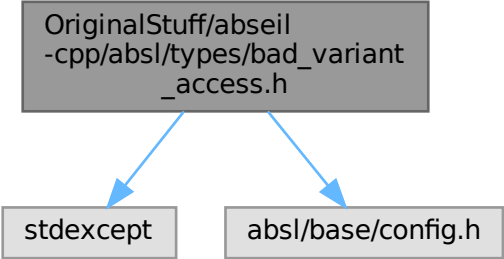

```
graph TD; A["OriginalStuff/abseil  
-cpp/absl/types/bad_variant  
_access.h"] --> B["stdexcept"]; A --> C["absl/base/config.h"]
```

The diagram illustrates the dependencies of the file `OriginalStuff/abseil-cpp/absl/types/bad_variant_access.h`. It is represented as a box at the top, with two blue arrows pointing downwards to two other boxes: `stdexcept` on the left and `absl/base/config.h` on the right.

stdexcept

absl/base/config.h