


OriginalStuff/abseil
-cpp/absl/base/internal
/strerror.h

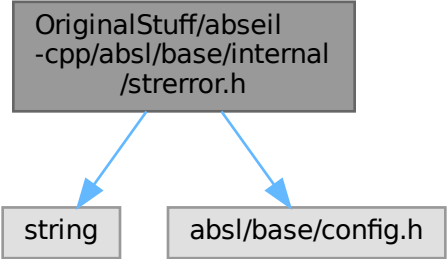

```
graph TD; A[OriginalStuff/abseil-cpp/absl/base/internal/strerror.h] --> B[string]; A --> C[absl/base/config.h]
```

The diagram illustrates the dependencies of the file 'OriginalStuff/abseil-cpp/absl/base/internal/strerror.h'. It is represented by a dark gray box at the top. Two blue arrows point downwards from this box to two light gray boxes below it. The left arrow points to a box containing 'string', and the right arrow points to a box containing 'absl/base/config.h'.

string

absl/base/config.h