



25-11-12_update

Placing classes with non continuous color pallets next to each other

```
classify_boot_blend(bidata, simpleplot, n = 100, res = 101, method = "qda")+  
  theme(legend.position = "none")+  
ggplot(bidata, aes(x = x, y = y, fill = class))+  
  geom_classify(method = "qda")+  
  geom_point_fill() + plot_layout(guides = "collect", axes = "collect")
```

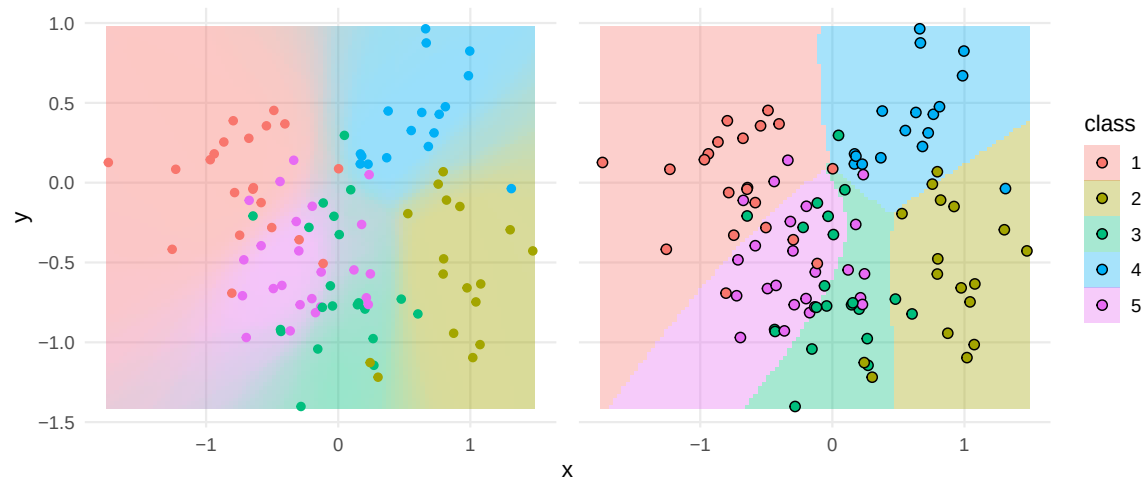


Same plot with KNN

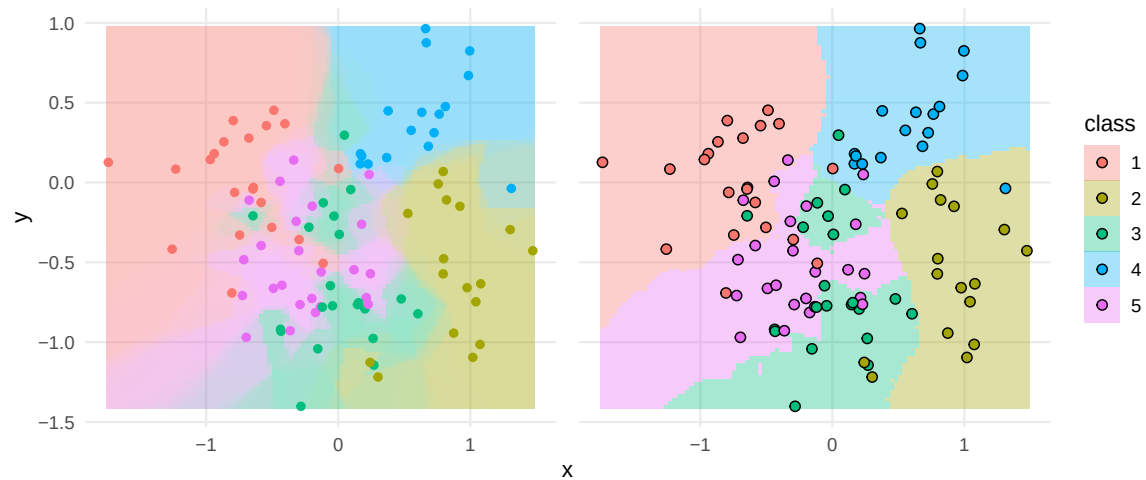

Repeating those plots using the binned proportion of the plurality class.


```
classify_boot_blend(bidata, simpleplot, n = 100, res = 101, method = "qda", style = "fade")+  
  
ggplot(bidata, aes(x = x, y = y, fill = class))+  
  geom_classify(method = "qda")+  
  theme(legend.position = "none")+  
  geom_point_fill() + plot_layout(guides = "collect", axes = "collect")
```

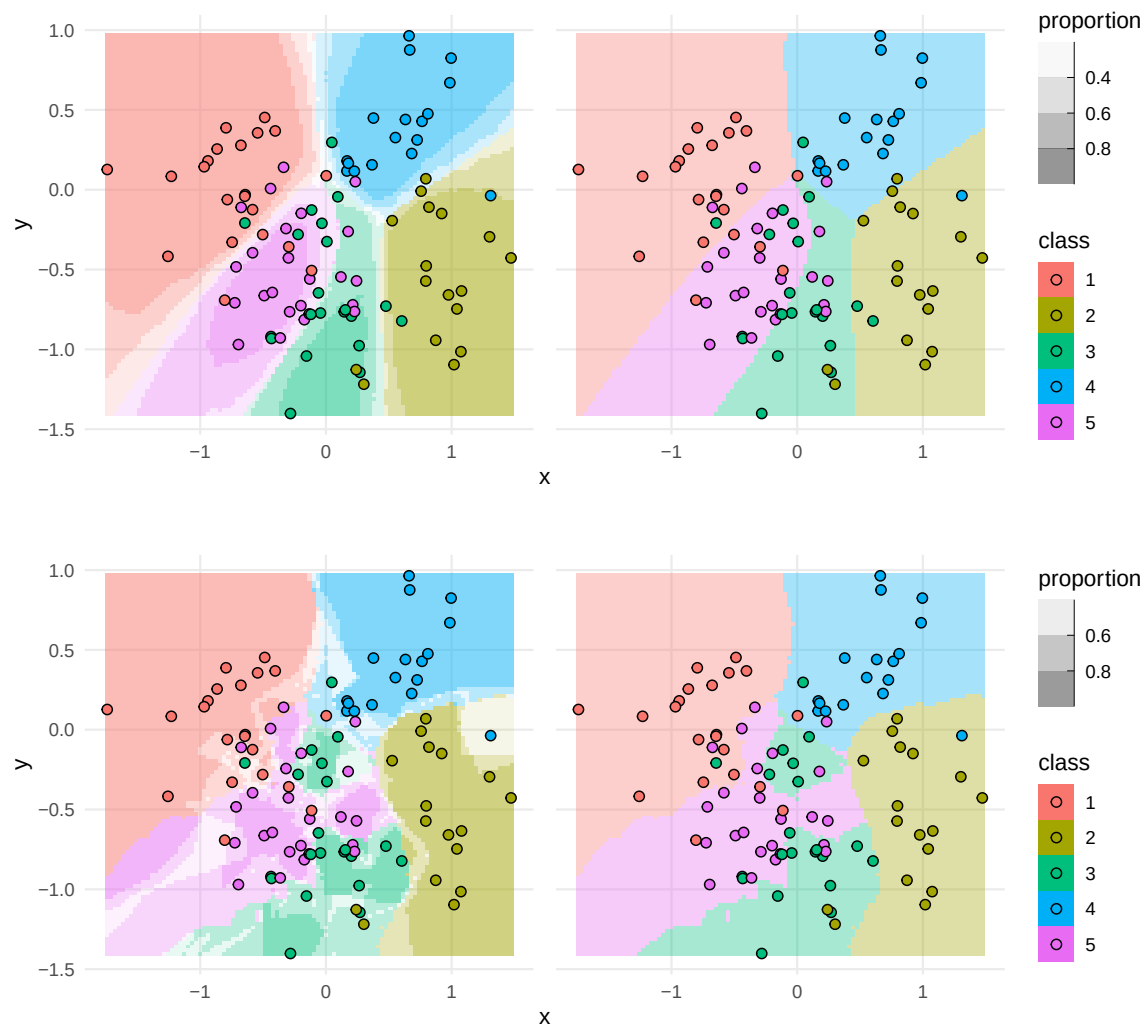

geom_point_cluster


```
kmeans_spec_5 <- k_means(num_clusters = 5) |> set_engine("stats")

(ggplot(bidata, aes(x, y))+
  geom_point_cluster(method = kmeans_spec_5))/
(ggplot(bidata, aes(x, y))+
  geom_point_fill(aes(fill = class)))
```

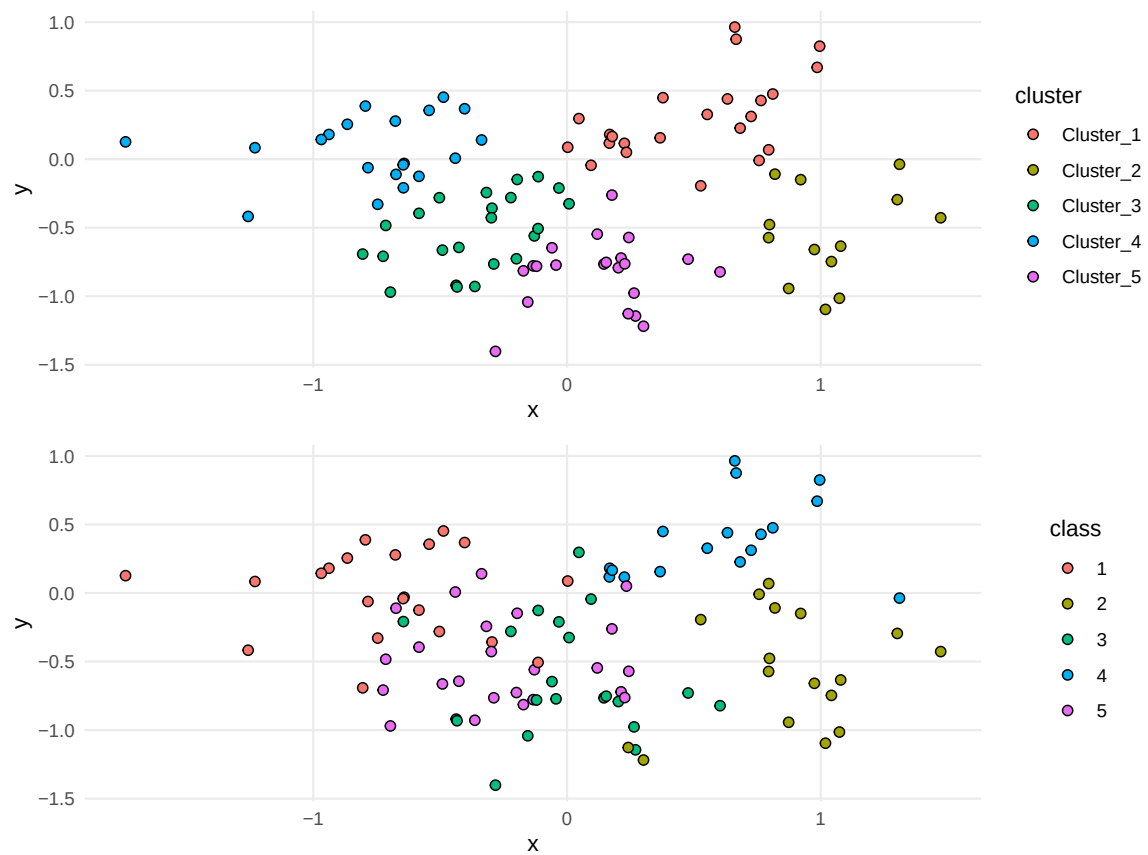


geom_point_classify

```
ggplot(bidata, aes(x, y, fill = class))+  
  geom_point_classify()
```

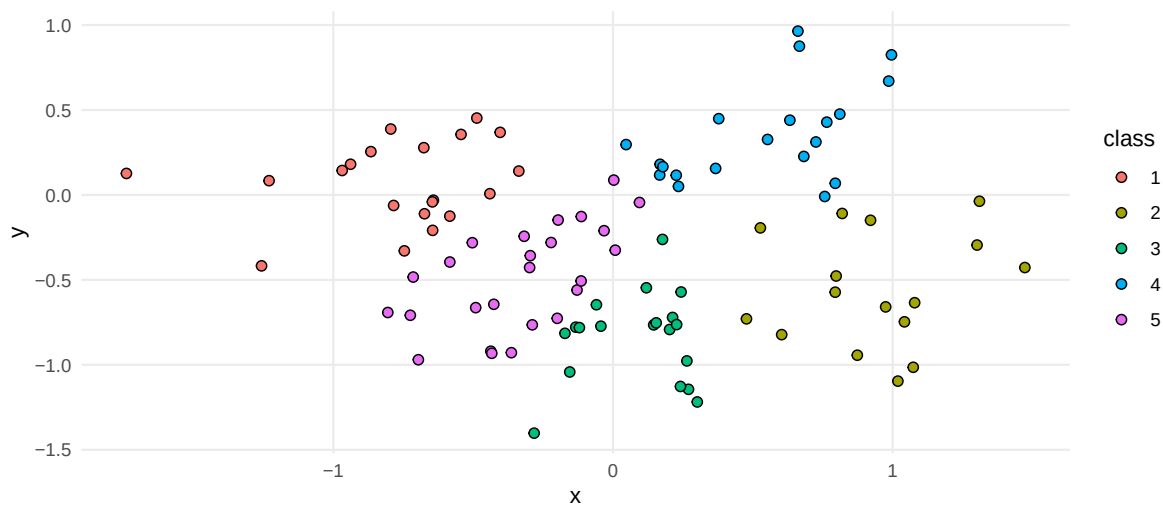


color can be used instead of fill via the class afterstat

```
ggplot(bidata, aes(x, y, fill = class)) +  
  stat_point_classify(geom = GeomPoint, aes(col = after_stat(class)), shape = 19)
```

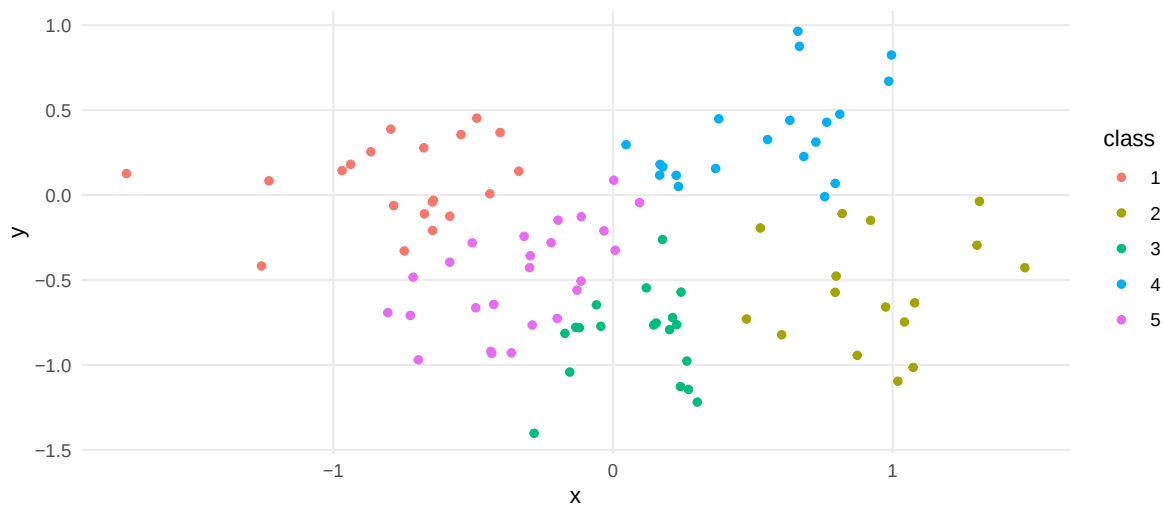

An interesting way to see where the classifier fails is combining color and fill, or color and shape

```
ggplot(penguins, aes(bill_len, bill_dep, fill = species, col = species)) +
  geom_point_classify()
```

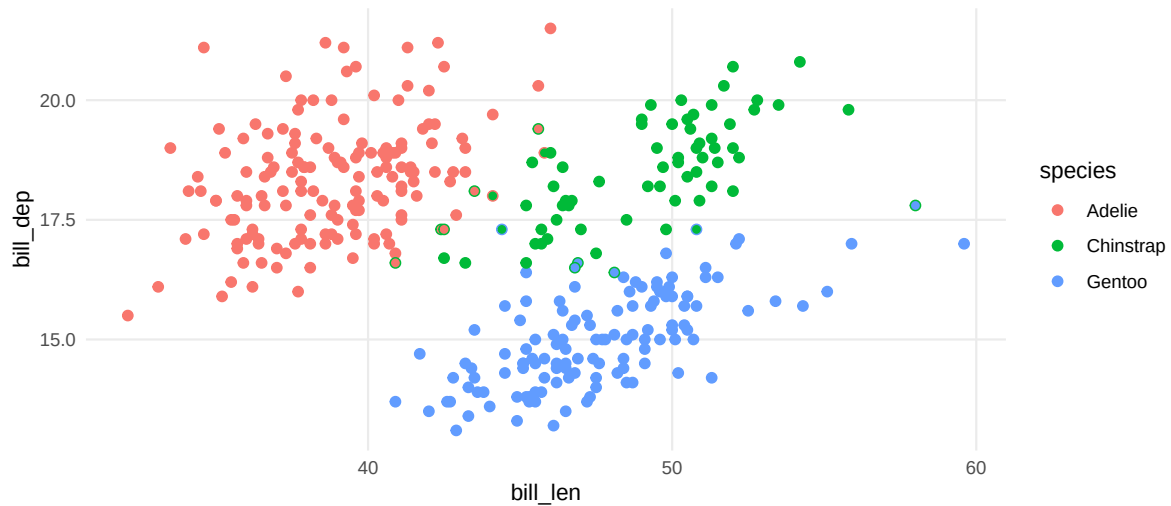

```
ggplot(penguins, aes(bill_len, bill_dep, fill = species)) +
  stat_point_classify(geom = GeomPoint,
    aes(col = after_stat(class), shape = species))
```

