
Kelompok 6

Aslam Thariq Akbar Akrami A11.2021.13224


Liem Nathaniel A11.2021.13226

Kurnia Andi Saifani A11.2021.13706


Login Page

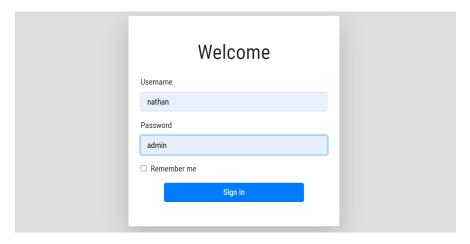


Home Page




Index Barang Page

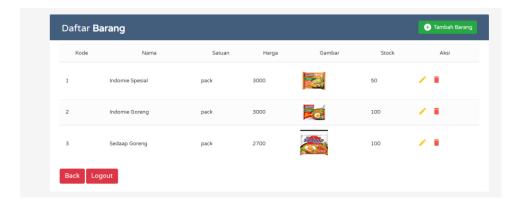


Delete Barang Page

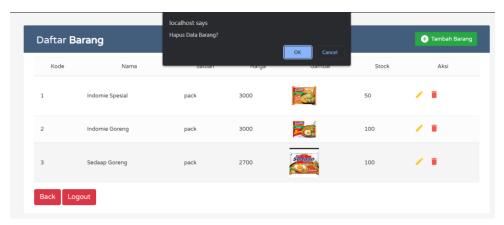


Hasil Delete Barang

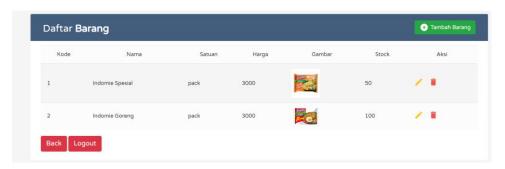


Tambah Barang Page

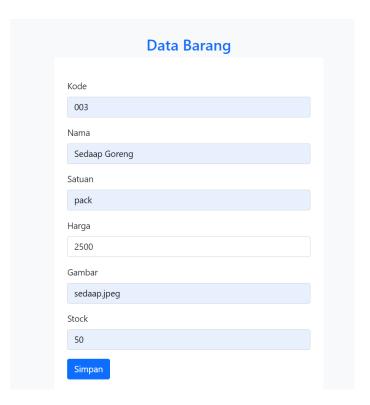


Hasil Tambah Barang

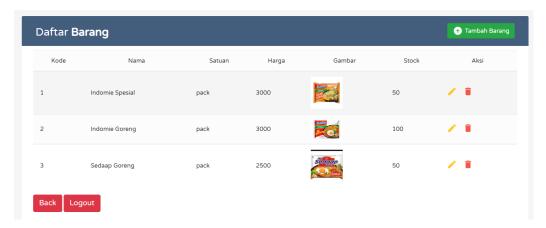


Edit Barang Page

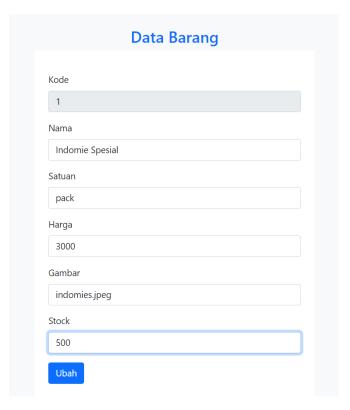


Hasil Edit Barang

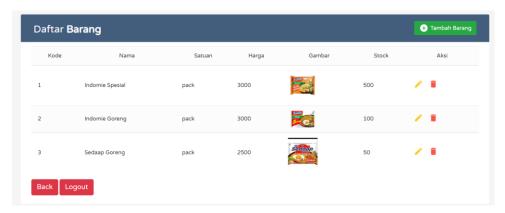

Index User Page

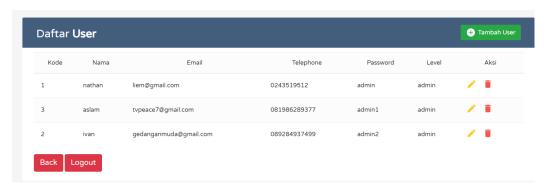


Delete User Page

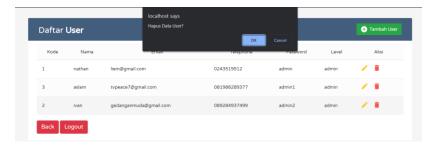


Hasil Delete User




Tambah User Page

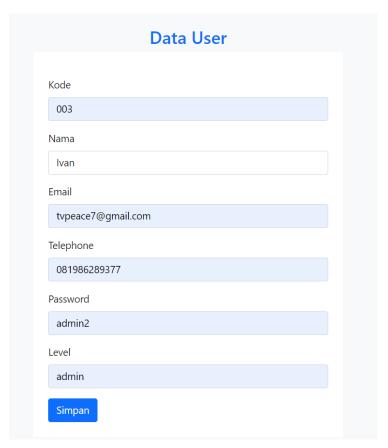


Hasil Tambah User

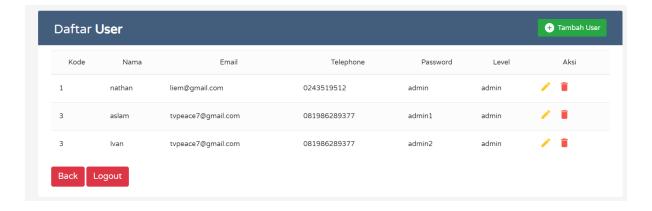

Edit User Page

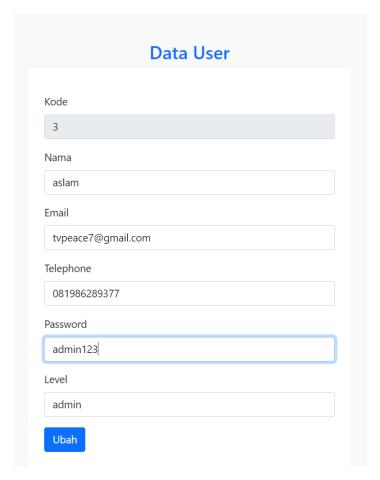

Hasil Edit User

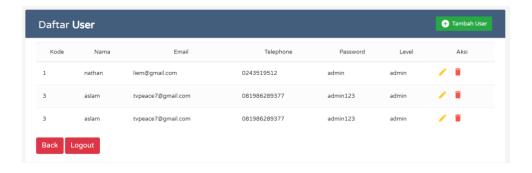

DATABASE

Barang

#	Name	Туре	Collation	Attributes	Null	Default
1	kode 🔑	int(10)			No	None
2	nama	varchar(20)	latin1_swedish_ci		No	None
3	satuan	varchar(10)	latin1_swedish_ci		No	None
4	harga	int(10)			No	None
5	gambar	varchar(265)	latin1_swedish_ci		No	None
6	stock	int(10)			No	None

User

	#	Name	Туре	Collation	Attributes	Null	Default
	1	kode	int(11)			No	None
	2	nama	varchar(20)	latin1_swedish_ci		No	None
	3	email	varchar(50)	latin1_swedish_ci		No	None
	4	telp	varchar(20)	latin1_swedish_ci		No	None
	5	password	varchar(20)	latin1_swedish_ci		No	None
	6	level	varchar(10)	latin1_swedish_ci		No	None

SOURCE CODE

Controller.php

```
$update = $this->model->updateBrg($kode, $nama, $satuan, $harga, $gambar, $stock);
              header("location:index_barang.php");
function deleteBrg($kode){
             $delete = $this->model->deleteBrg($kode);
              header("location:index_barang.php");
function insertBrg(){
    $kode = $_POST['kode'];
            $\text{$\frac{1}{2}} \text{$\frac{1}{2}} 
             $gambar = $_POST['gambar'];
$stock = $_POST['stock'];
             $insert = $this->model->insertBrg($kode, $nama, $satuan, $harga, $gambar, $stock);
             header("location:index_barang.php");
function indexUsr(){
             $data = $this->model->selectAllUsr(); //pada class ini (controller), akses variabel model
function viewEditUsr($kode){
             $data = $this->model->selectUsr($kode); //select data mahasiswa dengan nim ...
             $row = $this->model->fetch($data); //fetch hasil select
function viewInsertUsr(){
              include "view/view_add_user.php"; //menampilkan halaman add data
```

```
tion indexBrg()
    $data = $this->model->selectAllBrg(); //pada class ini (controller), akses variabel model;
    include "view/view_barang.php"; //memamnggil view.php pada folder view
function viewEditBrg($kode){
    $data = $this->model->selectBrg($kode); //select data mahasiswa dengan nim ...
    $row = $this->model->fetch($data); //fetch hasil select
function viewInsertBrg(){
    include "view/view_add_barang.php"; //menampilkan halaman add data
function updateBrg(){
   $kode = $_POST['kode'];
$nama = $_POST['nama'];
    $satuan = $_POST['satuan'];
$harga = $_POST['harga'];
    $gambar = $_POST['gambar'];
    $stock = $_POST['stock'];
    $update = $this->model->updateBrg($kode, $nama, $satuan, $harga, $gambar, $stock);
    header("location:index_barang.php");
function deleteBrg($kode){
    $delete = $this->model->deleteBrg($kode);
header("location:index_barang.php");
function insertBrg(){
    $kode = $_POST['kode'];
    $nama = $_POST['nama'];
    $satuan = $ POST['satuan'];
```

```
$harga = $_POST['harga'];
    $gambar = $_POST['gambar'];
$stock = $_POST['stock'];
    $insert = $this->model->insertBrg($kode, $nama, $satuan, $harga, $gambar, $stock);
    header("location:index_barang.php");
function indexUsr(){
    $data = $this->model->selectAllUsr(); //pada class ini (controller), akses variabel model
    include "view/view_user.php"; //memamnggil view.php pada folder view
function viewEditUsr($kode){
   $data = $this->model->selectUsr($kode); //select data mahasiswa dengan nim ...
    $row = $this->model->fetch($data); //fetch hasil select
    include "view/view_edit_user.php"; //menampilkan halaman untuk mengedit data
function viewInsertUsr(){
    include "view/view_add_user.php"; //menampilkan halaman add data
function updateUsr(){
    $kode = $_POST['kode'];
$nama = $_POST['nama'];
    $email = $_POST['email'];
    $telp = $_POST['telp'];
    $password = $_POST['password'];
    $level = $_POST['level'];
    $update = $this->model->updateUsr($kode, $nama, $email, $telp, $password, $level);
    header("location:index_user.php");
```

Model.php

```
function fetch($var){
    return mysqli_fetch_array($var);
}

//pasangan construct adalah destruct untuk menghapus inisialisasi class pada memori
function __destruct(){
}

//pasangan construct adalah destruct untuk menghapus inisialisasi class pada memori
function __destruct(){
}
```

View_add_barang.php

```
| Chead | Chea
```

View_add_user.php

```
chtellang="en">
chtel lang="en">
chtel lang="en"-stylesphee"
chtel lang="en"-stylesphee
chtel lang="en"-styles
```

View_barang.php

```
<html lang="en">
 <meta charset="utf-8">
 <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
<meta name= Viewport Content= width-device width-dev
clink rel="stylesheet" href="https://fonts.googleapis.com/ioon/family=Material+Icons">
clink rel="stylesheet" href="https://fonts.googleapis.com/ioon/family=Material+Icons">
clink rel="stylesheet" href="https://maxcdn.bootstrapcdn.com/font-awesome/4.7.0/css/font-awesome.min.css">
 body {
                background: #f5f5f5;
font-family: 'Varela Round', sans-serif;
 .table-responsive {
                  margin: 30px 0;
                background: #fff;
                  padding: 20px 25px;
                  border-radius: 3px;
                min-width: 1000px;
box-shadow: 0 1px 1px rgba(0,0,0,.05);
 .table-title {
                padding-bottom: 15px;
                  background: #435d7d;
                 color: #fff;
                 padding: 16px 30px;
                 min-width: 100%;
                  margin: -20px -25px 10px;
```

```
.table-title h2 {
         margin: 5px 0 0;
         font-size: 24px;
41 v .table-title .btn-group {
        float: right;
         float: right;
         font-size: 13px;
         border: none;
         min-width: 50px;
         border-radius: 2px;
         margin-left: 10px;
55 v.table-title .btn i {
         font-size: 21px;
         margin-right: 5px;
60 ∨ .table-title .btn span {
         margin-top: 2px;
64 ∨ table.table tr th, table.table tr td {
         border-color: #e9e9e9;
         padding: 12px 15px;
         vertical-align: middle;
69 ∨ table.table tr th:first-child {
         width: 60px;
72 ∨ table.table tr th:last-child {
        width: 100px;
```

```
table.table-striped tbody tr:nth-of-type(odd) {
   background-color: #fcfcfc;
table.table-striped.table-hover tbody tr:hover {
   background: #f5f5f5;
   font-size: 13px;
   margin: 0 5px;
   opacity: 0.9;
    font-size: 22px;
   margin: 0 5px;
table.table td a {
   font-weight: bold;
   display: inline-block;
   text-decoration: none;
   color: #2196F3;
table.table td a.edit {
    font-size: 19px;
```

```
border-radius: 50%;
    margin-right: 10px;
.pagination {
    float: right;
    margin: 0 0 5px;
.pagination li a {
    min-width: 30px;
    min-height: 30px;
   color: #999;
margin: 0 2px;
    line-height: 30px;
    padding: 0 6px;
.pagination li.active a, .pagination li.active a.page-link
    background: #03A9F4;
.pagination li.active a:hover {
    background: #0397d6;
.pagination li.disabled i {
.pagination li i {
    padding-top: 6px
```

View_user.php

```
<html lang="en">
k rel="stylesheet" href="https://fonts.googleapis.com/css?family=Roboto|Varela+Round">
k rel="stylesheet" href="https://stackpath.bootstrapcdn.com/bootstrap/4.5.0/css/bootstrap.min.css"></ur>

// Fonts.googleapis.com/icon?family=Material+Icons">

// Interest the content of the c
body {
                background: #f5f5f5;
font-family: 'Varela Round', sans-serif;
                 font-size: 13px;
 .table-responsive {
               margin: 30px 0;
  .table-wrapper {
            background: #fff;
               padding: 20px 25px;
                border-radius: 3px;
                min-width: 1000px;
                 box-shadow: 0 1px 1px rgba(0,0,0,.05);
  .table-title {
                padding-bottom: 15px;
                  background: #435d7d;
                 padding: 16px 30px;
                 min-width: 100%;
                 border-radius: 3px 3px 0 0;
```

```
margin: 5px 0 0;
         font-size: 24px;
41 v .table-title .btn-group {
         float: right;
44 ∨ .table-title .btn {
         float: right;
         font-size: 13px;
         border: none;
         min-width: 50px;
         border-radius: 2px;
         outline: none !important;
         margin-left: 10px;
         font-size: 21px;
         margin-right: 5px;
         margin-top: 2px;
         border-color: #e9e9e9;
         padding: 12px 15px;
         vertical-align: middle;
         width: 60px;
        width: 100px;
```

```
table.table-striped tbody tr:nth-of-type(odd) {
   background-color: #fcfcfc;
table.table-striped.table-hover tbody tr:hover {
   background: #f5f5f5;
   font-size: 13px;
   margin: 0 5px;
   opacity: 0.9;
    font-size: 22px;
   margin: 0 5px;
table.table td a {
   font-weight: bold;
   display: inline-block;
   text-decoration: none;
   color: #2196F3;
table.table td a.edit {
    font-size: 19px;
```

```
border-radius: 50%;
    margin-right: 10px;
.pagination {
    float: right;
    margin: 0 0 5px;
.pagination li a {
    min-width: 30px;
    min-height: 30px;
   color: #999;
margin: 0 2px;
    line-height: 30px;
    padding: 0 6px;
.pagination li.active a, .pagination li.active a.page-link
    background: #03A9F4;
.pagination li.active a:hover {
    background: #0397d6;
.pagination li.disabled i {
.pagination li i {
    padding-top: 6px
```

View_edit_barang.php

View_edit_user.php

View_login.php

```
<!DOCTYPE html>
<html lang="en">
   <meta charset="utf-8"</pre>
   <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no"/>
   integrity="sha384-JcKb8q3iqJ61gNV9KGb8thSsNjpSL0n8PARn9HuZOnIxN0hoP+VmmDGMN5t9UJ0Z" crossorigin="anonymous"/
   <link href="https://fonts.googleapis.com/css2?family=Roboto+Condensed&display=swap"rel="stylesheet"/>
    body {
     font-family: "Roboto Condensed", sans-serif;
     background-color: #dedede;
   <title>Login</title>
   echo $reslt;
   <form action="" method="POST">
     class="container rounded shadow-lg px-4 py-5 mt-5 bg-white"
       <h1 class="text-center mb-4">Welcome</h1>
         <label for="exampleInputEmail1">Username</label>
         <input class="form-control" name="username" id="exampleInputEmail1" aria-describedby="emailHelp"/>
         <div class="form-group">
           <label for="exampleInputPassword1">Password</label>
           <input class="form-control" name="password" id="exampleInputPassword1"/>
```

Index_barang.php

```
//include class controller
include "controller/controller.php";

//variabel main merupakan objek baru yang dibuat dari class controller
fmain = new controller();

//kondisi untuk menampilkan halaman web yang diminta
if(isset($_GET['e'])){ //kondisi untuk mengakses halaman edit

kkode = $_GET['e'];
fmain->viewEditBrg($kode);
}else if(isset($_GET['d'])){ //kondisi untuk menghapus data (mengakses fungsi delete)

kkode = $_GET['d'];
fmain->deleteBrg($kode);
}else if(isset($_GET['i'])){
fmain->viewInsertBrg(); //kondisi untuk mengakses halaman add
}else{
fmain->indexBrg(); //kondisi awal (menampilkan seluruh data)
}
```

Index_user.php

Index.php

```
1  <?php
2  include_once("controller/Controller.php");
3  $controller = new Controller();
4  $controller->invoke();
5  ?>
```

Afterlogin.php

Home.html

```
<html lang="en" dir="ltr">
      <meta charset="utf-8">
      <title>MVC</title>
      <link rel="stylesheet" href="style.css">
      <div class="wrapper">
        <div class="text">
            <a href="index_barang.php">Barang</a>
            <a href="index_user.php">User</a>
         const buttons = document.querySelectorAll("a");
         buttons.forEach((button) => {
           button.onclick = function(e){
             let x = e.clientX - e.target.offsetLeft;
             let y = e.clientY - e.target.offsetTop;
             let ripple = document.createElement("span");
             ripple.style.left = `${x}px`;
ripple.style.top = `${y}px`;
             this.appendChild(ripple);
             setTimeout(function(){
               ripple.remove();
             }, 600); // 1second = 1000ms
```

login.php

logout.php