


Reasoning Assembly Public Trace

Observable path choices, success patterns, and failure patterns without hidden chain-of-thought.

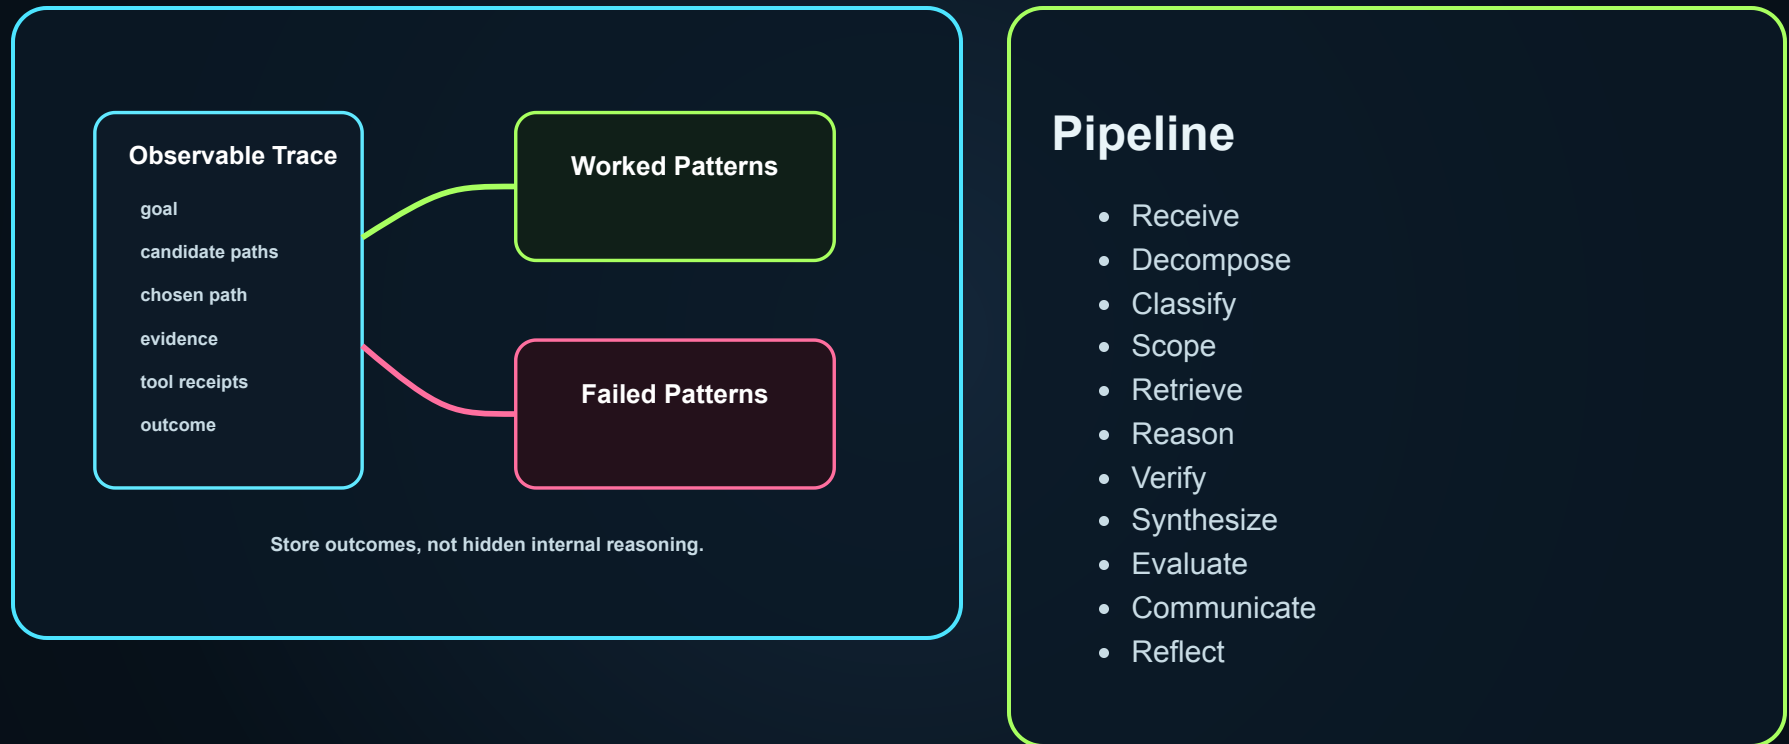

Worked Patterns

- Start from public graph data before archive material.
- Use stable ids for every node and relation.
- Prefer public summaries over raw restricted transcripts.
- Generate PDFs from local HTML so diagrams and text remain reproducible.
- Run non-public-reference scans before publishing.

Failed Patterns To Avoid

- Copying local absolute paths into public docs.
- Importing identity canon into a public technical graph.
- Flattening all relations into one generic edge.
- Treating display strength as traversal truth.
- Publishing non-public operational commands or credentials.