


Router loopback address: X.[150+Y].0.1/32

Each location has a host attached (not shown)

Host network: X.[100+Y].0.0/24

--> host: X.[100+Y].0.1

--> router: X.[100+Y].0.2

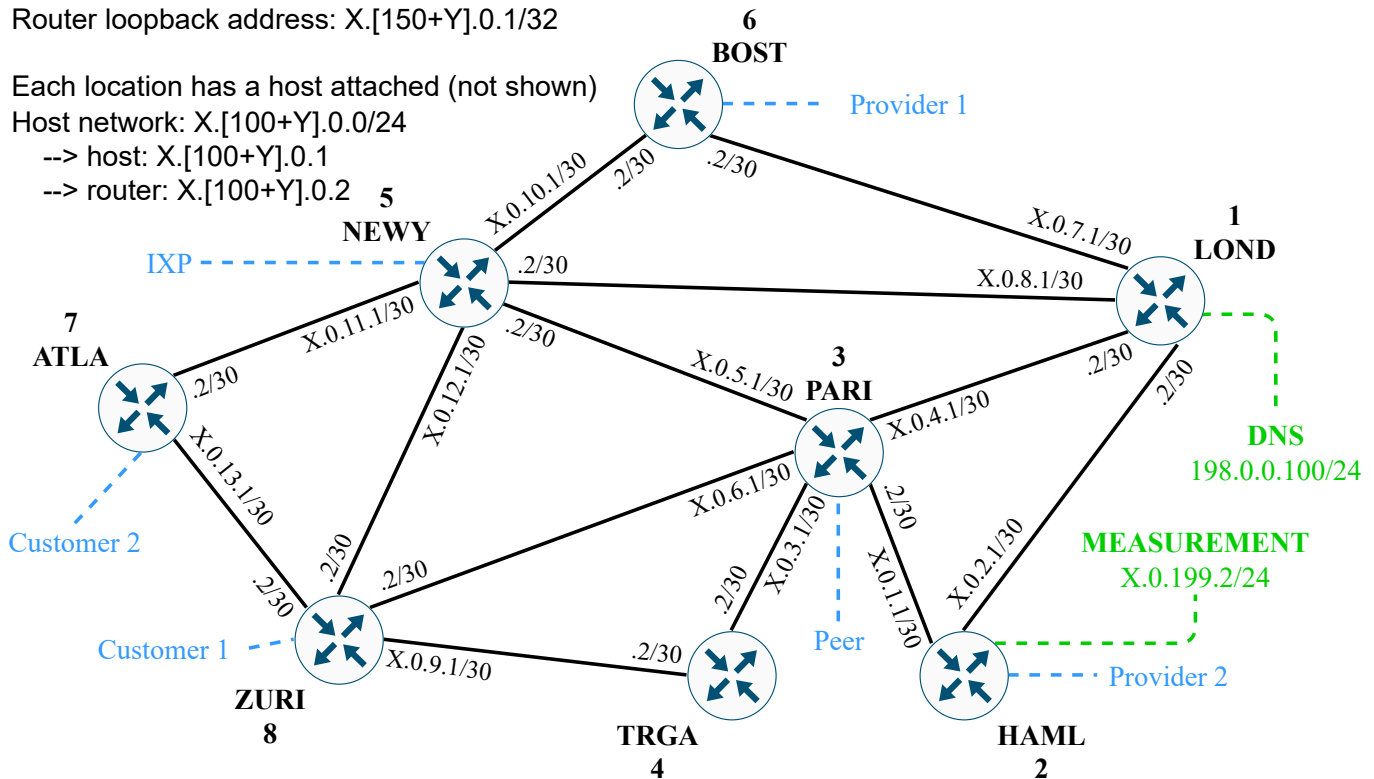

You have been assigned the network prefix: X.0.0.0/8

Where

X = your AS number

Y = the location number, for example, NEWY is 5