
Multi-Model Reference Averages (v1 / Threshold 0.5) | Luna: native presets (prompt N/A)


v1 | threshold = 0.5 | shared non-PII dataset names | equal dataset weights | PII reported separately

- Fastino | request: fastino/GLiDE
  resolved: glide_v2
- Fastino GLiNER2.5-Decide
  model ID: fastino/gliner2.5-decide
  response model: fastino/gliner2.5-decide
  v1 / 0.5; PII not tested
- Fastino POC model
  model ID: 21ac7ad2-f9b5-5e6f-801b-45b52e26bdc9
  response model: glide_v2 (mapping unverified)
  v1 / 0.5; PII not tested
- Fastino GLiGuard-LLMGuardrails-300M
  model ID: fastino/gliguard-LLMGuardrails-300M
  v1 / 0.5; PII not tested
- Laya | request: typed-decisions
  serving: laya-rl-agent
  routed: typed-decisions
- TypeSafe | request: jev-latest
  resolved: unconfirmed (API response required)
- OpenJev 4B | supplied internal summary
  model / version: not supplied (not sample-paired)
- OpenJev 32B | supplied internal summary
  single-run timing (not sample-paired)
- Microsoft Decision-1 | supplied internal summary
  single-run timing (not sample-paired)
- Qwen3Guard-Stream-8B | supplied summary
  binary safety labels; PII unsupported
- Luna | original task-specific presets
  prompt: N/A; binary threshold: 0.5
  PII: separate multilabel evaluation


Accuracy

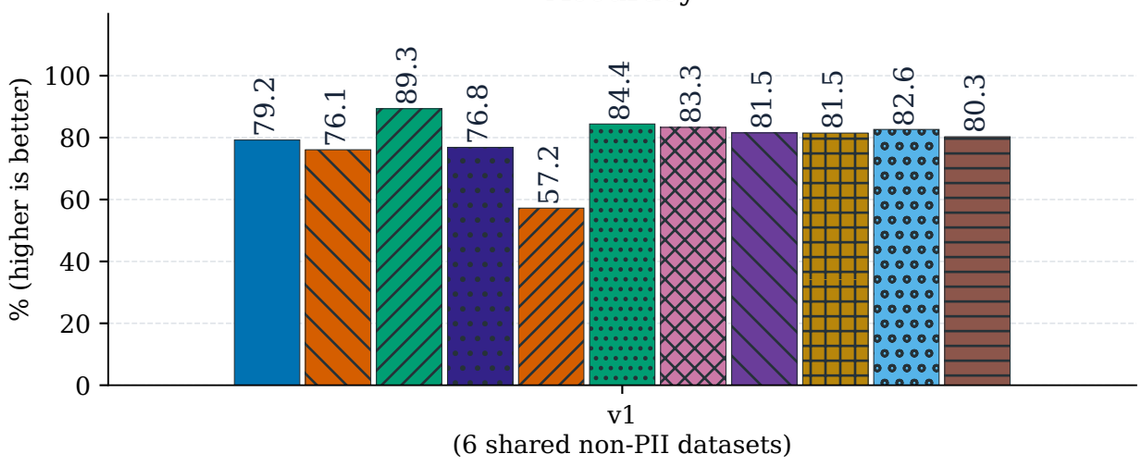


F1

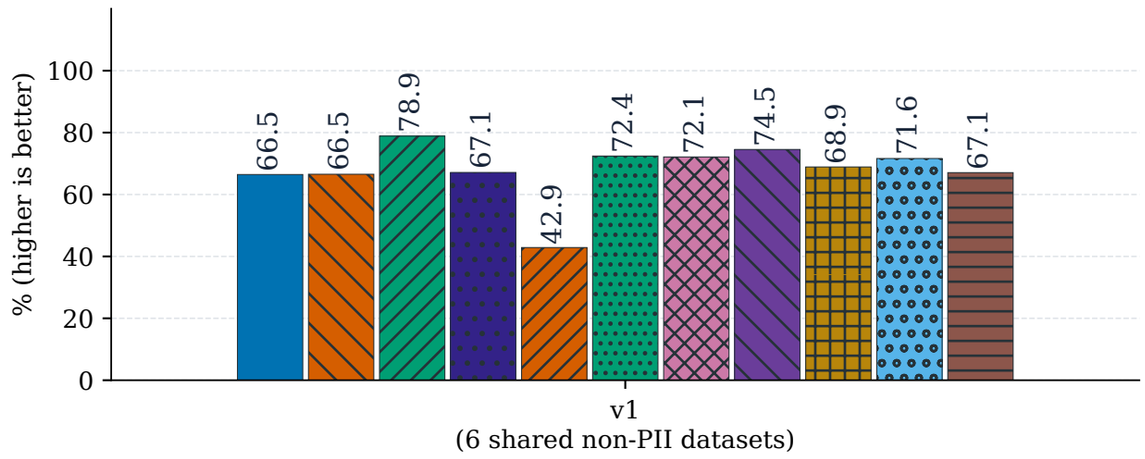


Precision

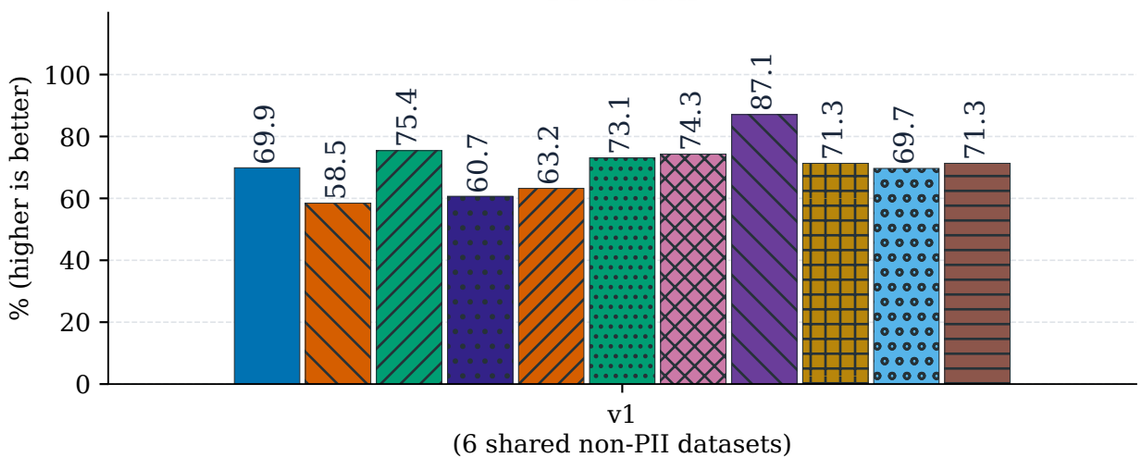


Recall

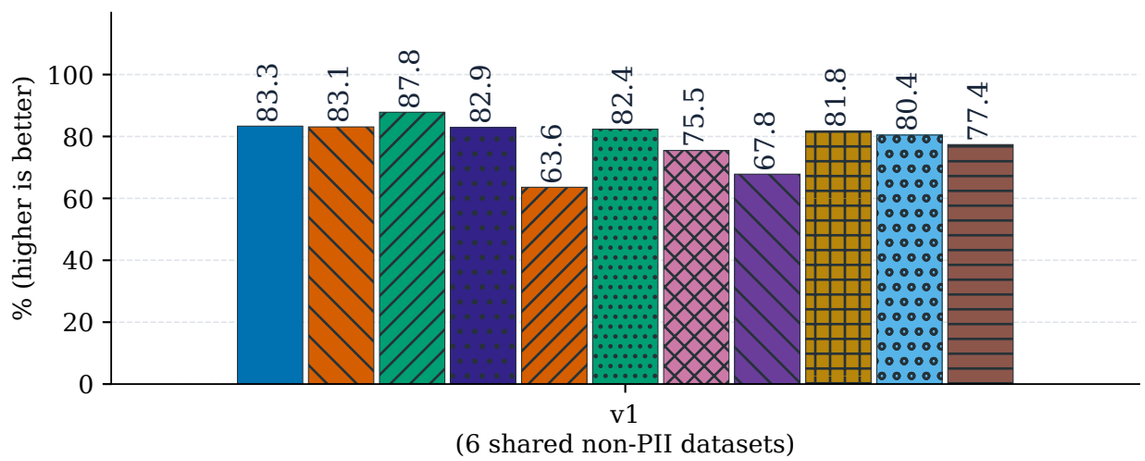

AUROC

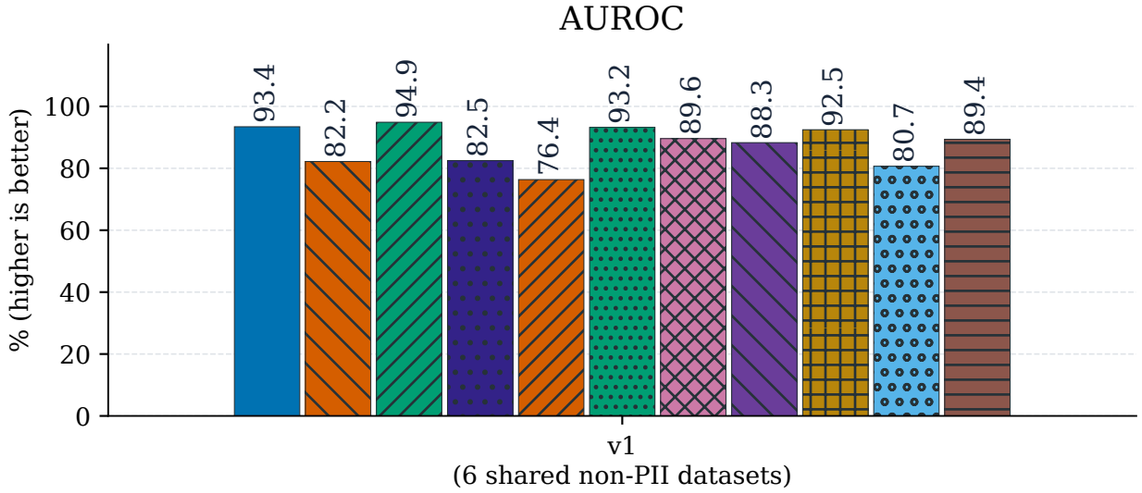

AVG latency (ms)

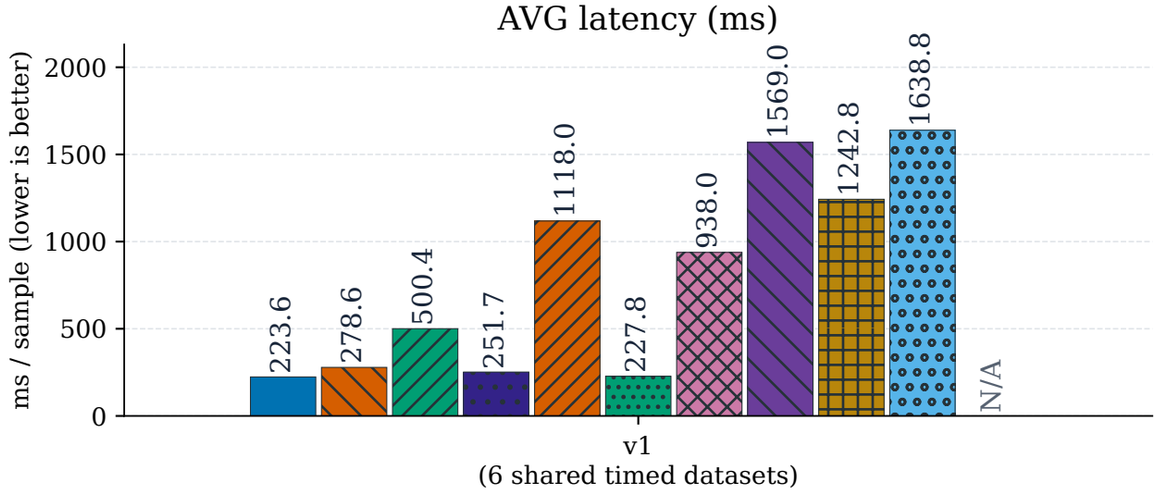

Each model uses its own successful samples; aggregate models have no paired sample IDs. Not a fair ranking.
Latency: original models' shared fully timed v1 / 0.5 subset; Qwen follows the same dataset scope:
ToxiGen, HateCheck, AEGIS2, Detect-Jailbreak, Jailbreak-Classification, JailbreakHub. Quality and latency dataset scopes can differ.
APIs: v1 / 0.5 single-run timing. OpenJev 4B: supplied summary; 32B / Decision-1: supplied single-run timing.
PII is ordinary binary classification (present vs absent), not masking quality; positives-only results are separate.
Missing quality stays N/A; no shared timing subset = N/A latency. Timing protocols differ; not inference time.
Qwen3Guard-Stream-8B: binary safety labels; PII unsupported (historical proxies are audit-only).
Qwen mean latency: log elapsed/processed (failures included); CSV P95: successful requests. No ranking.
Luna: original task-specific presets, no custom prompts (prompt N/A); binary threshold 0.5.
Other models use dataset-specific v1/v2 prompts. Task-definition differences may affect results.
Luna PII micro-F1 is separate; binary PII and latency are N/A. Supplied metrics; scorer versions unverified.