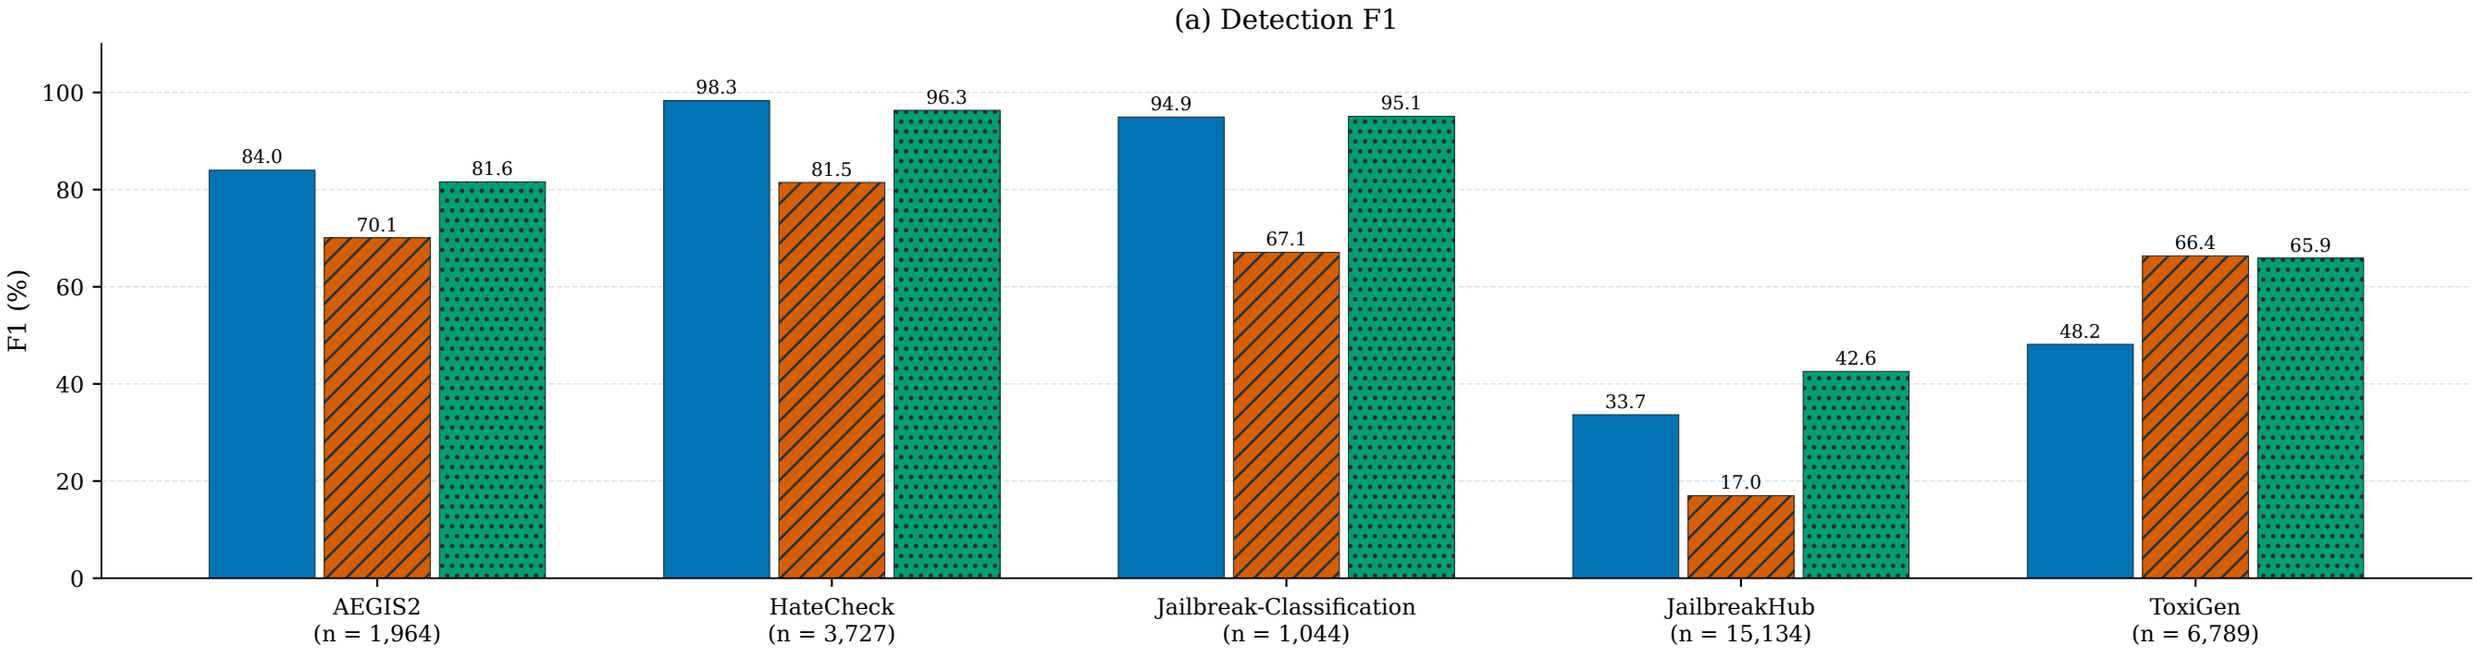
# Sample-Aligned Classification Comparison

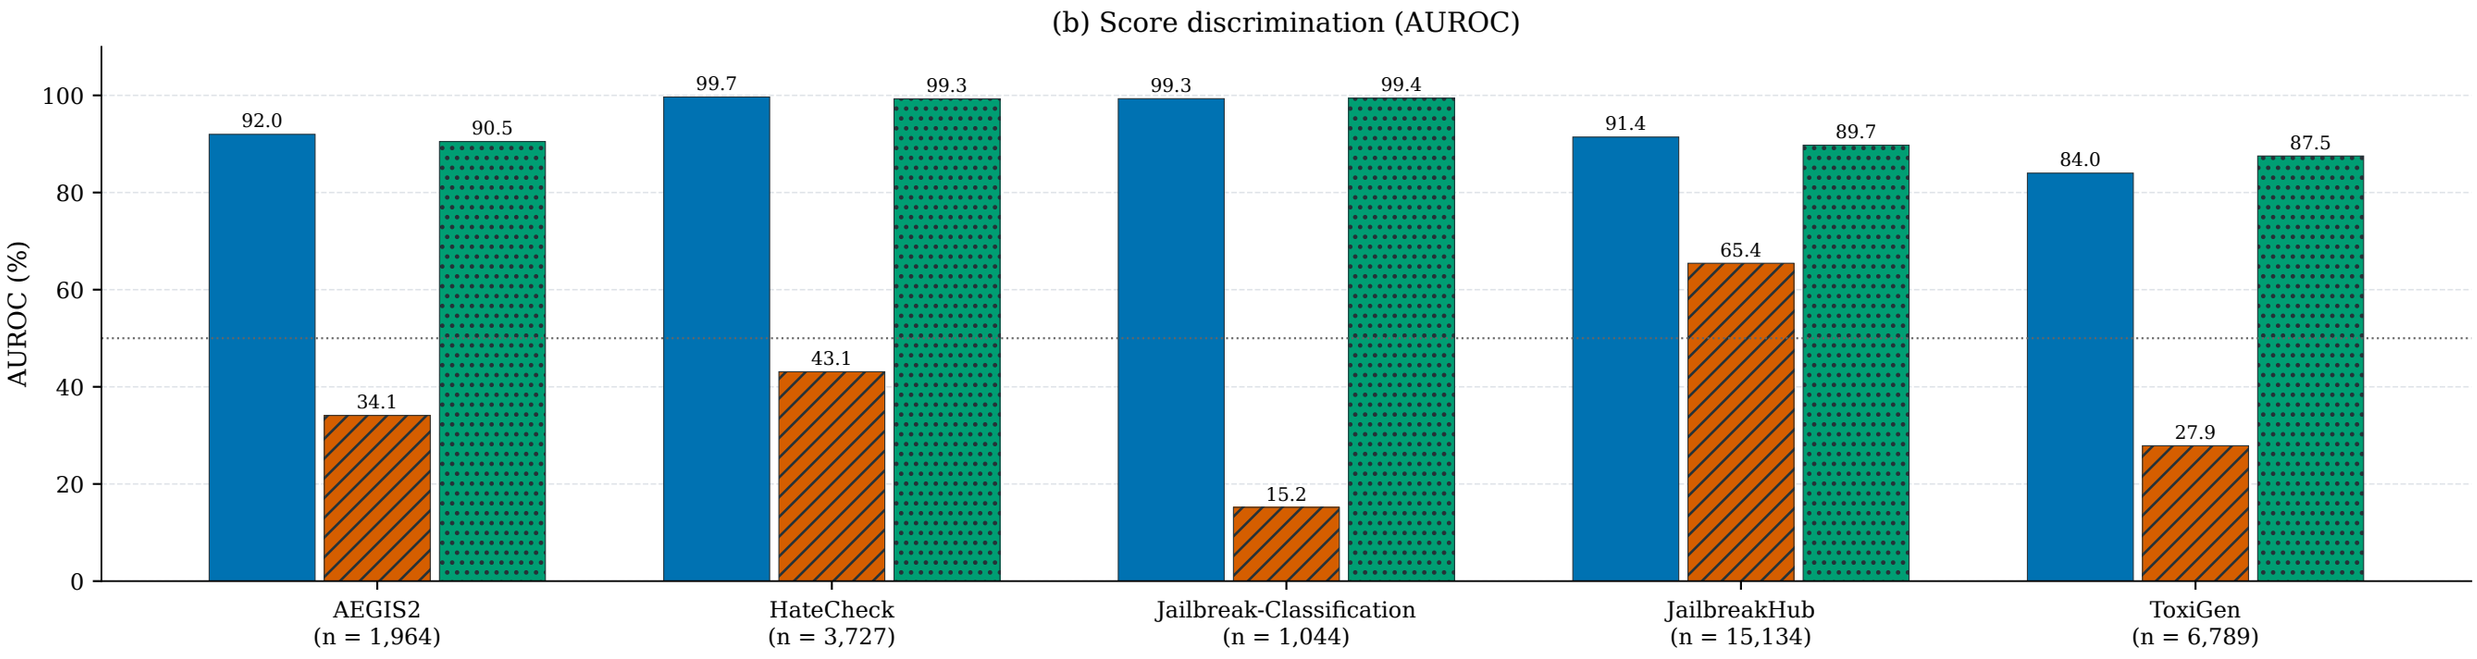
v1 | threshold = 0.5 | common completed non-PII datasets | higher is better

Fastino | request: fastino/GLiDE
resolved: glide_v2

Laya | request: typed-decisions
serving: laya-rl-agent
routed: typed-decisions

TypeSafe | request: jev-latest
resolved: unconfirmed (API response required)

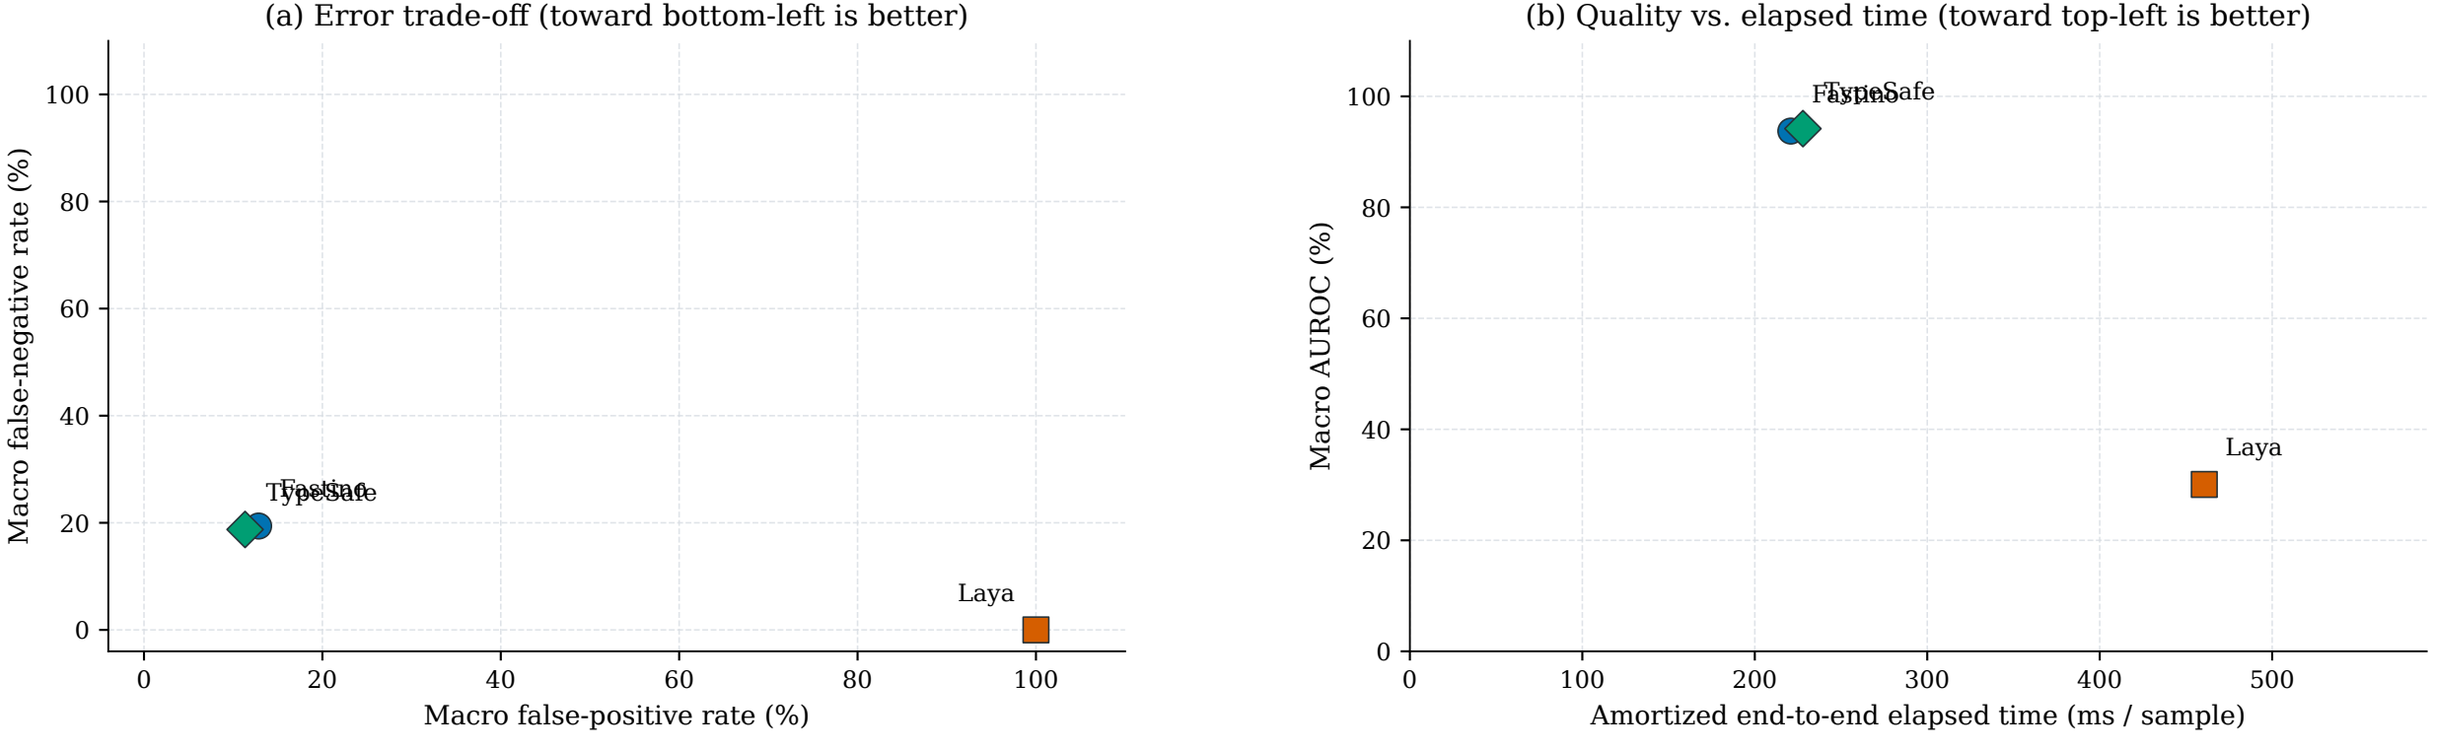



Each dataset uses the same successful sample IDs for all selected models.
Values are descriptive point estimates; repeated sweeps are not independent replicates.

# Error Rates and Latency Trade-offs

v1 | threshold = 0.5 | (a) 5 shared datasets | (b) 4 shared fully timed datasets




Panel (b) recomputes BOTH macro AUROC and sample-weighted elapsed on the same shared timed subset:
AEGIS2, HateCheck, Jailbreak-Classification, ToxiGen. No four-run timing averages substitute for missing v1 / 0.5 timing.
Elapsed time = total logged elapsed / all processed subset rows, including failed requests.
Runs occurred at different times; this is not pure inference latency or a request-level percentile.

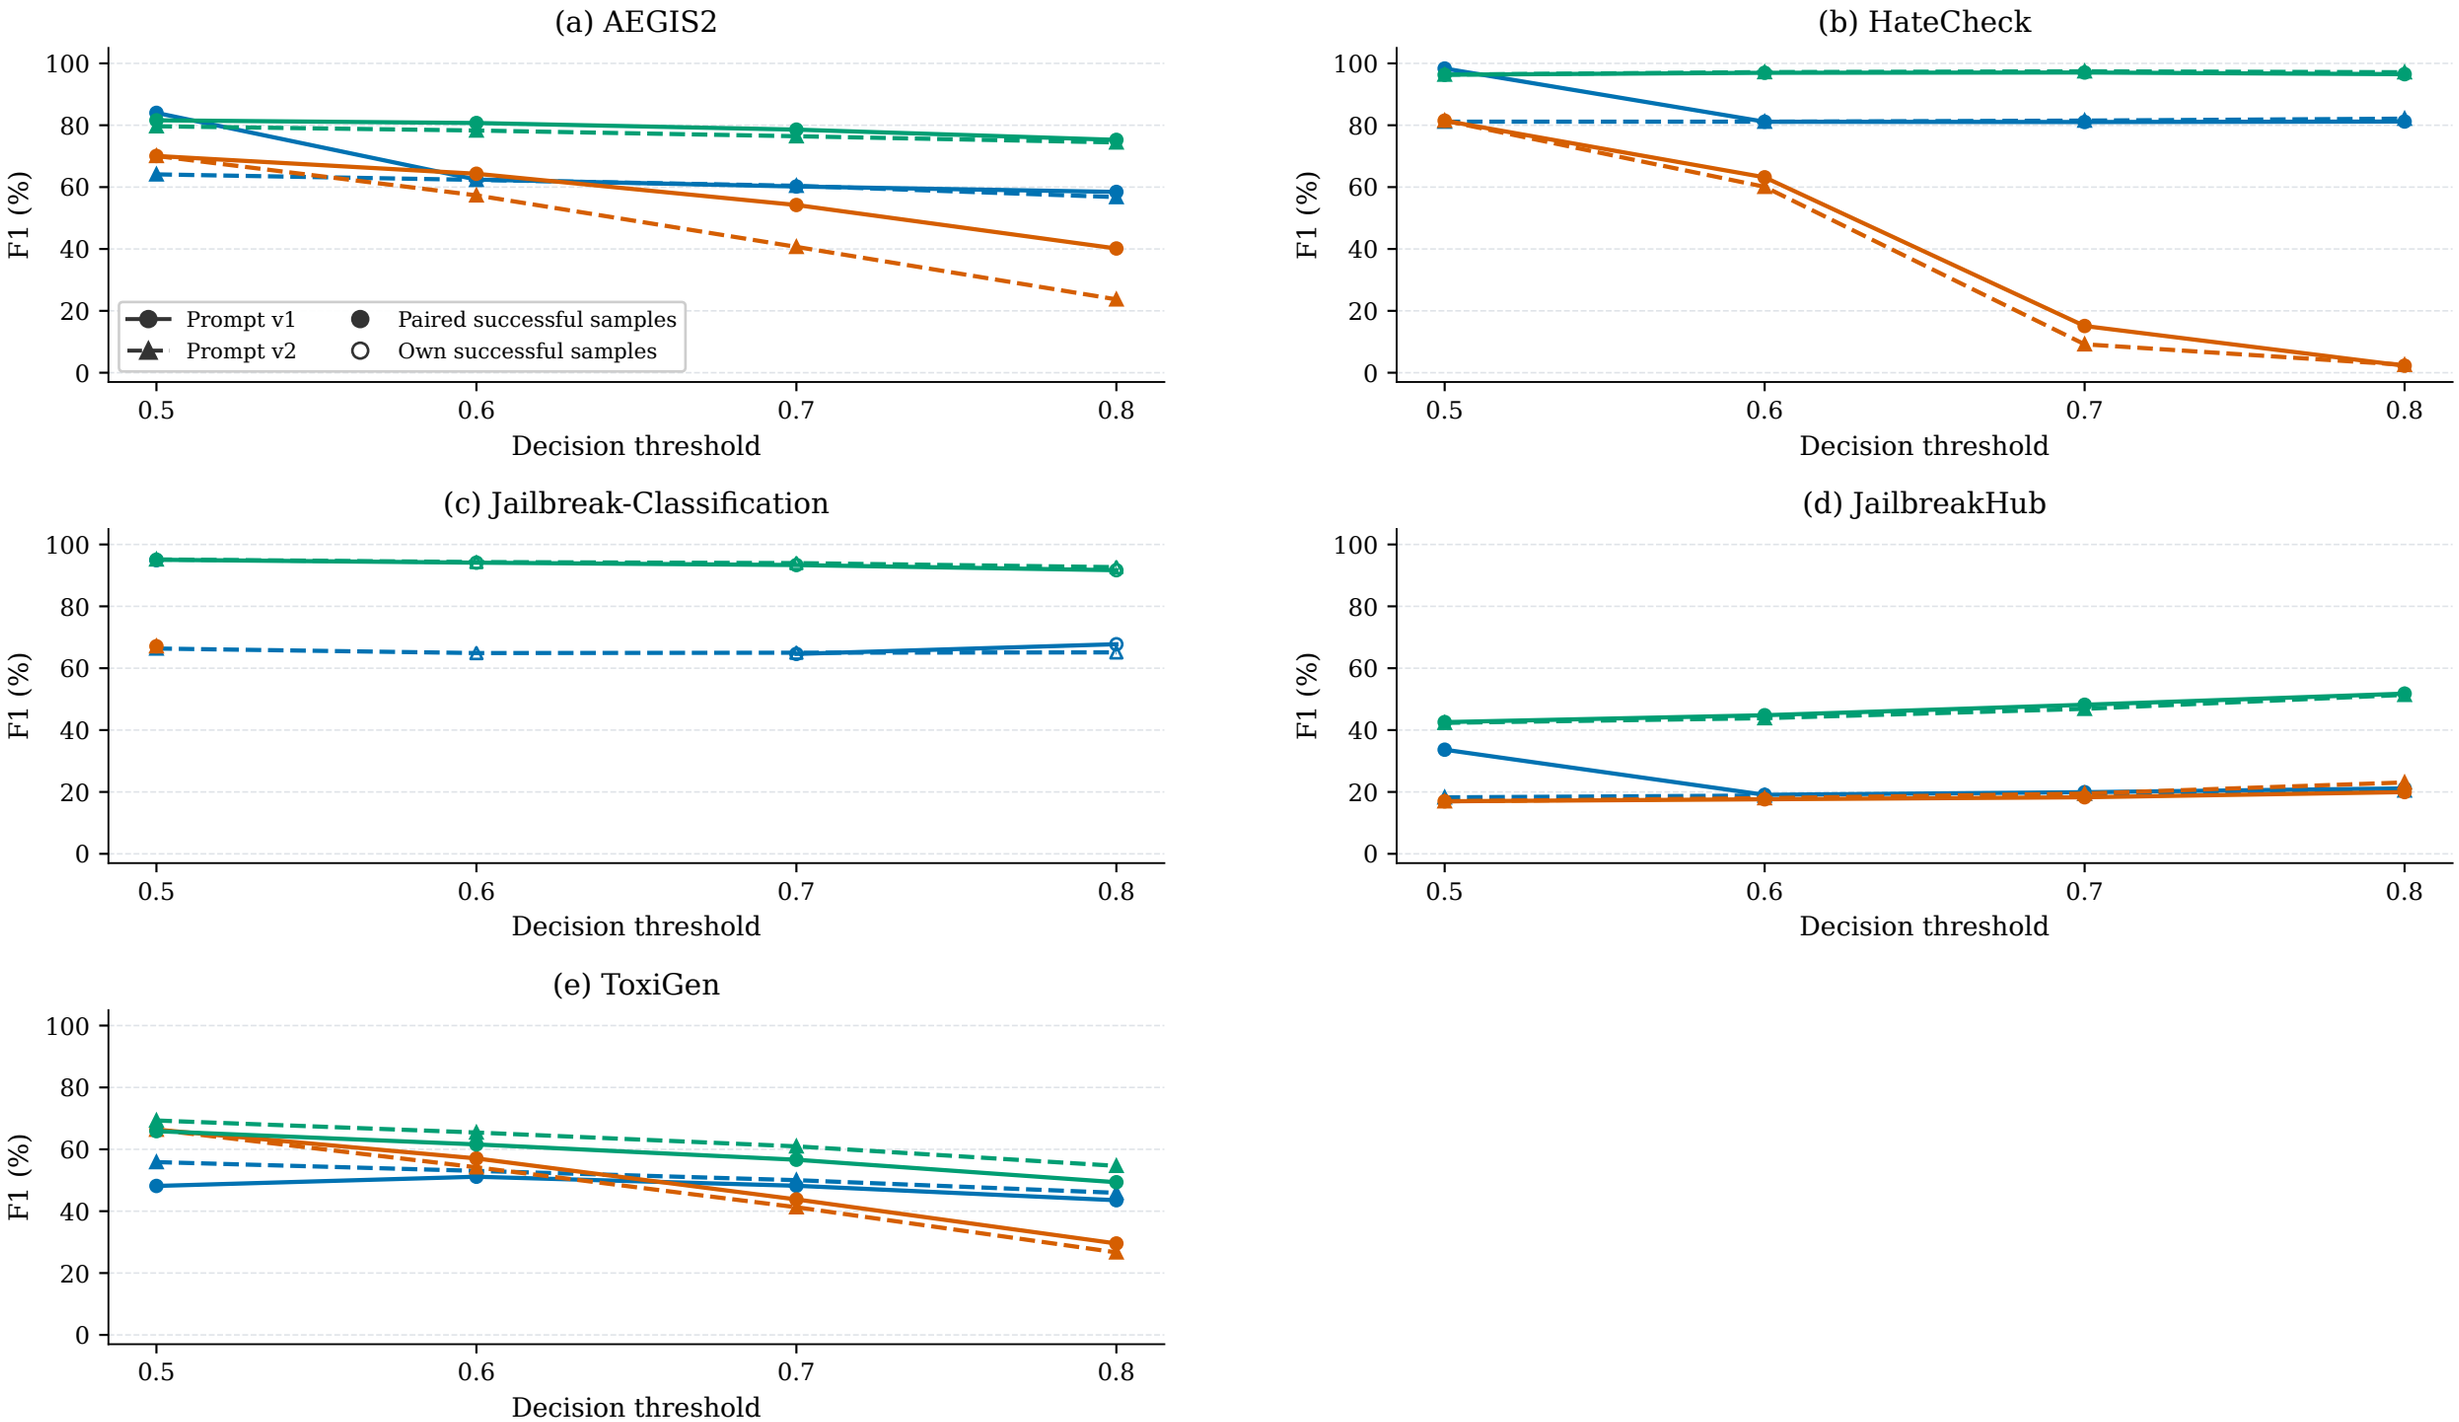
Fastino | request: fastino/GLiDE
resolved: glide_v2

Laya | request: typed-decisions
serving: laya-rl-agent
routed: typed-decisions

TypeSafe | request: jev-latest
resolved: unconfirmed (API response required)

# Prompt and Threshold Sensitivity (Fastino, Laya, TypeSafe)

Exploratory test-set sweeps, not held-out model selection




Filled markers: paired successful samples; hollow: own successes when paired metrics are unavailable.
Sample sets can differ across points; this is not a fair ranking. Missing or all-failed runs remain gaps.
Curves mix threshold effects and repeat-call variation.
Scores are not held fixed across thresholds; lines do not imply independent replicates or confidence intervals.

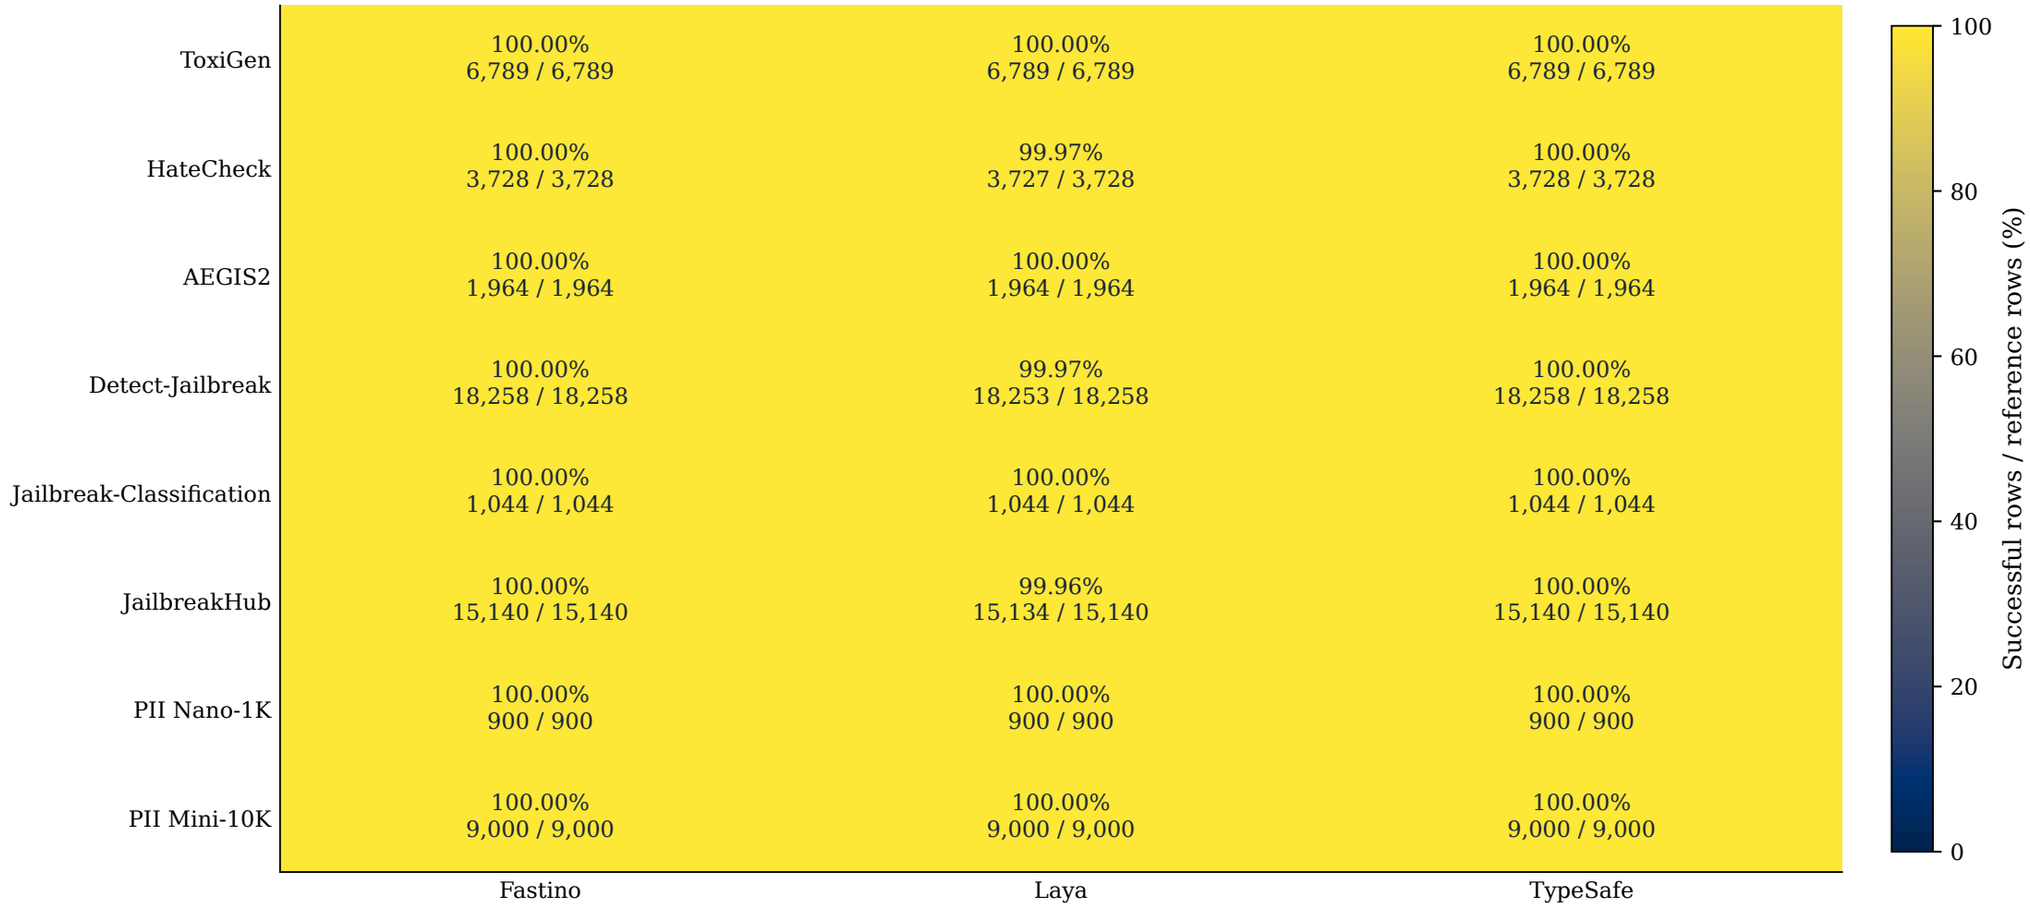
Fastino | request: fastino/GLiDE
resolved: glide_v2

Laya | request: typed-decisions
serving: laya-rl-agent
routed: typed-decisions

TypeSafe | request: jev-latest
resolved: unconfirmed (API response required)

# Evaluation Coverage and Request Failures

v1 | threshold = 0.5 | counts are successful / reference rows




Fastino | request: fastino/GLiDE
resolved: glide_v2

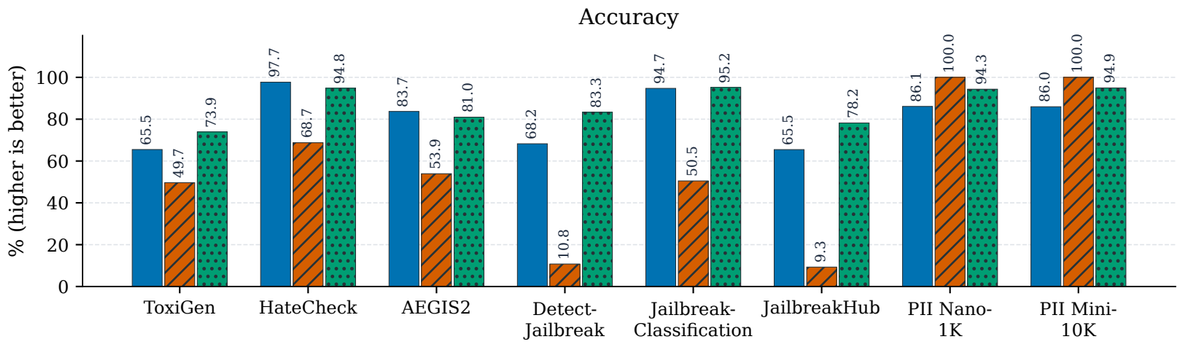
Laya | request: typed-decisions
serving: laya-rl-agent
routed: typed-decisions

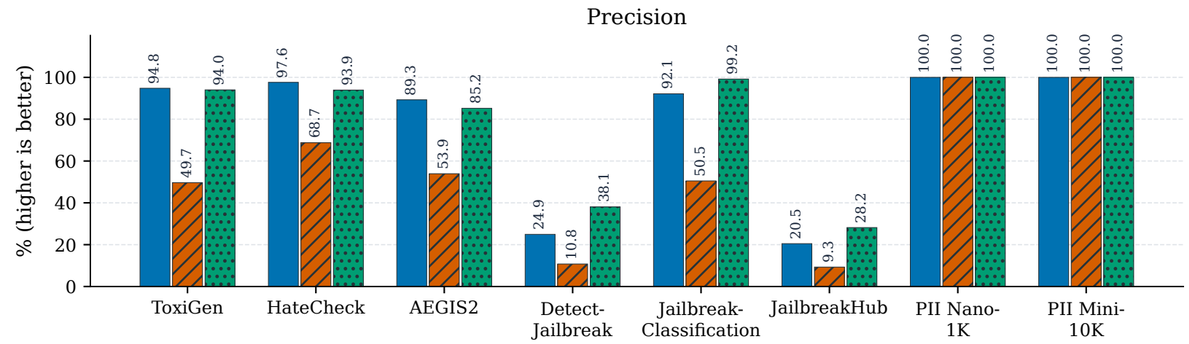
TypeSafe | request: jev-latest
resolved: unconfirmed (API response required)

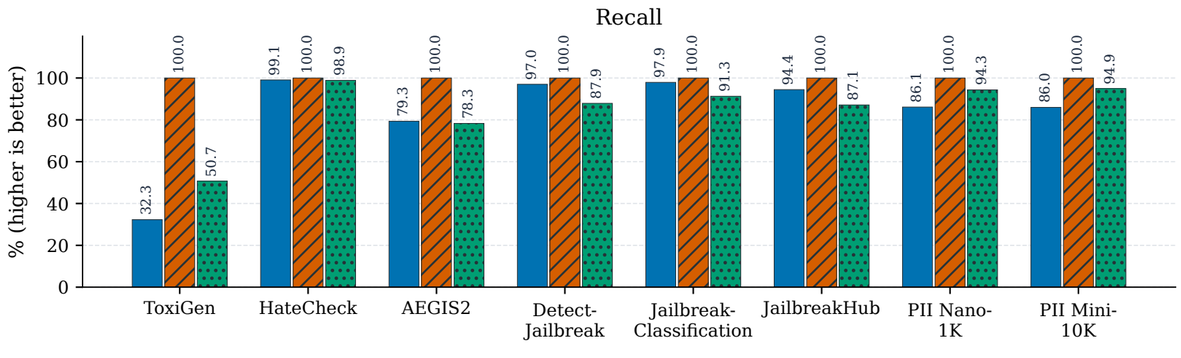
Gray = no saved predictions; hatched = complete CSV with no successful requests, not a missing run.
PII rows measure only evaluation coverage, not masking quality.

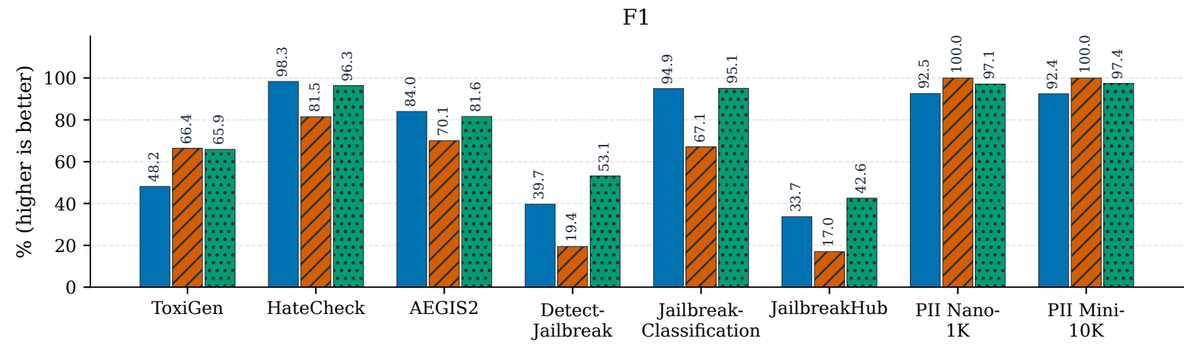
# Per-Dataset Performance Metrics (Fastino, Laya, TypeSafe)

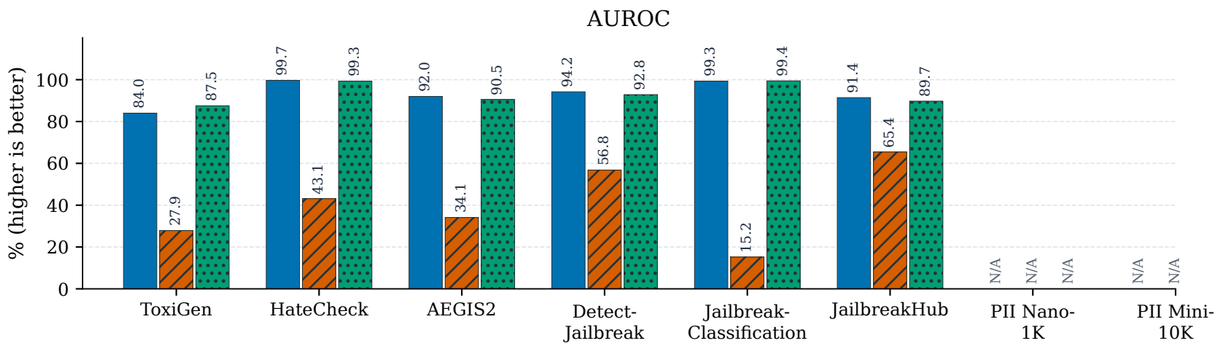
v1 | threshold = 0.5 | each model's own successful samples (not paired)

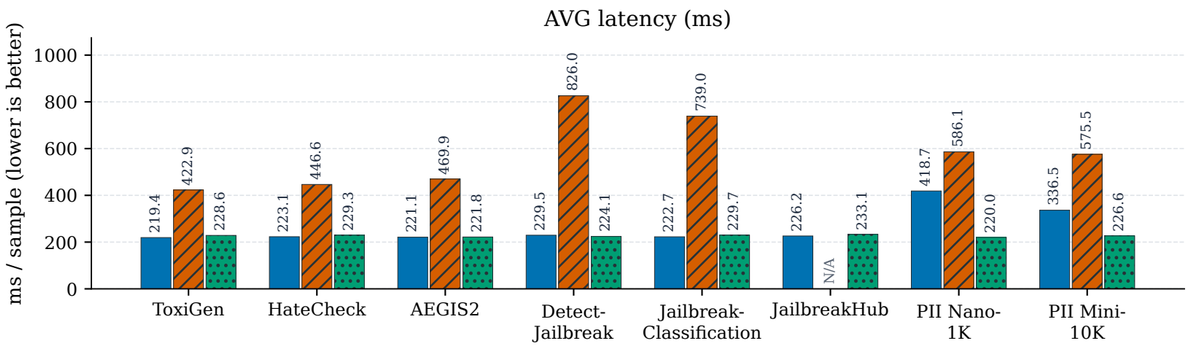



N/A = missing result, no successful predictions, undefined metric, or no aligned complete timing log.
PII datasets contain positives only: detection metrics do not measure masking quality; AUROC is undefined.
Latency = logged end-to-end elapsed / all processed rows, including failed requests; not pure inference time.
Successful sample sets can differ between models; use the paired baseline for fair quality comparisons.

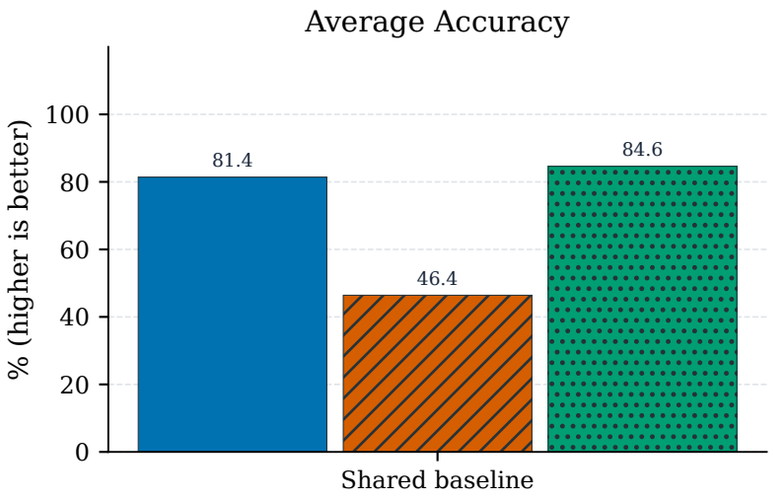
Fastino | request: fastino/GLiDE
resolved: glide_v2

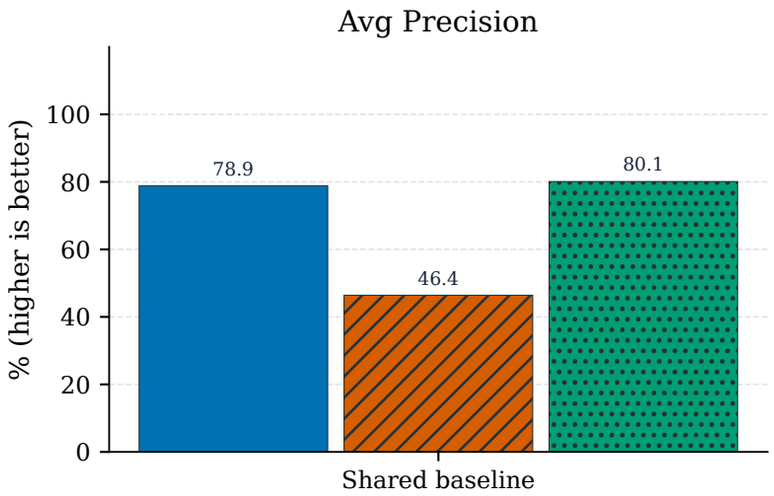
Laya | request: typed-decisions
serving: laya-rl-agent
routed: typed-decisions

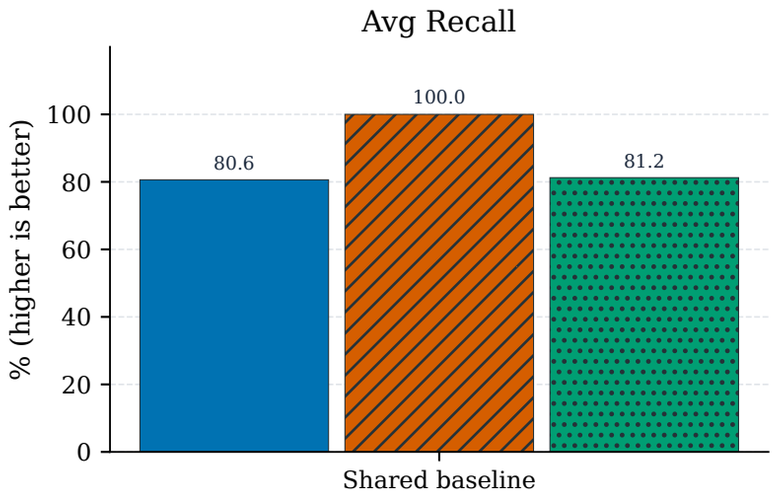
TypeSafe | request: jev-latest
resolved: unconfirmed (API response required)

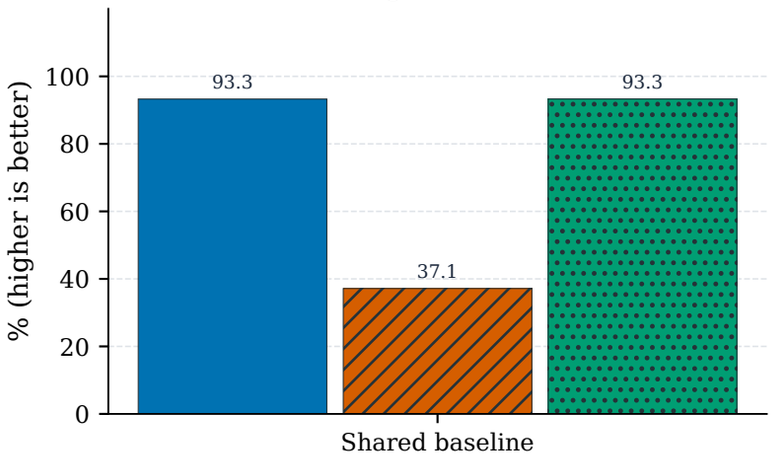
# Sample-Aligned Model Averages (Fastino, Laya, TypeSafe)

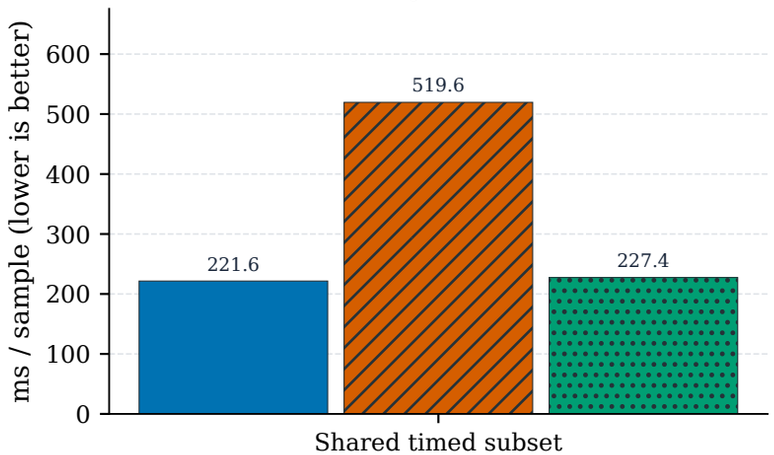
v1 | threshold = 0.5 | quality: 5 shared non-PII datasets | latency: 4 shared fully timed datasets | equal dataset weights




Quality: common successful sample IDs within each dataset, then an unweighted mean across datasets.
Latency: unweighted mean of per-dataset log elapsed / processed rows on the SAME timed subset for all models: AEGIS2, HateCheck, Jailbreak-Classification, ToxiGen. Quality and latency dataset scopes can differ.
Elapsed includes failures and network overhead, not pure inference time. No four-run timing substitutes.
N/A timing means no shared fully timed baseline datasets; missing is never zero.

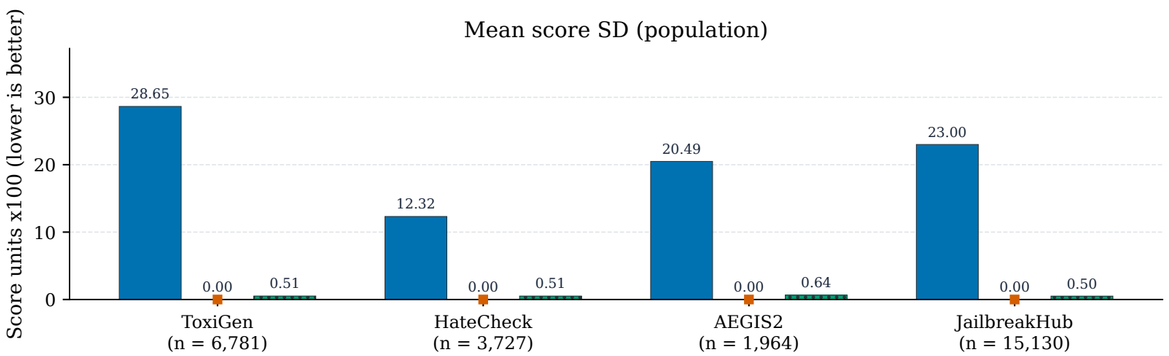
Fastino | request: fastino/GLiDE
resolved: glide_v2

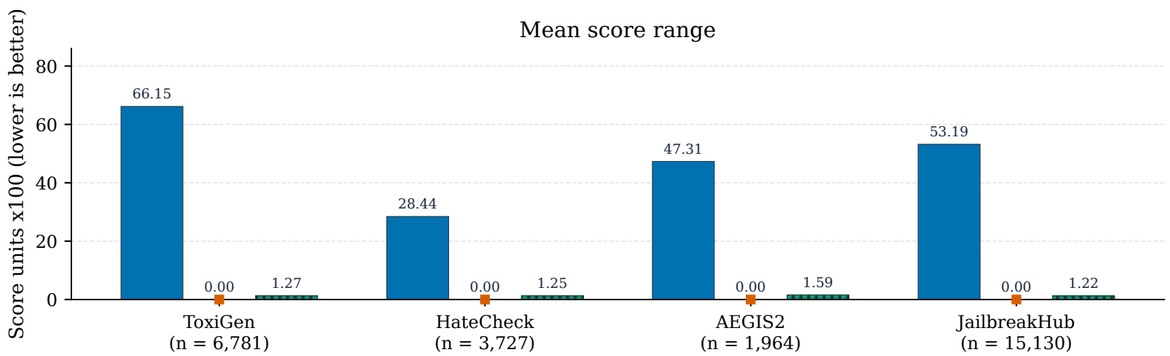
Laya | request: typed-decisions
serving: laya-rl-agent
routed: typed-decisions

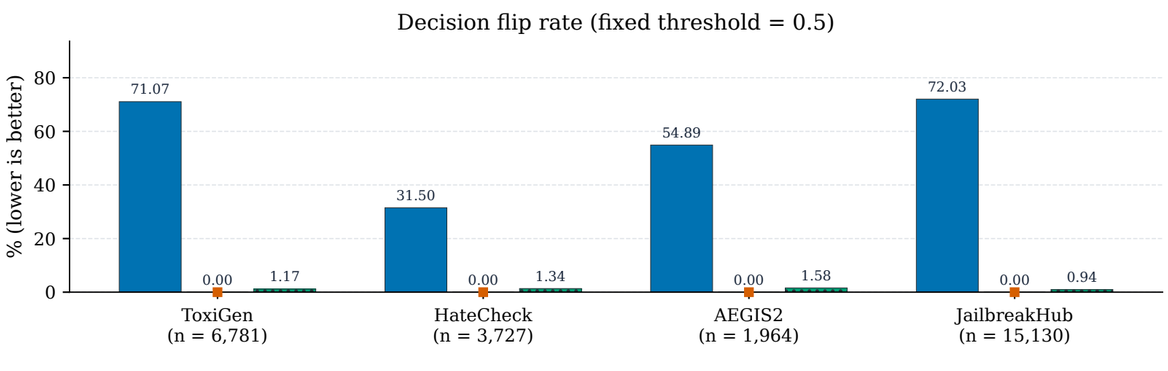
TypeSafe | request: jev-latest
resolved: unconfirmed (API response required)

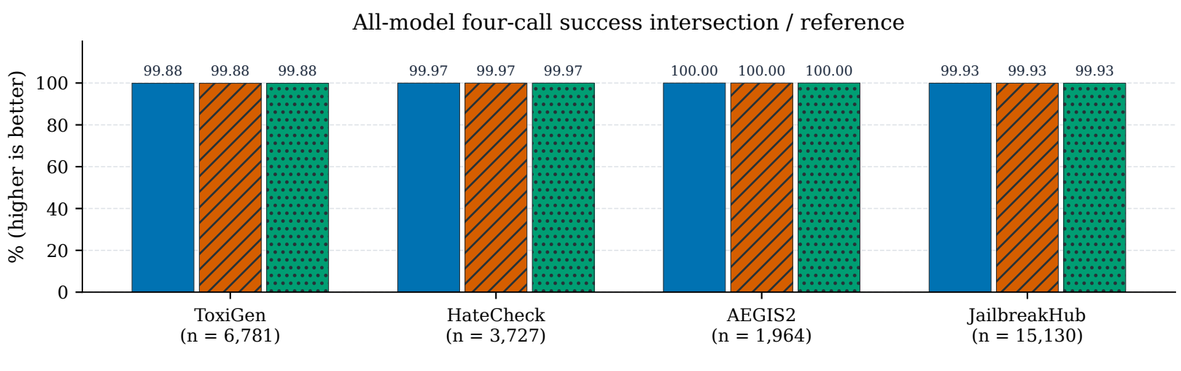
# Repeat-Call Consistency: v1 (Fastino, Laya, TypeSafe)

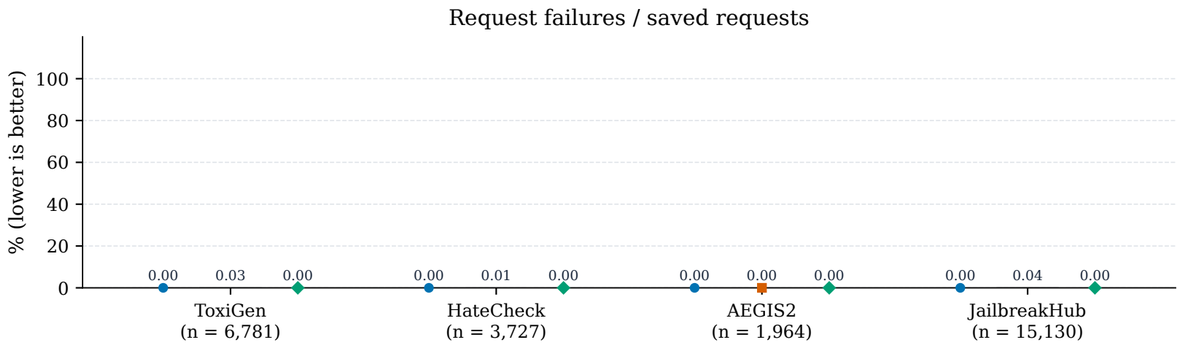
4 shared datasets | four calls per model | identical successful sample IDs across all models




Score SD and range are displayed x100; flip rate uses score >= 0.5 for ALL four calls (not saved predictions).
Only datasets with complete four-call CSVs for every model and nonempty common successful IDs are shown.
Baseline markers show measured zeros, not missing data. Coverage uses all-model common IDs; failures use all saved requests.
Historical backend / routing / time changes may contribute. Consistency is not accuracy; this is exploratory.

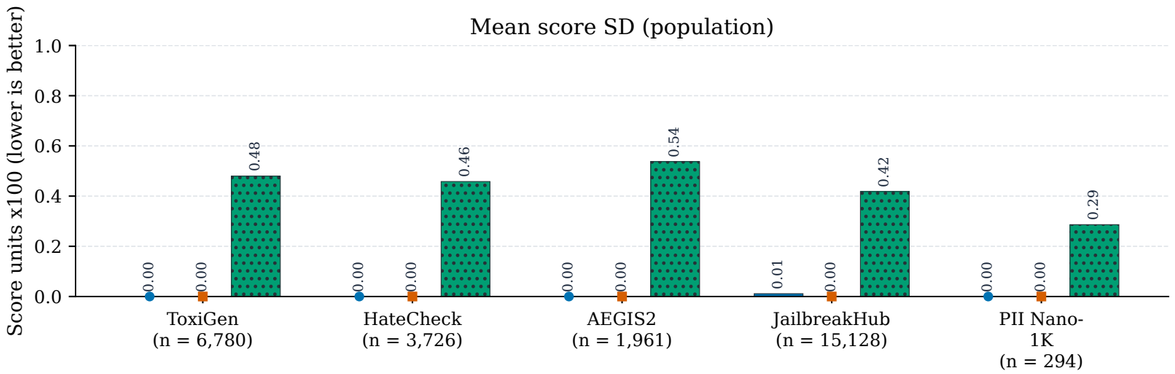
Fastino | request: fastino/GLiDE
resolved: glide_v2

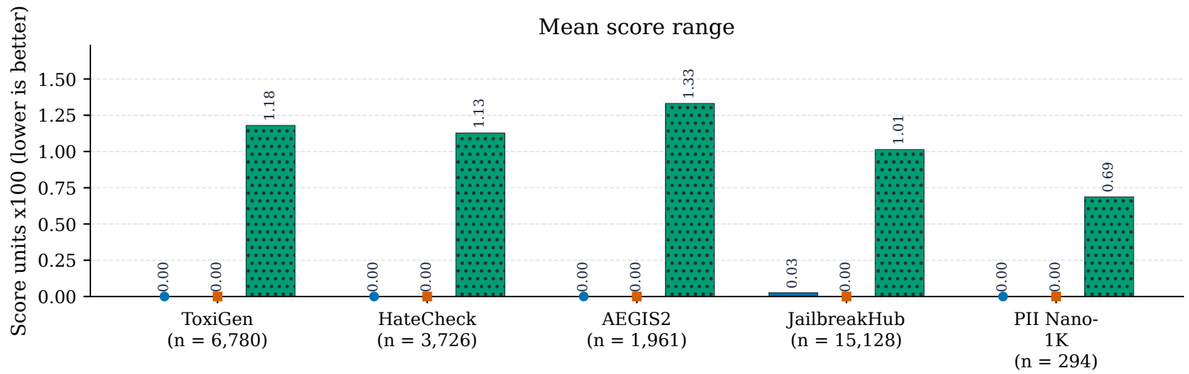
Laya | request: typed-decisions
serving: laya-rl-agent
routed: typed-decisions

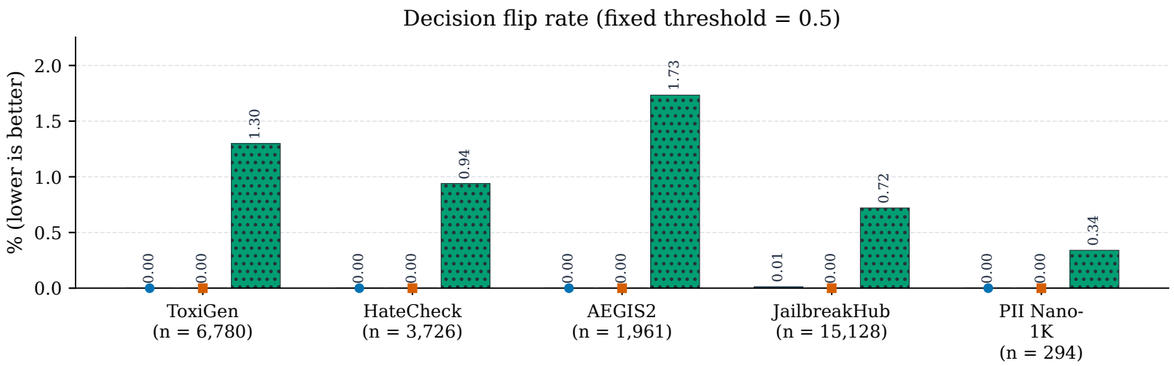
TypeSafe | request: jev-latest
resolved: unconfirmed (API response required)

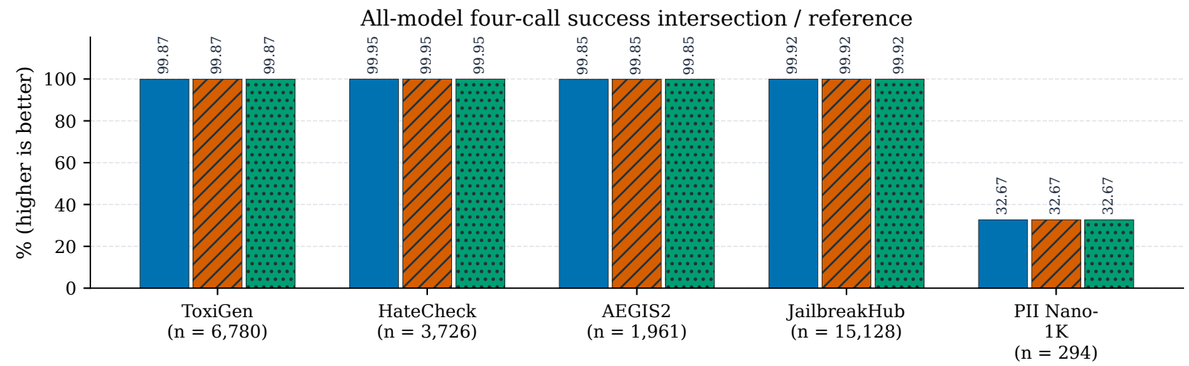
# Repeat-Call Consistency: v2 (Fastino, Laya, TypeSafe)

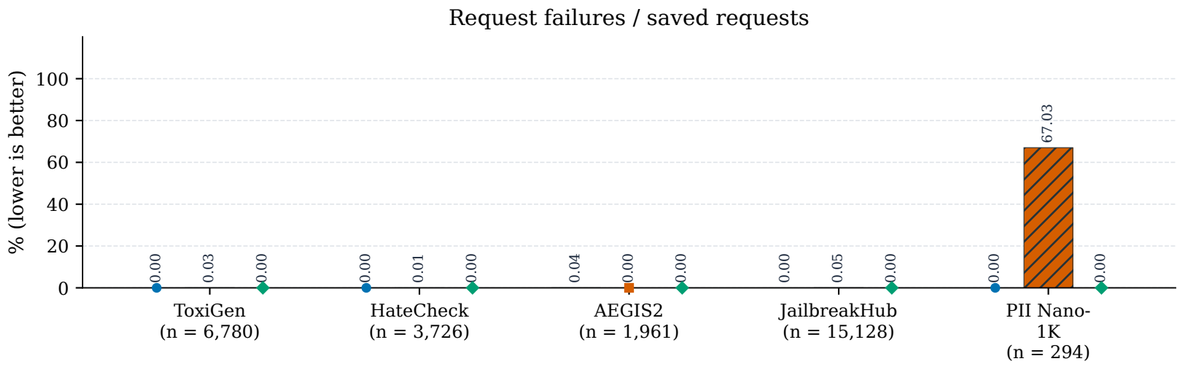
5 shared datasets | four calls per model | identical successful sample IDs across all models




Score SD and range are displayed x100; flip rate uses score >= 0.5 for ALL four calls (not saved predictions).
Only datasets with complete four-call CSVs for every model and nonempty common successful IDs are shown.
Baseline markers show measured zeros, not missing data. Coverage uses all-model common IDs; failures use all saved requests.
Historical backend / routing / time changes may contribute. Consistency is not accuracy; this is exploratory.

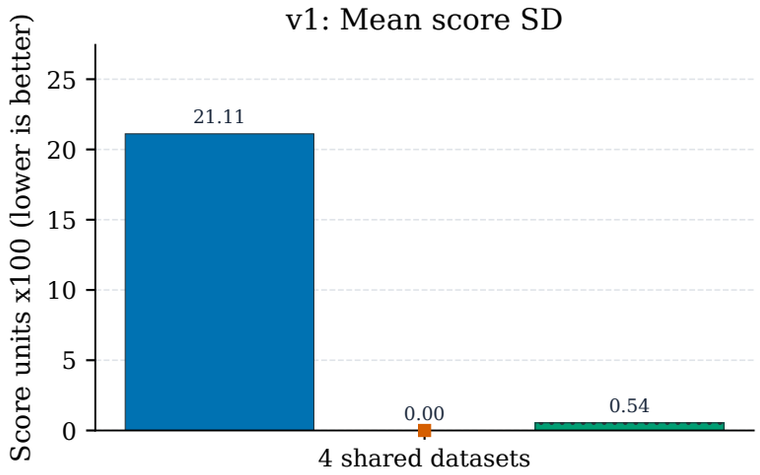
Fastino | request: fastino/GLiDE
resolved: glide_v2

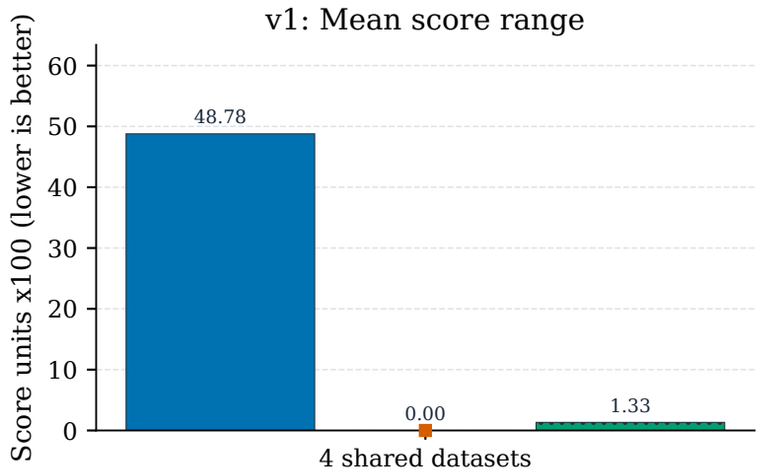
Laya | request: typed-decisions
serving: laya-rl-agent
routed: typed-decisions

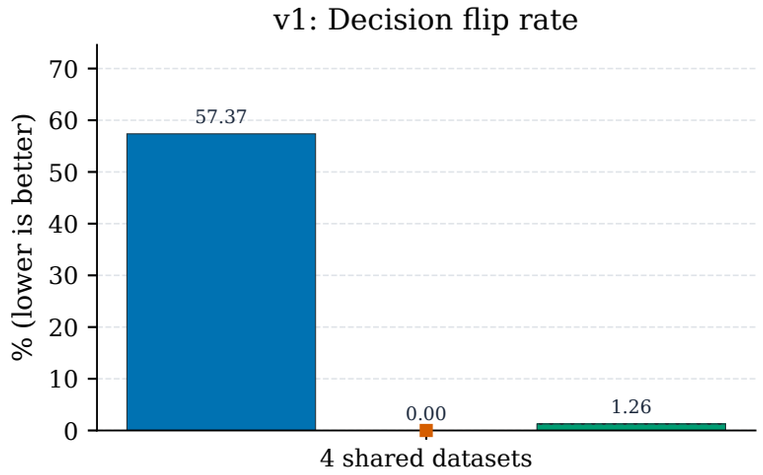
TypeSafe | request: jev-latest
resolved: unconfirmed (API response required)

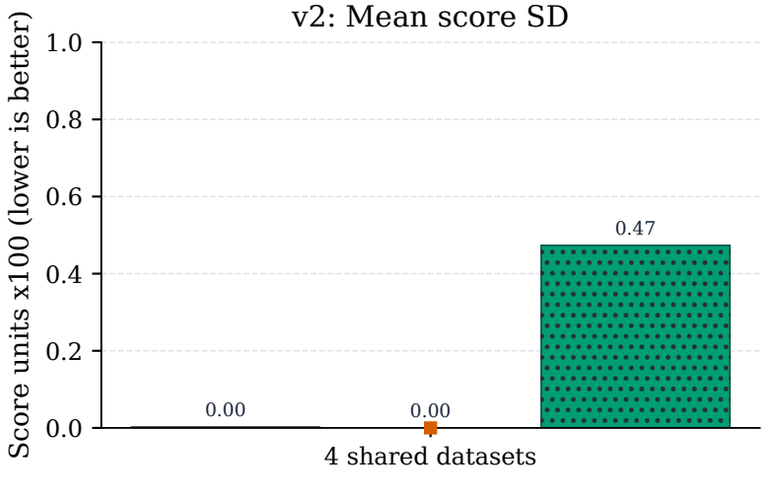
# Repeat-Call Consistency Averages (Fastino, Laya, TypeSafe)

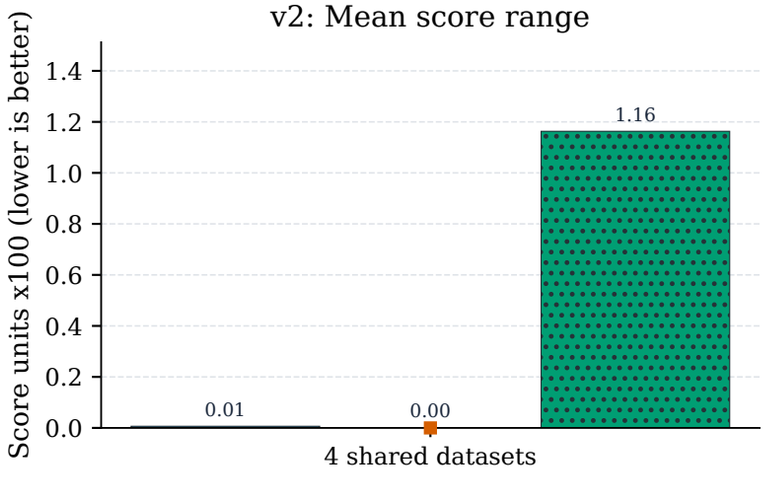
Prompt v1 and v2 are separate | common four-call successful IDs | shared non-PII datasets only

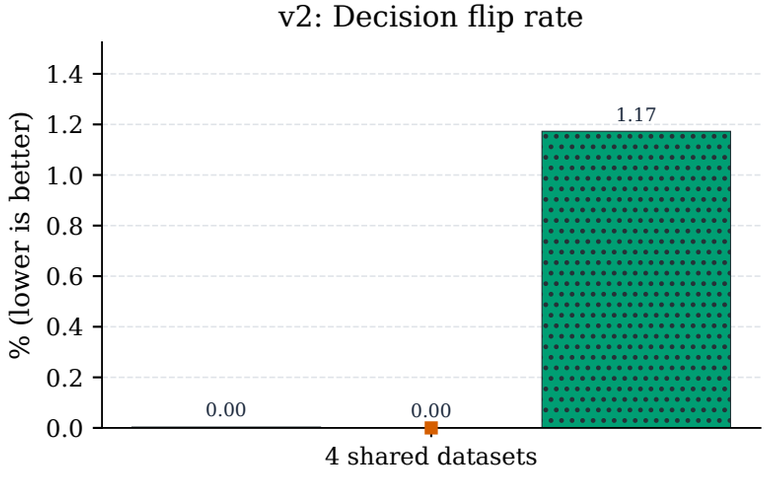



Equal dataset weights. Score SD / range displayed x100; decision flips use the fixed threshold 0.5.
Baseline markers show measured zeros. No eligible shared datasets = N/A; datasets and IDs may differ between prompts.
See the report for shared sample counts, coverage and failure rates; low variation does not imply correctness.

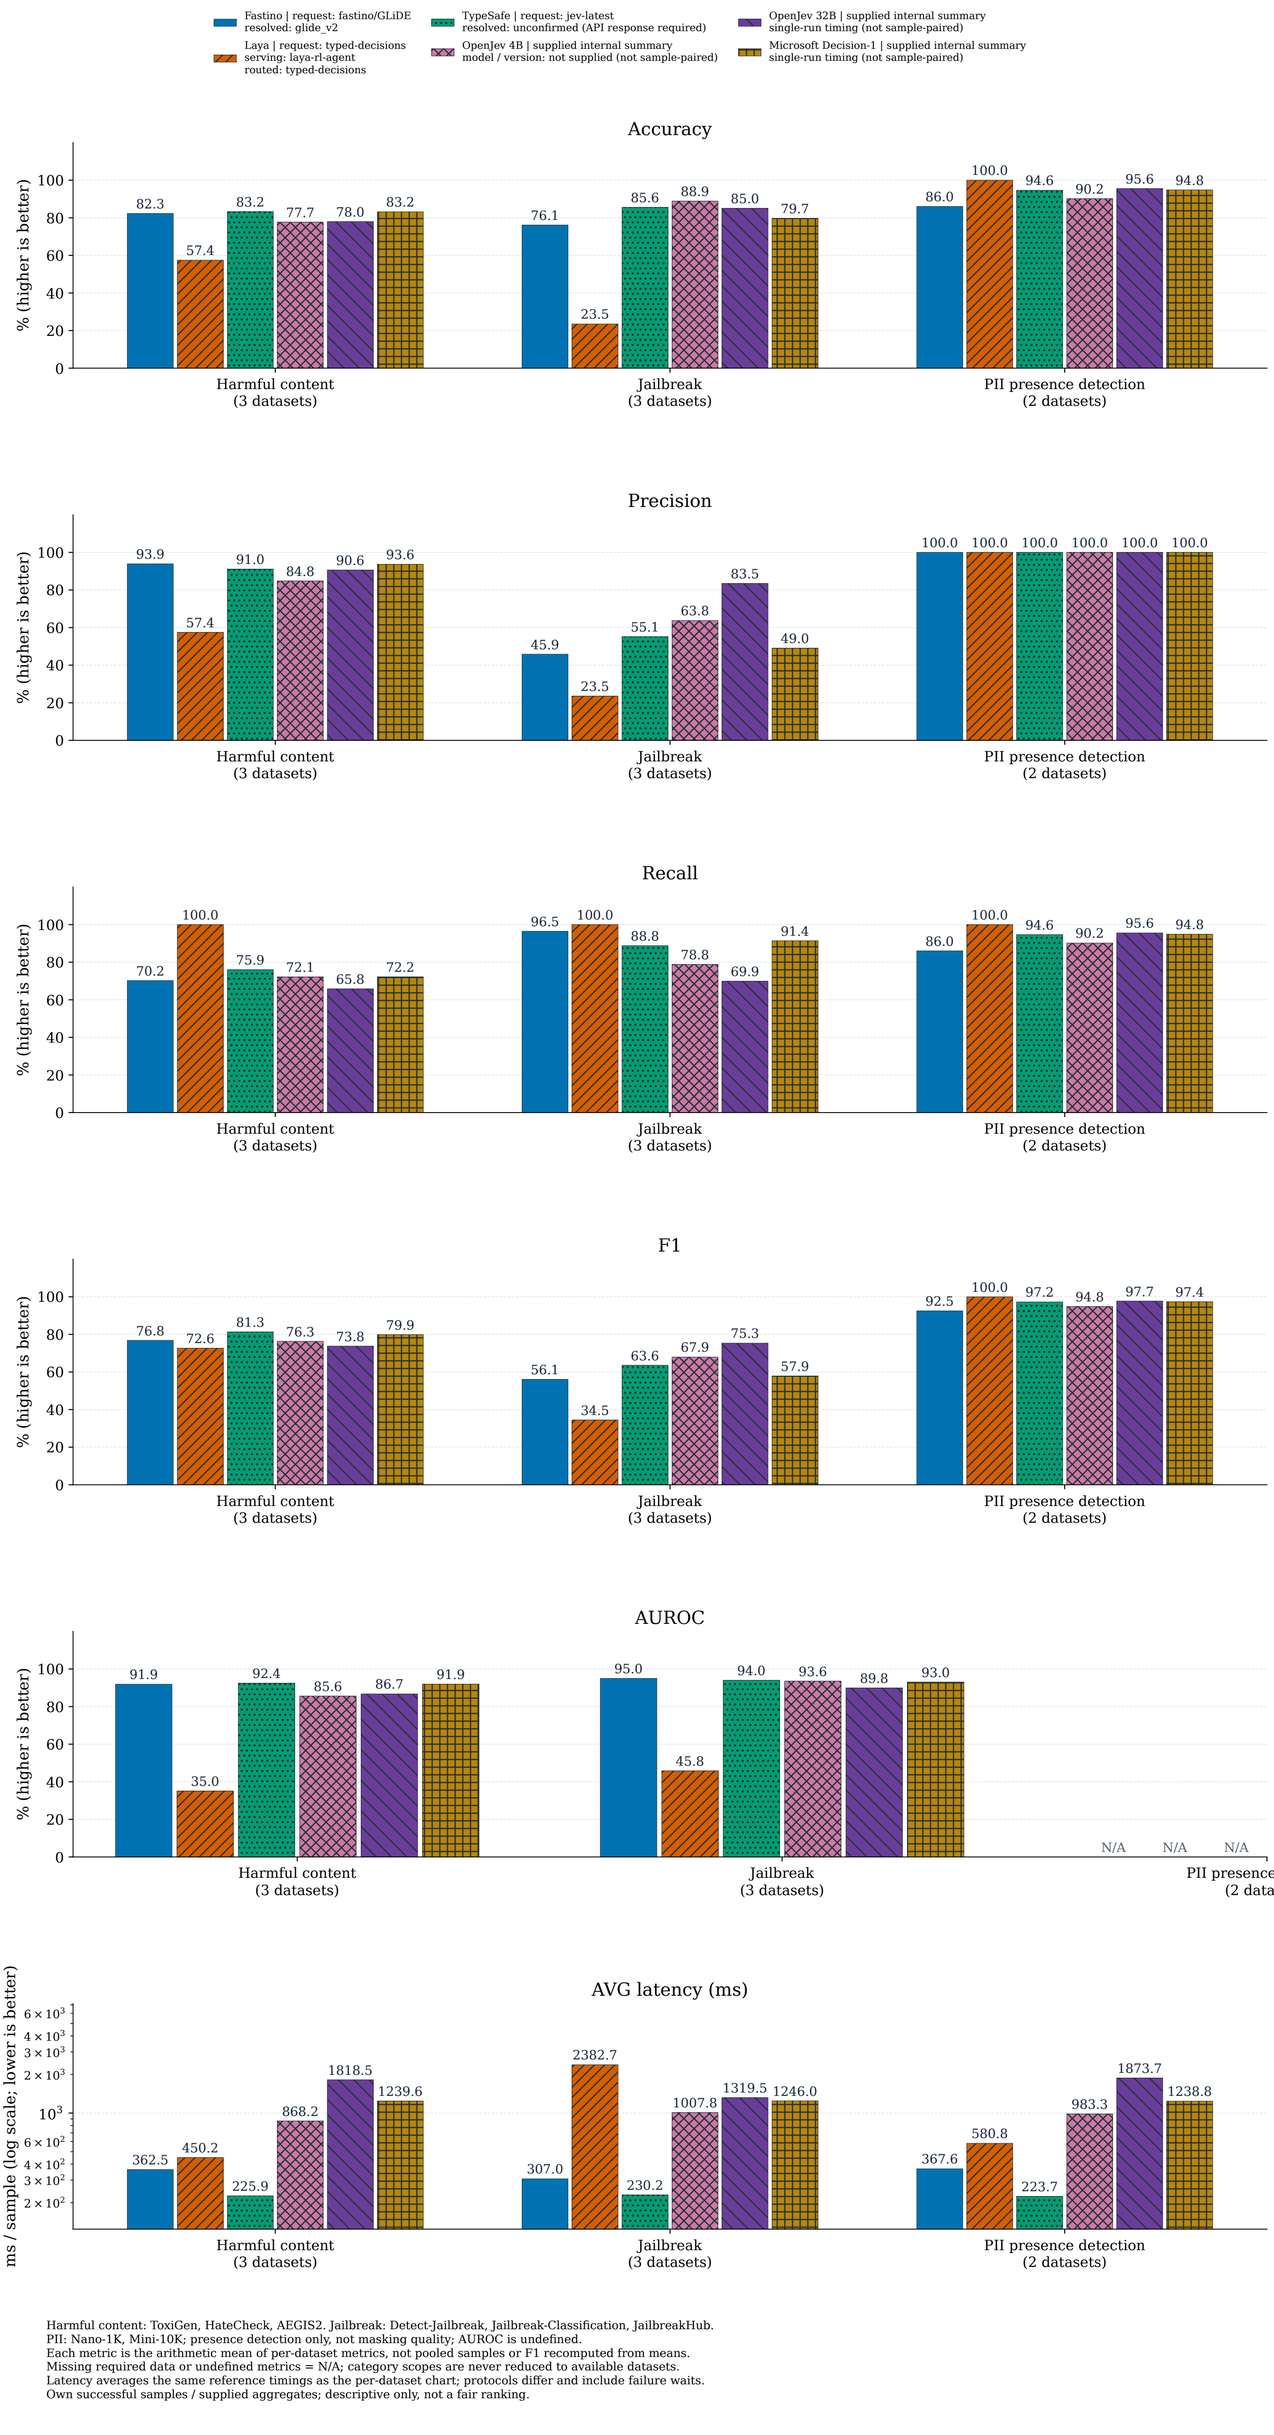
Fastino | request: fastino/GLiDE
resolved: glide_v2

Laya | request: typed-decisions
serving: laya-rl-agent
routed: typed-decisions

TypeSafe | request: jev-latest
resolved: unconfirmed (API response required)

# Model reference averages by dataset category


v1 / threshold = 0.5 | equal dataset weights within each category | NOT sample-paired

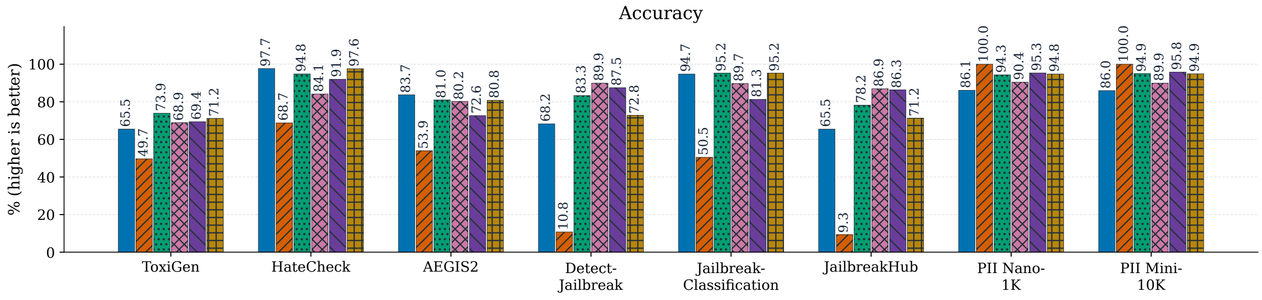


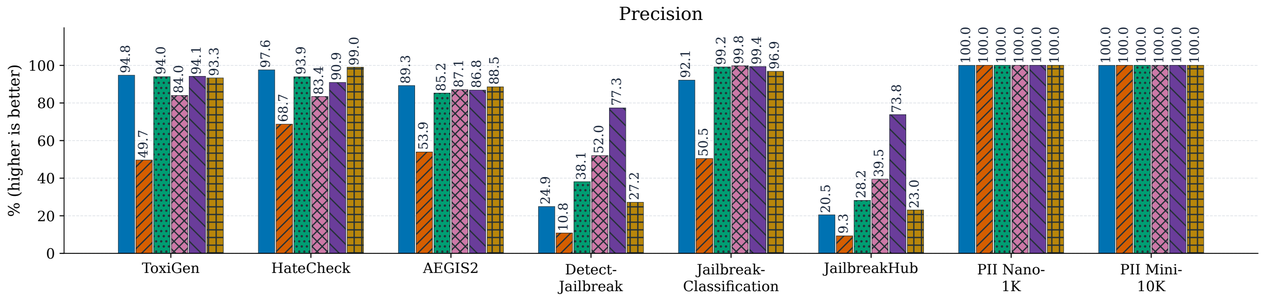

Harmful content: ToxiGen, HateCheck, AEGIS2. Jailbreak: Detect-Jailbreak, Jailbreak-Classification, JailbreakHub.
PII: Nano-1K, Mini-10K; presence detection only, not masking quality; AUROC is undefined.
Each metric is the arithmetic mean of per-dataset metrics, not pooled samples or F1 recomputed from means.
Missing required data or undefined metrics = N/A; category scopes are never reduced to available datasets.
Latency averages the same reference timings as the per-dataset chart; protocols differ and include failure waits.
Own successful samples / supplied aggregates; descriptive only, not a fair ranking.

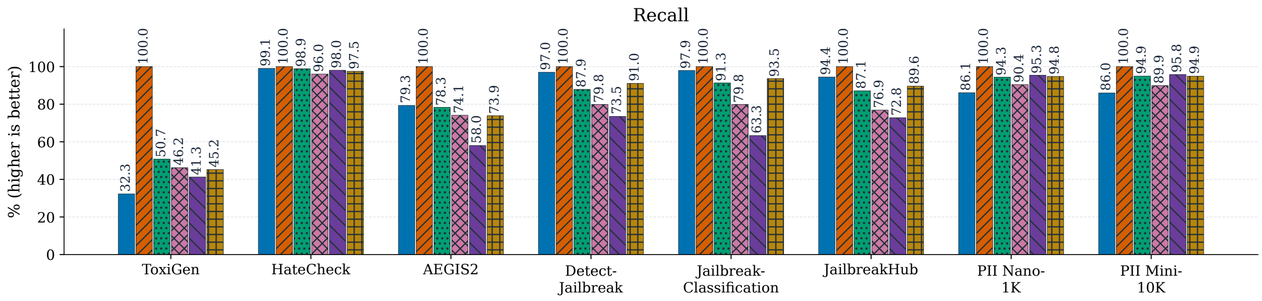
# Model reference comparison: prompt v1

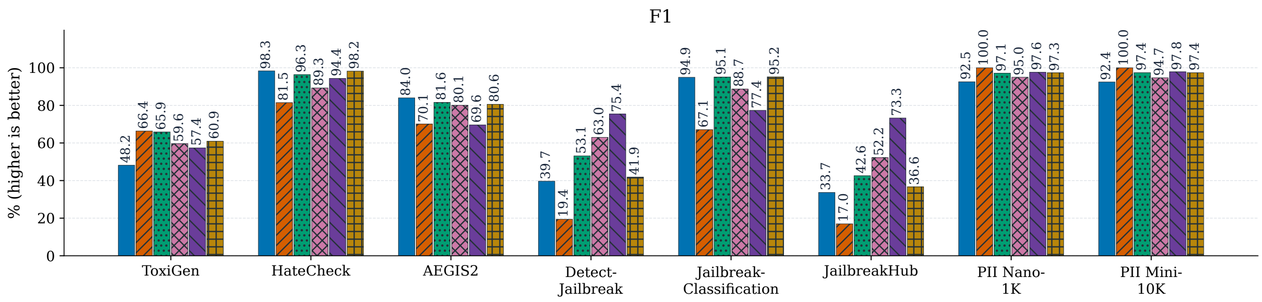
threshold = 0.5 | own successful samples | internal models: aggregates, NOT sample-paired

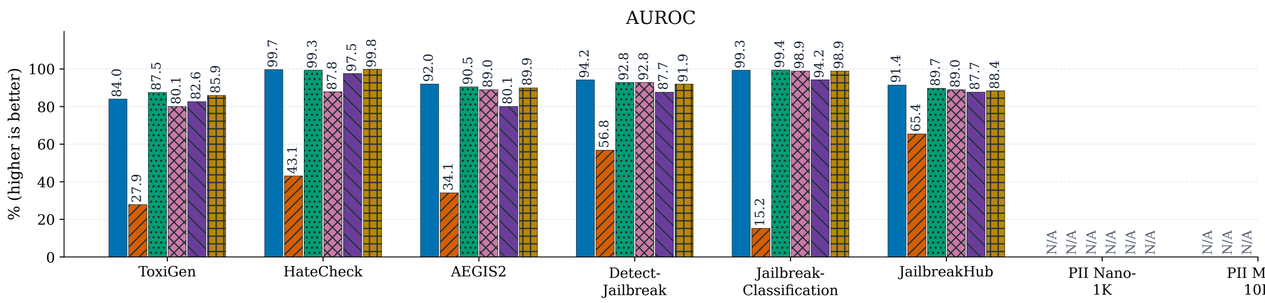


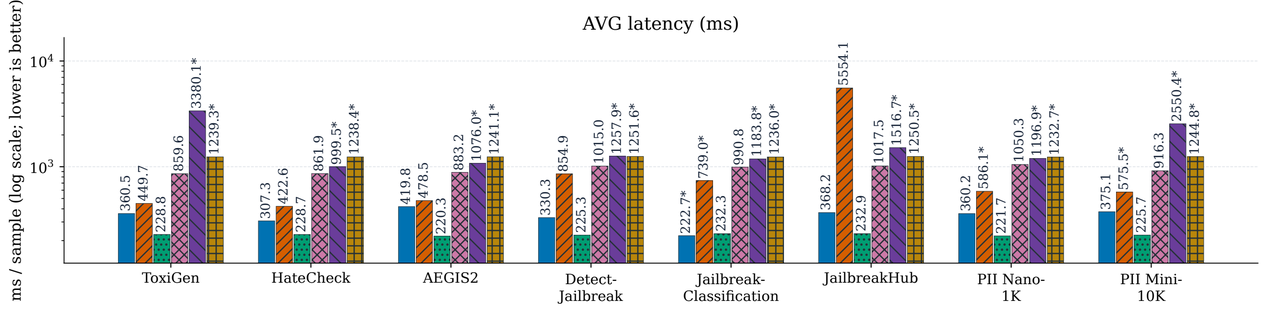



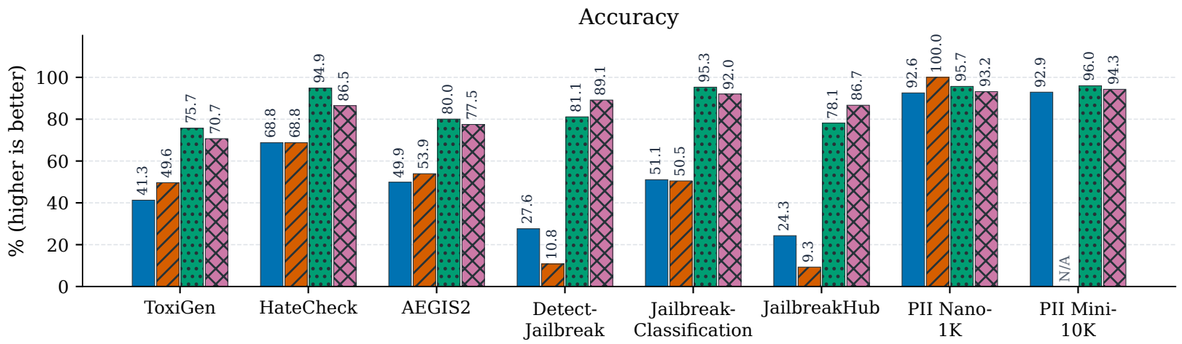



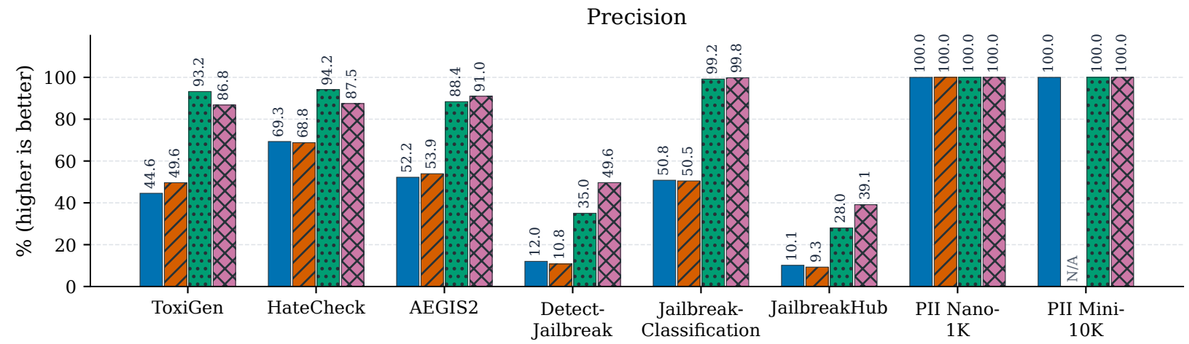



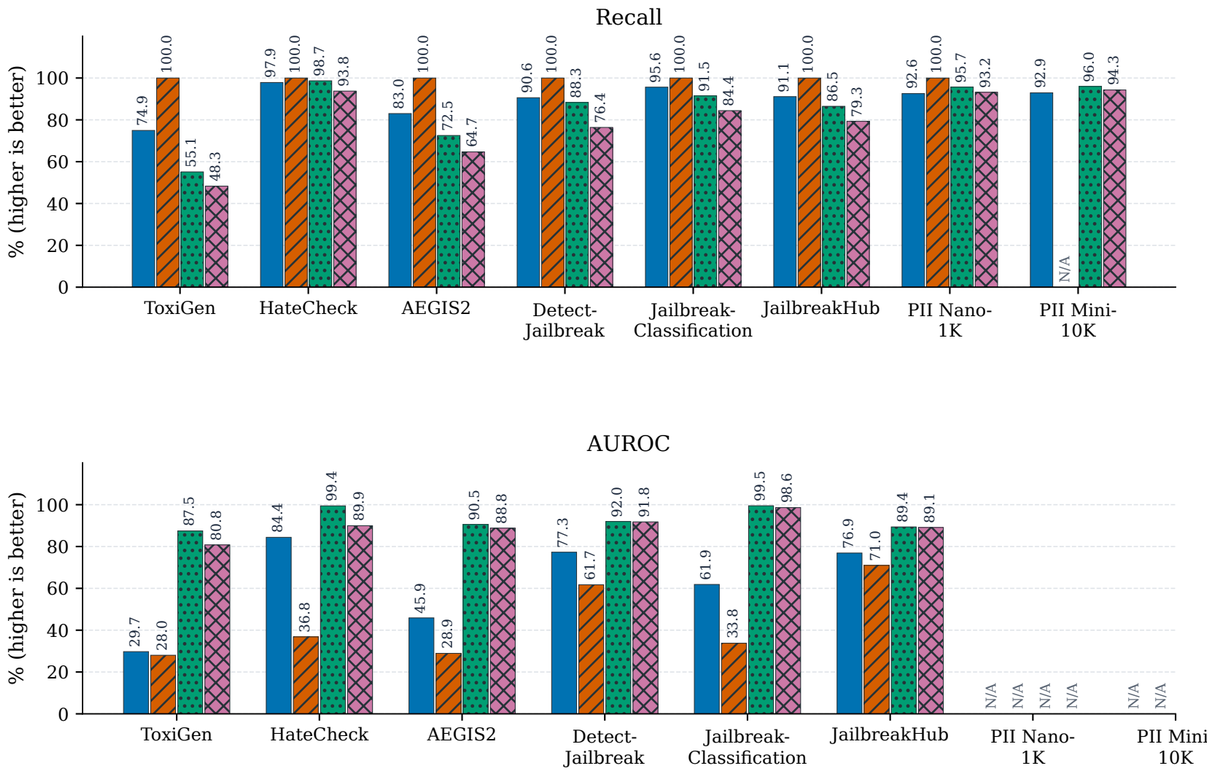

OpenJev 4B: four-run summary timing; local models prefer four-run log averages. 4B valid/error counts are unknown.
* = single-run v1 / 0.5 timing; local models require complete, matched logs; internal models use supplied summaries.
OpenJev 32B / Microsoft Decision-1: supplied single-run timing, including failures; protocols differ.
32B has 27,460 errors / 56,823 rows; quality excludes errors.
N/A = missing quality, undefined metric, or incomplete timing; missing values are not zero.
Descriptive only, not a fair ranking. PII measures presence detection, not masking quality.

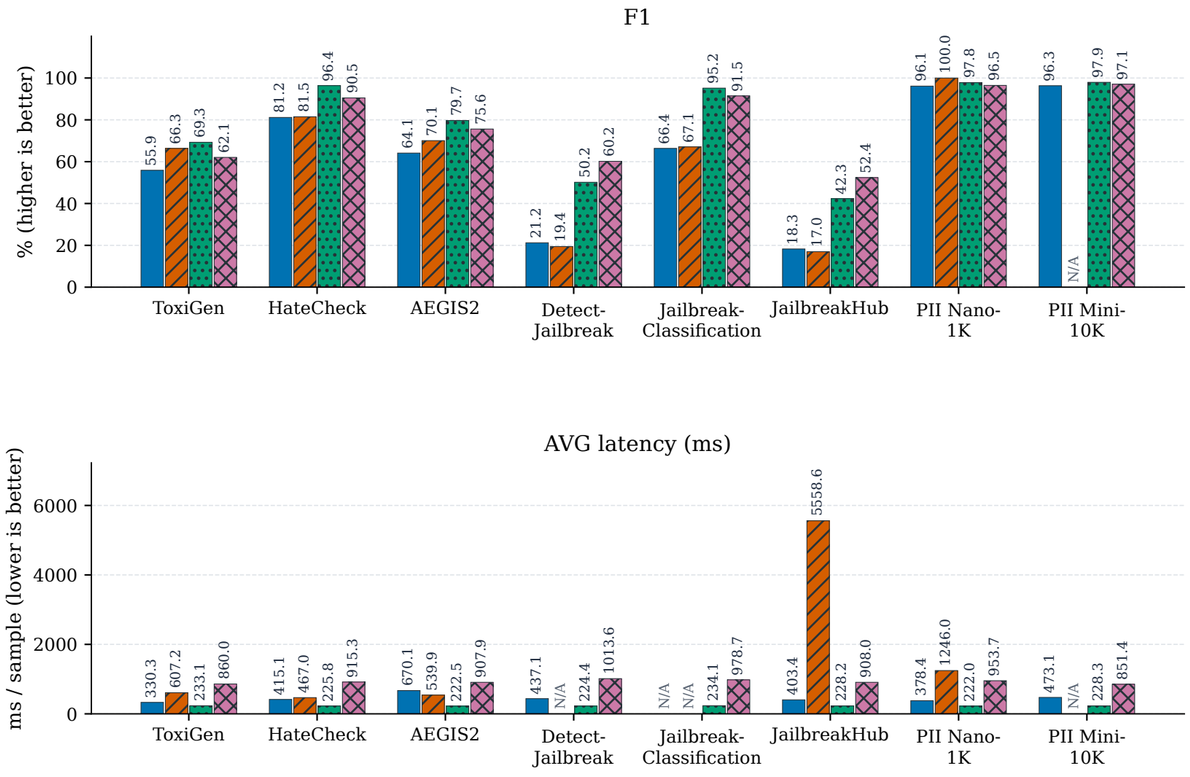
# Per-Dataset Reference Comparison: v2 / Threshold 0.5 (Fastino, Laya, TypeSafe, OpenJev 4B)

threshold = 0.5 | own successful samples | internal models: aggregates, NOT sample-paired










OpenJev 4B: four-run summary timing; local models prefer four-run log averages. 4B valid/error counts are unknown.
N/A = missing quality, undefined metric, or incomplete timing; missing values are not zero.
Descriptive only, not a fair ranking. PII measures presence detection, not masking quality.

Fastino | request: fastino/GLiDE
resolved: glide_v2

Laya | request: typed-decisions
serving: laya-rl-agent
routed: typed-decisions

TypeSafe | request: jev-latest
resolved: unconfirmed (API response required)

OpenJev 4B | supplied internal summary
model / version: not supplied (not sample-paired)

# Model reference averages (not sample-paired)

v1 | threshold = 0.5 | shared non-PII dataset names | equal dataset weights | PII reported separately

Fastino | request: fastino/GLiDE
resolved: glide_v2

Laya | request: typed-decisions
serving: laya-rl-agent
routed: typed-decisions

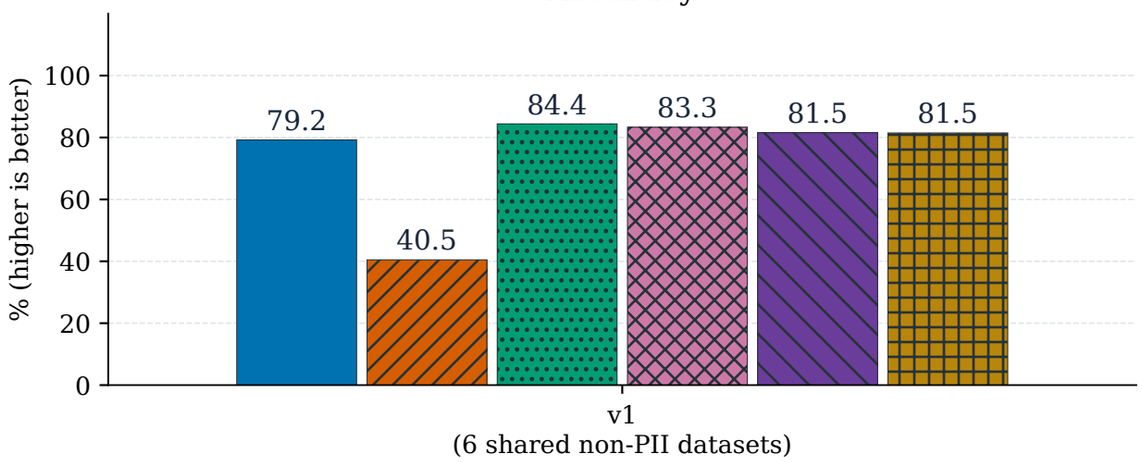
TypeSafe | request: jev-latest
resolved: unconfirmed (API response required)

OpenJev 4B | supplied internal summary
model / version: not supplied (not sample-paired)

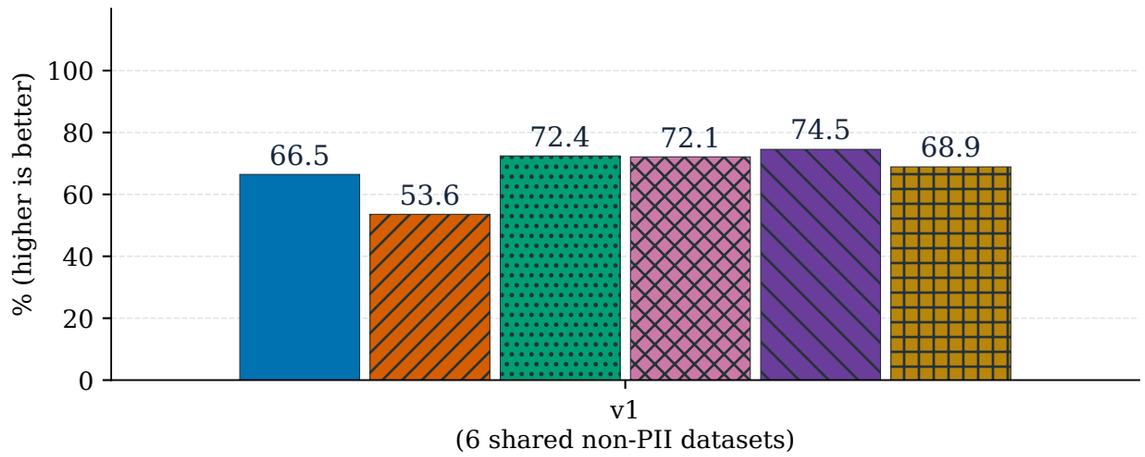
OpenJev 32B | supplied internal summary
single-run timing (not sample-paired)

Microsoft Decision-1 | supplied internal summary
single-run timing (not sample-paired)

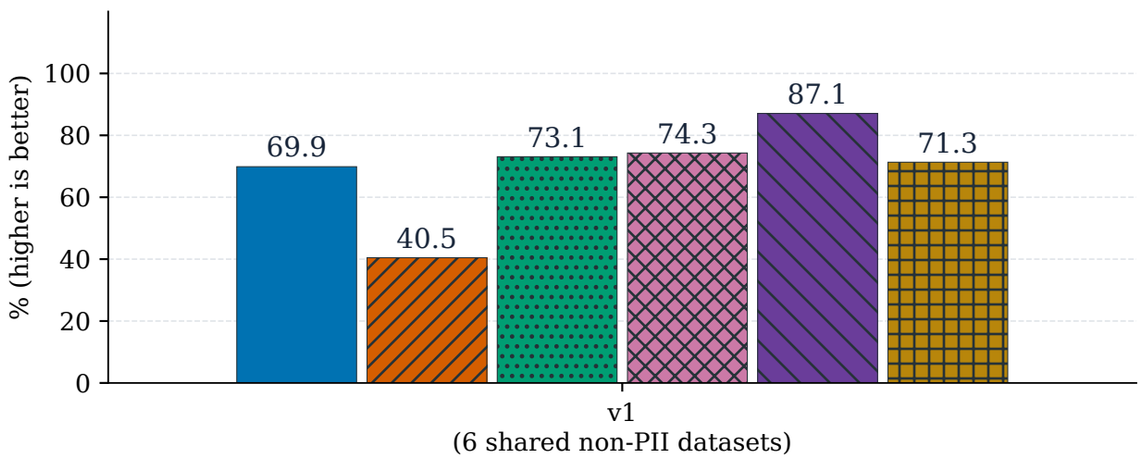
## Accuracy



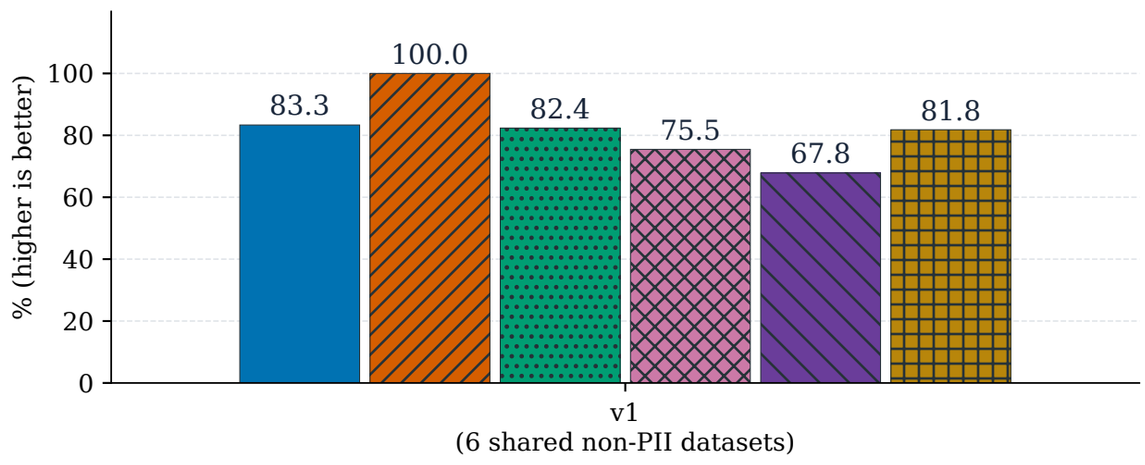

## F1



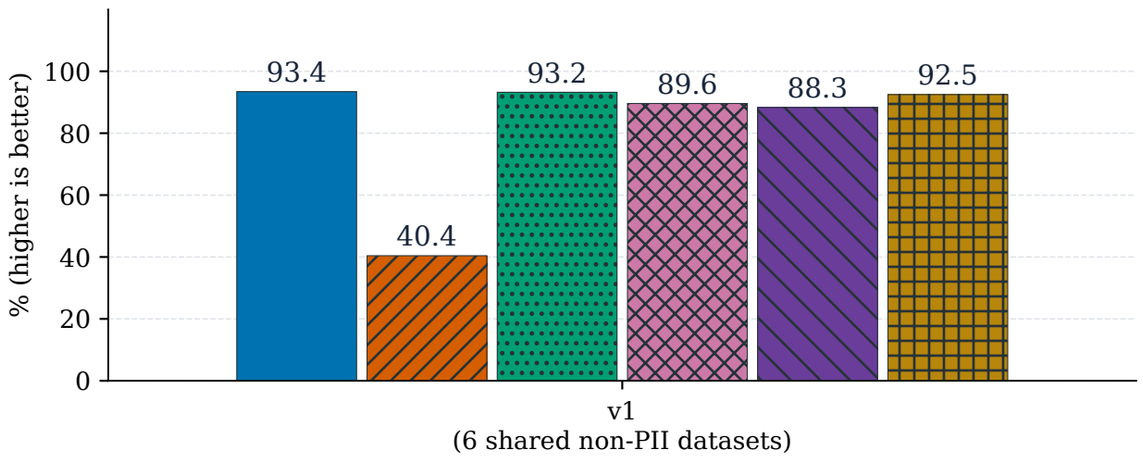

## Precision



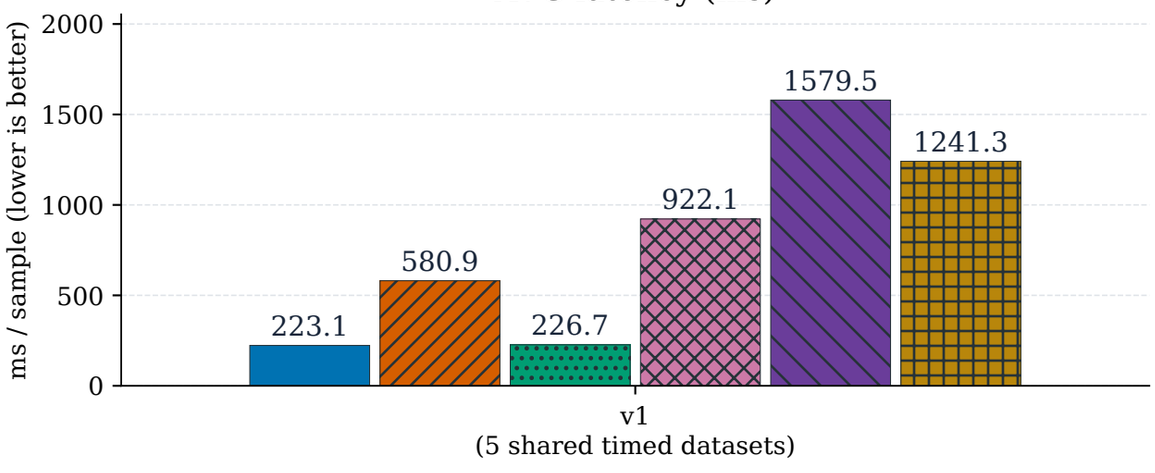

## Recall




## AUROC



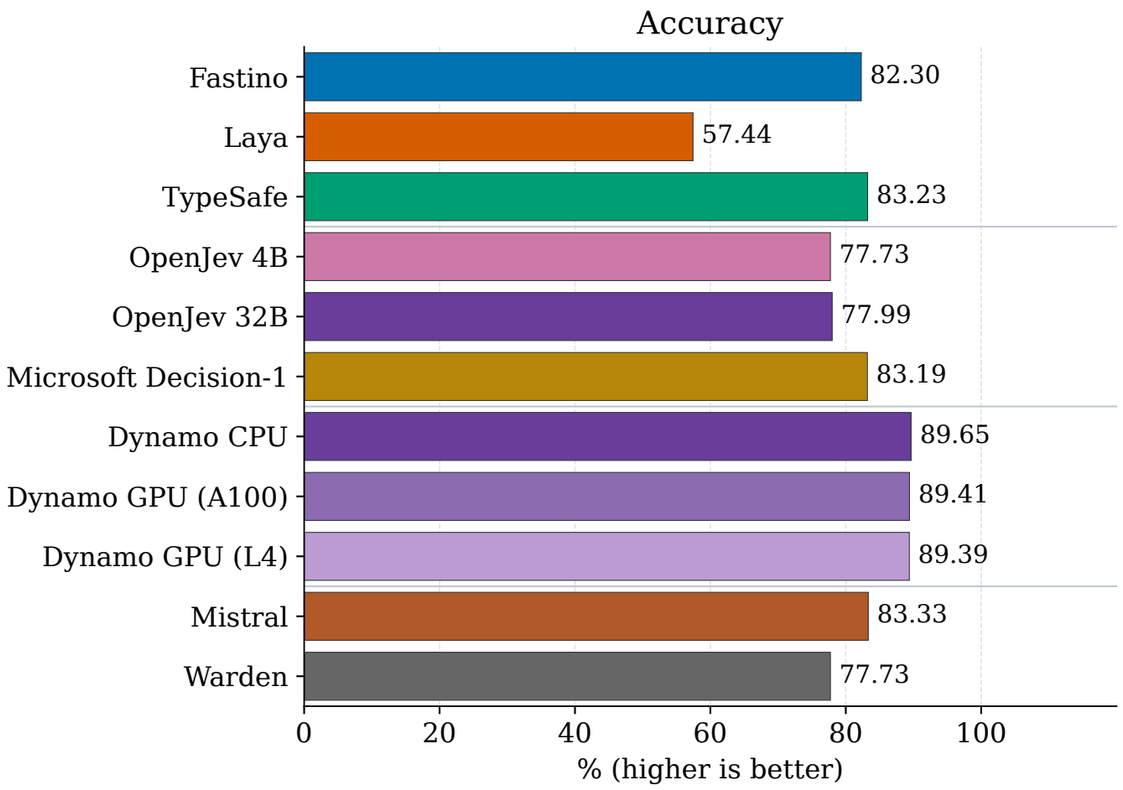

## AVG latency (ms)

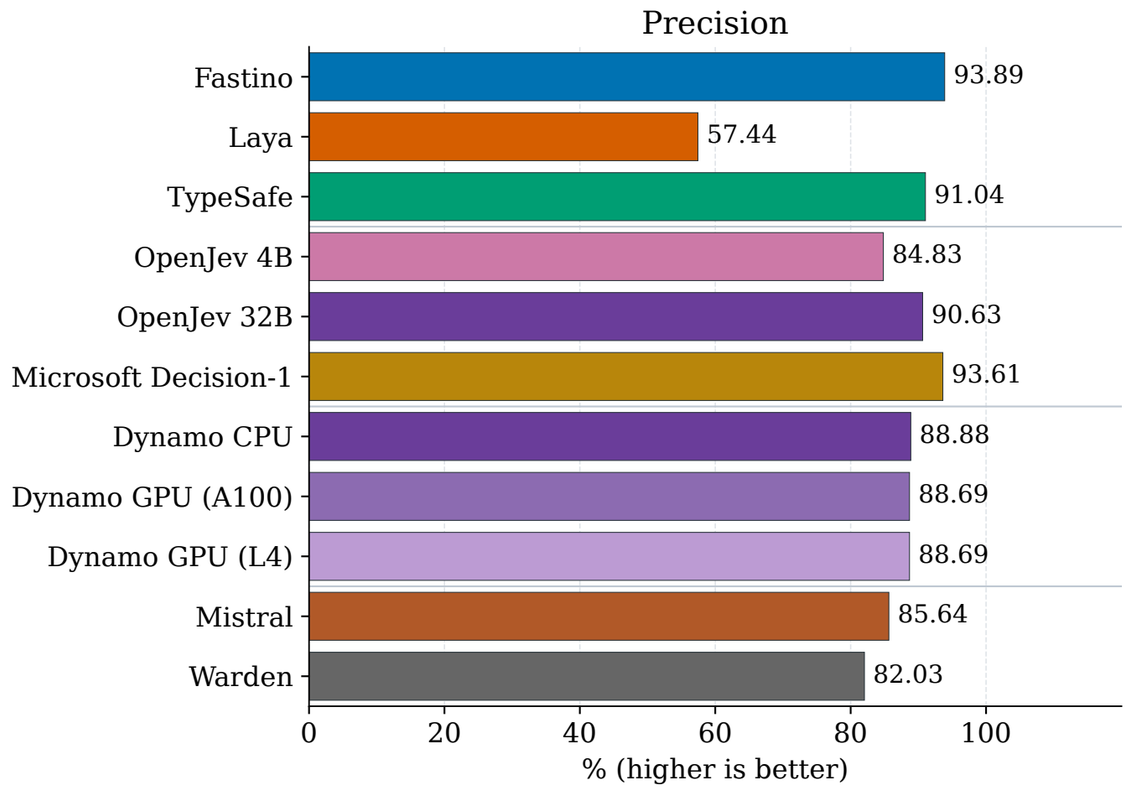


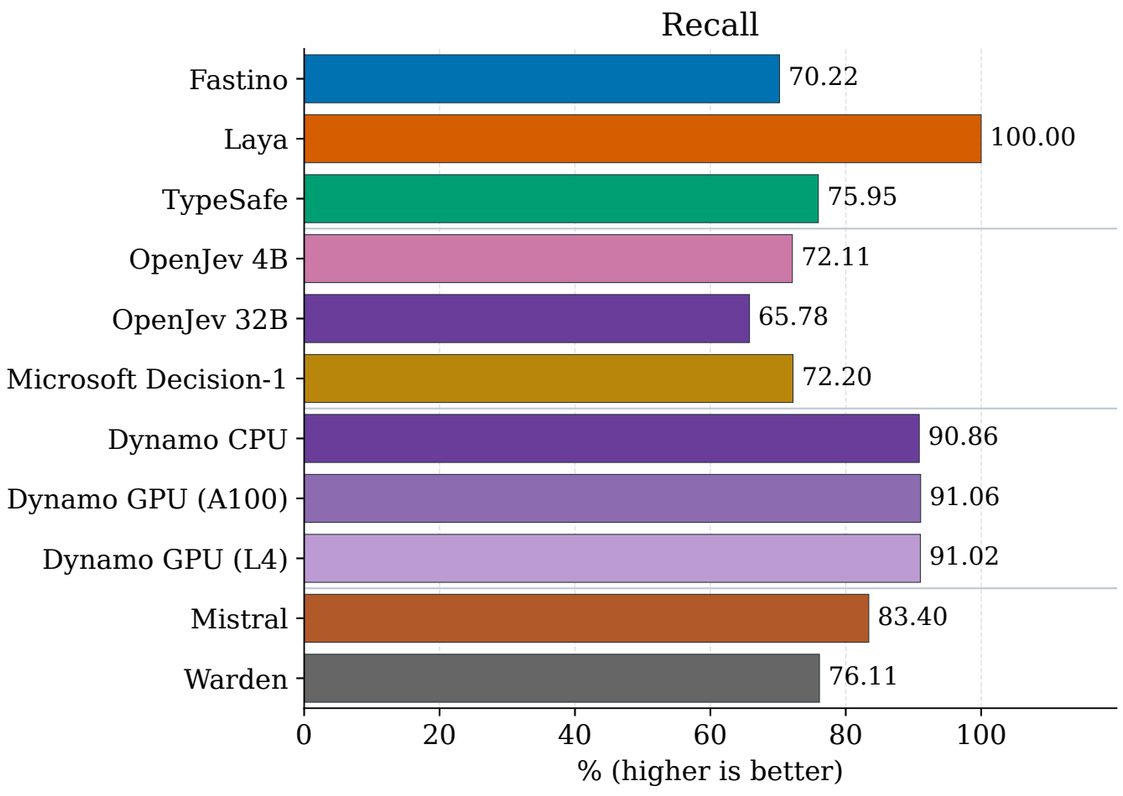

Each model uses its own successful samples; aggregate models have no paired sample IDs. Not a fair ranking.
Latency: equal dataset weights on the SAME fully timed v1 / 0.5 subset for all models:
ToxiGen, HateCheck, AEGIS2, Detect-Jailbreak, Jailbreak-Classification. Quality and latency dataset scopes can differ.
APIs: v1 / 0.5 single-run timing. OpenJev 4B: supplied summary; 32B / Decision-1: supplied single-run timing.
PII positives-only metrics and eight-dataset supplementary means are reported separately on the page.
Missing quality stays N/A; no shared timing subset = N/A latency. Timing protocols differ; not inference time.

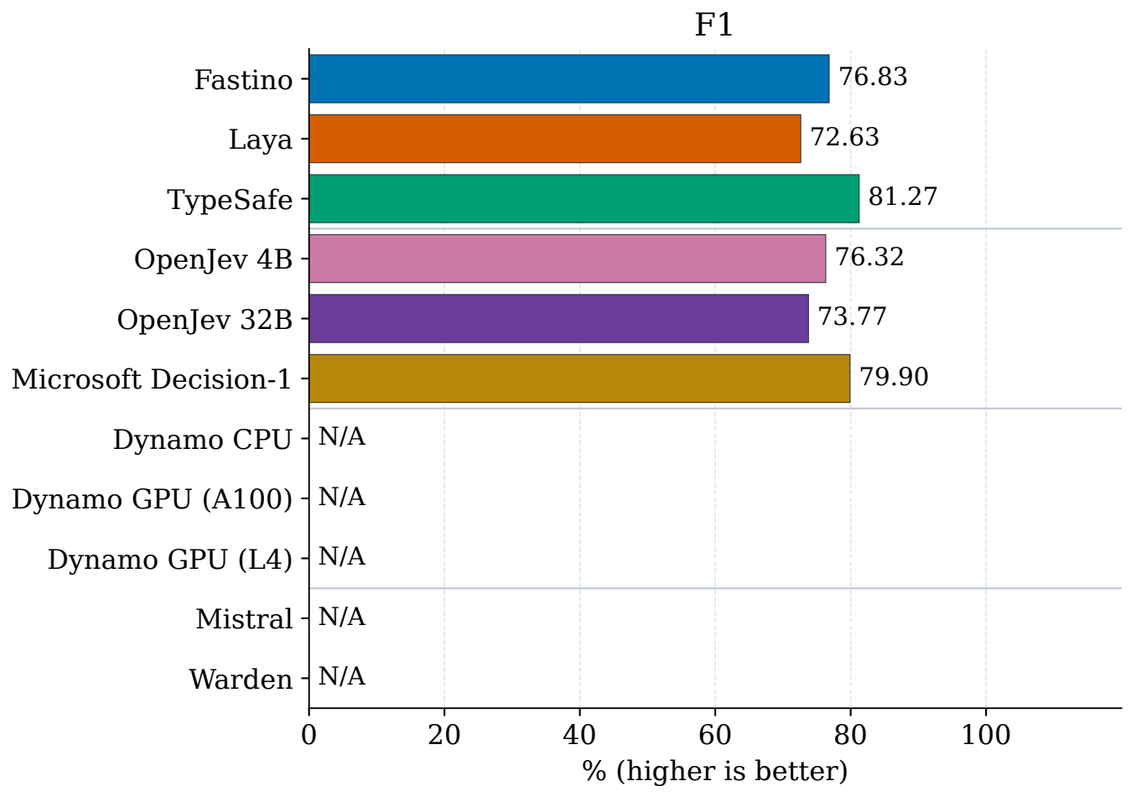
# Three-dataset model reference averages

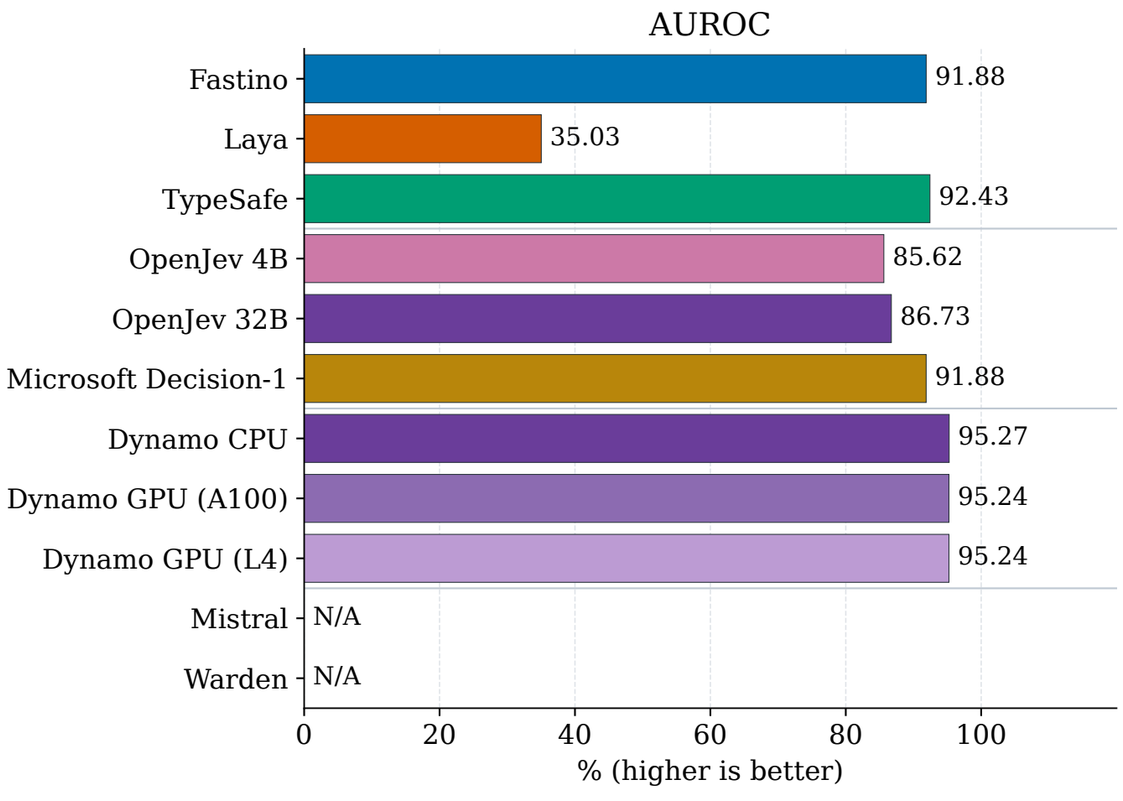
Computed averages: ToxiGen / HateCheck / AEGIS2 | supplied-model dataset scopes unverified

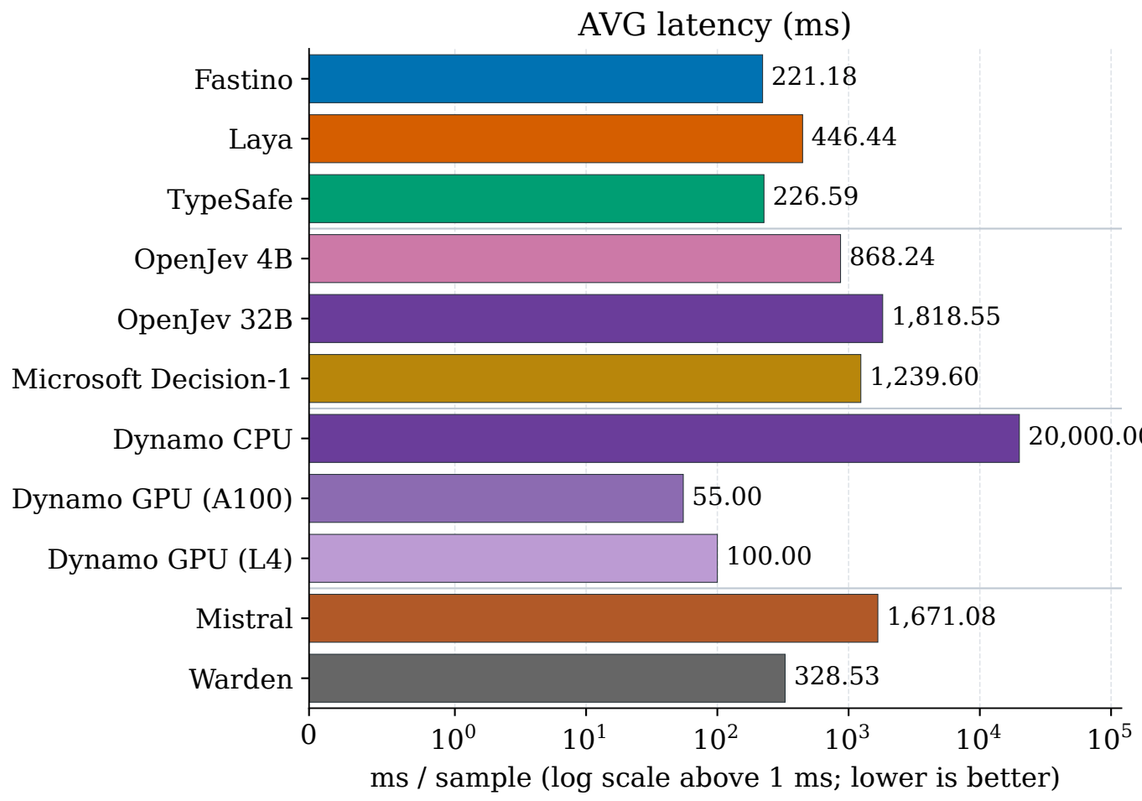



Computed models: no internal dataset was available; v1 / 0.5 means use only the three shared datasets.
Local latency uses v1 / 0.5 runs; OpenJev 4B / 32B and Decision-1 use their supplied summary latency.
Dynamo / Mistral / Warden: supplied averages; their evaluations may also include an internal dataset.
Its inclusion in their averages is unconfirmed; prompt, threshold and timing protocols were not supplied.
N/A = not supplied or required source data missing. F1 is not inferred from average precision / recall.
Successful samples and timing protocols are not aligned; descriptive reference only, not a fair ranking.