Multi-Model Reference Averages (v1 / Threshold 0.5) | Luna: native presets (prompt N/A) | Straiker: threshold N/A

v1 | threshold = 0.5 | shared non-PII dataset names | equal dataset weights | PII reported separately

Fastino | request: fastino/GLiDE
resolved: glide_v2

Fastino GLiNER2.5-Decide
model ID: fastino/gliner2.5-decide
response model: fastino/gliner2.5-decide
v1 / 0.5; PII not tested

Fastino GLiGuard-LLMGuardrails-300M
model ID: fastino/gliguard-LLMGuardrails-300M
v1 / 0.5; PII not tested

Laya | request: typed-decisions
serving: laya-rl-agent
routed: typed-decisions

TypeSafe | request: jev-latest
resolved: unconfirmed (API response required)

OpenJev 4B | supplied internal summary
model / version: not supplied (not sample-paired)

OpenJev 32B | supplied internal summary
single-run timing (not sample-paired)


Microsoft Decision-1 | supplied internal summary
single-run timing (not sample-paired)

Qwen3Guard-Stream-8B | supplied summary
binary safety labels; PII unsupported


Luna | original task-specific presets
prompt: N/A; binary threshold: 0.5
PII: separate multilabel evaluation

Straiker | supplied aggregate
prompt: v1; threshold: N/A
single-run log elapsed/processed


Accuracy

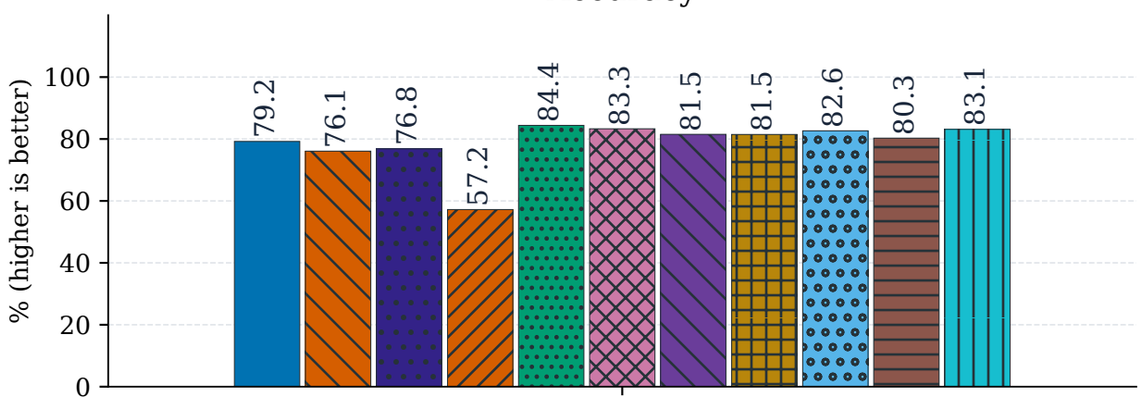


F1

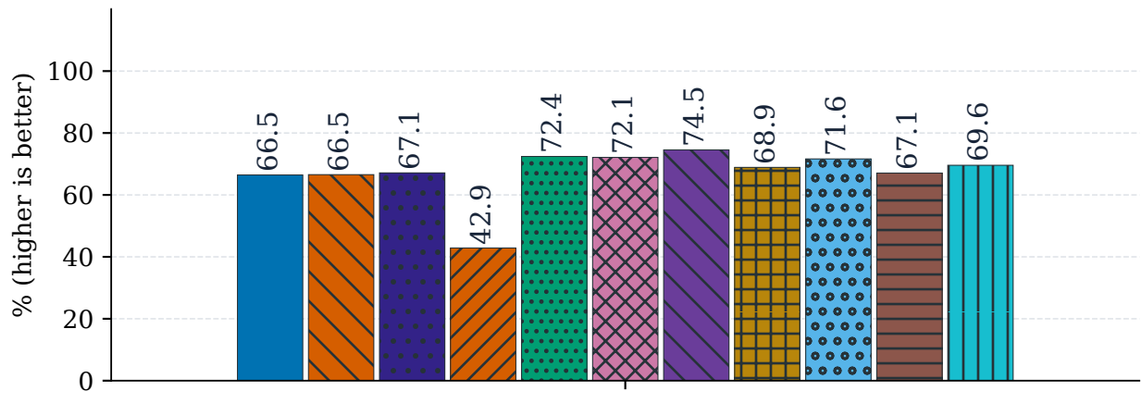


Precision

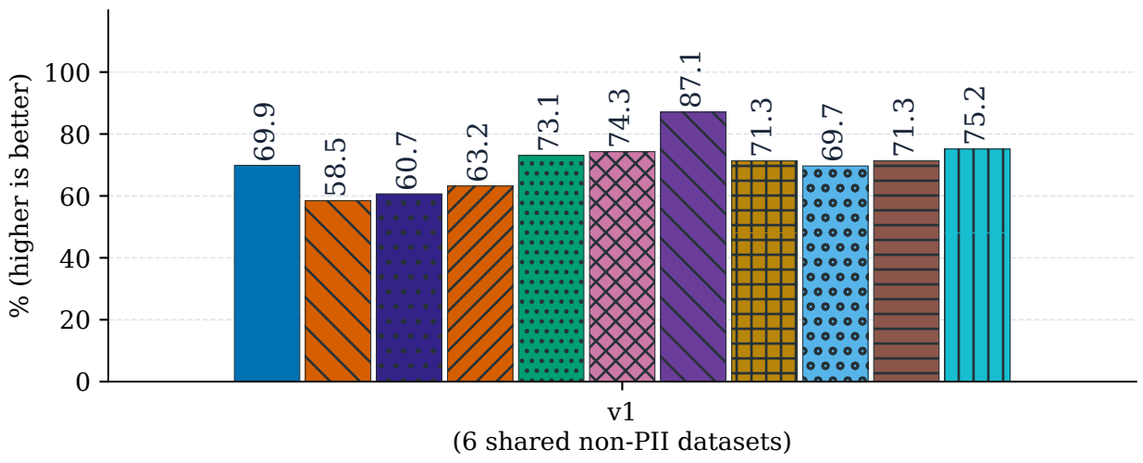


Recall

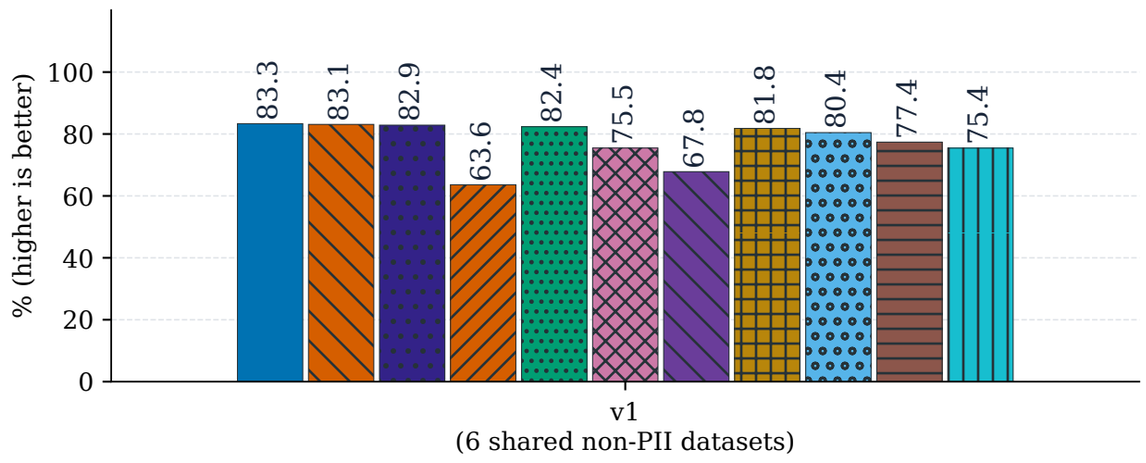

AUROC

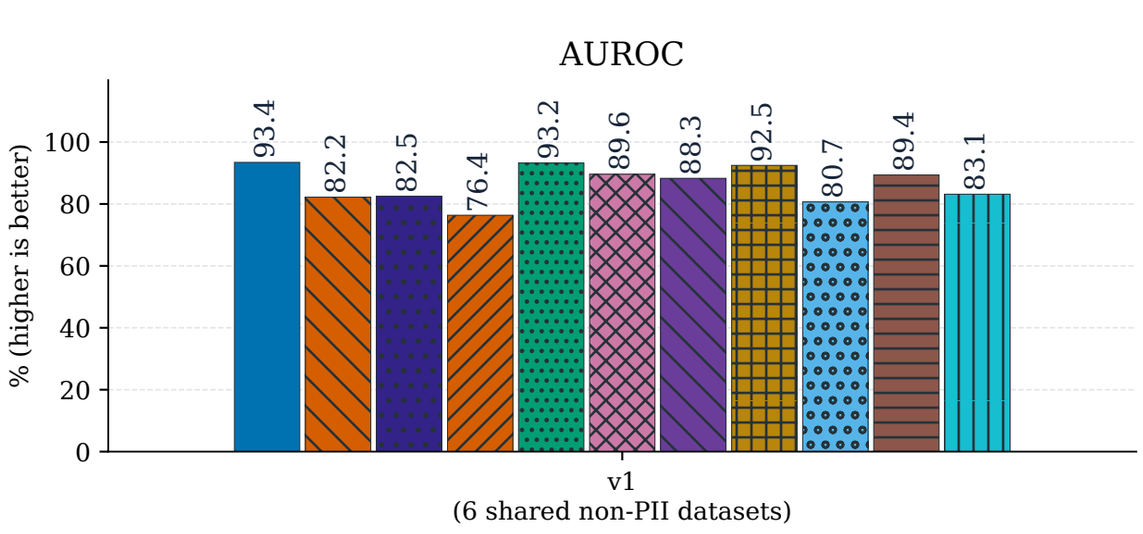

AVG latency (ms)

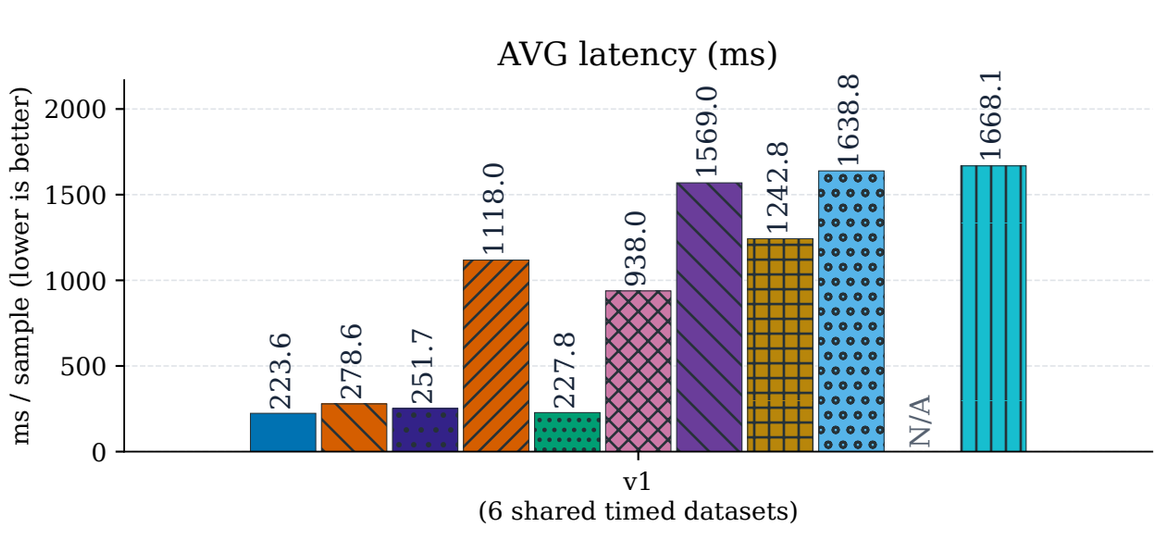

Each model uses its own successful samples; aggregate models have no paired sample IDs. Not a fair ranking.
Latency: original models' shared fully timed v1 / 0.5 subset; Qwen follows the same dataset scope:
ToxiGen, HateCheck, AEGIS2, Detect-Jailbreak, Jailbreak-Classification, JailbreakHub. Quality and latency dataset scopes can differ.
APIs: v1 / 0.5 single-run timing. OpenJev 4B: supplied summary; 32B / Decision-1: supplied single-run timing.
PII is ordinary binary classification (present vs absent), not masking quality; positives-only results are separate.
Missing quality stays N/A; no shared timing subset = N/A latency. Timing protocols differ; not inference time.
Qwen3Guard-Stream-8B: binary safety labels; PII unsupported (historical proxies are audit-only).
Qwen mean latency: log elapsed/processed (failures included); CSV P95: successful requests. No ranking.
Luna: original task-specific presets, no custom prompts (prompt N/A); binary threshold 0.5.
Other models use dataset-specific v1/v2 prompts. Task-definition differences may affect results.
Luna three-dataset reference latency: 181.97 ms (user-measured; timing/weights unspecified).
Per-dataset latency and binary PII: N/A; PII micro-F1 is separate. Scorer versions unverified.
Straiker: supplied v1 aggregates; threshold and model/version N/A (not confirmed as 0.5).
Single-run log elapsed/processed includes failures; JailbreakHub: 1 error. PII: binary classification.
Raw files unverified; own valid samples only, not a sample-aligned ranking.