



Per-dataset classification metrics and average latency


v1 | threshold = 0.5 | each model's own successful samples (not paired)

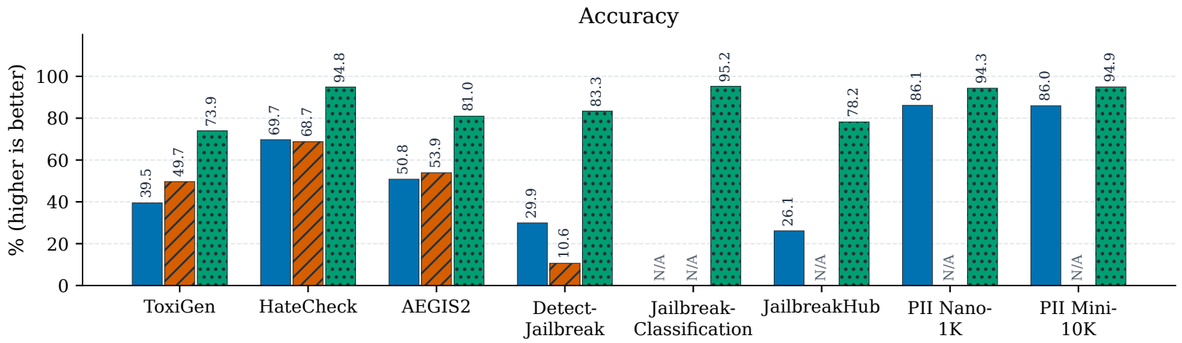


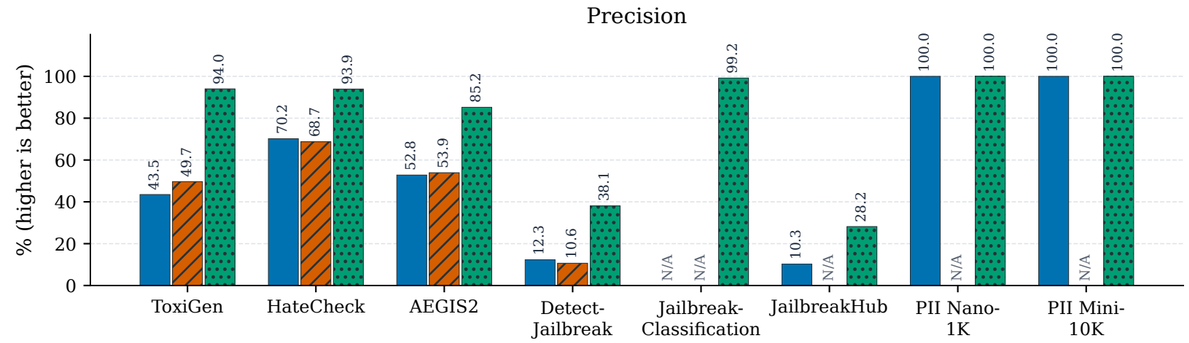

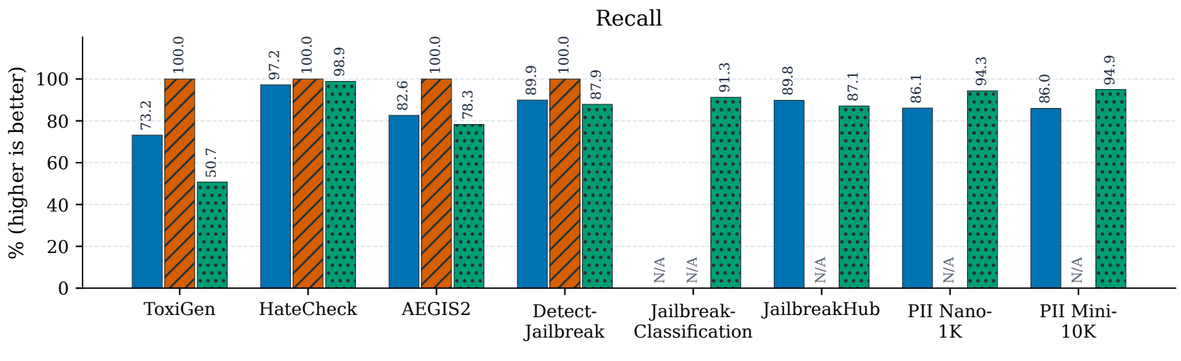

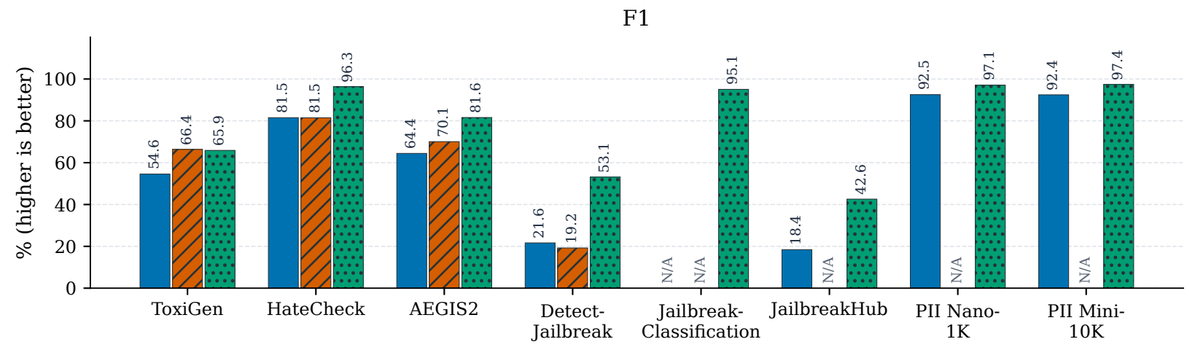

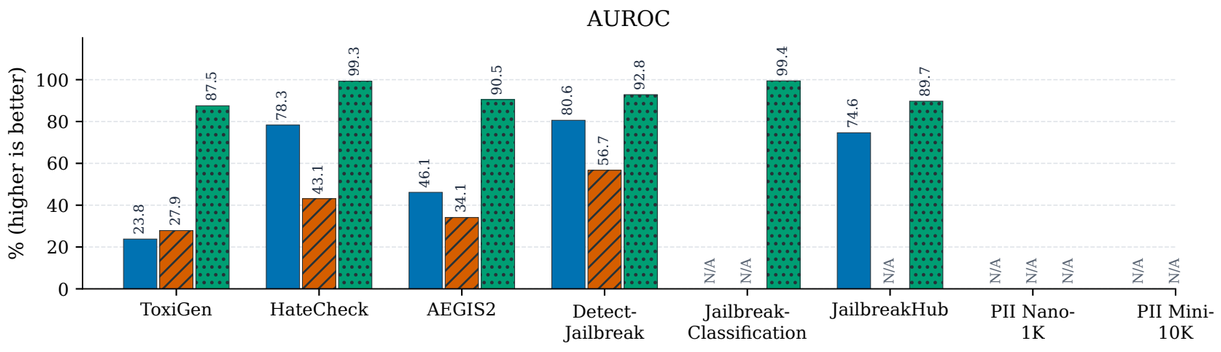

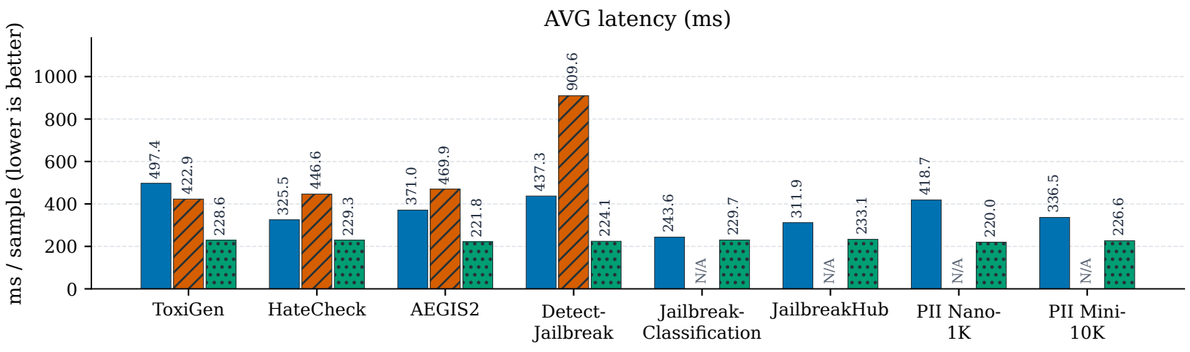

N/A = missing result, no successful predictions, undefined metric, or no aligned complete timing log.
PII datasets contain positives only: detection metrics do not measure masking quality; AUROC is undefined.
Latency = logged end-to-end elapsed / all processed rows, including failed requests; not pure inference time.
Successful sample sets can differ between models; use the paired baseline for fair quality comparisons.

Fastino | request: fastino/GLiDE
resolved: glide_v2

Laya | request: typed-decisions
serving: laya-rl-agent
routed: typed-decisions

TypeSafe | request: jev-latest
resolved: unconfirmed (API response required)