
Per-Dataset Multi-Model Reference Comparison (v1 / Threshold 0.5) | Luna: native presets (prompt N/A)


threshold = 0.5 | own successful samples | internal models: aggregates, NOT sample-paired

- Fastino | request: fastino/GLiDE resolved: glide_v2
- Fastino GLiNER2.5-Decide model ID: fastino/gliner2.5-decide response model: fastino/gliner2.5-decide v1 / 0.5; PII not tested
- Fastino GLiGuard-LLMGuardrails-300M model ID: fastino/gliguard-LLMGuardrails-300M v1 / 0.5; PII not tested
- Laya | request: typed-decisions serving: laya-rl-agent routed: typed-decisions
- TypeSafe | request: jev-latest resolved: unconfirmed (API response required)
- OpenJev 4B | supplied internal summary model / version: not supplied (not sample-paired)
- OpenJev 32B | supplied internal summary single-run timing (not sample-paired)
- Microsoft Decision-1 | supplied internal summary single-run timing (not sample-paired)
- Qwen3Guard-Stream-8B | supplied summary binary safety labels; PII unsupported
- Luna | original task-specific presets prompt: N/A; binary threshold: 0.5 PII: separate multilabel evaluation


Accuracy

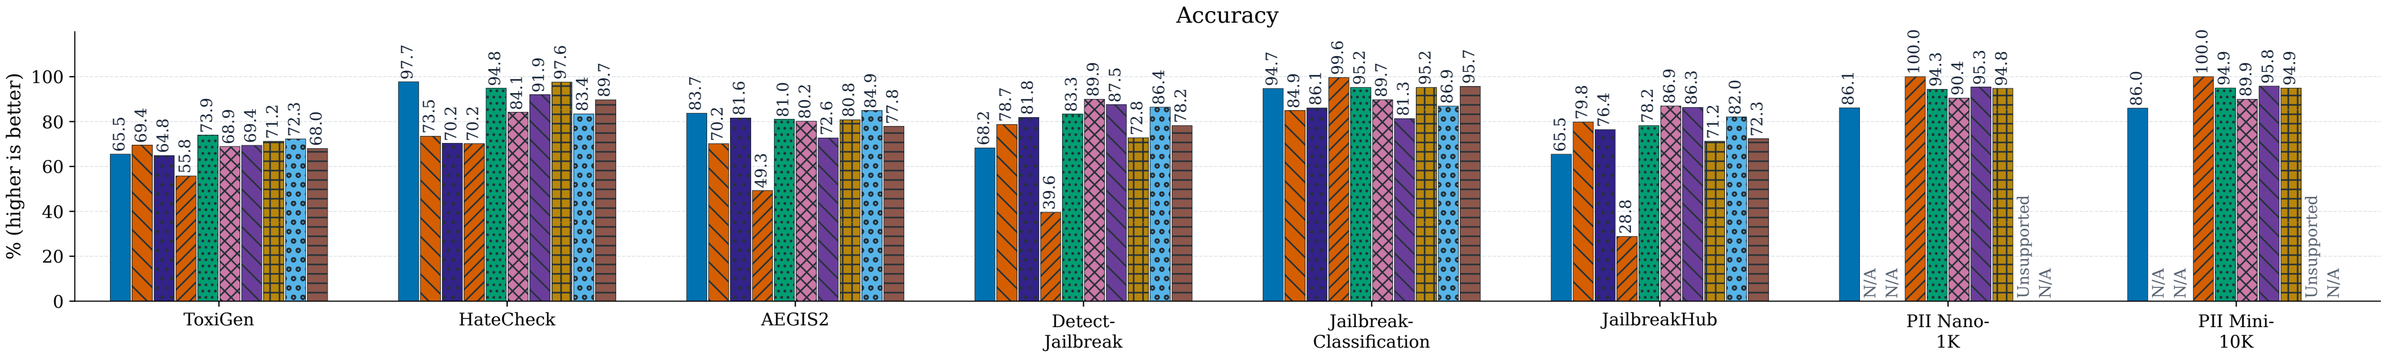


Precision

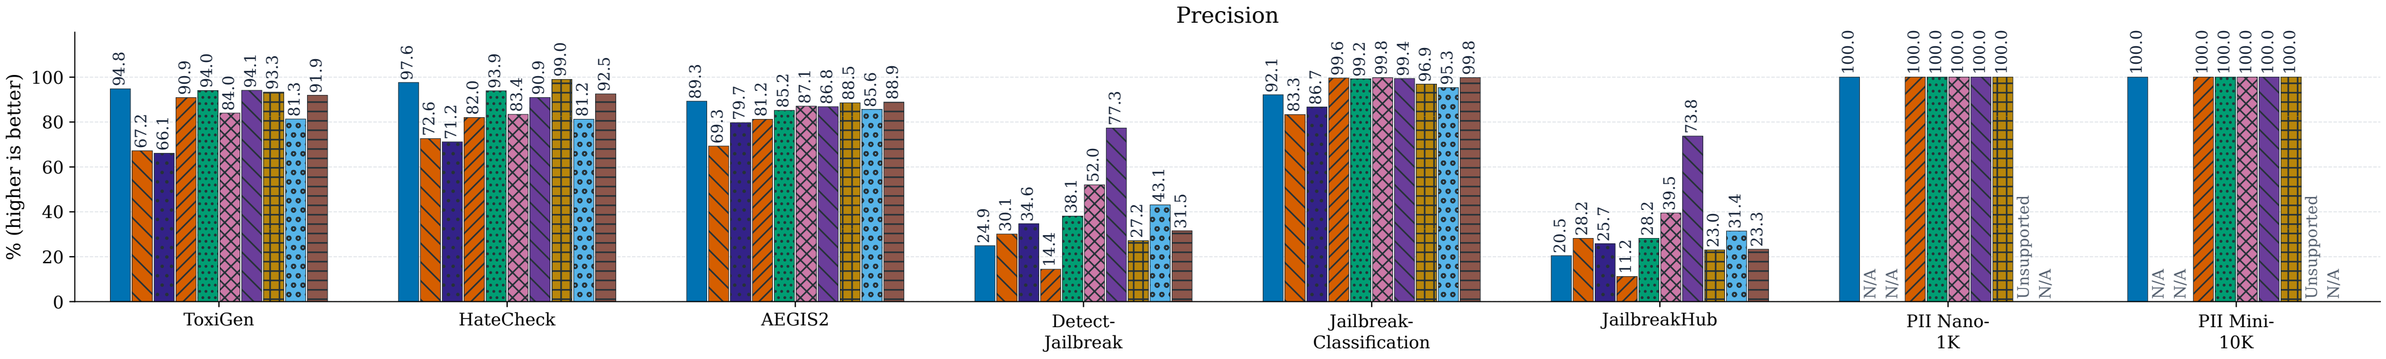

Recall

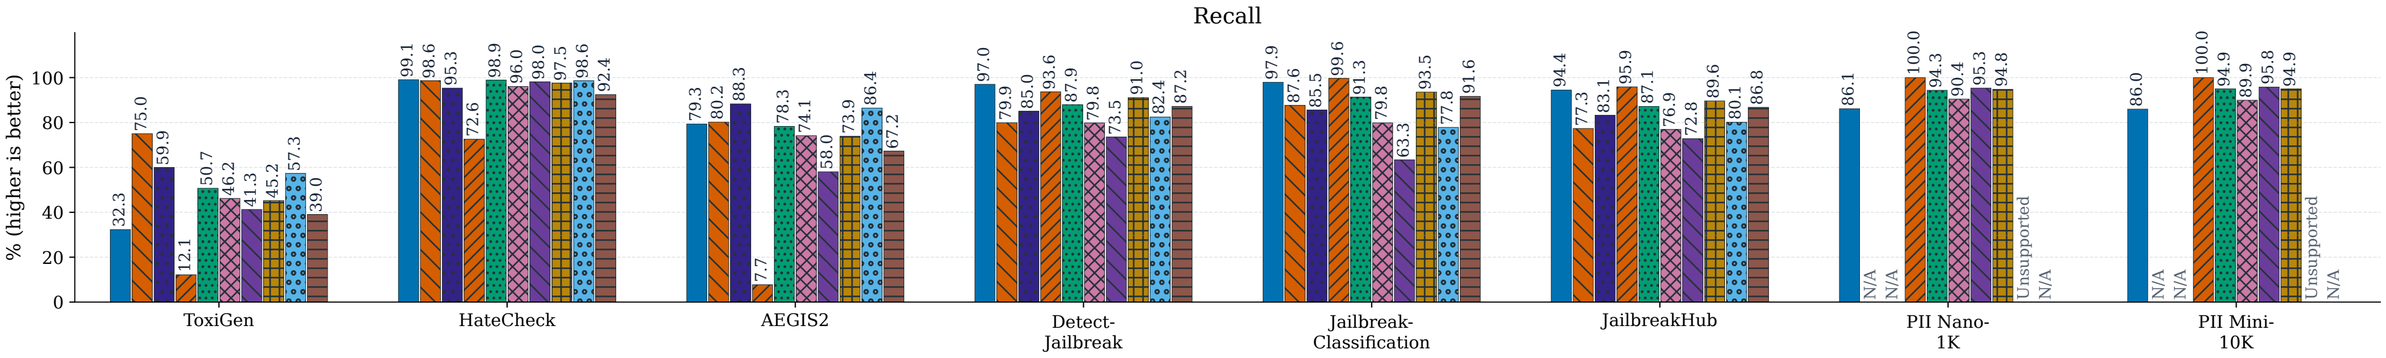


F1

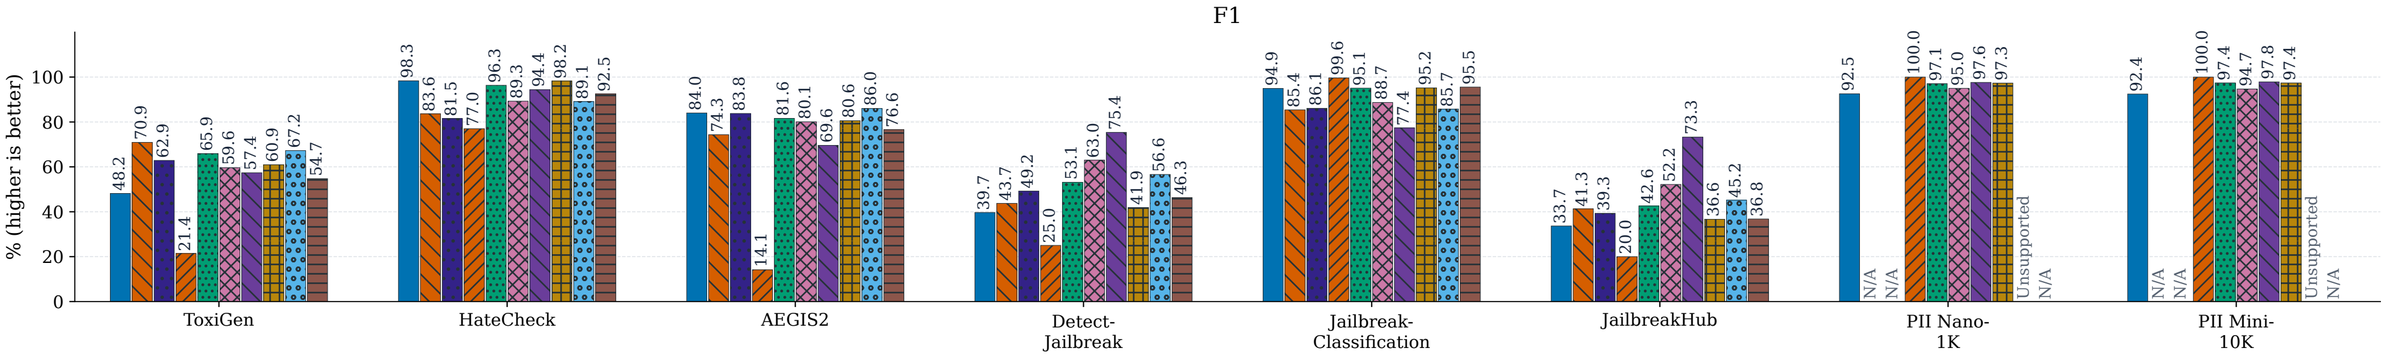

AUROC

AVG latency (ms)

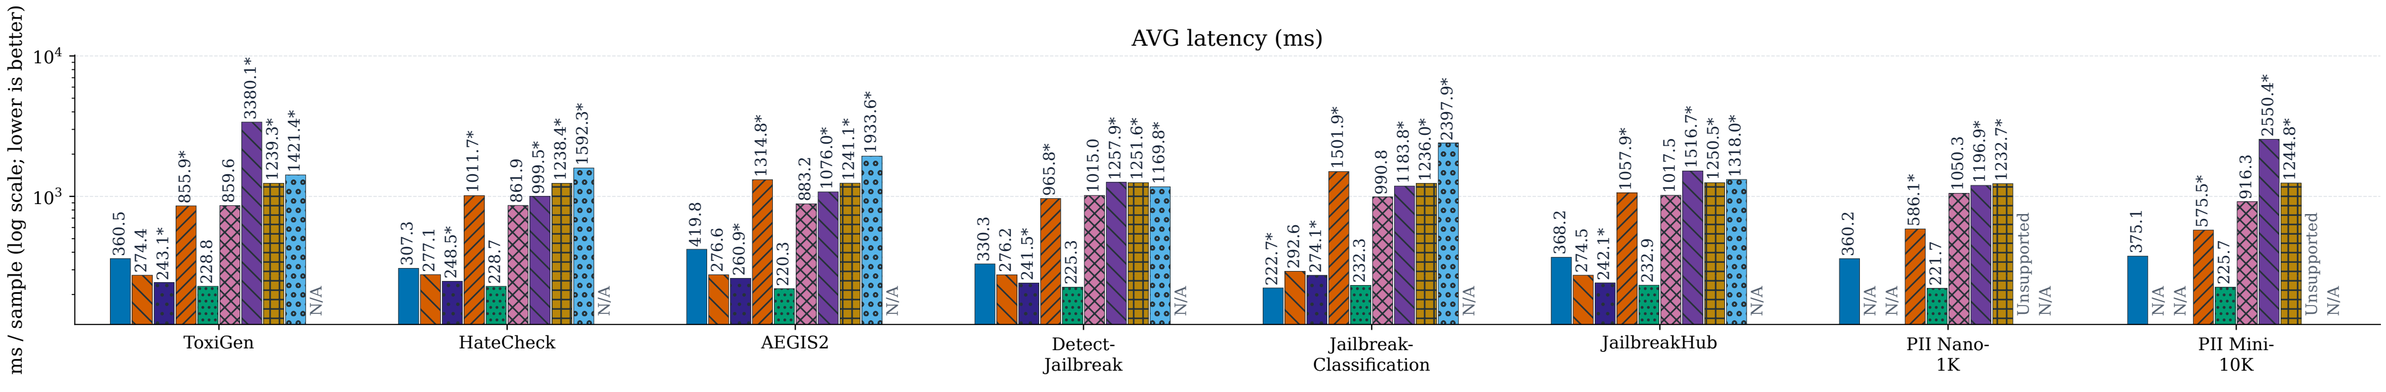

PII = ordinary binary classification (present vs absent), NOT masking quality.

OpenJev 4B: four-run summary timing; local models prefer four-run log averages. 4B valid/error counts are unknown.
* = single-run v1 / 0.5 timing; local models require complete, matched logs; internal models use supplied summaries.
OpenJev 32B / Microsoft Decision-1: supplied single-run timing, including failures; protocols differ.
32B has 27,460 errors / 56,823 rows; quality excludes errors.
N/A = missing quality, undefined metric, or incomplete timing; missing values are not zero.
Descriptive only, not a fair ranking. PII is ordinary binary classification (present vs absent), not masking quality.
Qwen3Guard-Stream-8B: binary safety labels; PII unsupported (historical proxies are audit-only).
Qwen mean latency: log elapsed/processed (failures included); CSV P95: successful requests. No ranking.
Luna: original task-specific presets, no custom prompts (prompt N/A); binary threshold 0.5.
Other models use dataset-specific v1/v2 prompts. Task-definition differences may affect results.
Luna PII micro-F1 is separate; binary PII and latency are N/A. Supplied metrics; scorer versions unverified.