




Kubernetes Workshop

Roadmap to Kubernetes

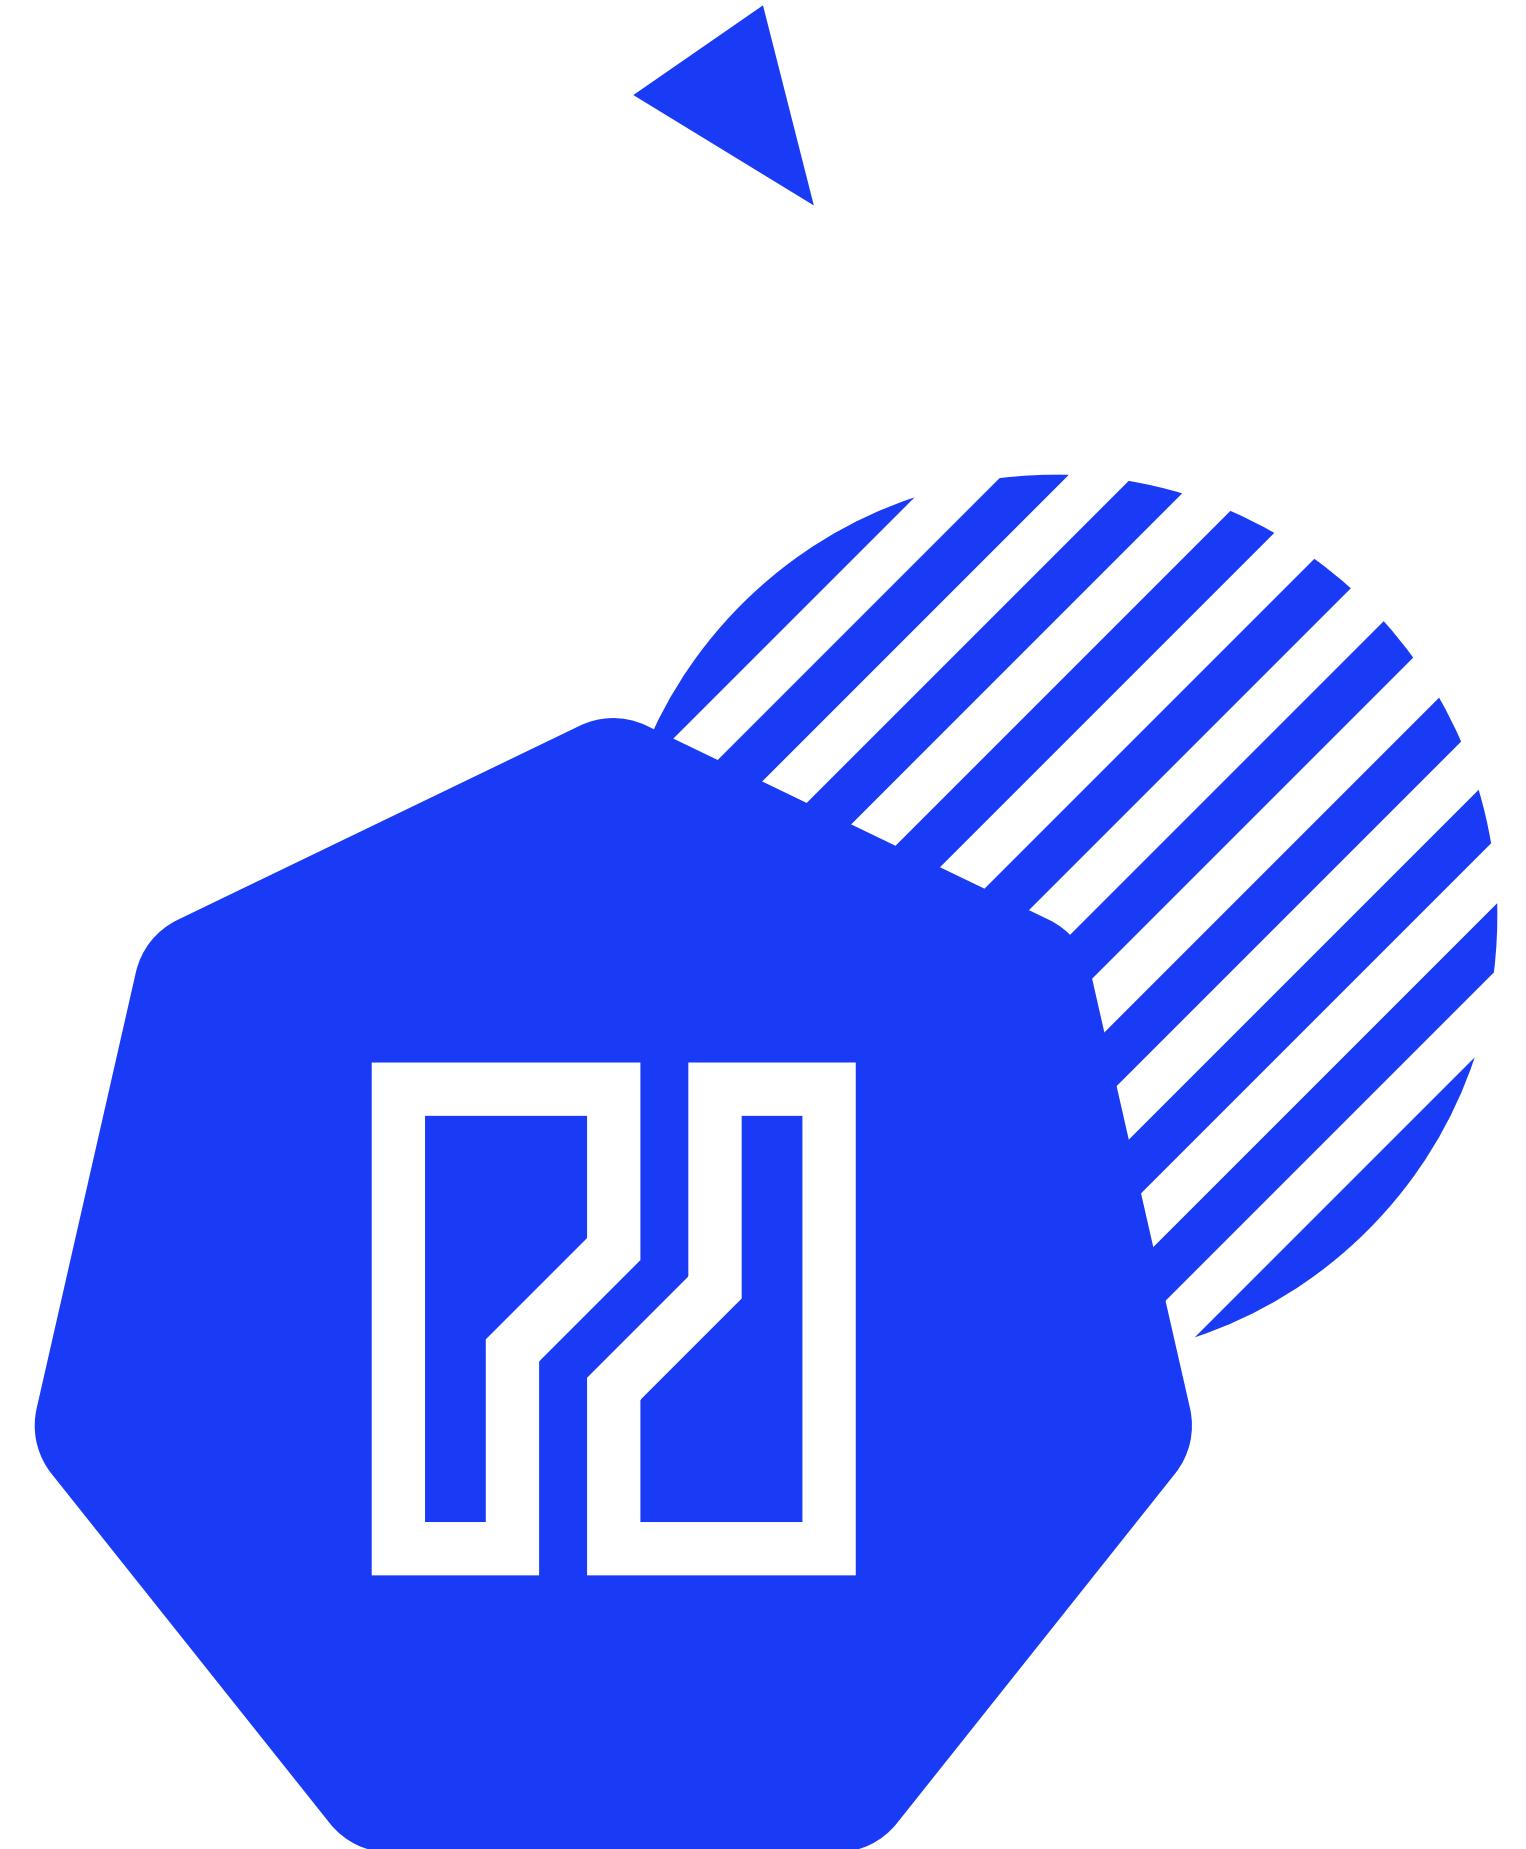

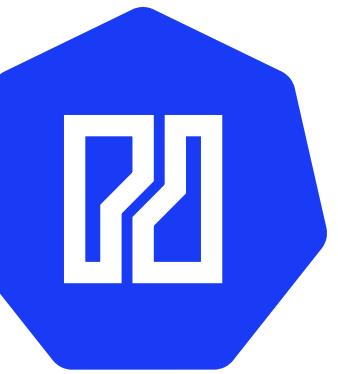

About Natron

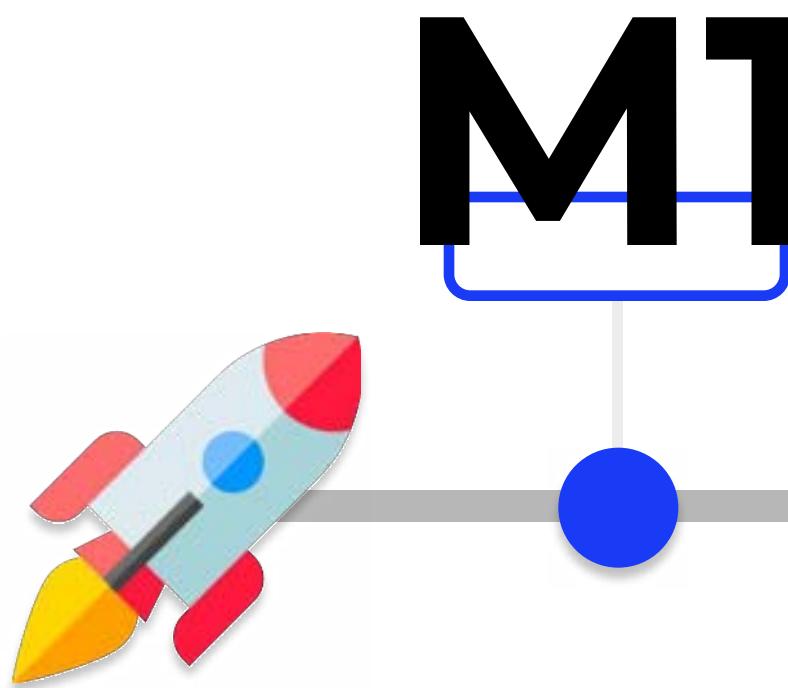

Basics

M3

M2

Networking

M5

M4

Storage

M7

M6


M8

Overview

Deploying &
Scaling


Trouble-
shooting

Further
Topics

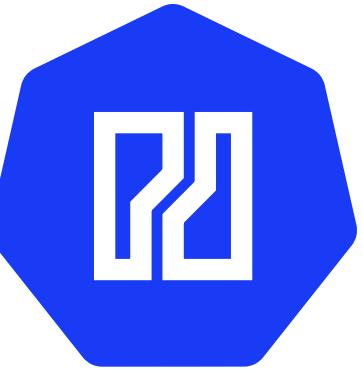



Introduction to Kubernetes

- Hands-On with Kubelab
- Core concepts
- CKAD preparation

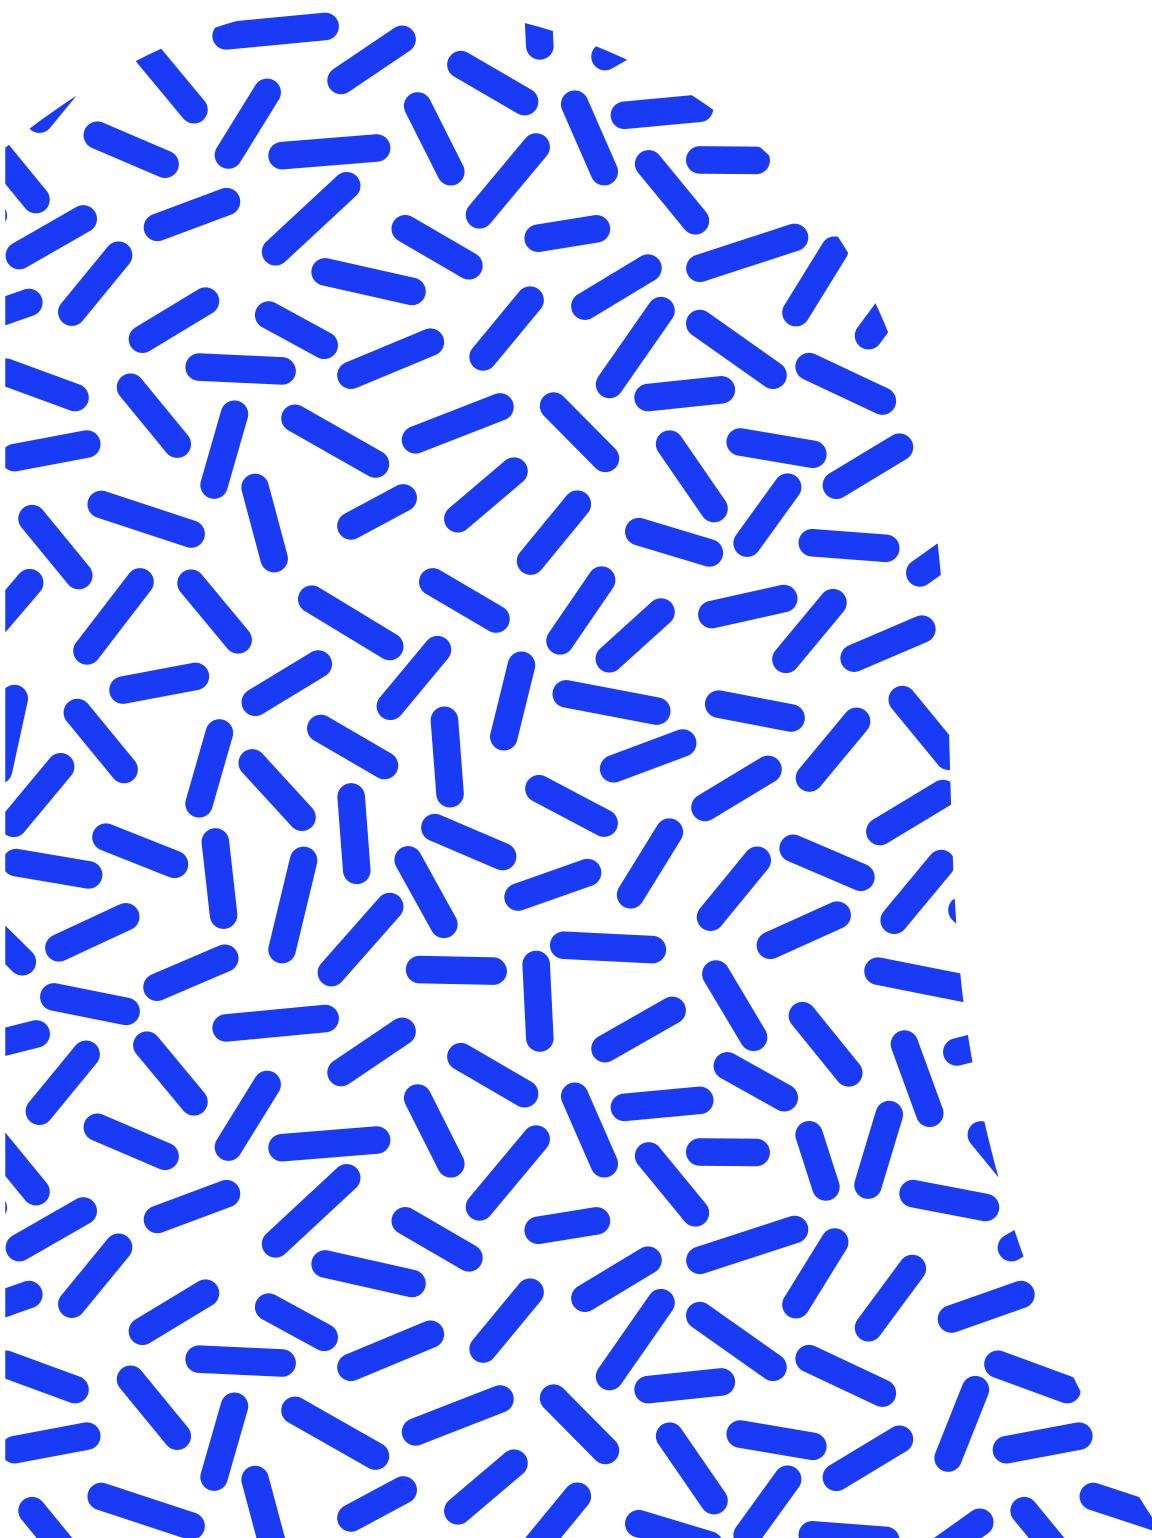

M1

About us

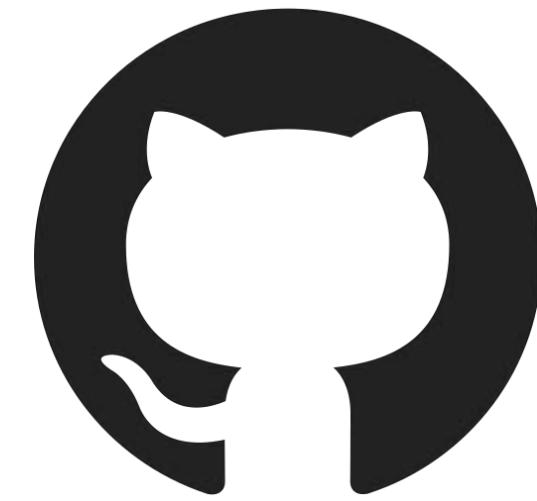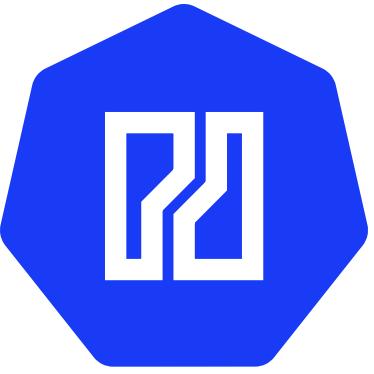

@natrontech

<https://natron.io>



M2

Kubernetes Basics





- What is Kubernetes?



Kubernetes is a powerful **open-source** system, initially developed by **Google**, for managing **containerized applications** in a **clustered** environment. It aims to provide better ways of managing related, distributed components and services across varied infrastructure.

Often seen: **K8S (Kubernetes)**

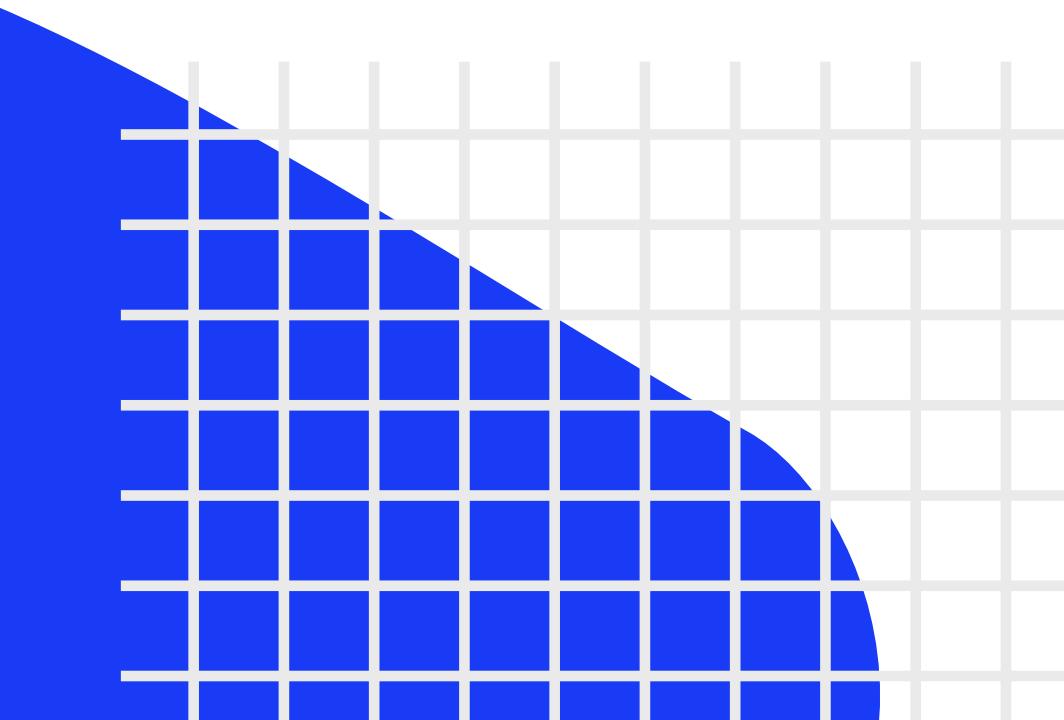

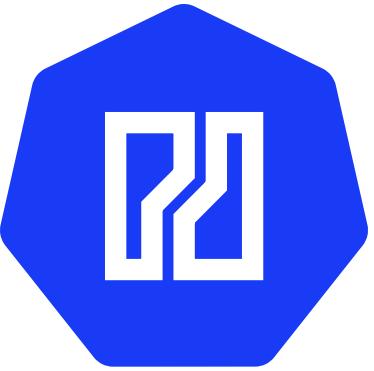

- Founded by Google
- Development and design are heavily influenced by Google's Borg system
- Documentary: <https://www.youtube.com/watch?v=BE77h7dmoQU>
- Original code name for Kubernetes within Google was Project Seven of Nine, the « **friendlier** » Borg
- Kubernetes **v1.0** was released on **July 21, 2015**. Google partnered with the Linux Foundation to form the Cloud Native Computing Foundation (**CNCF**)

Current Release: **1.27**


M2-2 Community Contributions





Kubernetes Companies statistics (Contributions, Range: Last decade), bots excluded ▾		
Rank	Company	Number
	All	3749886
1	Google LLC	1119419
2	Red Hat Inc.	451501
3	VMware Inc.	302668
4	Microsoft Corporation	153885
5	Independent	121132
6	International Business Machines Corporation	116782
7	Huawei Technologies Co. Ltd	49421
8	Intel Corporation	42156
9	The Scale Factory Limited	39996
10	Amazon	36350

<https://k8s.devstats.cncf.io/d/9/companies-table?orgId=1>


M2-3 Certified Kubernetes

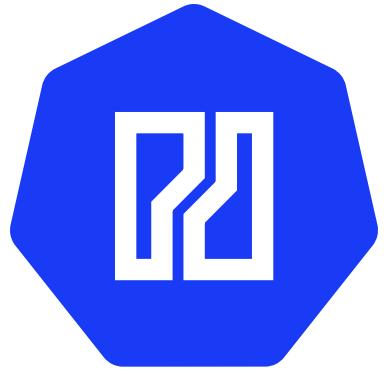


- Consistency
 - when interacting with any installation of Kubernetes
- Confirmability
 - by running identical open source conformance applications
- Timely Updates
 - updates yearly or more frequently

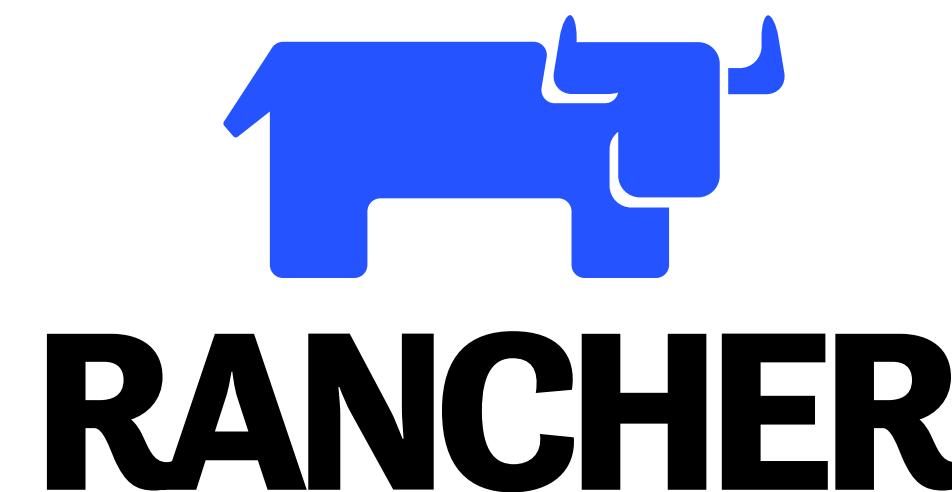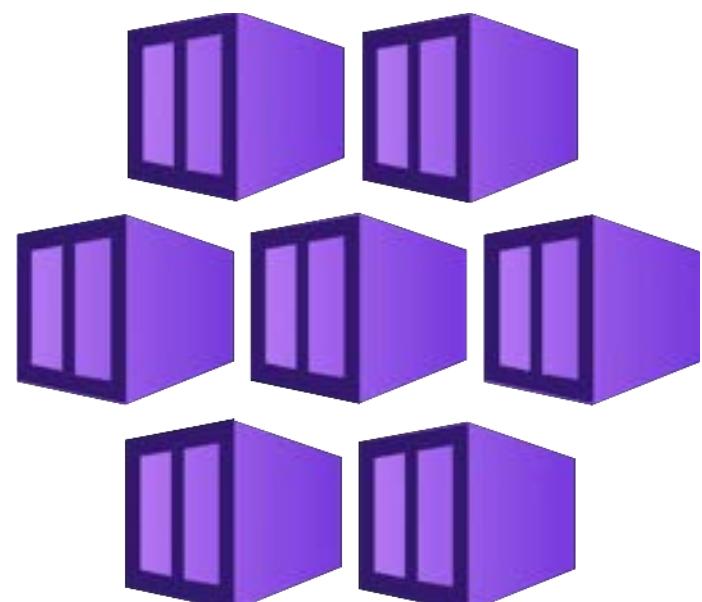


M2-4 What is it?

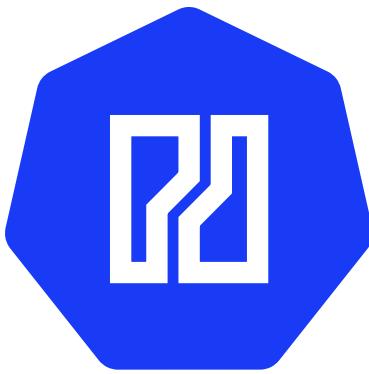

Kubernetes, at its basic level, is a system for **running and coordinating** containerized applications across a cluster of machines. It is a platform designed to completely manage the life cycle of containerized applications and services using methods that provide **predictability, scalability, and high availability**.

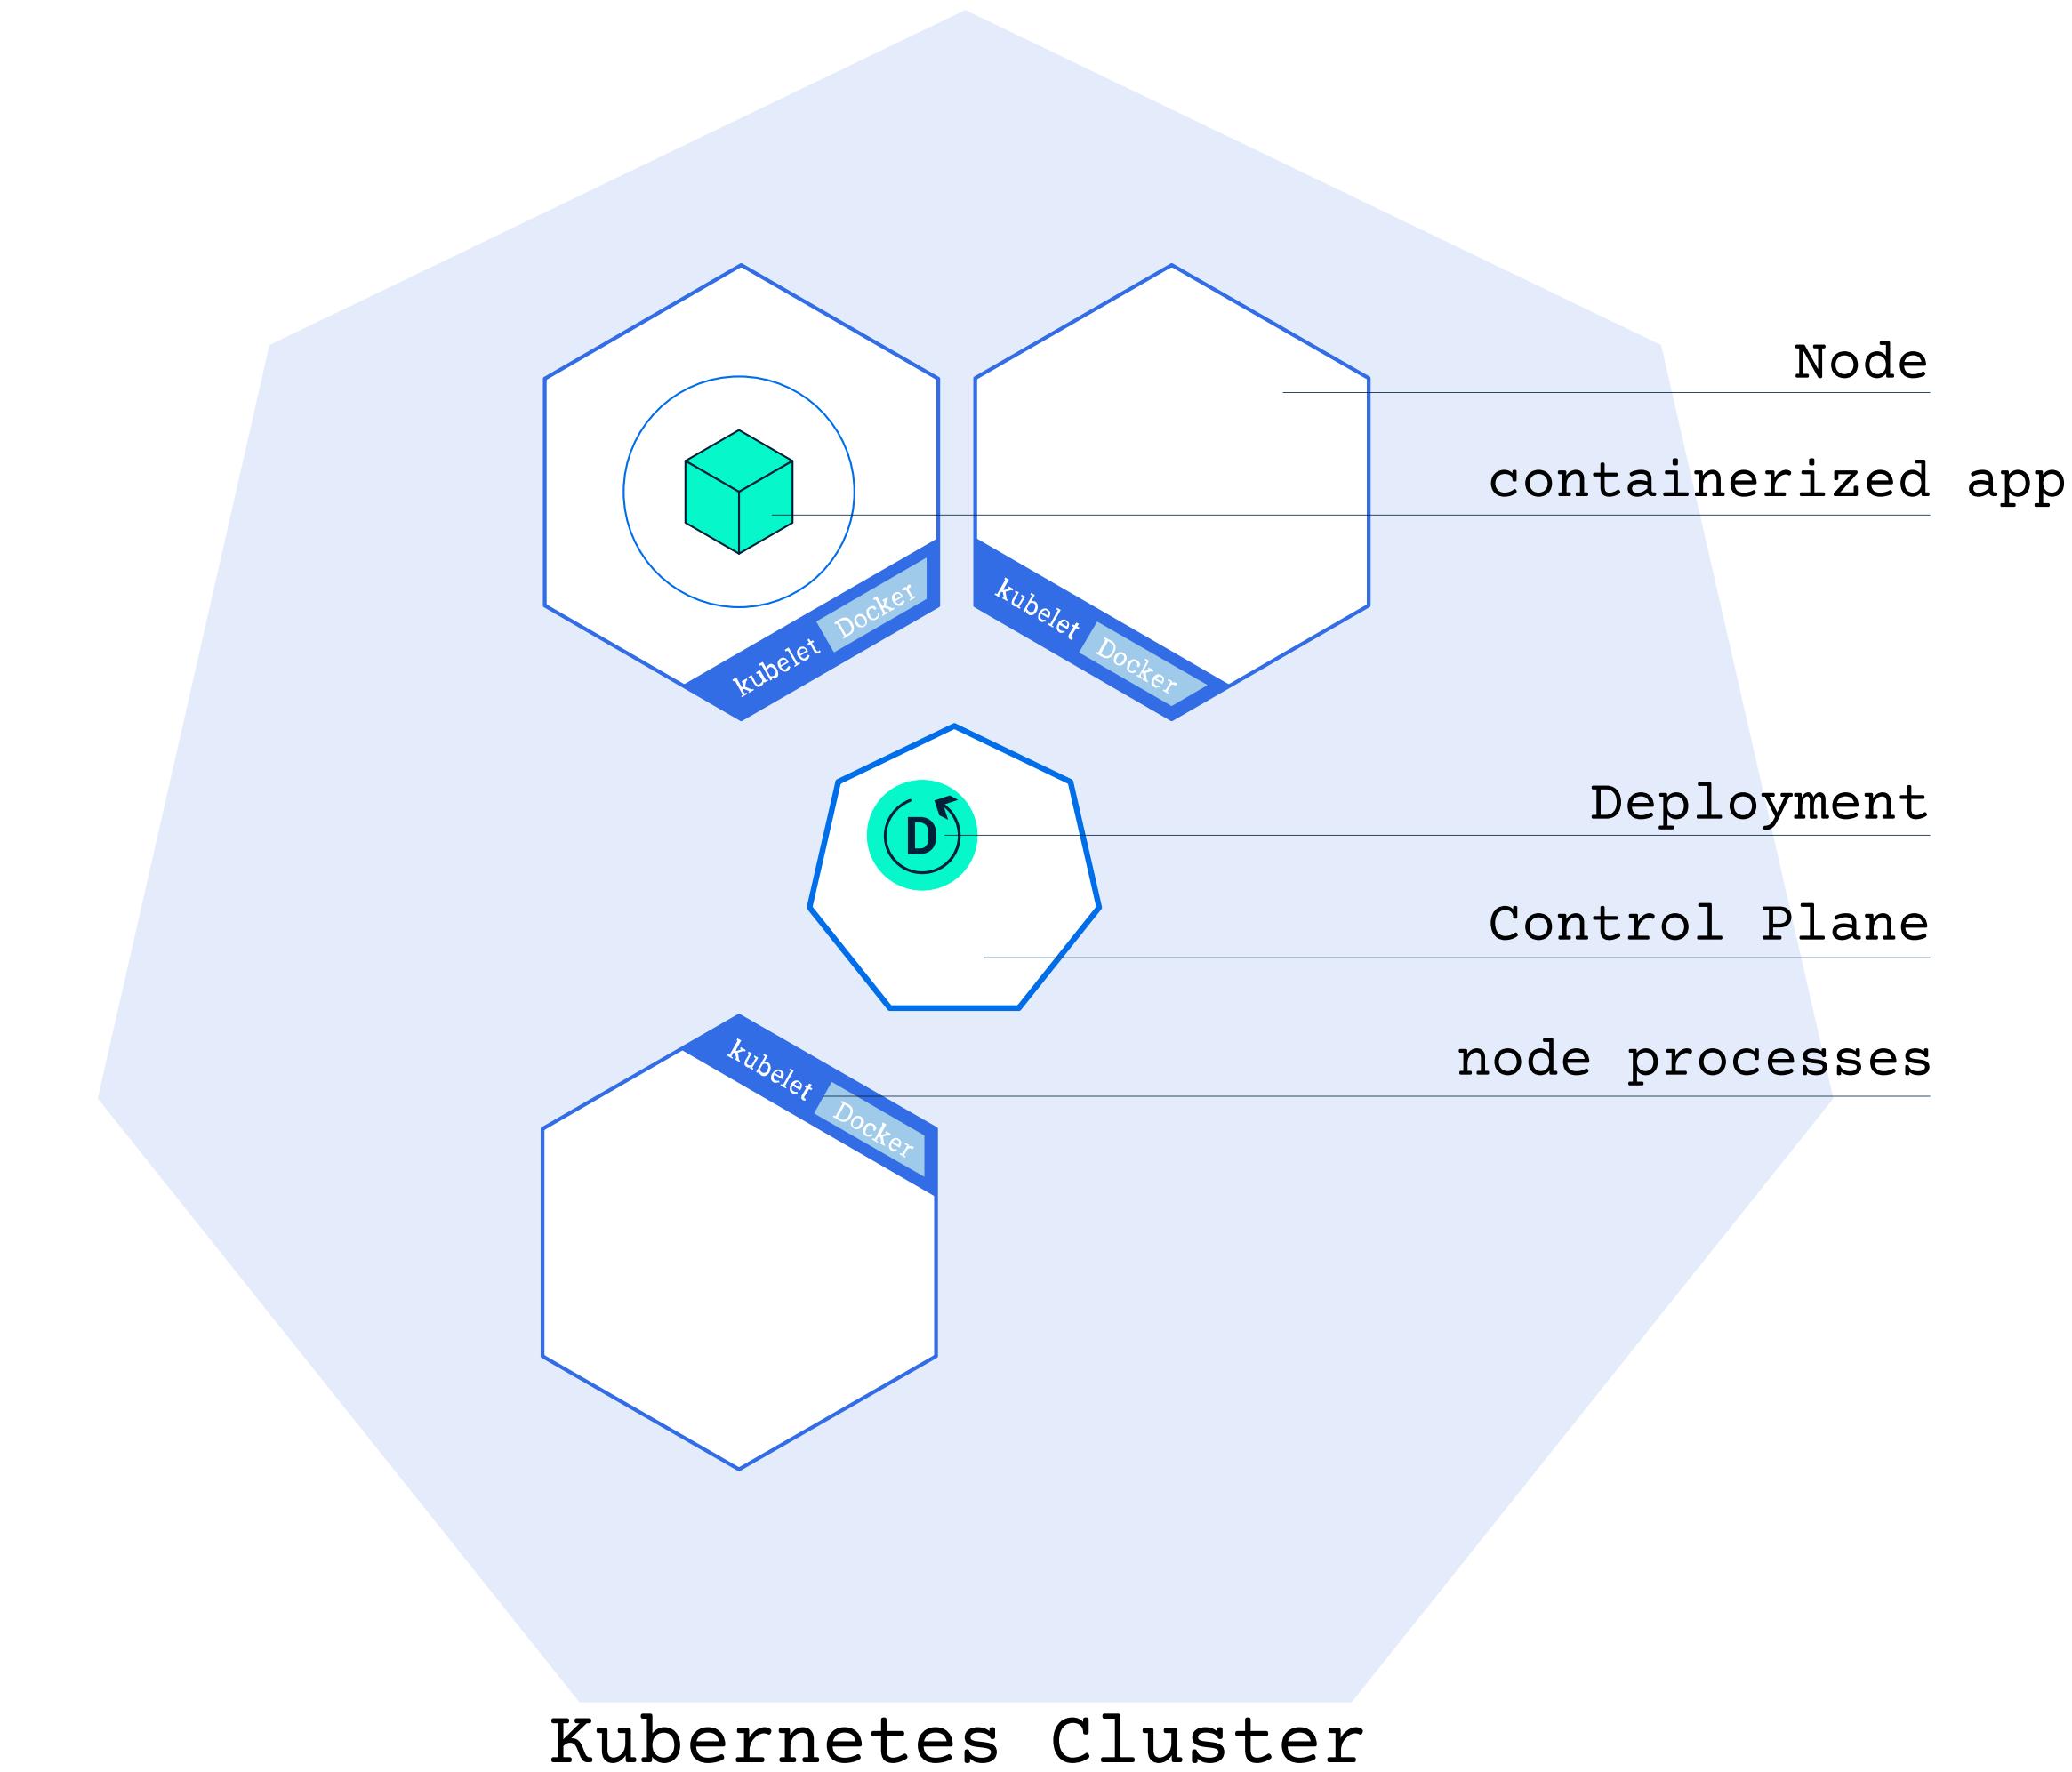


M2-5 KubeLab

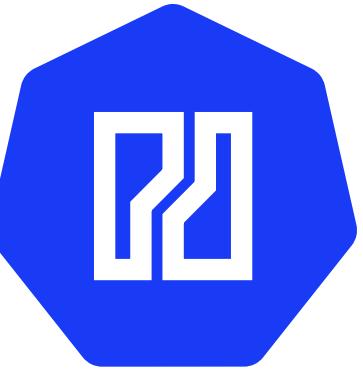

- Practical Hands-On exercises
- Seamless in-browser terminal experience
- Each learning session is isolated with its own Kubernetes cluster



<https://kubelab.swisscom.k8s.natron.cloud>

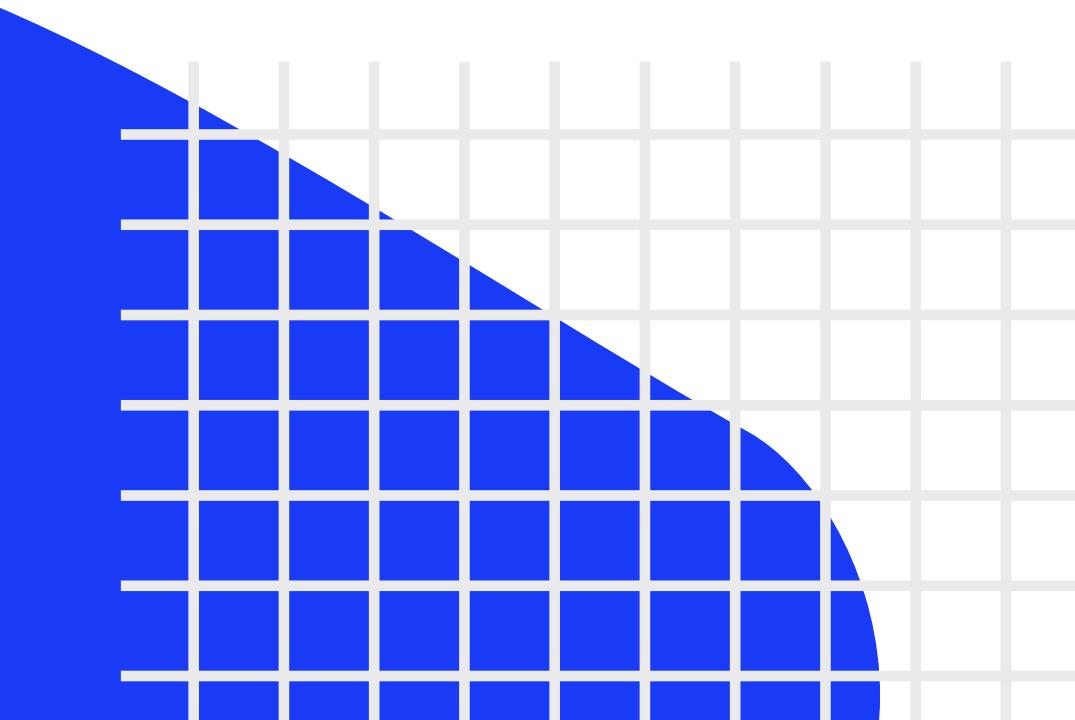

M2-6 Tools





- **kubectl** (<https://kubernetes.io/de/docs/tasks/tools/install-kubectl>)
- Creating resources **imperative**:

```
kubectl create deployment nginx --image=nginx
```

- Creating resources **declarative**:

```
kubectl apply -f deployment.yaml
```

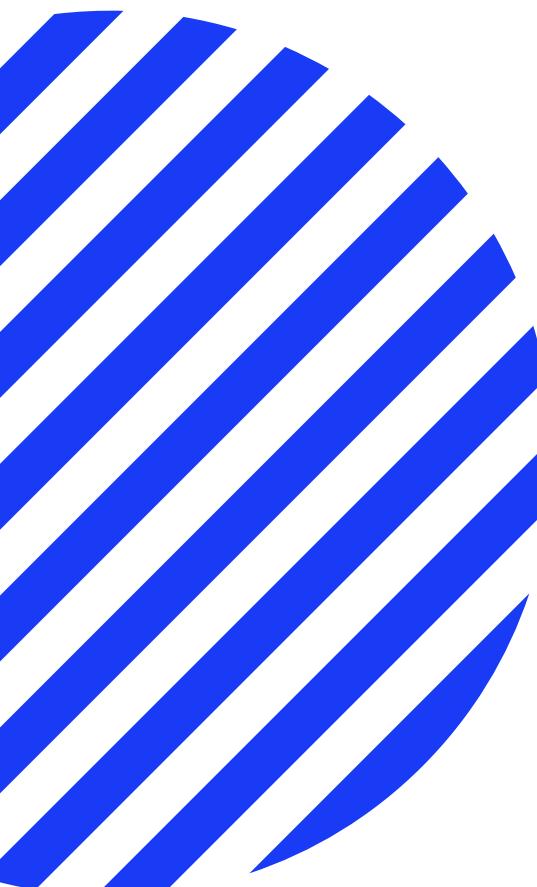

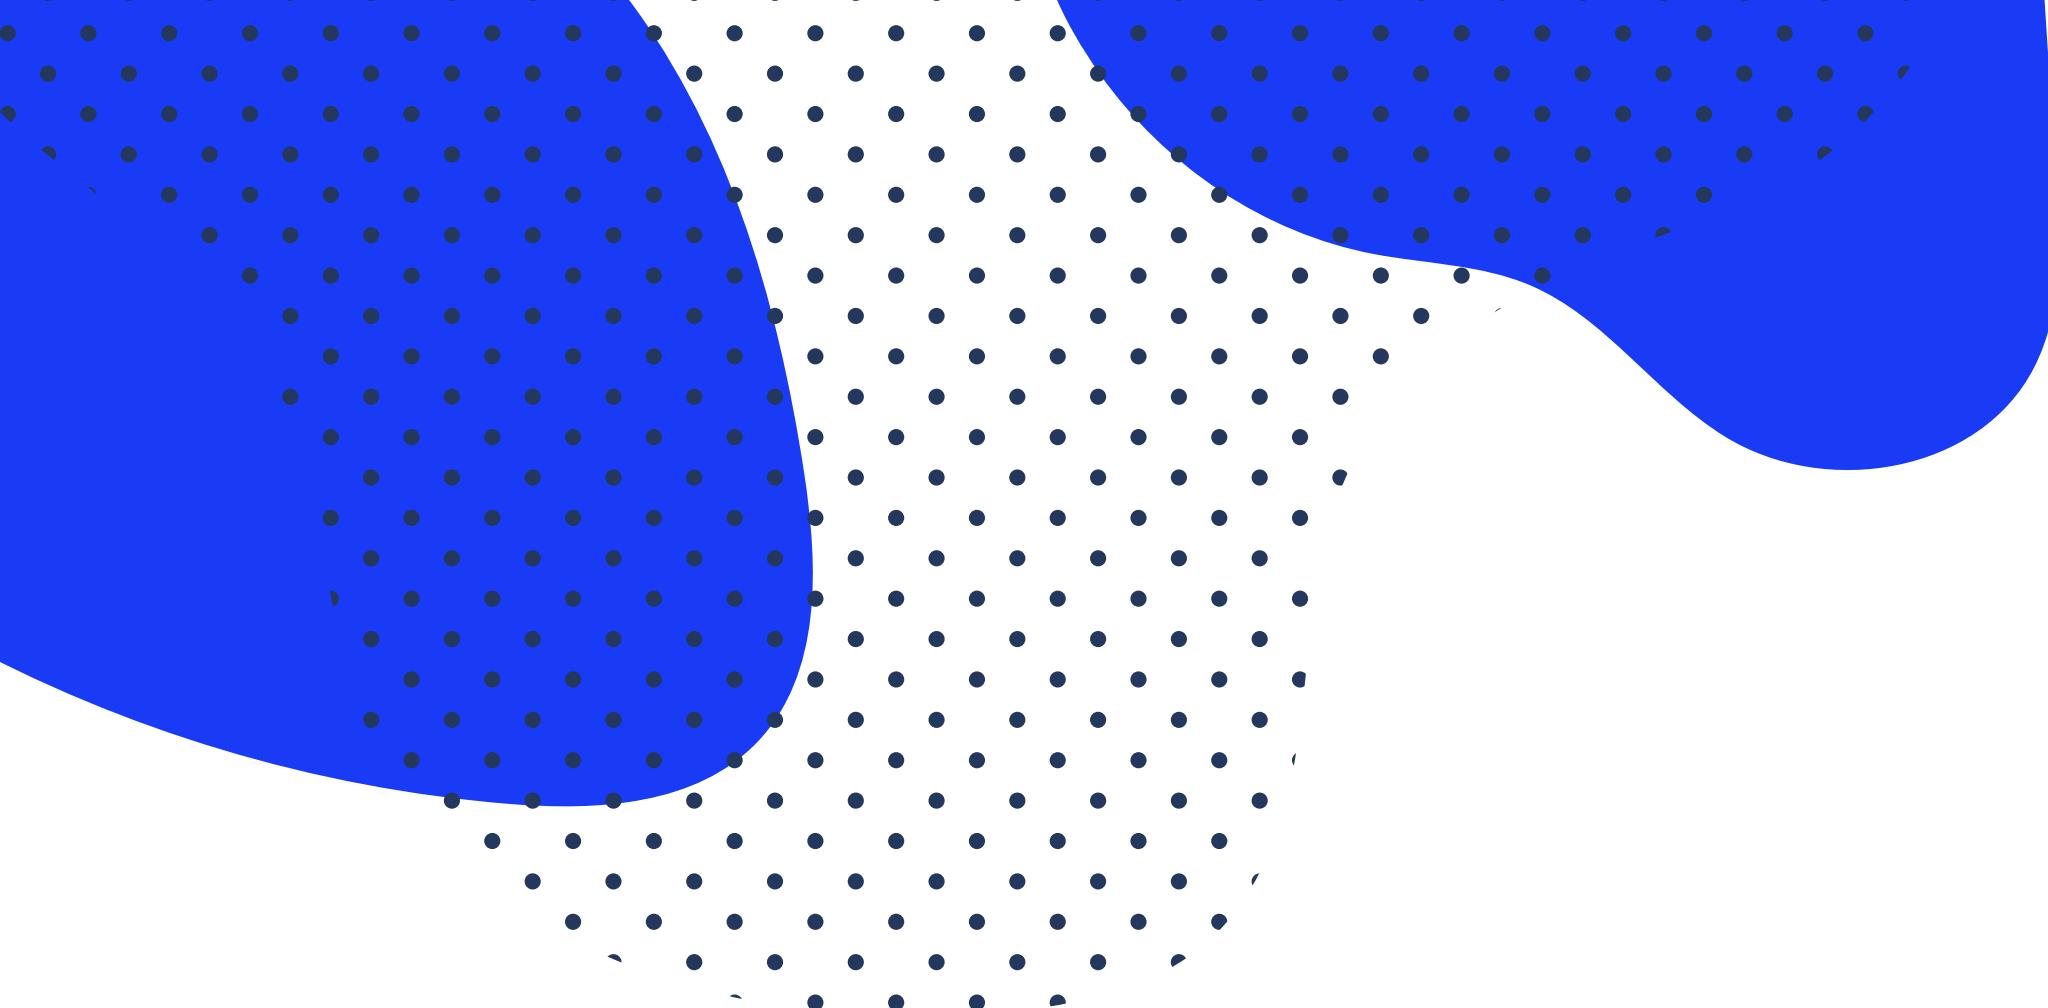



LAB 1


Introduction




M3

Cluster


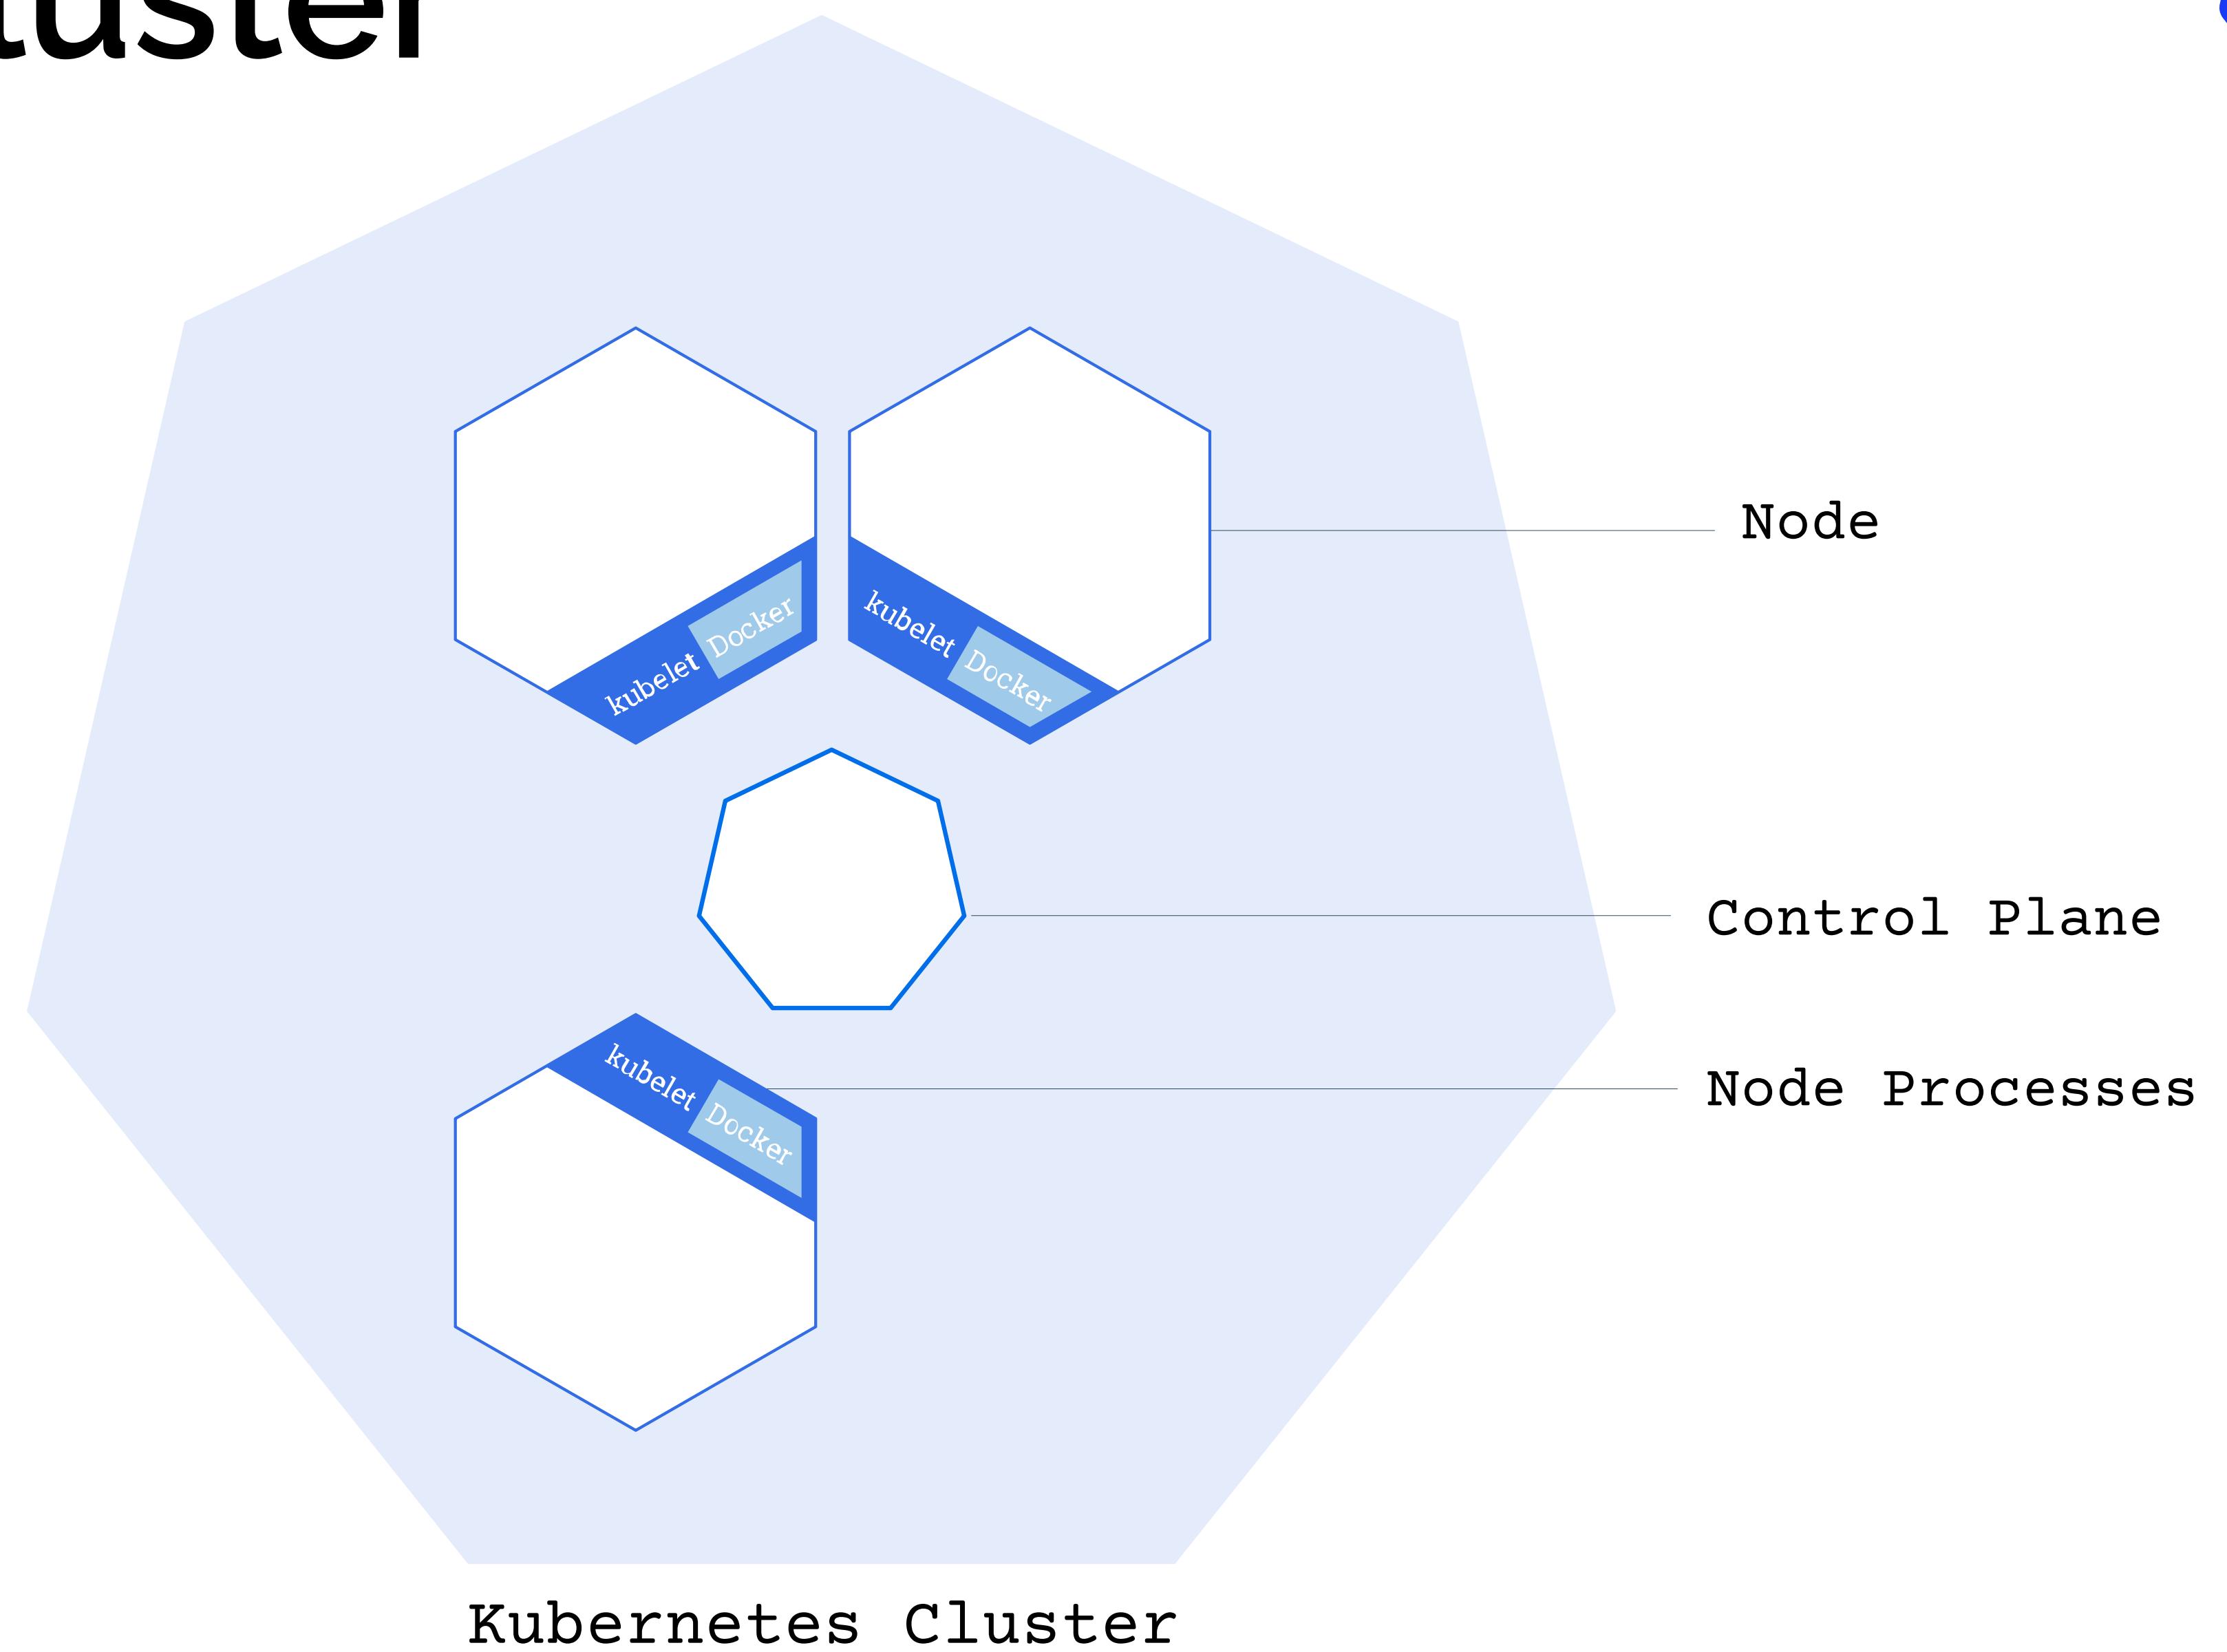
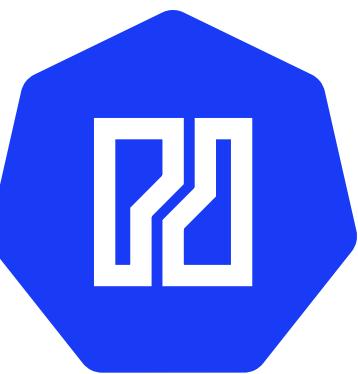


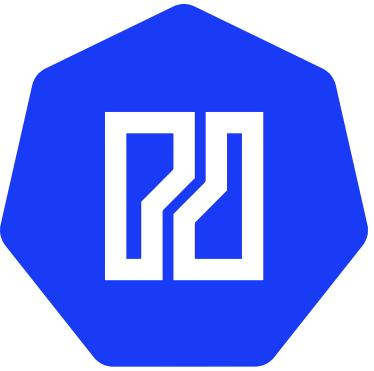


- **Pod** is the smallest deployable unit on a Node. It's a group of containers which must run together. Quite often, but not necessarily, a Pod usually contains one container.
- **Volume** is essentially a directory accessible to all containers running in a Pod.

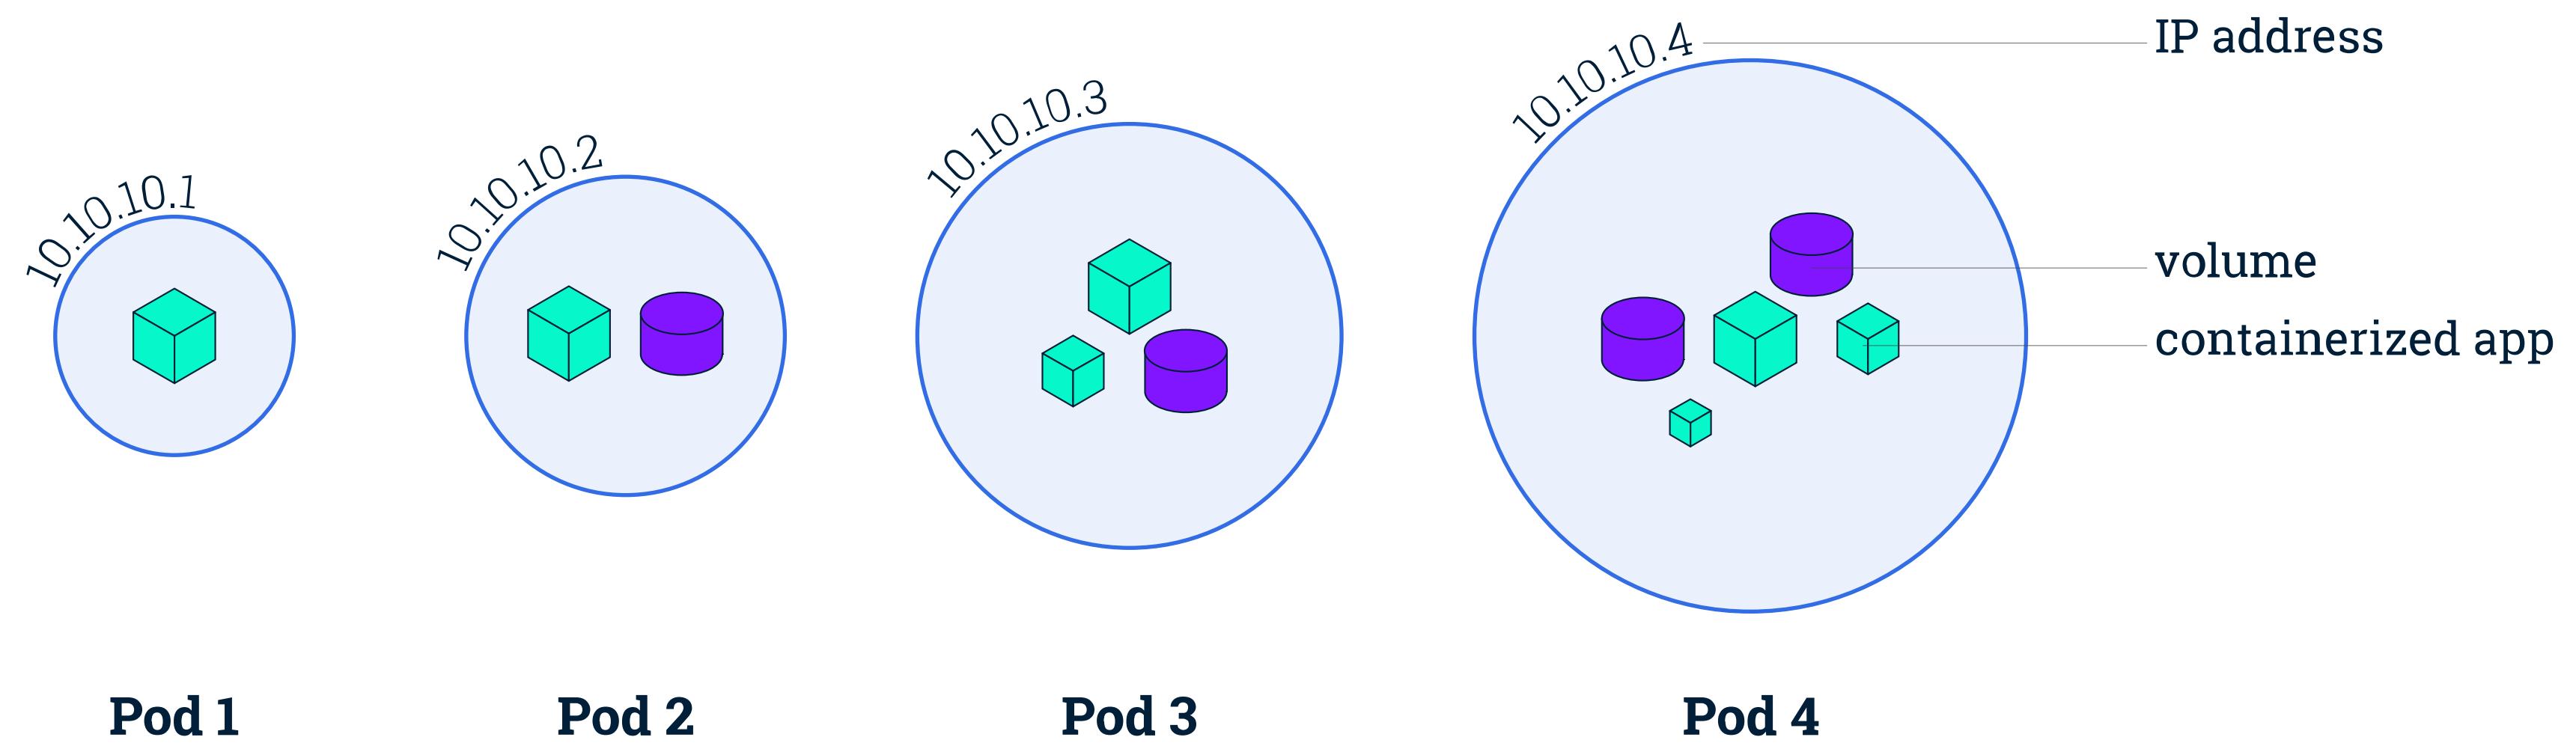

M3-2 Pods

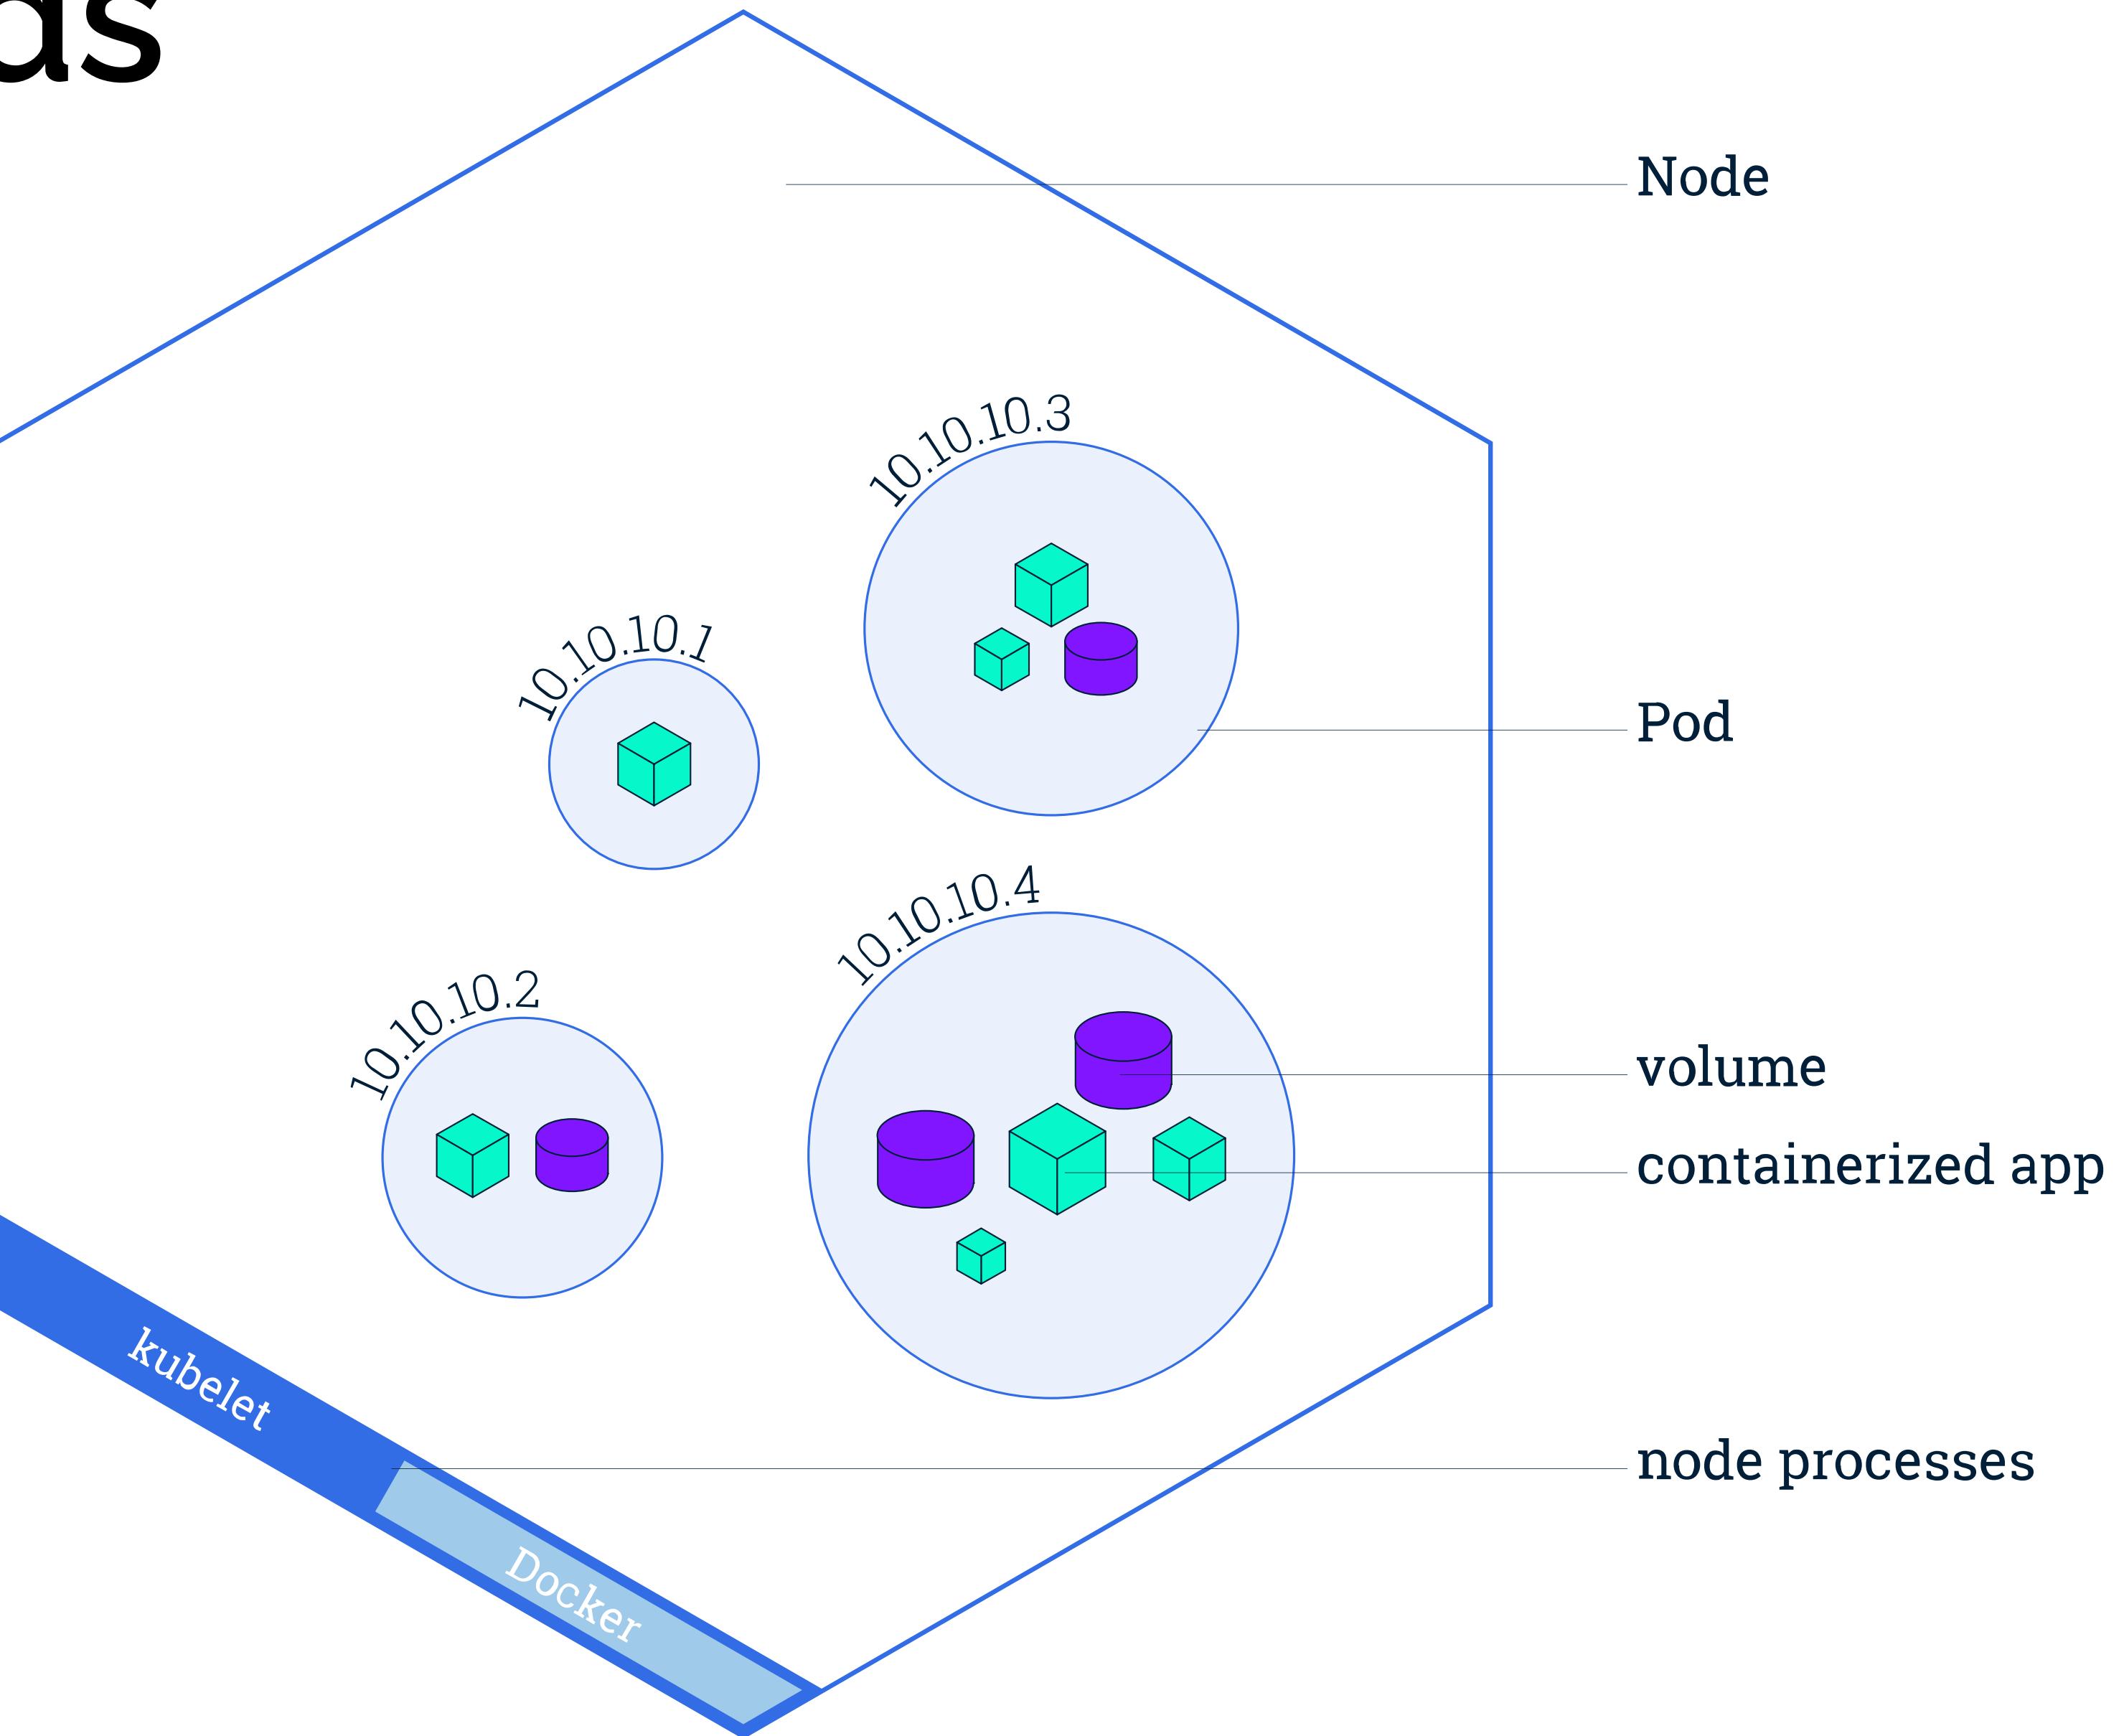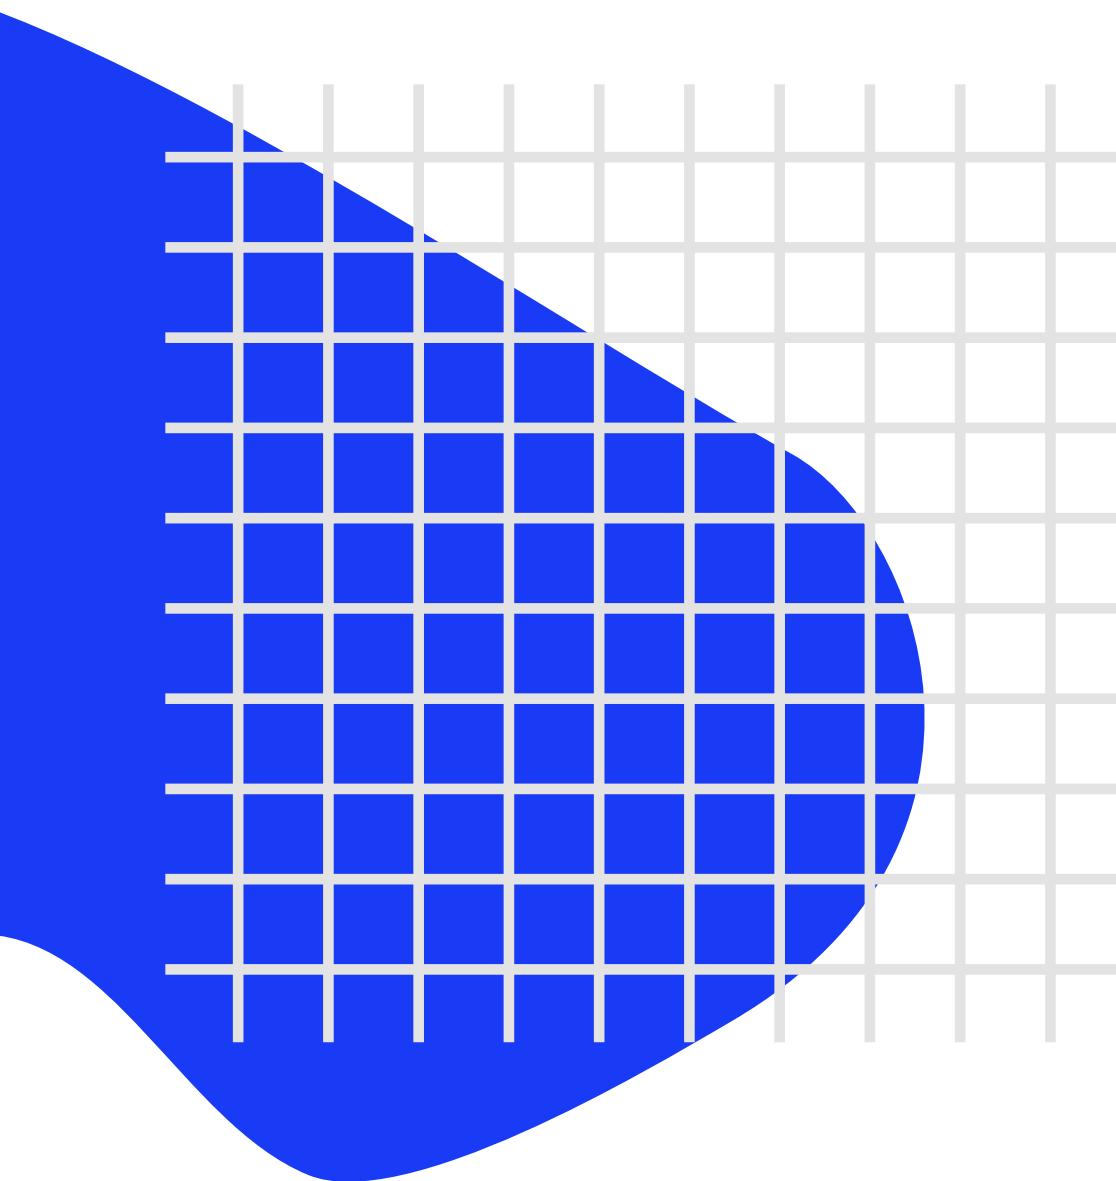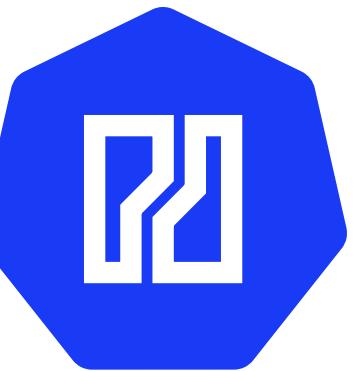


M3-3 Pods - YAML

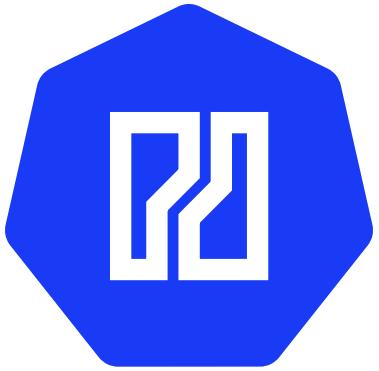

```
apiVersion: v1
kind: Pod
metadata:
  name: nginx
  labels:
    name: nginx
spec:
  containers:
    - name: nginx
      image: nginx
```

M3-4 Namespaces

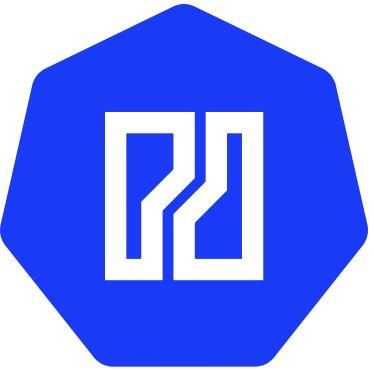



Namespaces provides a mechanism for **isolating groups** of resources within a single cluster.

- Namespaces are intended for use in environments with many users spread across multiple teams, or projects.
- Namespaces provide a scope for names. Names of resources need to be **unique within** a namespace, but **not across namespaces**. Namespaces **can not be nested** inside one another and each Kubernetes resource can only be **in one namespace**.
- Namespaces are a way to divide cluster resources between multiple users (via **resource quota**).



M3-5 Namespaces

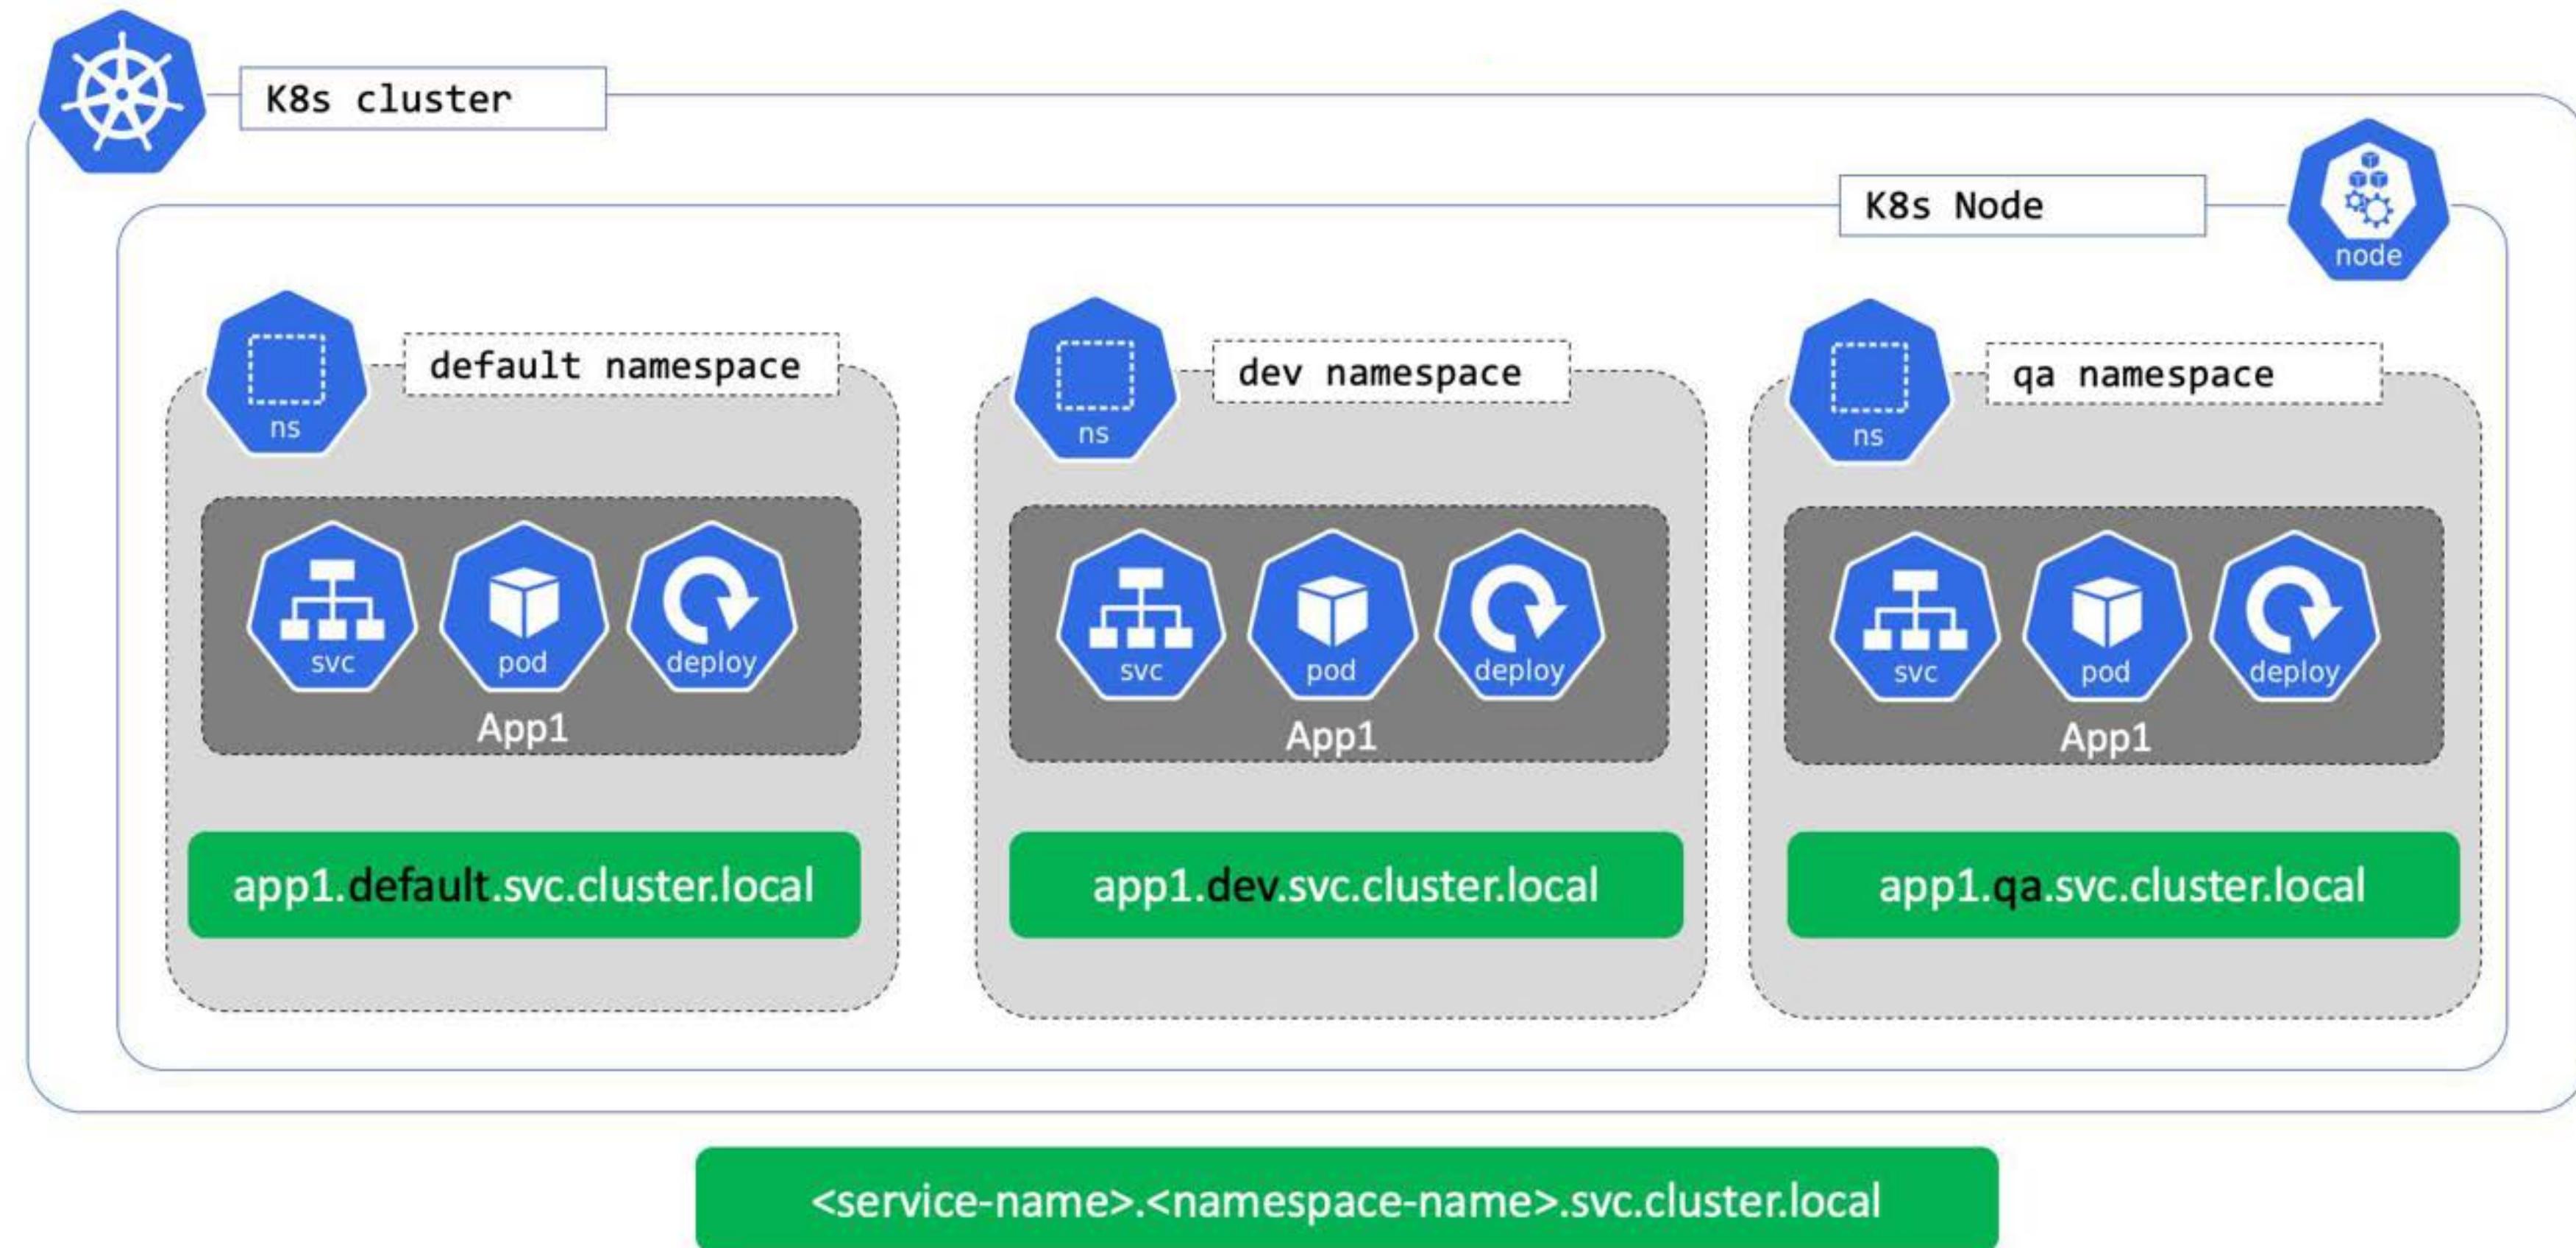

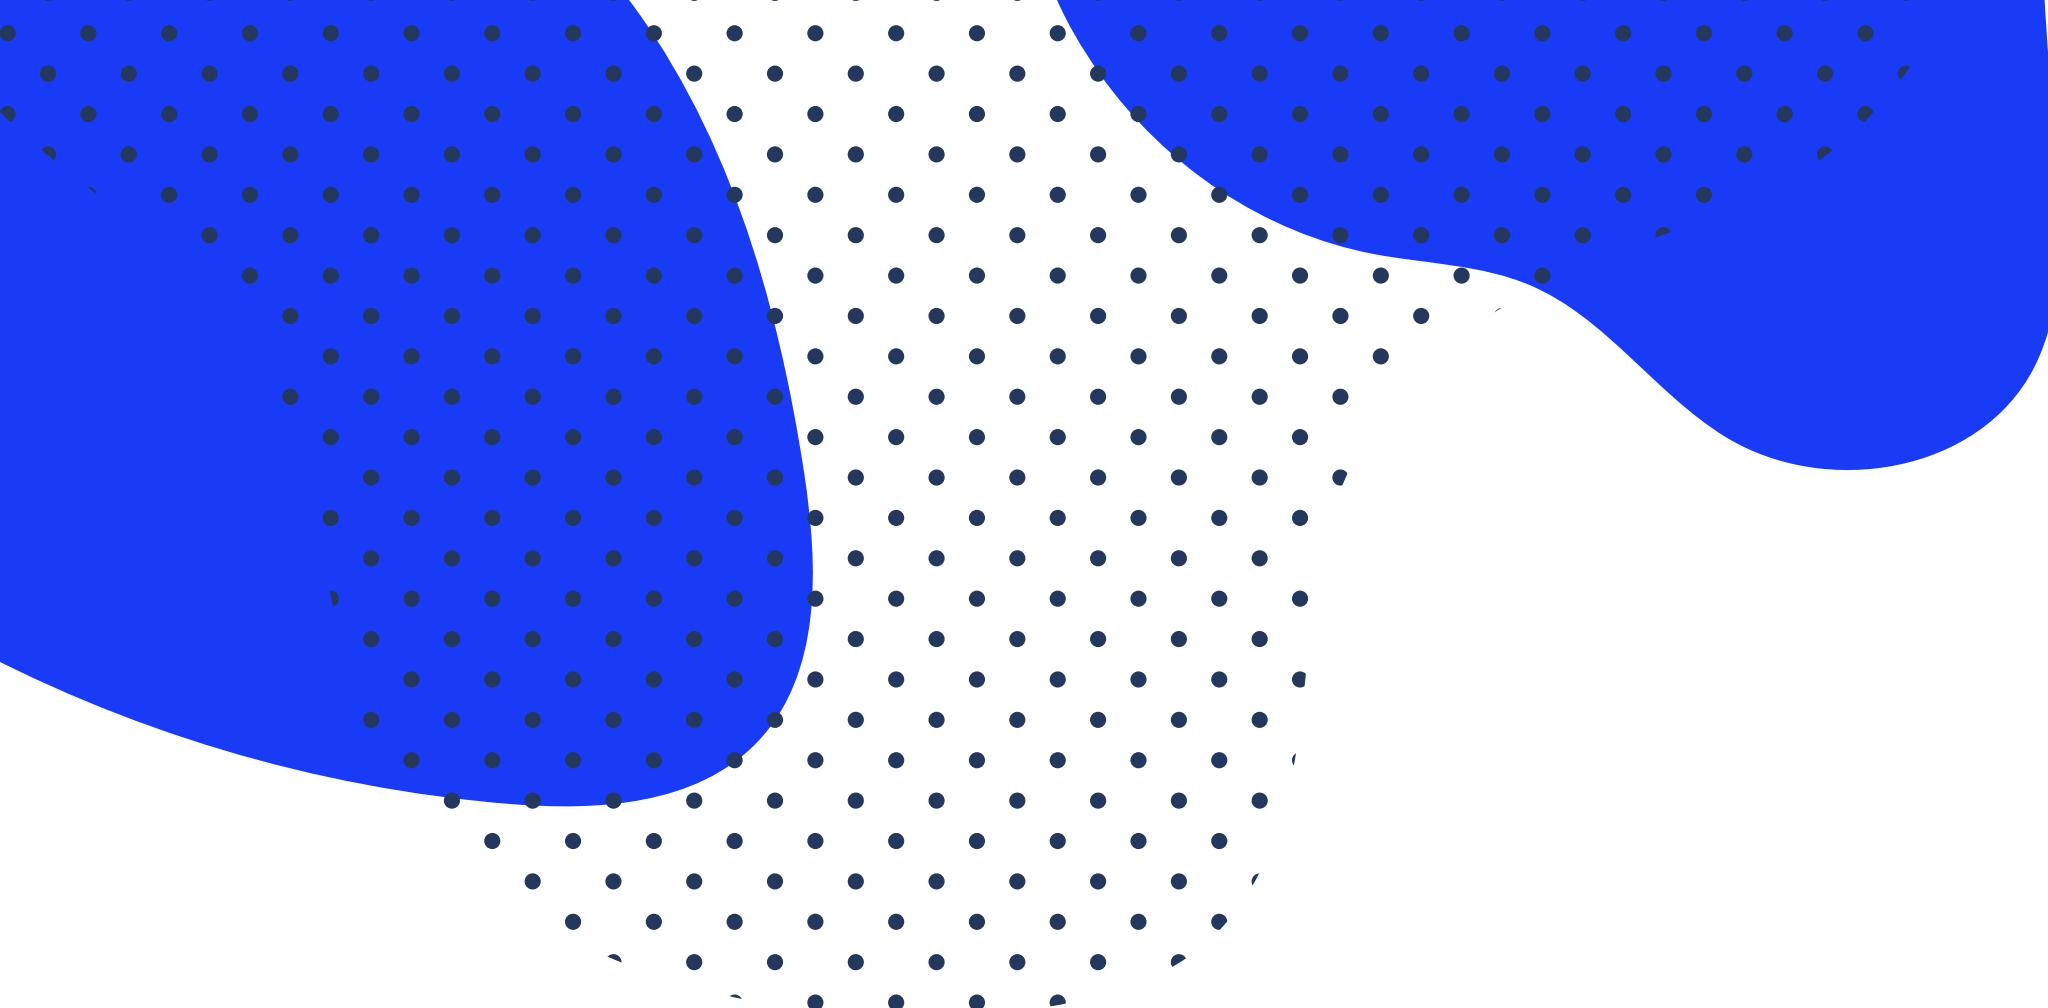


LAB 2

First Steps



M4

Replication Sets

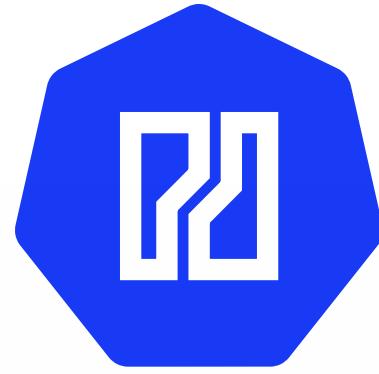

- A **ReplicaSet's** purpose is to maintain a stable set of **replica** Pods running at any given time. As such, it is often used to **guarantee** the availability of a specified **number of identical** Pods.
- defines **pod template**
- control parameters to **scale replicas**
- scaling **horizontally**

```
replicaset.yaml
...
apiVersion: apps/v1
kind: ReplicaSet
metadata:
  name: frontend
  labels:
    app: guestbook
    tier: frontend
spec:
  replicas: 3
  selector:
    matchLabels:
      tier: frontend
  template:
    metadata:
      labels:
        tier: frontend
    spec:
      containers:
        - name: nginx
          image: nginx
```

M4-1 Deployments





- A **Deployment** provides declarative updates for **Pods** and **ReplicaSets**.
- Deployments use replication sets as a **building block**, adding **flexible** life cycle management functionality to the mix.


```
replicaset.yaml

apiVersion: apps/v1
kind: Deployment
metadata:
  name: frontend
  labels:
    app: guestbook
    tier: frontend
spec:
  replicas: 3
  strategy:
    type: RollingUpdate
  selector:
    matchLabels:
      tier: frontend
  template:
    metadata:
      labels:
        tier: frontend
    spec:
      containers:
        - name: nginx
          image: nginx
```

M4-2 Deployments & Replicsets

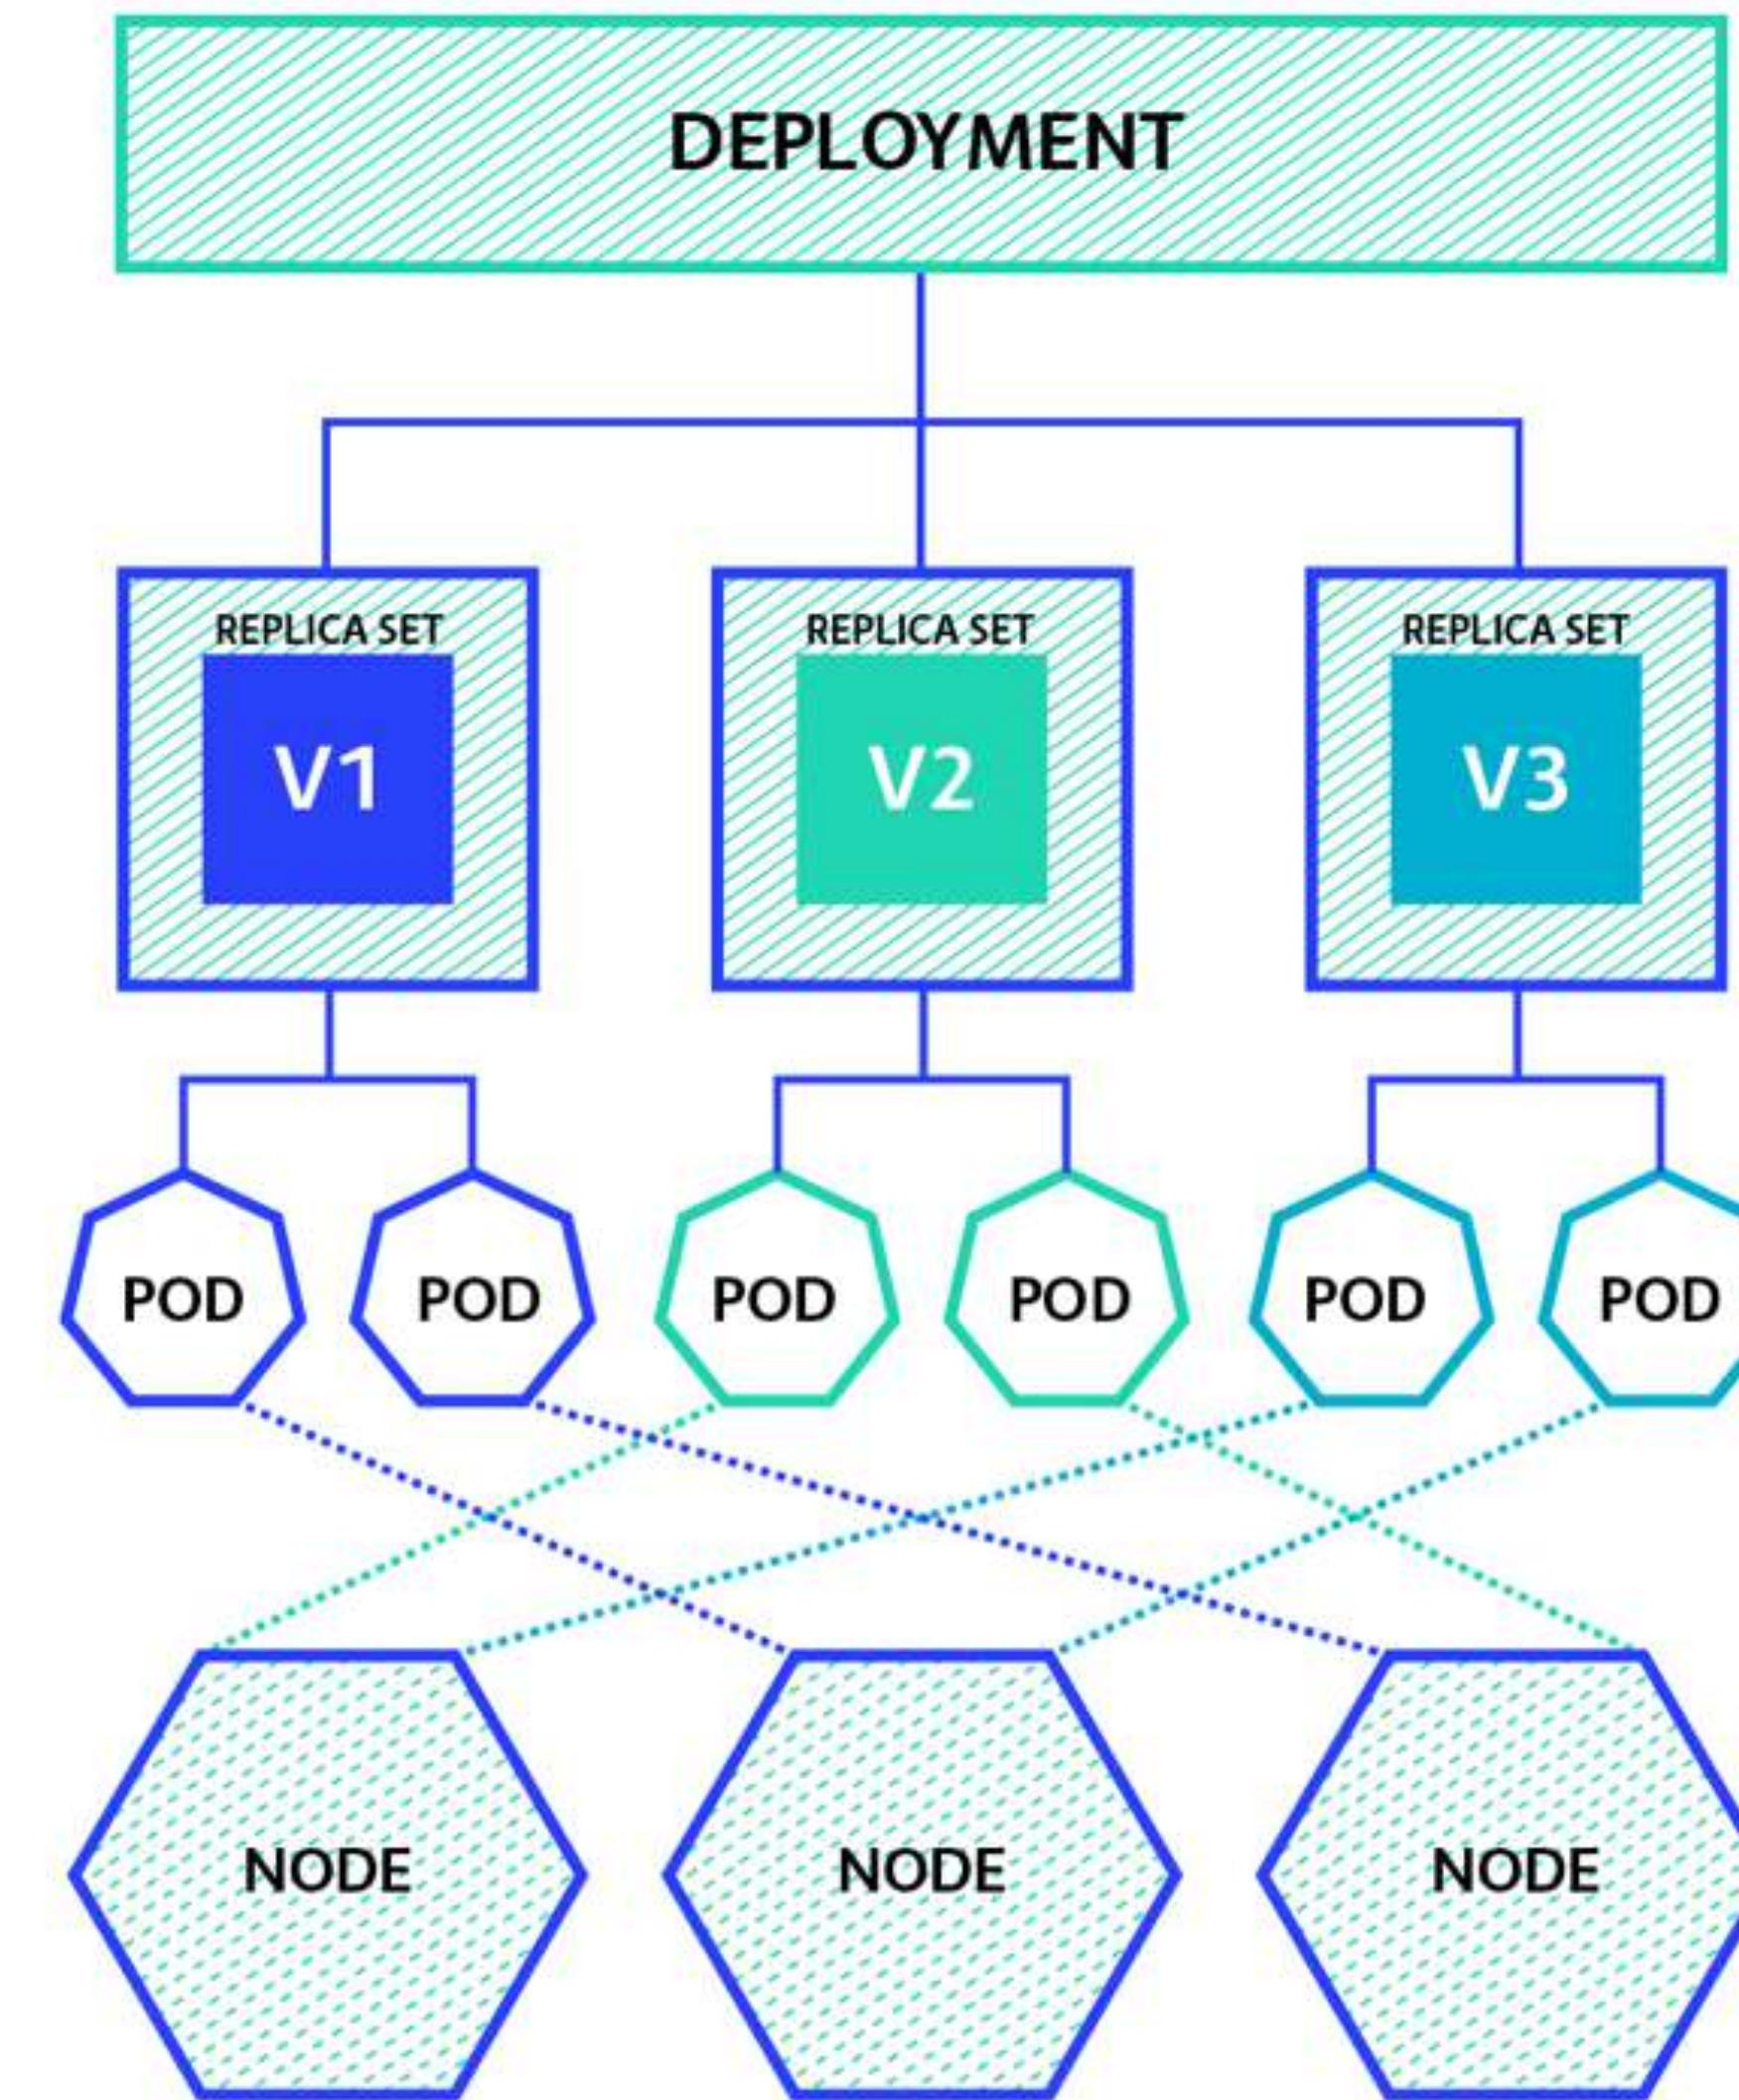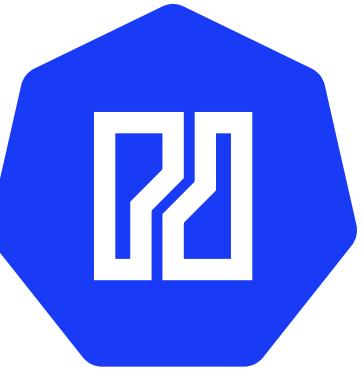

M4-3 Services


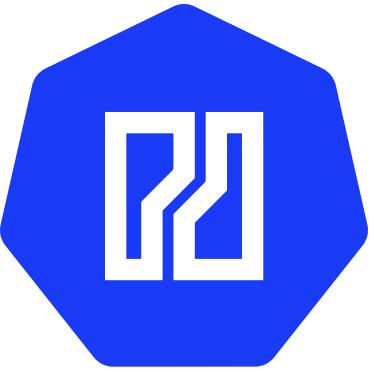


- An abstract way to **expose** an application running on a set of **Pods** as a network service.
- Kubernetes gives Pods their own **IP addresses** and a single **DNS name** for a set of Pods, and can **load-balance** across them.


```
replicaset.yaml

apiVersion: v1
kind: Service
metadata:
  name: guestbook-service
  labels:
    app: guestbook
spec:
  selector:
    tier: frontend
  ports:
  - protocol: TCP
    port: 3000
    targetPort: 3000
```



M4-4 Services Diagram

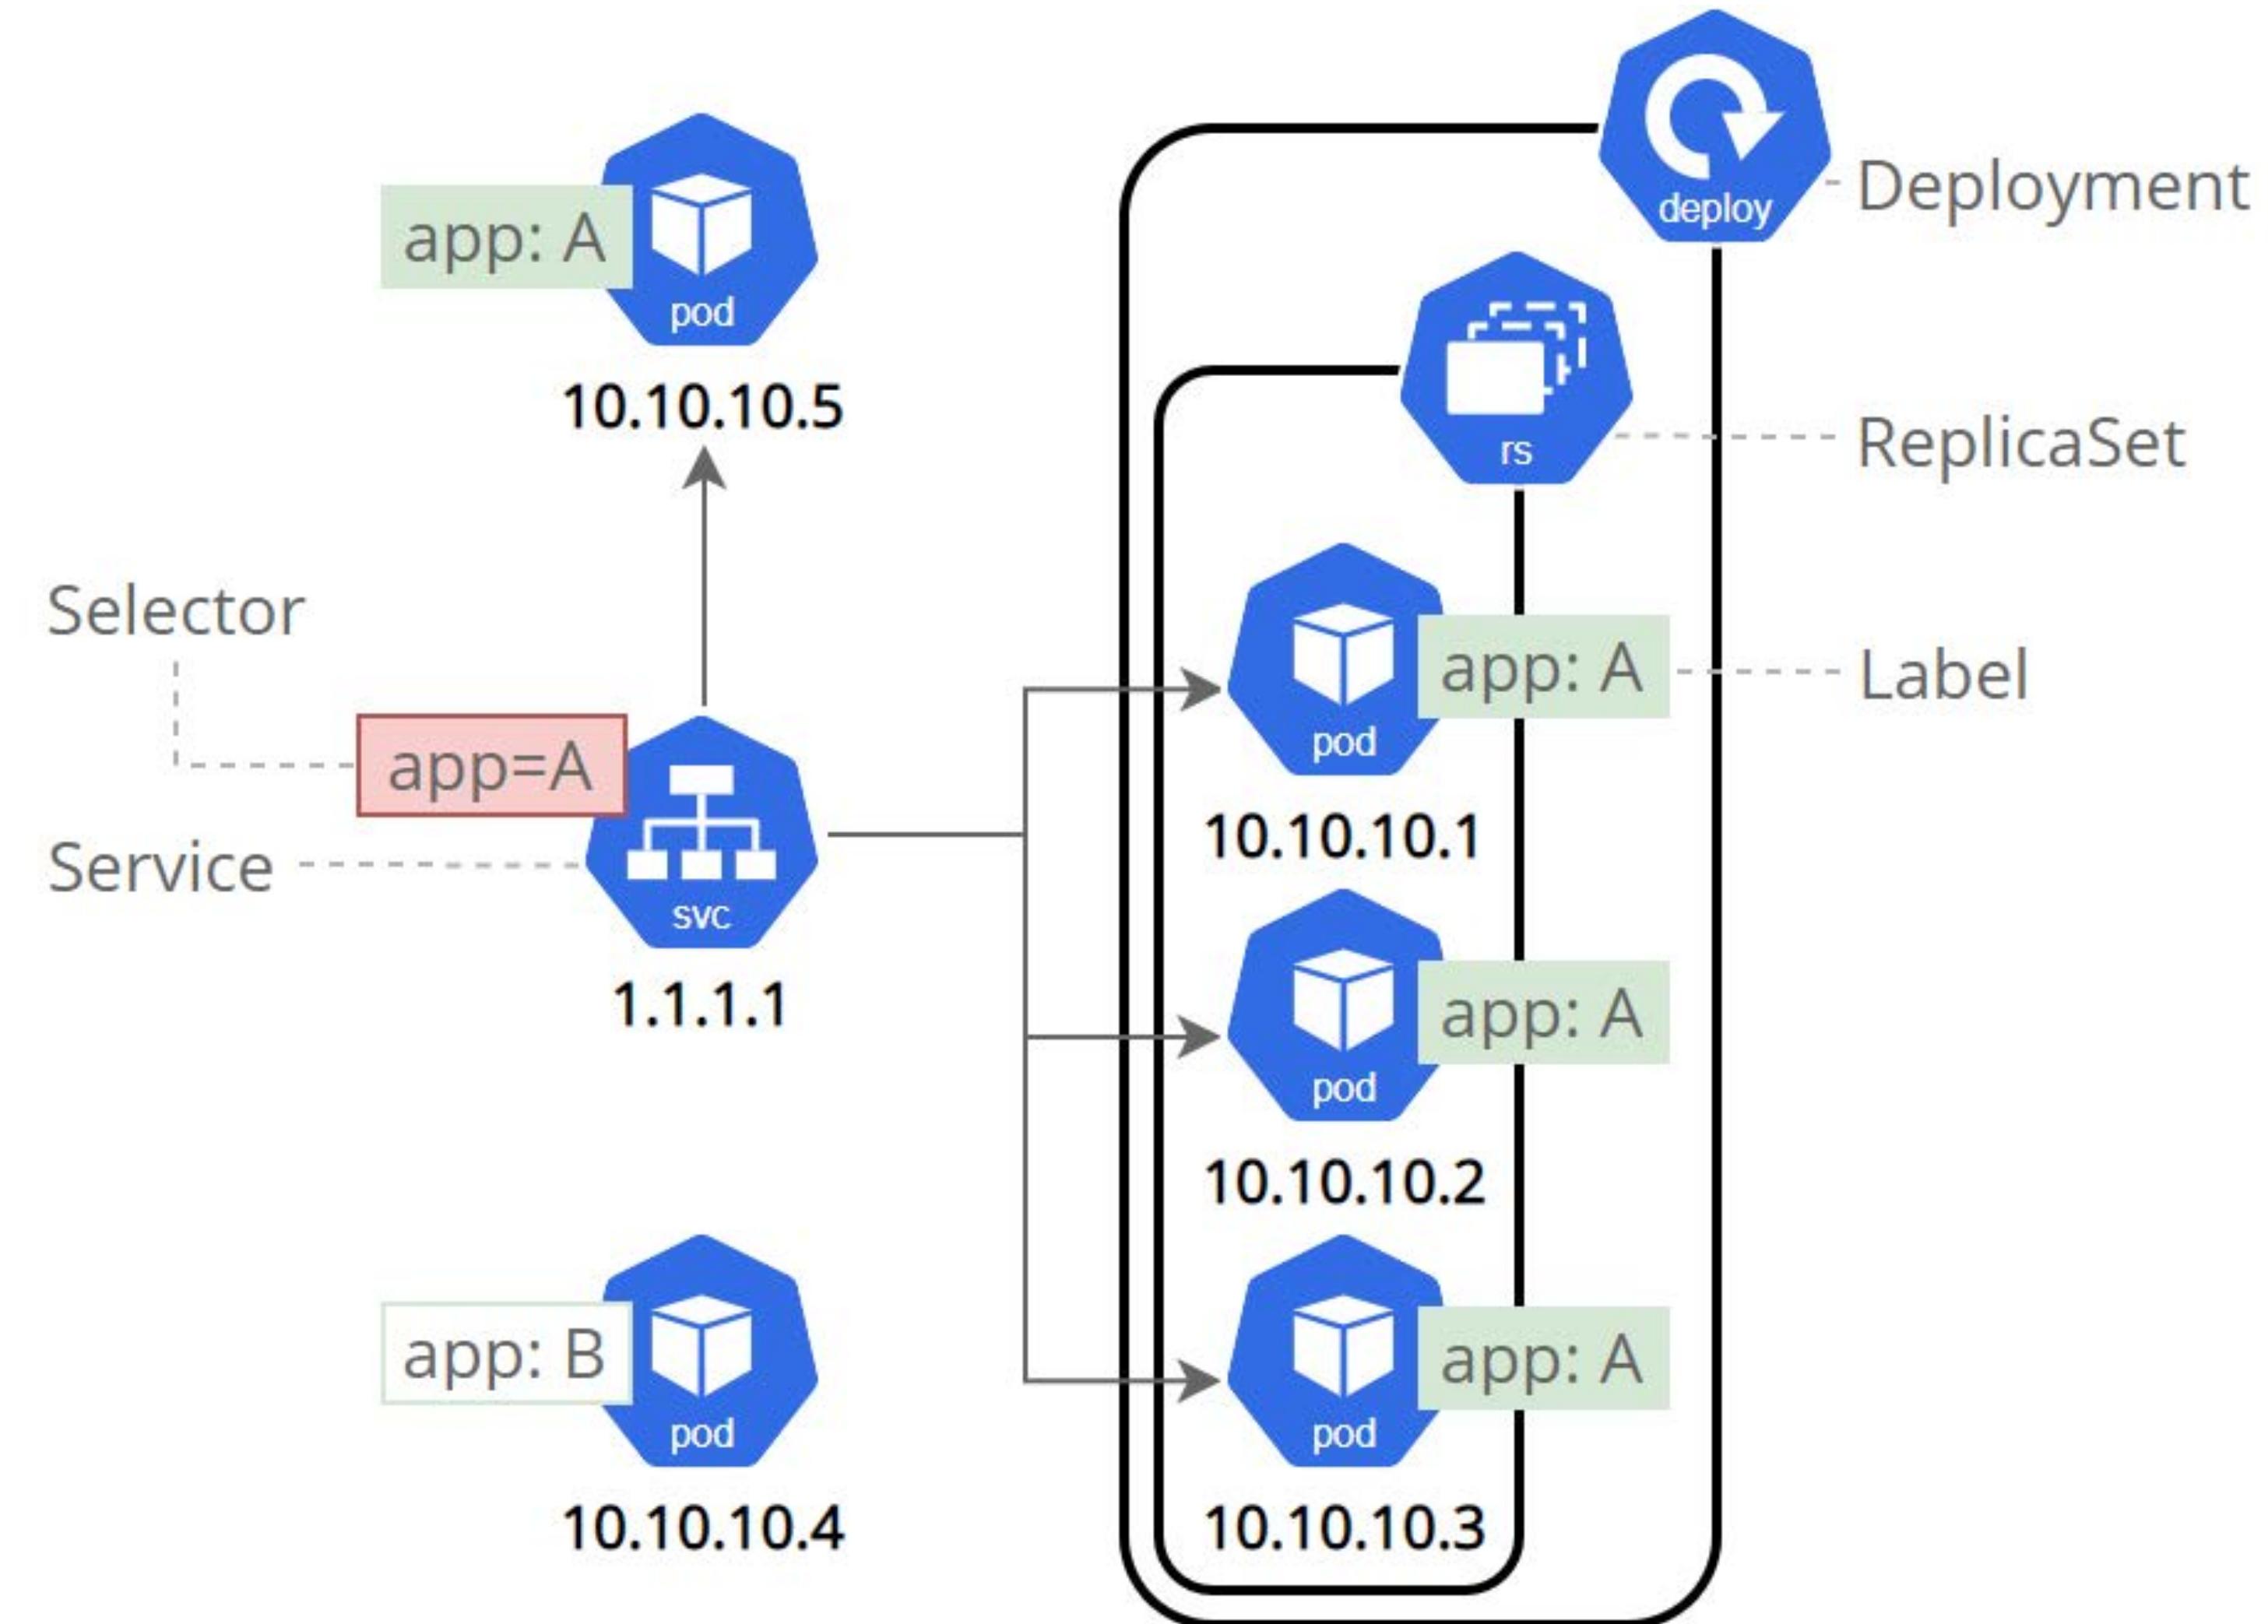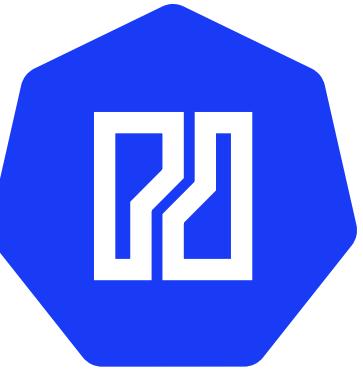

M4-5 Scaling

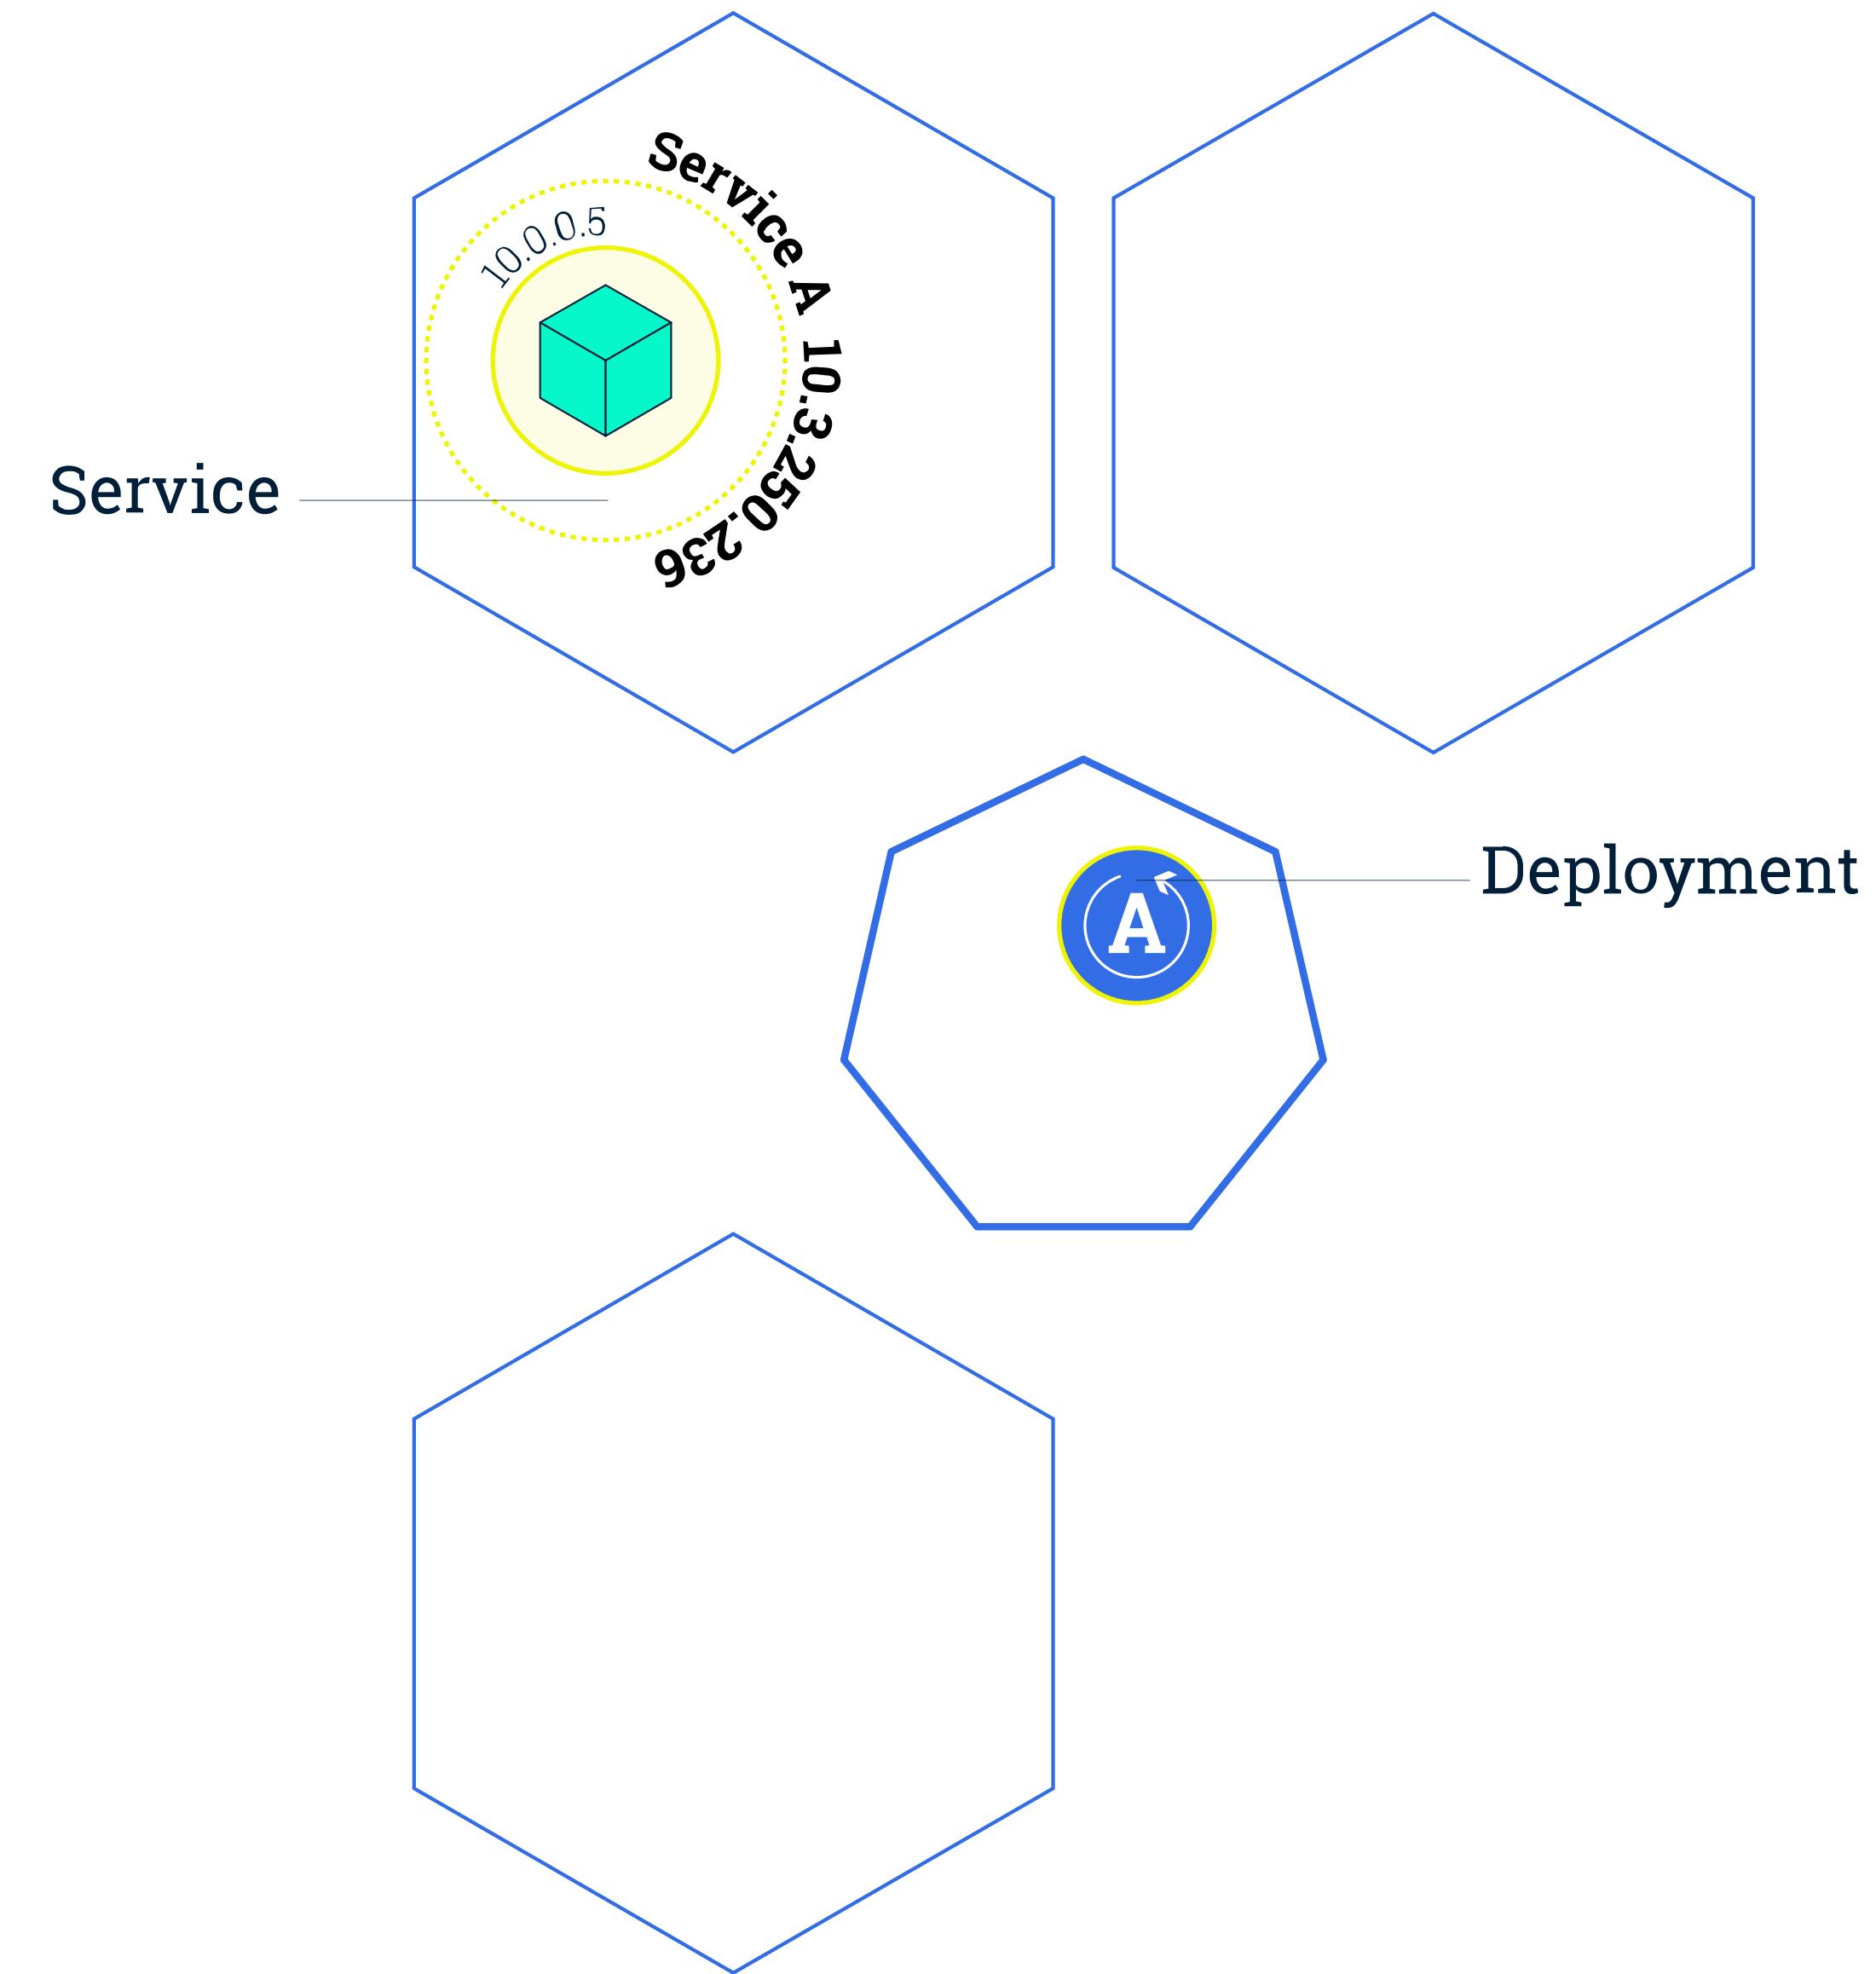

M4-6 Scaling

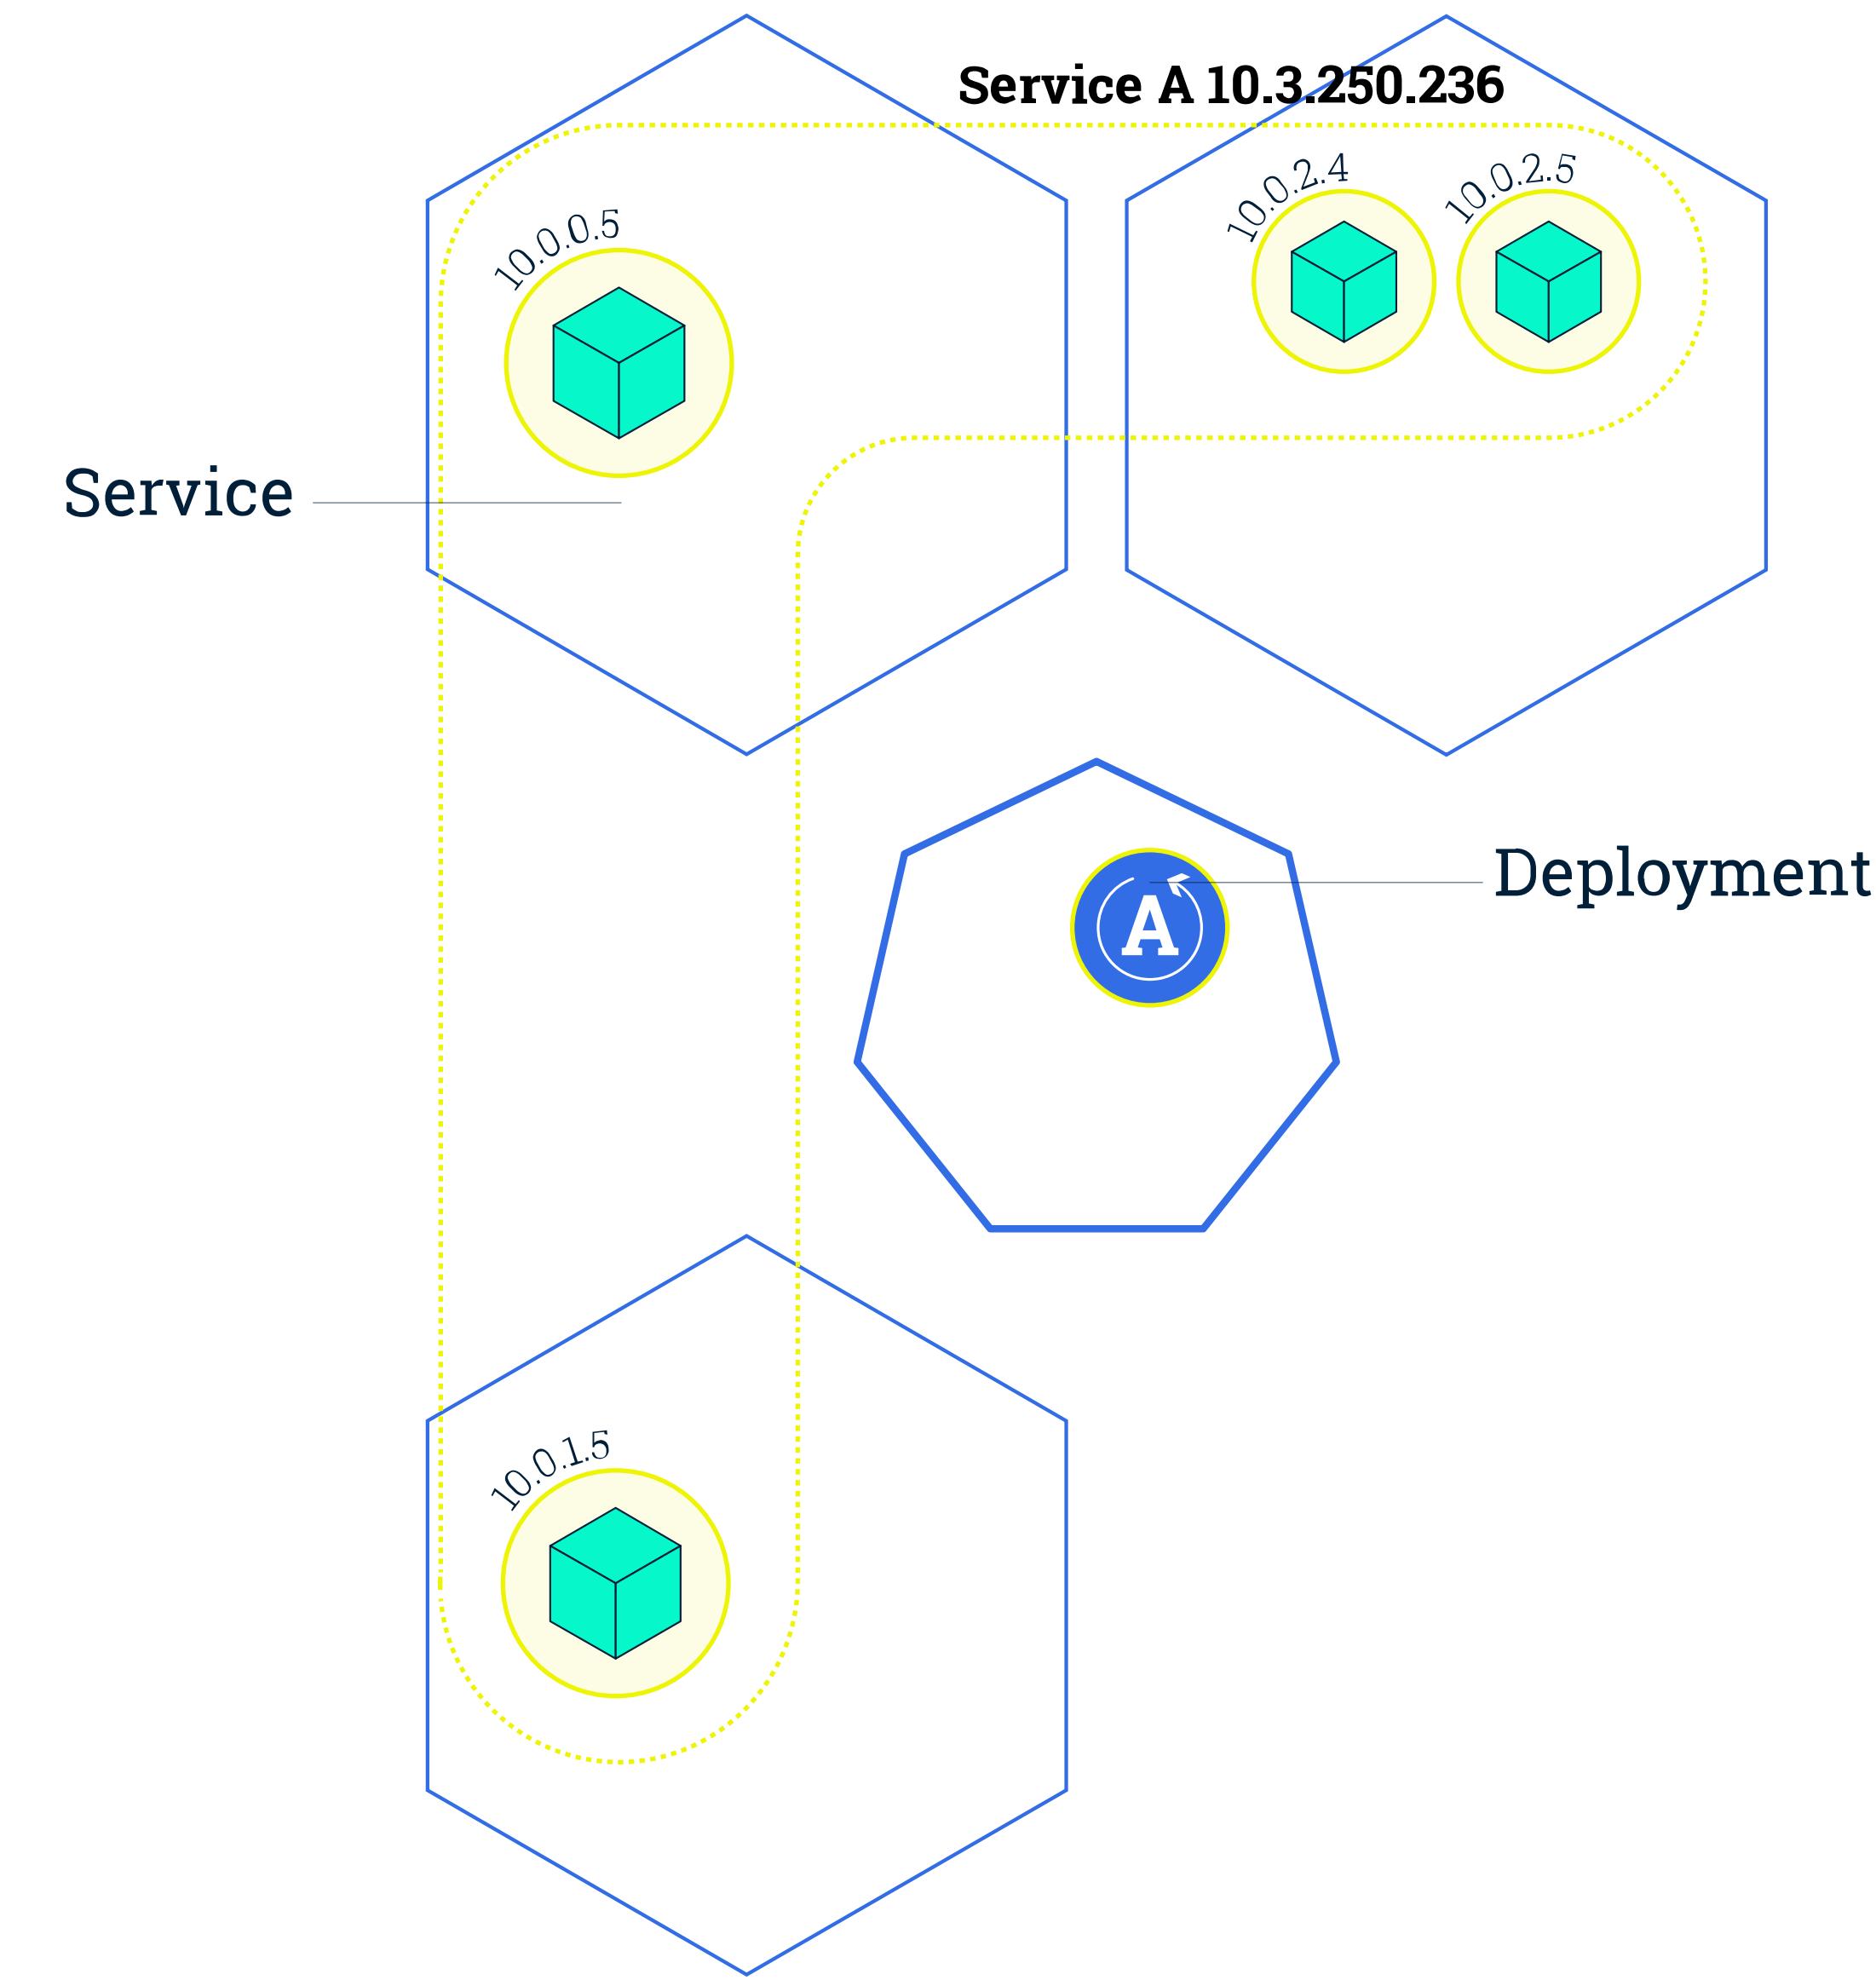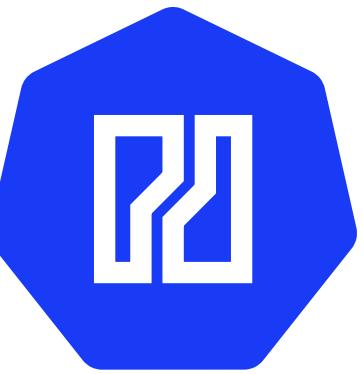





LAB 3

Deploy and Scale




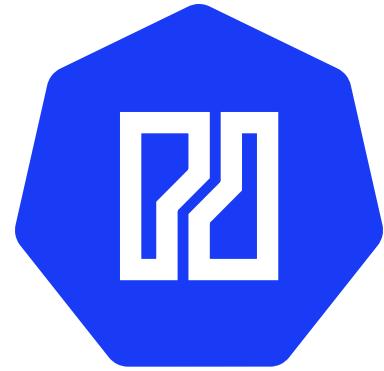

- **Container to Container** communication
- **Pod to Pod** communication
- **Pod to Service** communication
- **External to Service** communication

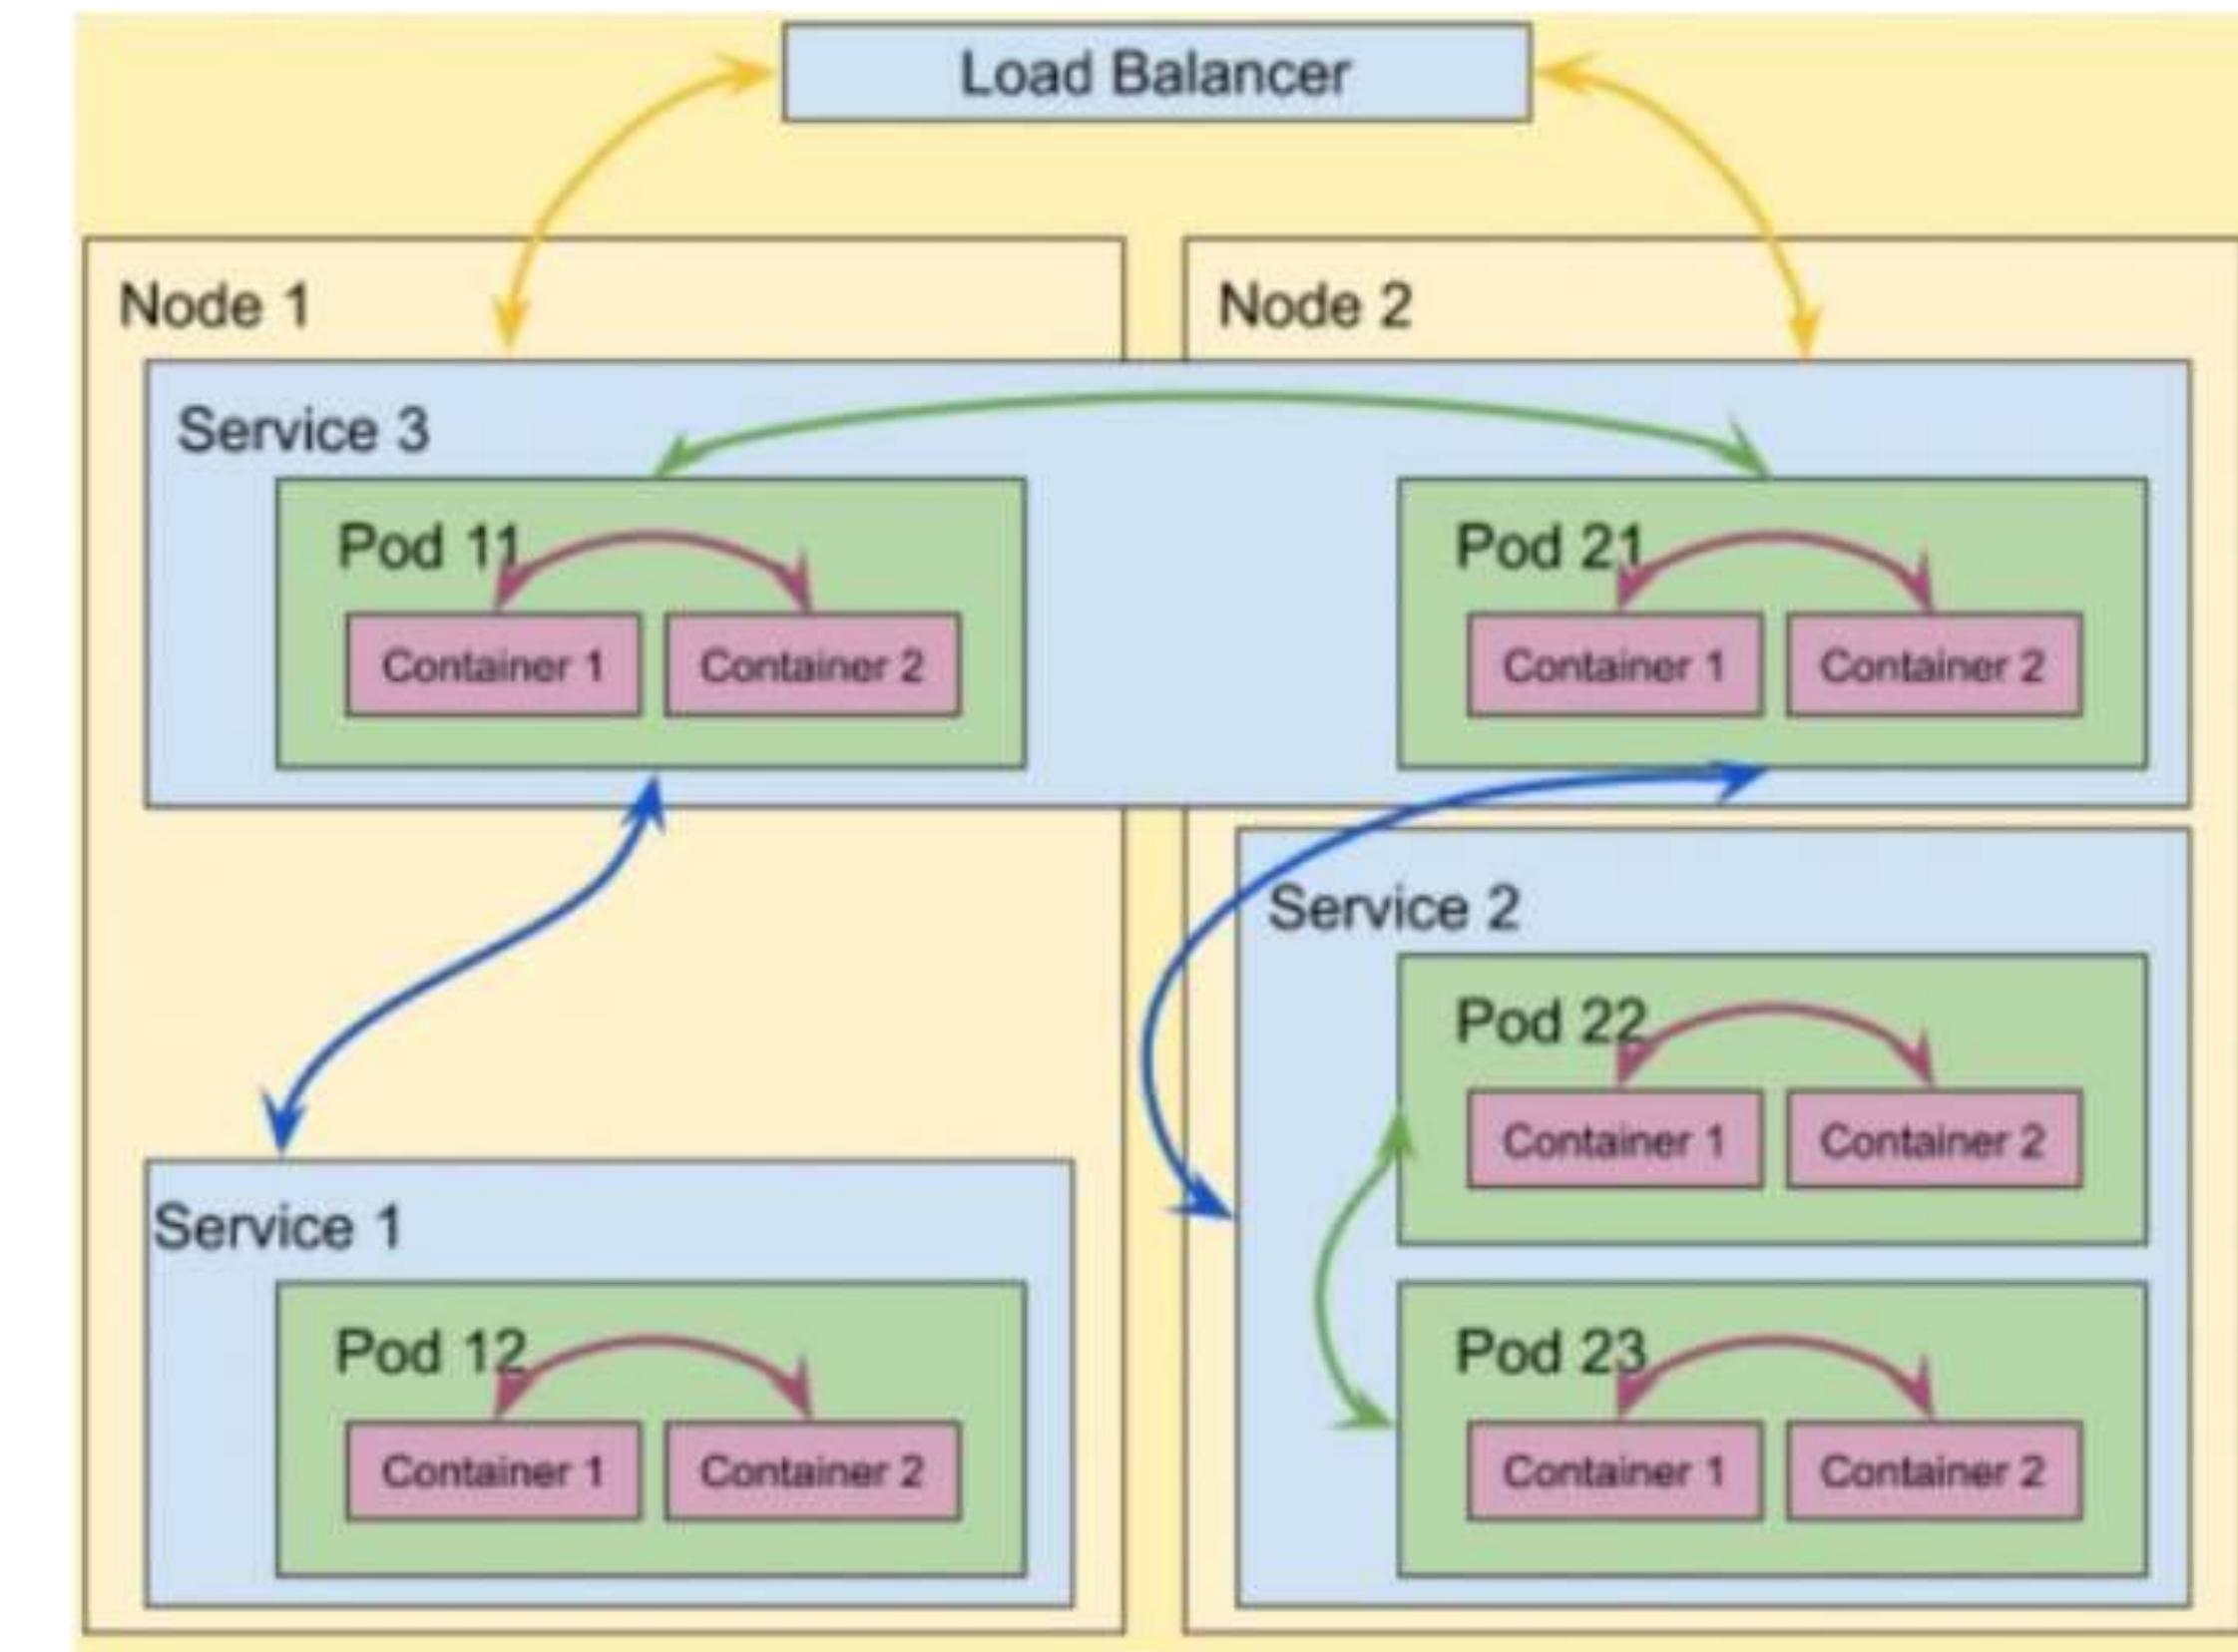


M5-1 Network Model

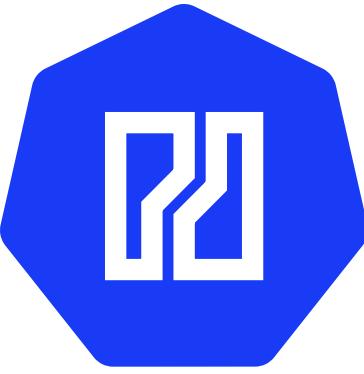


- All **containers** can communicate with each other **without NAT**
- All **nodes** can communicate with containers **without NAT**
- The IP address a **container** sees for itself is the **same address** everyone else sees


Container Network Interface (CNI)

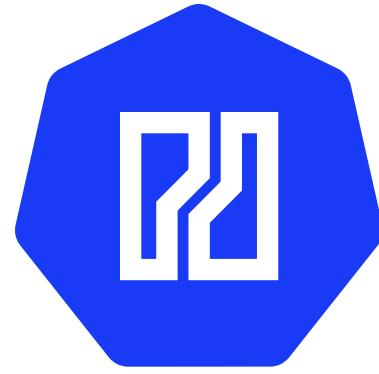


- Kubernetes enables networking through **2** different network plugins:
 - **Kubenet**
 - **CNI**
- **CNI** is only responsible for network connectivity of **containers** and **removing** allocated resources when the container is deleted.
- Initially the **container/pod** has **no network interface**. To connect containers Kubernetes calls the CNI plugin with commands like **ADD**, **DEL**, **CHECK**, **VERSION**.

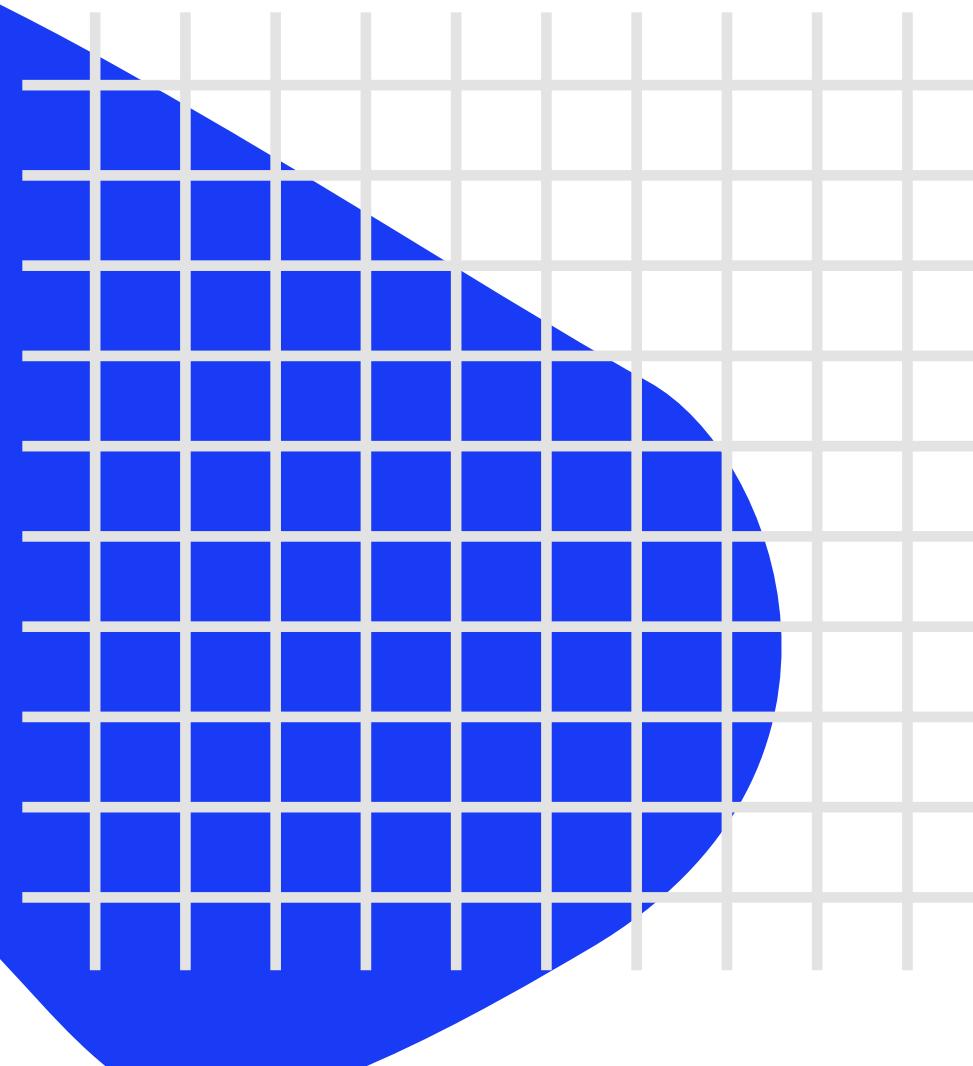

M5-3 DNS

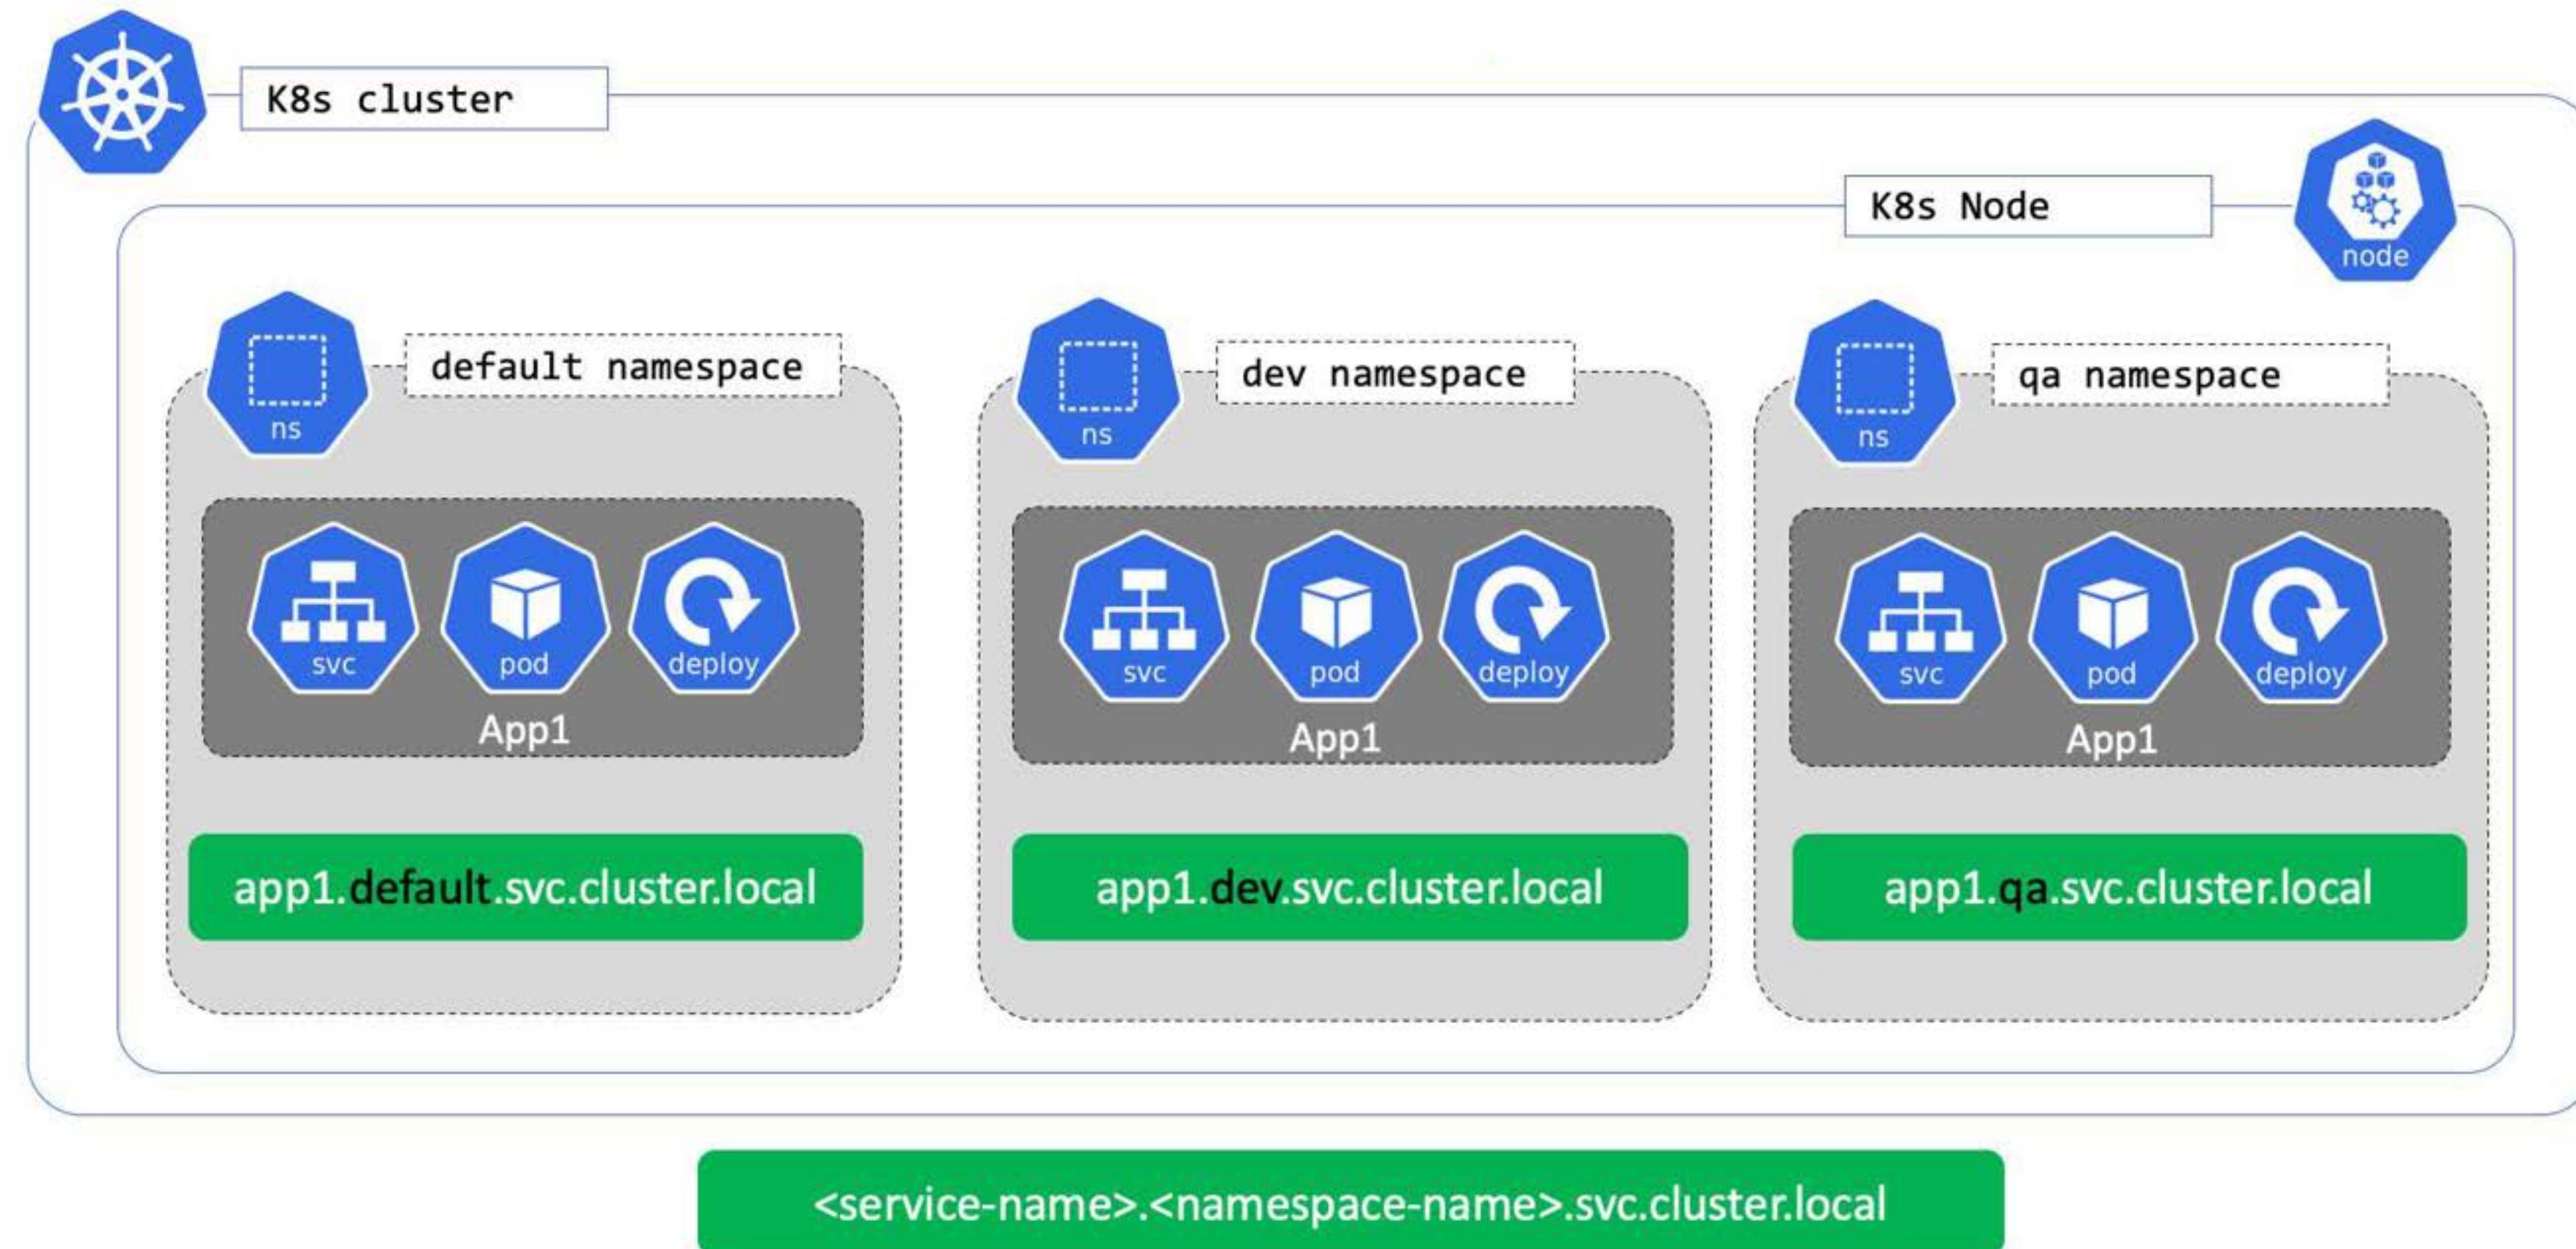


M5-4 DNS

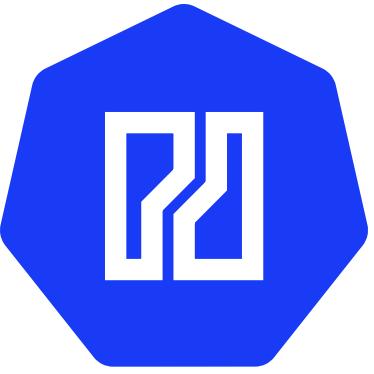

- **“Normal” (not headless) Services are assigned a DNS A or AAAA record**
 - my-svc.my-namespace.svc.cluster.local
- **Pods are assigned a DNS A or AAA record**
 - pod-ip-address.my-namespace.pod.cluster.local
- **Pods exposed by a Service have the following DNS resolution:**
 - pod-ip-address.service-name.my-namespace.svc.cluster.local

M5-5 Ingress

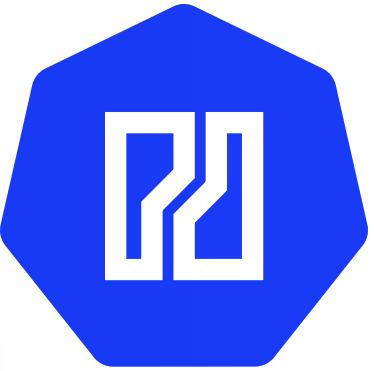



- An API object that manages **external access** to the services in a cluster, typically **HTTP**.
- **Ingress** may provide load balancing, SSL termination and name-based **virtual hosting**.

```
replicaset.yaml

apiVersion: networking.k8s.io/v1
kind: Ingress
metadata:
  name: guestbook-ingress
spec:
spec:
  ingressClassName: public-ingress
  rules:
  - host: example.com
    http:
      paths:
      - path: /
        pathType: Prefix
        backend:
          service:
            name: guestbook-service
            port:
              number: 3000
        tls:
        - hosts:
          - example.com
        secretName: example-tls
```

M5-6 Ingress

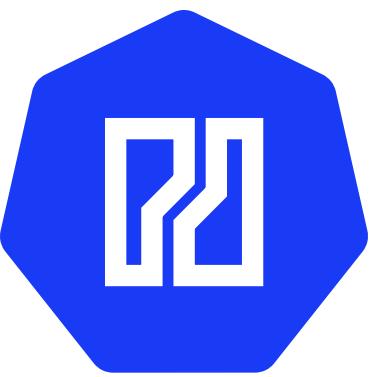

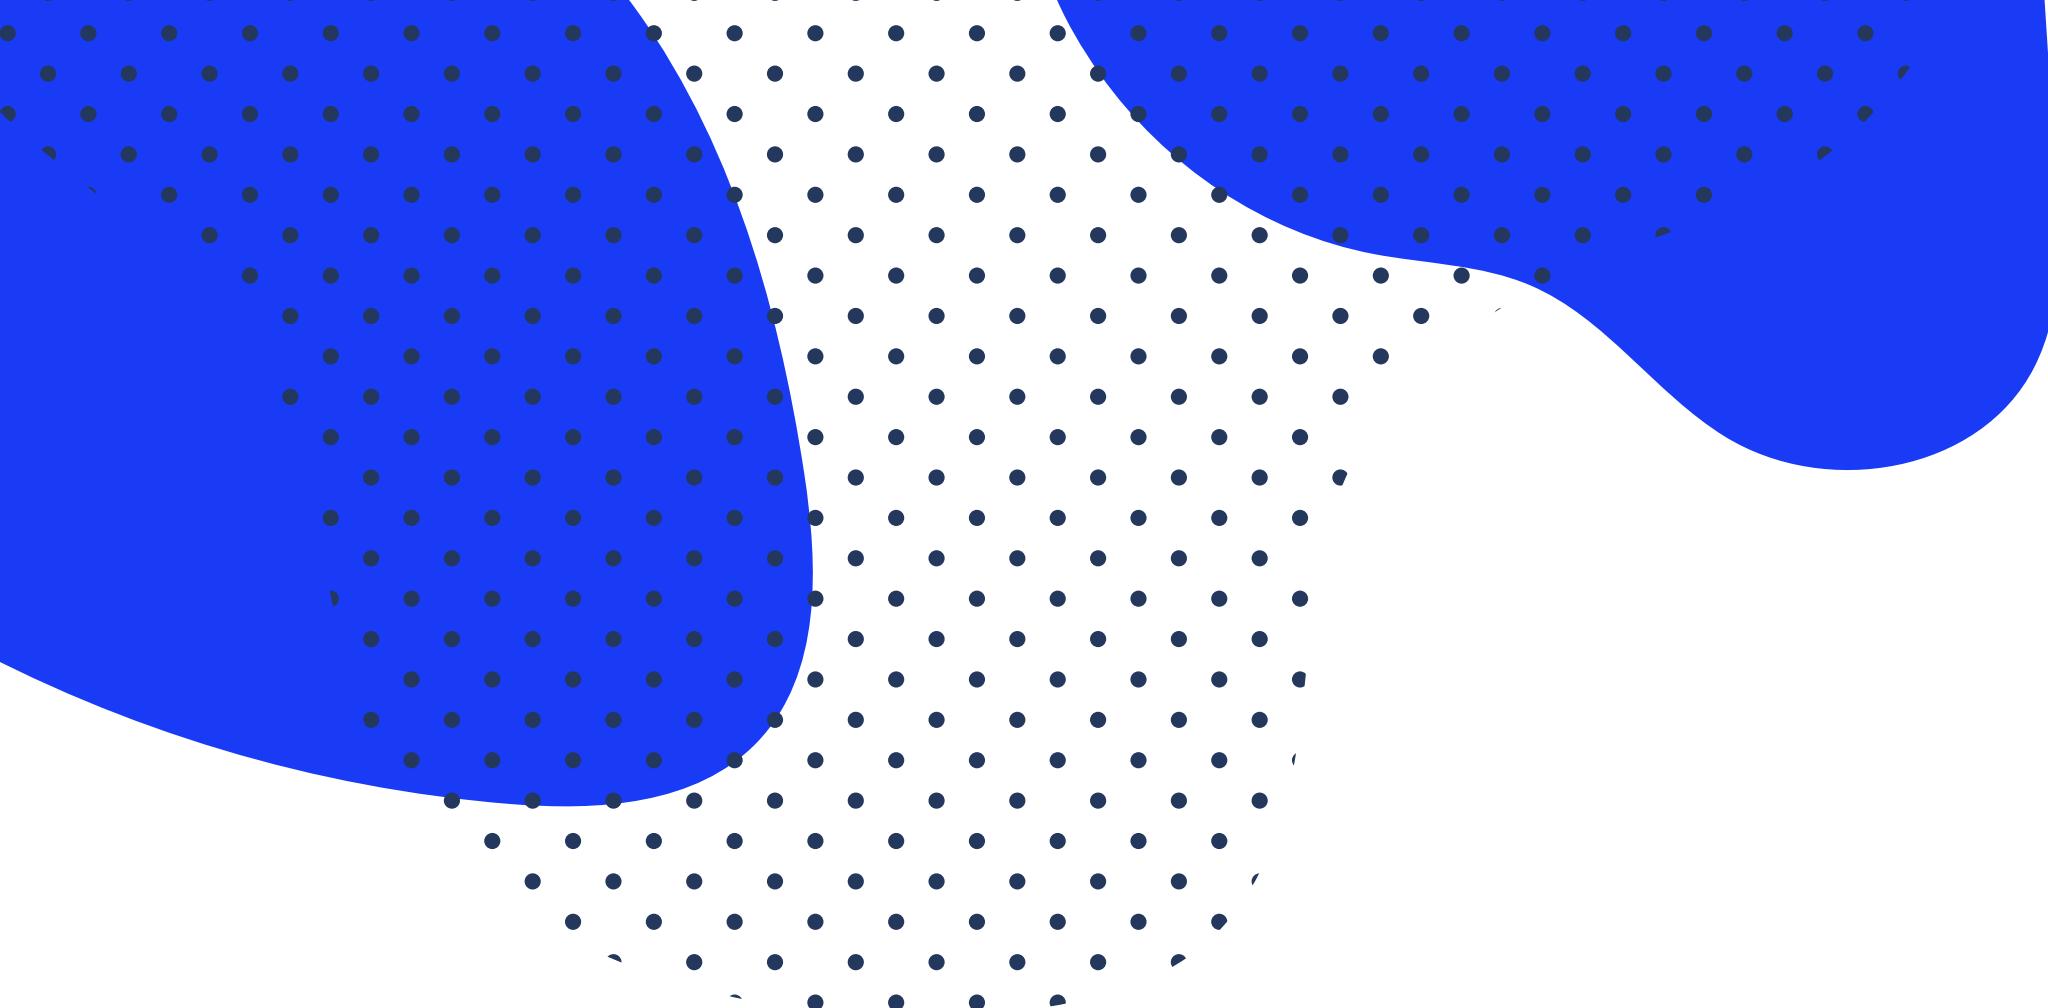


LAB 4

Networking




M6

Troubleshooting

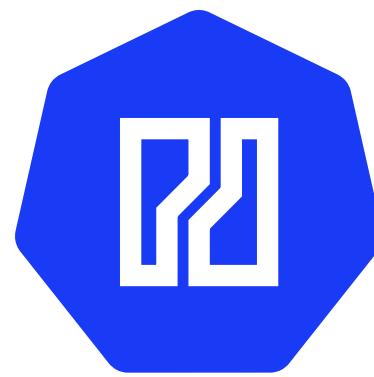


- Be aware of the architecture
- Troubleshoot step by step

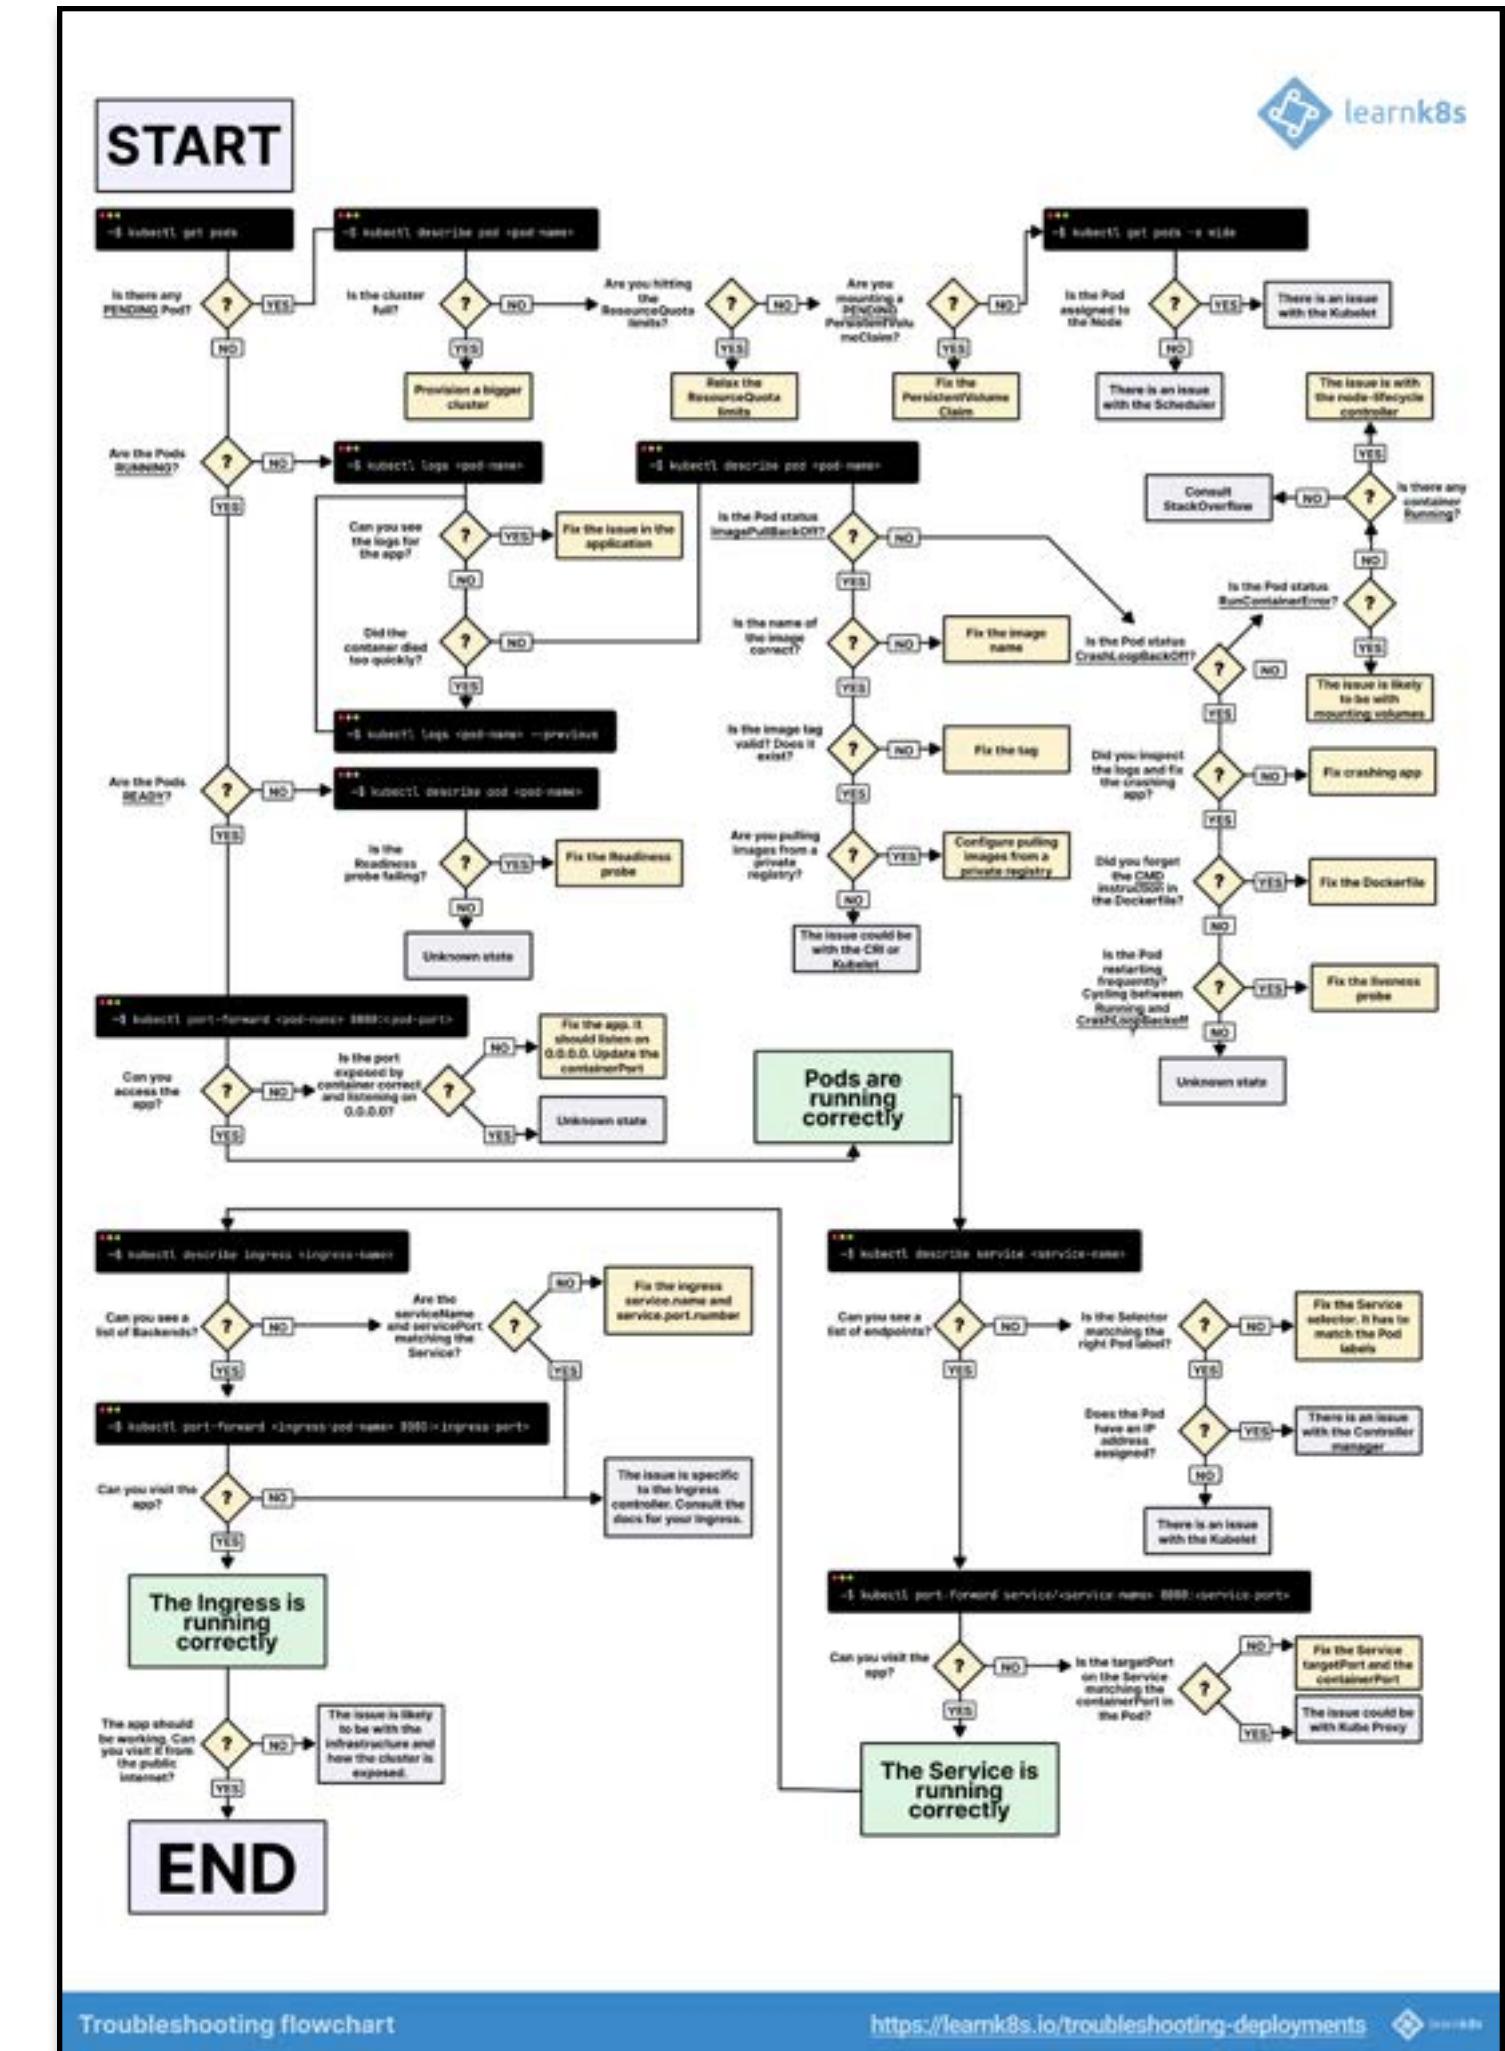

<https://learnk8s.io/troubleshooting-deployments>

M6-1 Troubleshooting

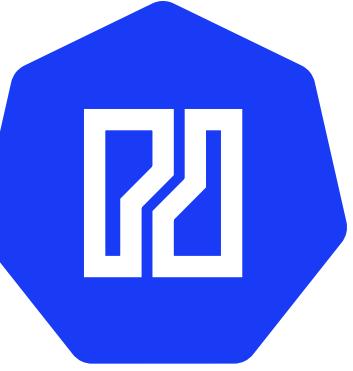

Troubleshooting Steps

1. Pod

- a. is Pod running?
- b. is Pod ready?

2. Service



```
kubectl port-forward ...
```

3. Ingress


- a. is backend correct?



LAB 5


Troubleshoot



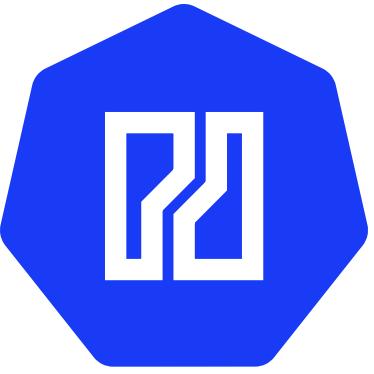



A **PersistentVolume (PV)** is a piece of storage in the cluster that has been provisioned by an administrator or dynamically provisioned using **Storage Classes**. It is a resource in the cluster just like a node is a cluster resource. PVs are **volume plugins** like **Volumes**, but have a lifecycle independent of any individual pod that uses the PV. This API object captures the details of the implementation of the storage, be that **NFS**, **iSCSI**, or a **cloud-provider-specific storage system**.

M7-1 PVC

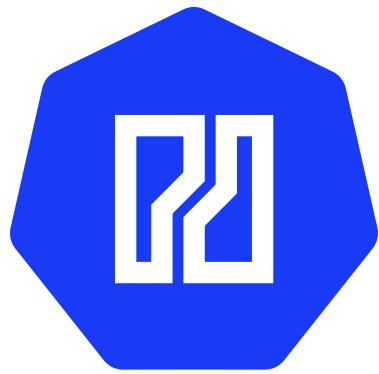

A **PersistentVolumeClaim (PVC)** is a request for storage by a user. It is **similar** to a **pod**. Pods **consume node resources** and **PVCs** consume **PV** resources. **Pods** can request specific levels of resources (**CPU** and **Memory**). **Claims** can request specific **size** and **access modes** (e.g. can be mounted once **read/write** or many times **read-only**).

M7-2 Overview

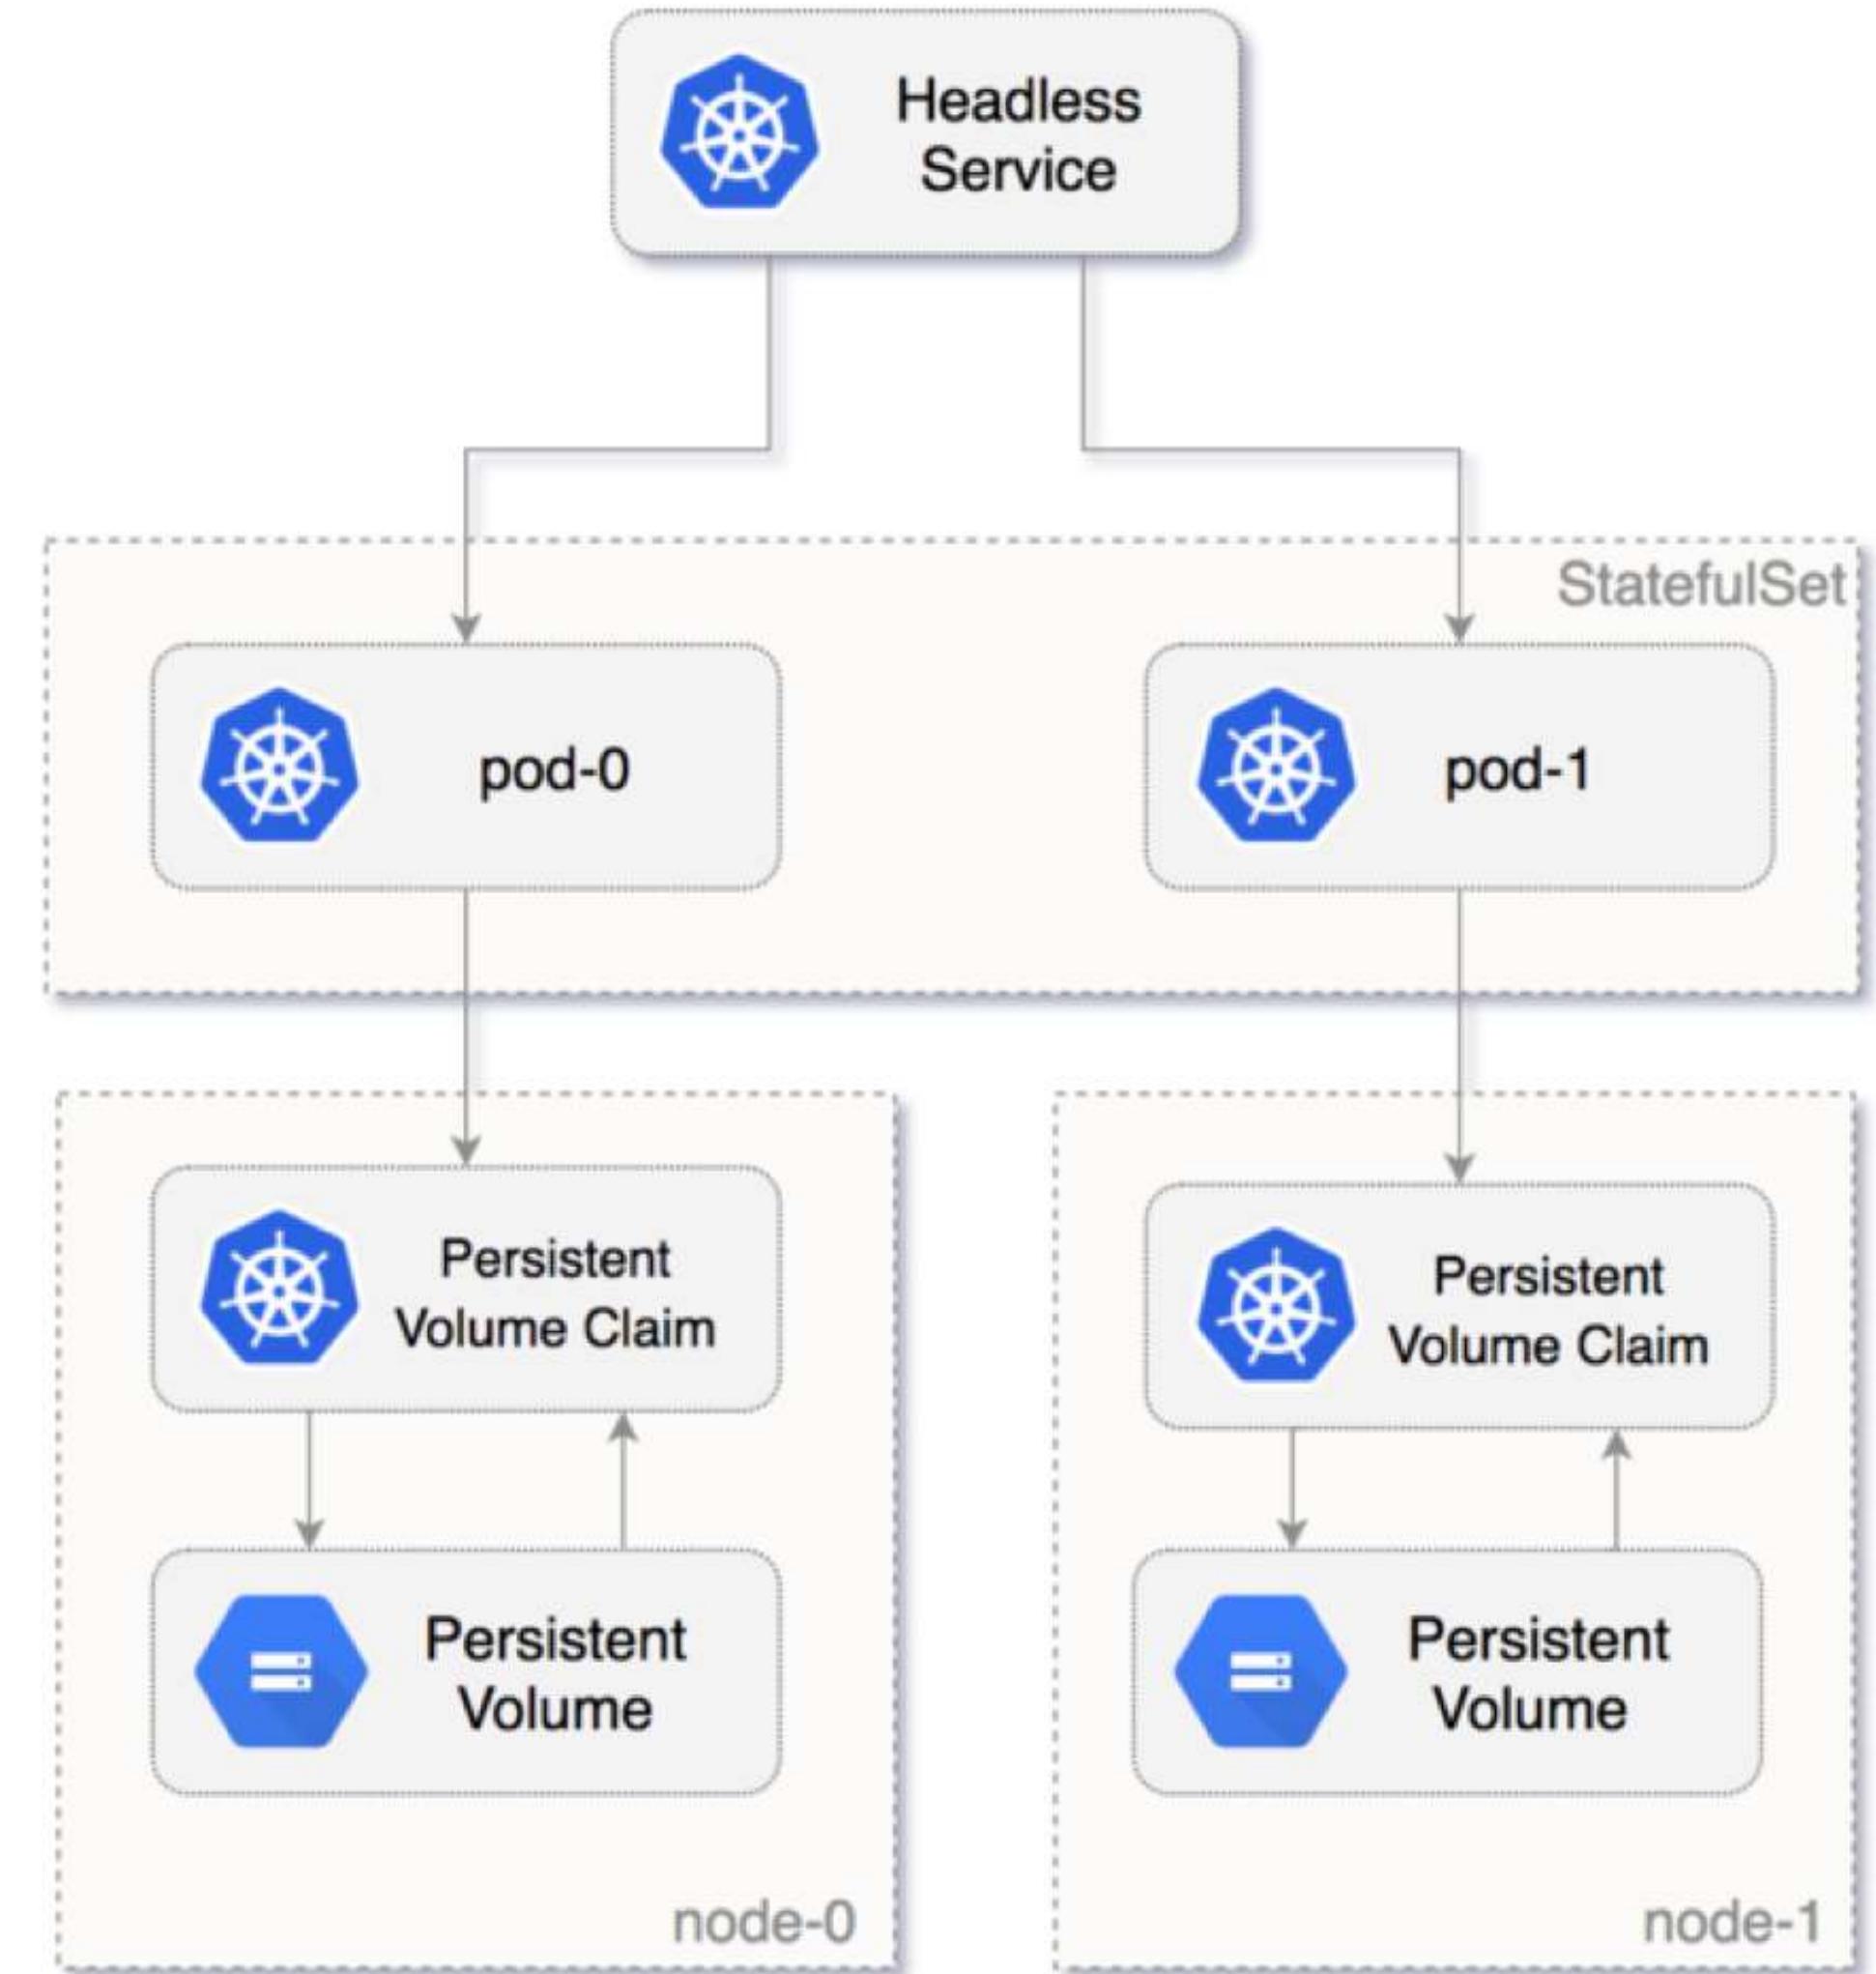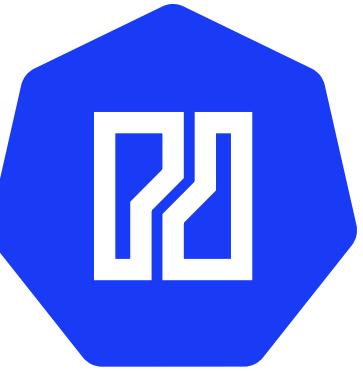




LAB 6


Storage



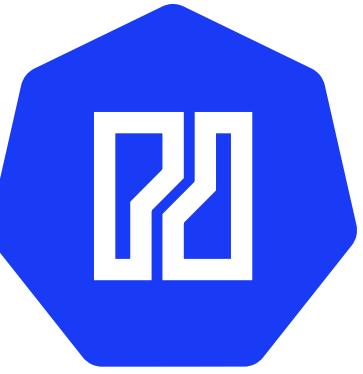

- **Monitoring**
 - Kubernetes Dashboard
 - Kube Prometheus Stack
- **Gitops**
 - Gitlab CI/CD
 - Flux
 - ArgoCD


M8-1 Useful Links

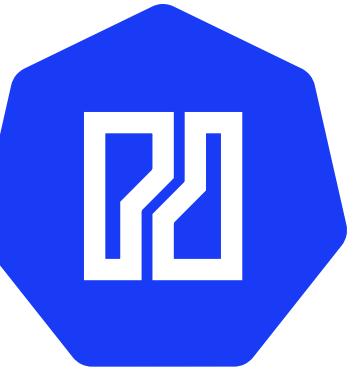

- **Official Kubernetes Docs**
 - <https://kubernetes.io/docs/home/>
- **CNCF Landscape**
 - <https://landscape.cncf.io>
- **Kubernetes API Reference**
 - <https://kubernetes.io/docs/reference/generated/kubernetes-api/v1.27/>




M8-2 Get certified

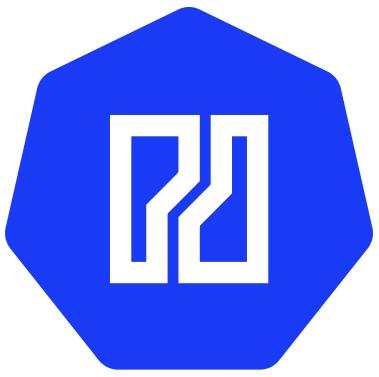

- **Certified Kubernetes Application Developer (CKAD)**
 - <https://www.cncf.io/certification/ckad/>
- **Certified Kubernetes Administrator (CKA)**
 - <https://www.cncf.io/certification/cka/>
- **Certified Kubernetes Security Specialist (CKS)**
 - <https://www.cncf.io/certification/cks/>




M8-3 Image Material

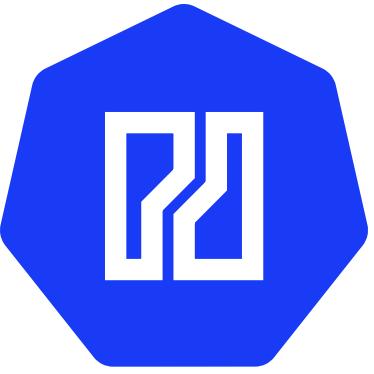


- <https://www.weave.works/blog/kubernetes-faq-configure-storage-for-bare-metal-cluster>
- <https://stacksimplify.com/azure-aks/azure-kubernetes-service-namespaces-imperative/>
- <https://kubernetes.io/docs/home/>
- <https://ray.so>
- <https://undraw.co>



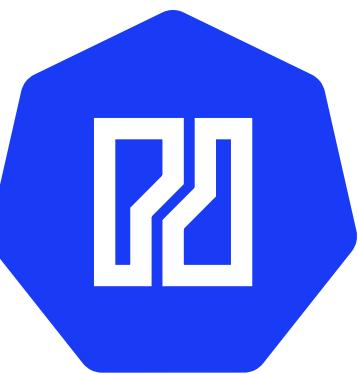

Keep on learning!

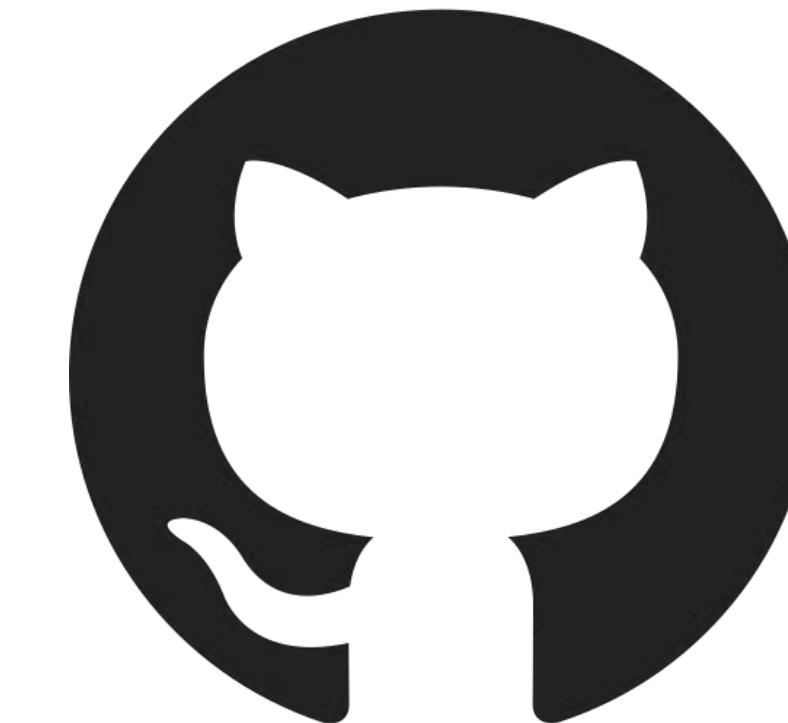

@natrontech