

# Analysis Illumina data

Heleen

8/6/2020

## 1. Pre blast

Load table and check read numbers

Functions:

```
getData <- function(){
  otu <- fread("~/Documents/derep_illum/changedheader/otu.about")
  before <- nrow(otu)
  # Remove X. or X from colnames
  names(otu) <- sub("#", "", names(otu))
  otu <- column_to_rownames(otu, var = "OTU ID")

# optional
remove_chimeras <- function(){
  chimeras <- read.csv("~/Documents/IlluminaAdaptertrimmedAllreps/thingremoved", header=FALSE, sep=";")
  otu <- column_to_rownames(otu, var = "OTU.ID")
  otu <- otu[ ! sub("^.*?:", "", otu$OTU.ID) %in% chimeras$V1,] ##remove all chimeras
  after <- nrow(otu)
  cat(paste("removed", before-after, "chimeric sequences\n\n"))
  rownames(otu) <- NULL
  return(otu)}

# optional chimera removal: otu <- remove_chimeras()

# print results nicely:
myOTUcat <- function(){
  #total read sum in all clusters
  total_reads <- sum(rowSums(otu))
  cat(paste('total reads (grand total with which clustering was done):\n',
            total_reads))
  cat("\n\n", 'Summary statistics of number of reads per OTU:\n')
  print(summary(rowSums(otu)))
  cat(paste("\n\n",
            'Total number of OTUs (including singletons):\n', nrow(otu)))
}
```

## Execution:

```
otu <- getData()
myOTUcat()

## total reads (grand total with which clustering was done):
## 2512237
##
## Summary statistics of number of reads per OTU:
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##      1.00   1.00   1.00   8.46   2.00 86074.00
##
##
## Total number of OTUs (including singletons):
## 296884
```

## Prepare Saba location data

### Functions:

```
#function to change decimal to comma in one
decimal_to_comma <- function(data, column){
  data[,column] <- sub(",", ".",
                        data[,column],
                        fixed = TRUE)}

prepLocSaba <- function(){
  ## load the Saba sample location data
  locdata_saba <- read.delim("~/Downloads/NIC05-eDNA-64PE432-Metadata-MinIon - DataFilterSaba.txt")

  ## Change samplenames, colnames in metadatafile so they match the OTU file making merging is possible
  ## Change decimal to comma for computation.
  locdata_saba[,1] <- gsub("(?![0-9])0+", "", locdata_saba[,1], perl = TRUE)
  locdata_saba[,1] <- gsub("\\.", "_", locdata_saba[,1], perl = TRUE)
  locdata_saba[,1] <- tolower(locdata_saba[,1])

  ## change long colnams to lat,long, altitude
  names(locdata_saba)[names(locdata_saba)=="geo_lat..in.decimalen..WGS84."] <- "lat"
  names(locdata_saba)[names(locdata_saba)=="geo_lon..in.decimalen..WGS84."] <- "long"
  names(locdata_saba)[names(locdata_saba)=="altitude..in.meters.aasl."] <- "altitude"
  names(locdata_saba)[1] <- "sample"

  ## change decimals to commas
  for (col in c("lat", "long")){
    locdata_saba[, col] <- as.numeric(decimal_to_comma(locdata_saba, col))}
  return(locdata_saba)}
```

## Execution:

```
# establish samples and controls
controls <- c("sxm_2018_62", "sxm_2018_63", "sxm_2018_64",
             "sxm_2018_65", "sxm_2018_66", "sxm_2018_70",
             "sxm_2018_71", "0", "unicon1",
             "unicon1A", "neg_controle")
samples <- names(otu)[-which(names(otu) %in% controls)]

locdata_saba <- prepLocSaba()

# take only the columns needed, and the samplenames needed
locdata_saba <- locdata_saba %>%
  select(sample, lat, long, altitude, habitat) %>%
  filter(sample %in% samples)
```

## load and prepare Statia data

select only relevant columns and rows, and setnames, and change the numbers to depth

```
# take relevant columns, take out the samples that are not in the OTU table, and set the colnames to saba
locdata_statia <- read.delim("~/statia_location.txt") %>%
  select(Field.nr., lat, long, Average.depth) %>% # select relevant columns
  filter(!Field.nr. %in% c(528, 529)) %>% # discard irrelevant rows
  setNames(c("sample", "lat", "long", "altitude")) %>% # change column names
  mutate(altitude = as.numeric(gsub('[+]', '', altitude)) * -1) # mutate altitude column to negative
```

## Bind Saba and statia data by row (to get merged data frame (mdf))

```
mdf <- plyr::rbind.fill(locdata_saba, locdata_statia)
```

## estimate boxcore altitude data

boxcore altitude data is missing, so it's estimated by taking the nearest point geographically of which altitude data is available

```
#fill in missing boxcore altitude data with nearestby latitude , the lowest value of that
mdf <- mdf %>%
  group_by(lat) %>%
  # arrange the groups by descending altitude within the groups
  arrange(desc(altitude), .by_group = TRUE) %>%
  # make new column with lowest altitude of group if the value is missing
  mutate(altitude = ifelse(is.na(altitude), min(altitude, na.rm = TRUE), altitude)) %>%
  # because for some boxcore samples it was taken at a slightly different latitude, it does not belong to the group
  # Thus, R introduces infinite values which this command changes to NA values
  mutate(altitude = ifelse(is.infinite(altitude), NA, altitude)) %>%
  # needs to be ungrouped to fill it with the nearest & lowest altitude
  ungroup() %>%
  fill(altitude, .direction = 'down')
```

```
## Warning in min(altitude, na.rm = TRUE): no non-missing arguments to min;
## returning Inf
```

```
## Warning in min(altitude, na.rm = TRUE): no non-missing arguments to min;
## returning Inf
```

Put every sample in north, south or statia catogery based on latitude, to enable exchange testing. Add a tag indication what region the sampling location is in: Saba north, Saba south, or Statia.

```
mdf$tag <- ifelse(grepl("[0-9]+$", mdf$sample), 'Statia',
                 ifelse(mdf$lat > 17.55, "Saba North",
                        "Saba South")) %>% as.factor()
```

## Control reads

### investigate control reads

#####Functions:

```
#prep data
controlDf <- function(){
  copy <- otu
  copy[copy>0] <- 1
  per_type <- copy %>% colSums() %>%
    as.data.frame() %>% rownames_to_column(var = "sample")%>%
    mutate(type = ifelse(sample %in% bottlecontrol, "storage bottle control",
                        ifelse(grepl("unicon", sample), "pcr + control",
                                ifelse(sample %in% c("0", "neg_controle"),
                                        "pcr - control", "samples")))) %>%
    mutate(type = fct_reorder(type, desc(.)))
  return(per_type)}

plot_pertype <- function(df){
  control_plotOTU <-
    ggplot(df, aes(x = type,
                  y = .,
                  fill = type)) +
    geom_boxplot() +
    labs(title = "Number of OTUs per sample type",
         subtitle = "before abundance filterig",
         x = "Type of sample",
         y = "OTUs (log10)") +
    scale_fill_jco(alpha = 0.6) +
    scale_y_log10() +
# edit lines and background
    theme(text = element_text(size = 20),
          panel.grid.major.x = element_blank(),
          panel.grid.major.y = element_line("gray50", size = 0.2),
          panel.background = element_blank(),
          axis.line = element_line("gray50"),
```


```
legend.position = "none")
control_plotOTU}
```

Execution:

```
controls <- c("sxm_2018_62", "sxm_2018_63", "sxm_2018_64",
              "sxm_2018_65", "sxm_2018_66", "sxm_2018_70",
              "sxm_2018_71", "0", "unicorn1",
              "unicorn1A", "neg_controle")
bottlecontrol <- c("sxm_2018_62", "sxm_2018_63", "sxm_2018_64",
                  "sxm_2018_65", "sxm_2018_66", "sxm_2018_70",
                  "sxm_2018_71")

controlDf <- controlDf()
plot_pertype(controlDf)
```

## Number of OTUs per sample type before abundance filterig

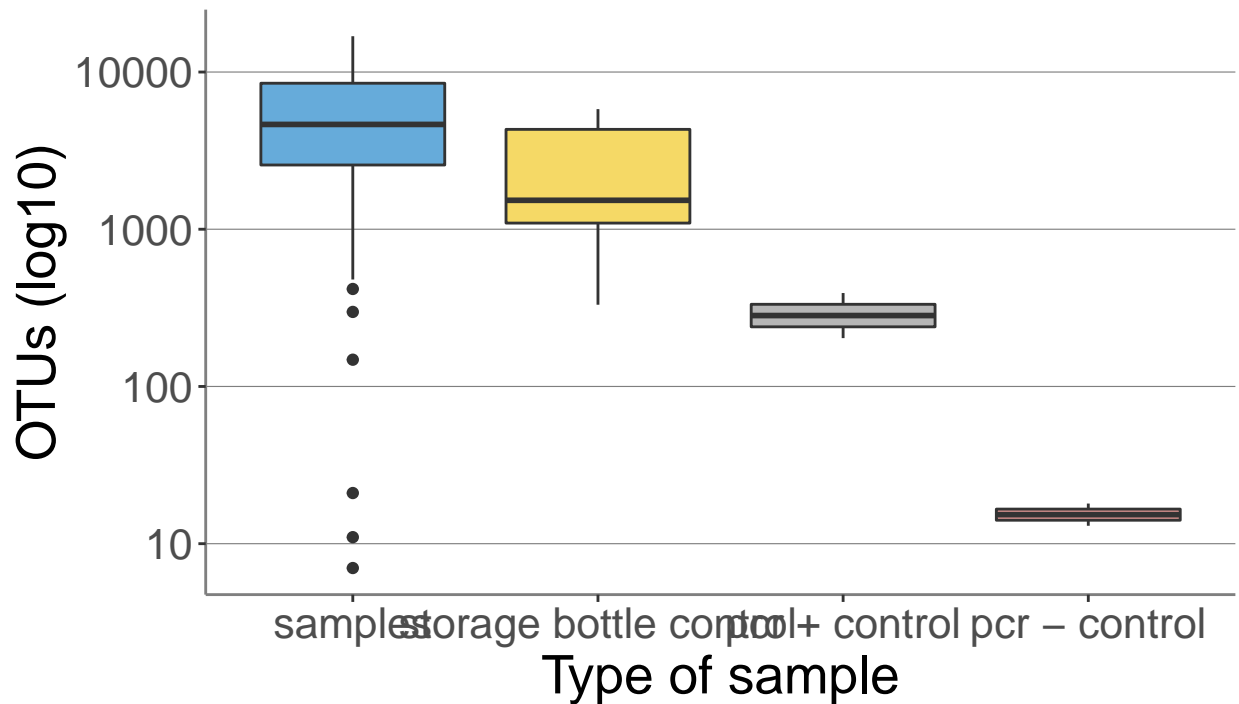

anova of storage bottle control

```
res.aov <- aov(d = controlDf, . ~ type)
summary(res.aov)
```

##	Df	Sum Sq	Mean Sq	F value	Pr(>F)
----	----	--------	---------	---------	--------

```
## type          3 1.763e+08 58764044 3.444 0.0198 *
## Residuals    96 1.638e+09 17060989
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

```
TukeyHSD(res.aov)
```

```
## Tukey multiple comparisons of means
## 95% family-wise confidence level
##
## Fit: aov(formula = . ~ type, data = controlDf)
##
## $type
##
```

	diff	lwr	upr	p adj
storage bottle control-samples	-3137.205	-7376.563	1102.152	0.2204976
pcr + control-samples	-5496.348	-13218.159	2225.463	0.2517563
pcr - control-samples	-5778.848	-13500.659	1942.963	0.2117674
pcr + control-storage bottle control	-2359.143	-11018.102	6299.817	0.8919758
pcr - control-storage bottle control	-2641.643	-11300.602	6017.317	0.8553299
pcr - control-pcr + control	-282.500	-11082.120	10517.120	0.9998844

```
# check for assumptions
check_assumption <- function(){
  plot(res.aov, 1) # homogeneity of variances
  plot(res.aov, 2) # normality of residuals
  shapiro.test(residuals(res.aov))} # shapiro wilk of anova residuals
```

## Post-blast

investigate storage bottle control identifications


```
`lca storage` <- read.delim("~/Documents/derep_illum/controls/underep/taxadded/lca") ## load lca file o
species <- table(`lca storage`$X.genus) %>%
  data.frame() %>%
  mutate(Var1 = ifelse(Freq < 1000, "Other", as.character(Var1))) %>%
  filter(!Var1=="no identification") %>%
  group_by(Var1) %>%
  dplyr::summarise(Freq = sum(Freq)) %>%
  mutate(Prop = (Freq/sum(Freq))*100) %>%
  ungroup() %>%
  mutate(Var1 = fct_reorder(Var1, desc(Freq))) %>%
  mutate(Var1 = fct_relevel(Var1, "Other", after = Inf))
```

```
## `summarise()` ungrouping output (override with `.groups` argument)
```

```
get_col <- function(){
  colorcount <- length(genuscount$Var1)
  qual_col <- brewer.pal.info[brewer.pal.info$category == "qual",]
```

```
col_vector <- unlist(mapply(brewer.pal,
                           qual_col$maxcolors, rownames(qual_col)))
mycol <- sample(col_vector, colorcount)}


ggplot(species, aes(x = Var1, y = Freq, fill = Var1)) +
  geom_bar(stat = "identity", color = "black") +
  theme(text = element_text(size = 20),
        axis.text.x = element_text(angle = 45, hjust = 1, size = 15),
        legend.position = "none") +
  scale_fill_jco() +
  labs(title = "Genera represented in storage bottles",
       x = "Genus\n",
       y = "Number of identifications (log10)") +
  scale_y_log10()
```

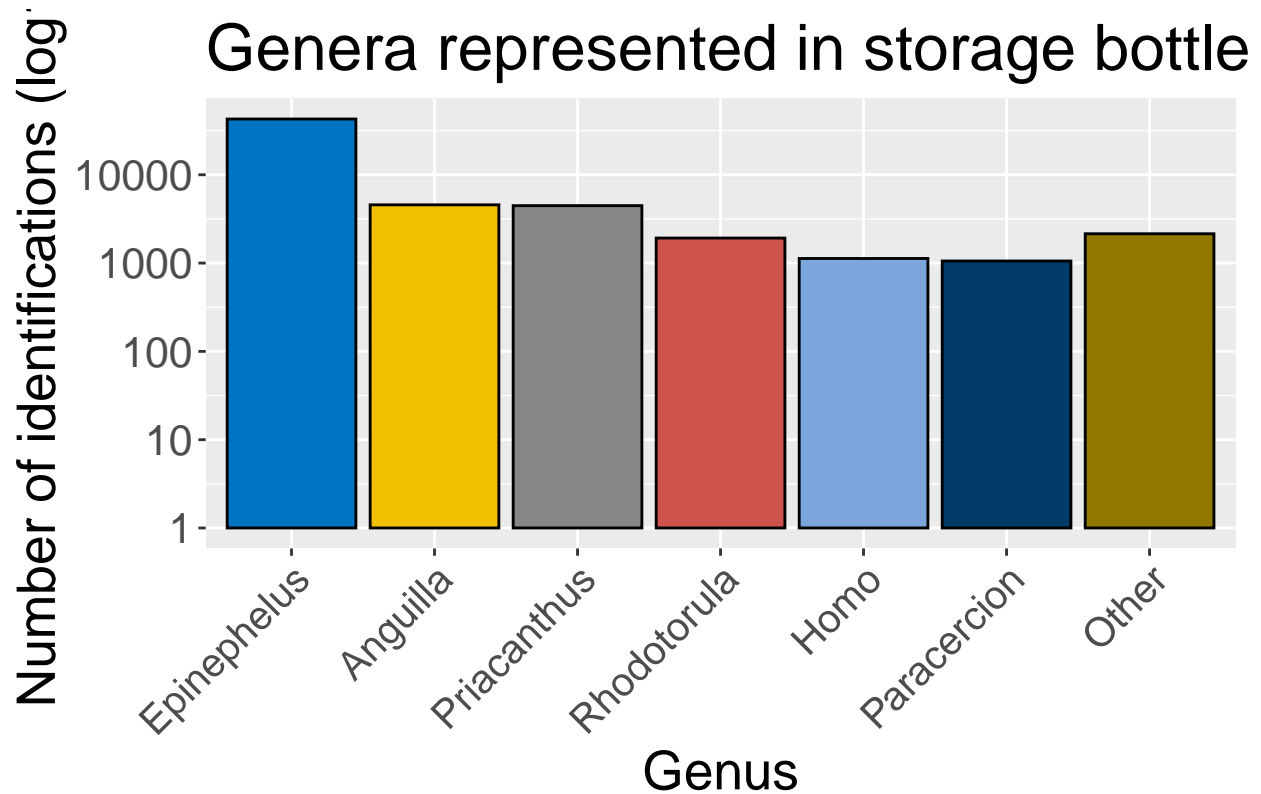

```
# Pie Chart
# add position of label
count.data <- species %>%
  arrange(desc(Var1)) %>%
  mutate(lab.ypos = cumsum(Prop) - 0.5*Prop)

ggplot(count.data, aes(x = "", y = Prop, fill = Var1)) +
  geom_bar(width = 1, stat = "identity", color = "white") +
  coord_polar("y", start = 0)+
```

```
geom_text(aes(y = lab.ypos, label = round(Prop,1)), color = "white")+
theme_void()
```

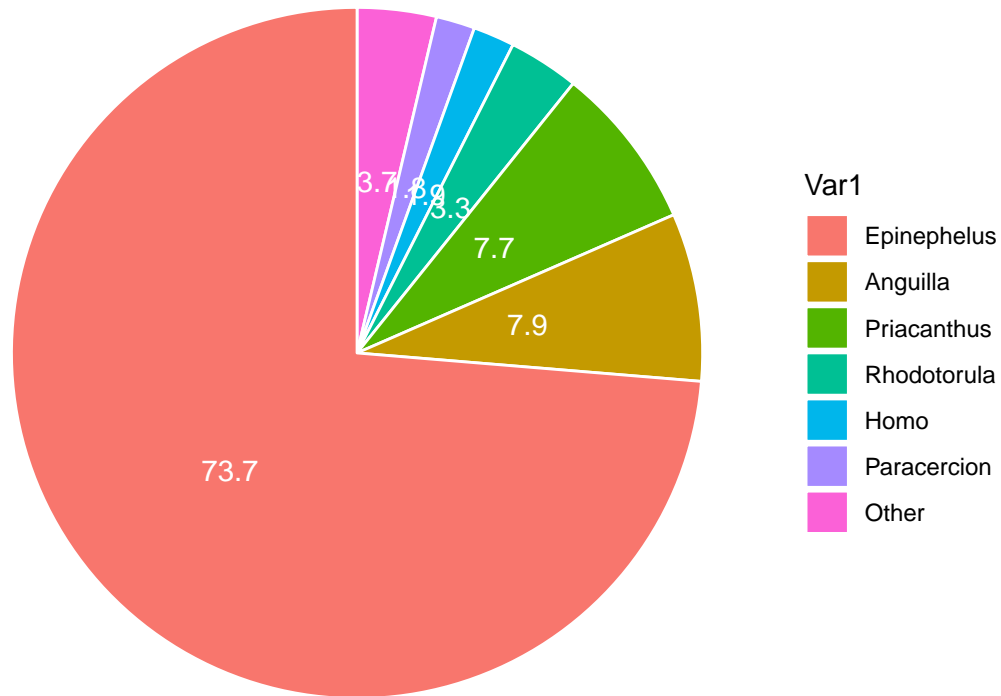

## Filter out out controls

If a OTU also contains control reads, these need to be filtered out of the samples contain them in frequencies that are close to the control frequencies. This could be contamination from the bottles the sample was stored in, or PCR contamination.

```
posContamination <- function(){
  contam <- otu %>% filter(unicorn1 > 5000) %>% select(!c("unicorn1",
    "unicorn1A")) %>% sum()
  total <- otu %>% filter(unicorn1 > 5000) %>% sum()
  freq <- contam/total
  cat(paste("Contamination percentage of positive control in other samples: \t", round(freq*100, 5), "\n"))
  return(freq)}

negContamination <- function(){
  contam <- otu %>% select(neg_controle) %>% sum()
  total <- otu %>% filter(neg_controle>0) %>% sum()
  freq <- contam/total
  cat(paste("Contamination percentage in negative samples: \t", round(freq*100, 5)))}
```



```
rate <- posContamination()
```

```
## Contamination percentage of positive control in other samples: 0.00671
```

```
negContamination()
```

```
## Contamination percentage in negative samples: 0.0612
```

## Low abundance filter

the rate of contamination in the positive control was used as low abundance filter rate.

```
lowAbundanceFilter <- function(rate){
  before <- nrow(otu)
  colsum <- colSums(otu)
  min_read <- colsum * rate # if OTU contains less than this many reads, filter out
  otu <-
    mapply(col = otu, min = min_read, function(col, min){
      col[col < min] <- 0
      col}) %>%
    as.data.frame () %>%
    `rownames<-`(rownames(otu)) %>% filter(!rowSums(.[samples]) == 0) # take out "empty" otus
  after <- nrow(otu)
  percentage_ret <- ((before-after)/before)*100
  cat(paste("filtered out ", before-after, " OTUs, which is ",
    round(percentage_ret, 2), "% of original OTUs
    \n\n",
    after, " OTUs were retained", sep = ""))
  return(otu)
}

controls <- c("sxm_2018_62", "sxm_2018_63", "sxm_2018_64",
  "sxm_2018_65", "sxm_2018_66", "sxm_2018_70",
  "sxm_2018_71", "0", "unicon1",
  "unicon1A", "neg_controle")
bottlecontrol <- c("sxm_2018_62", "sxm_2018_63", "sxm_2018_64",
  "sxm_2018_65", "sxm_2018_66", "sxm_2018_70",
  "sxm_2018_71")
samples <- names(otu)[-which(names(otu) %in% controls)]

otu <- lowAbundanceFilter(rate = rate)
```

```
## filtered out 244221 OTUs, which is 82.26% of original OTUs
```

```
##
```

```
##
```

```
## 52663 OTUs were retained
```

## remove singleton OTUs

```

remove_singletons <- function(){
  OTUbefore <- nrow(otu)
  otu <- otu %>% filter(!rowSums(.[samples]) < 2) # remove all rows where rowSum == 1 (singleton OTU)
  OTUafter <- nrow(otu)
  removed <- OTUbefore-OTUafter
  retained_percent <- round(OTUafter/OTUbefore*100, 2)
  cat(paste("removed", removed, "singletons\n",
            "retained", OTUafter, "OTUs, which means", retained_percent, "percent of OTUs was retained"
            sep = " "))
  return(otu)}

otu <- remove_singletons()

```

```

## removed 12254 singletons
## retained 40409 OTUs, which means 76.73 percent of OTUs was retained

```

plot number of otus per sample

```

saba <- samples[grepl("sxm", samples)]

copy <- otu
copy[copy>0] <- 1
copy <- copy %>% colSums() %>%
  as.data.frame() %>% rownames_to_column(var = "sample")%>%
  mutate(type = ifelse(sample %in% bottlecontrol, "storage bottle control",
                       ifelse(grepl("unicon", sample), "pcr + control",
                                ifelse(sample %in% c("0", "neg_control"),
                                         "pcr - control", "samples")))) %>%
  mutate(type = fct_reorder(type, desc()))

control_plotOTU <-
  ggplot(copy, aes(x = type,
                   y = .,
                   fill = type)) +


  geom_boxplot() +
  labs(title = "Number of OTUs per sample type",
       subtitle = "After abundance filter",
       x = "Type of sample",
       y = "OTUs (log10)") +
  scale_fill_jco(alpha = 0.6) +
  scale_y_log10() +
  # edit lines and background
  theme(text = element_text(size = 20),
        panel.grid.major.x = element_blank(),
        panel.grid.major.y = element_line("gray50", size = 0.2),
        panel.background = element_blank(),
        axis.line = element_line("gray50"),
        legend.position = "none")

```

```
control_plotOTU
```

```
## Warning: Transformation introduced infinite values in continuous y-axis
```

```
## Warning: Removed 1 rows containing non-finite values (stat_boxplot).
```

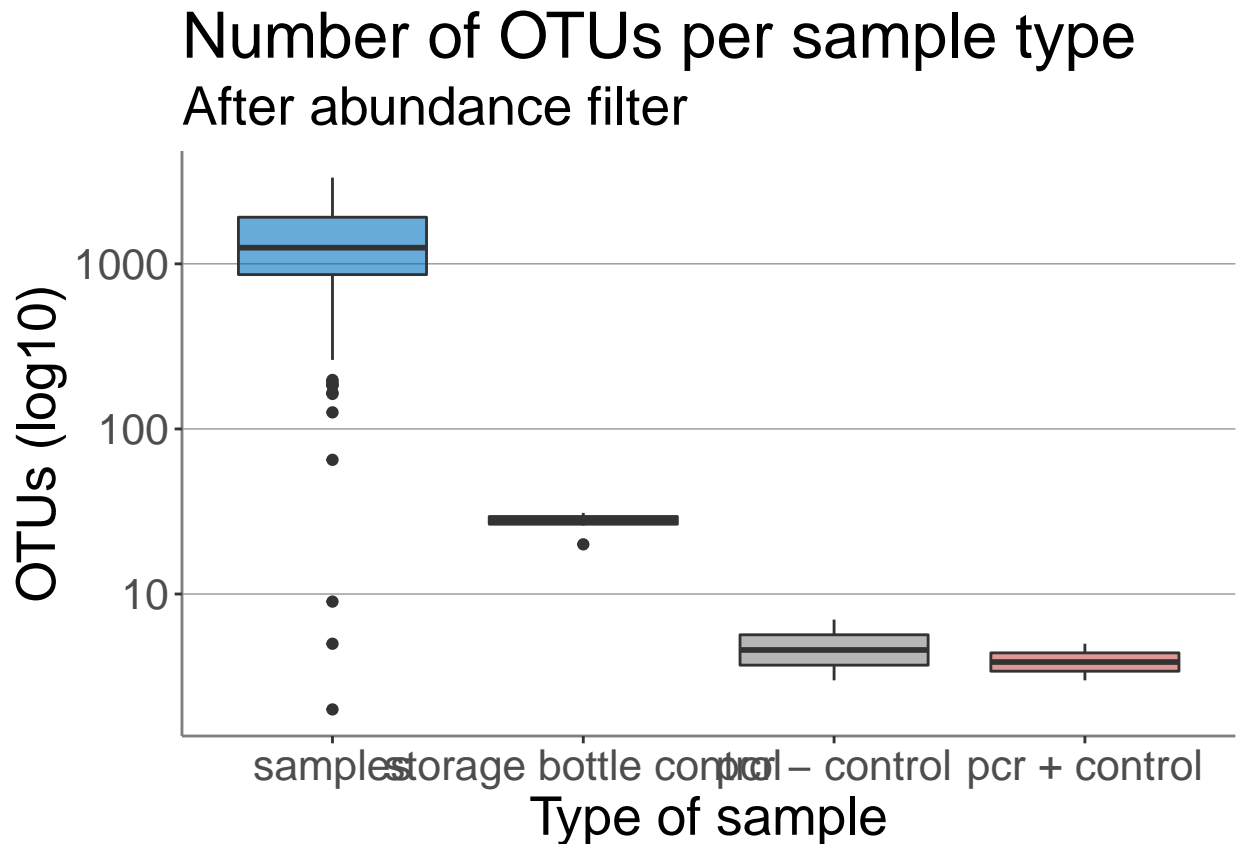

```
ggsave("controlplot AFTER abundance filter", plot = control_plotOTU, device = "png", height = 7, width = 10)
```

```
## Warning: Transformation introduced infinite values in continuous y-axis
```

```
## Warning: Removed 1 rows containing non-finite values (stat_boxplot).
```

### Additional bottle control contamination check for saba samples

And remove controls from otu table

```
# establish controls and samples
controls <- c("sxm_2018_62", "sxm_2018_63", "sxm_2018_64",
             "sxm_2018_65", "sxm_2018_66", "sxm_2018_70",
             "sxm_2018_71", "0", "unicon1",
             "unicon1A", "neg_controle")
bottlecontrol <- c("sxm_2018_62", "sxm_2018_63", "sxm_2018_64",
```

```

      "sxm_2018_65", "sxm_2018_66", "sxm_2018_70",
      "sxm_2018_71")
samples <- names(otu)[-which(names(otu) %in% controls)]
saba <- samples[grepl("sxm", samples)]

# go over the rows(OTUs) where there are control reads and change any reads to 0 if they contain less than 2 control reads
filter_controls <- function(){
  OTUbefore <- nrow(otu)
  mcr <- do.call(pmax, otu[bottlecontrol]) # max control value for each otu
  mcp <- mcr > 0 # control values > 0
  otu[mcp, saba][otu[mcp, saba] < 2*mcr[mcp]] <- 0
  # discard controls, and OTUs that have no reads associated bc of control filter
  otu <- otu %>%
    select(all_of(samples)) %>% #only keep samples
    filter(!rowSums(.) == 0) # discard OTUs that have no reads because of filtering
  ncolbefore <- ncol(otu)
  OTUafter <- nrow(otu)
  cat(paste("Control filtering removed", OTUbefore-OTUafter, "OTUs, which is ",
    round(((OTUbefore-OTUafter)/OTUbefore)*100, 2)), "%")
  otu <- otu[,colSums(otu) > 2000]
  ncolafter <- ncol(otu)
  after2000 <- nrow(otu)
  cat(paste("\n\nanother", OTUafter-after2000, "OTUs, were removed by removing ", ncolbefore-ncolafter,
    return(otu)}

otu <- filter_controls()

```

```

## Control filtering removed 33 OTUs, which is 0.08 %
##
## another 0 OTUs, were removed by removing 3 samples that had read numbers below 2000 reads

```

```

# select only samples that have read counts of higher than two thousand

```

## write sequences to blast to file

now that all control reads and singletons have been filtered out, the remaining OTUs can be blasted. For this, the OTU centroid sequences from filtering step at 98% are extracted and then blasted -> taxadded -> dummyadded(for LCA script to work) -> lca script. Then its back to R

```

# make file with which sequences to be blasted can be selected (singletons filtered out)
write.table(rownames(otu),
  file = '~/OTUcentroids.txt',
  row.names = FALSE,
  quote = FALSE,
  col.names = FALSE)
nrow(otu)

```

```

## [1] 40376

```

### 3. LCA

#### remove bacteria hits

The entire dataset was blasted to genbank in galaxy. The resulting lca file is imported here to remove any reads belonging to bacteria.

```
genbank <- read.delim("~/Downloads/Galaxy6-[filtOTUseqs40376.fasta_BLAST_original_taxonomy_lca].tabular")
bact <- genbank %>% filter(X.kingdom == "Bacteria")
toremove <- bact$X.Query
length(toremove)
```

```
## [1] 22428
```

```
otu <- otu[!row.names(otu) %in% toremove,]
nrow(otu)
```

```
## [1] 17948
```

#### import and prepare lca data

Then, the lca files at bitscore 8 and 12 percent are imported and compared

```
getLca <- function(){
  df <- read.delim("~/Documents/derep_illum/changedheader/taxadded/bit8range")
  df2 <- read.delim("~/Documents/derep_illum/changedheader/taxadded/bit12range")
  dfs <- list(df, df2)
  # remove X. from cols and name the dfs
  dfs <-
    lapply(dfs, function(x){setNames(x, sub("^X.", "", names(x)))}) %>%
    `names<-`(c("Bitscore = 8", "Bitscore = 12"))}

#execute the functions
lcas <- getLca()
lcas <- lapply(lcas, function(x) {x <- x[!x$Query %in% toremove,]})

# add information on how many reads were captured by the bitscore threshold
merged_dfs <-
  lapply(1:length(lcas), function(x) lcas[[x]] %>%
    data.frame) %>%
  # create extra column with what bitscore was used and bind the dataframes
  Map(cbind, ., Bitscore_setting = names(lcas)) %>% # info of bitscore for bth dfs
  do.call(rbind, .) %>% #combined them by row
  data.frame() %>%
  filter(!grepl("sp\\.", species)) # remove hits that contain sp. because theyre not informative.


# get factor levels in right order for nice looking plots
merged_dfs$lca.rank <- factor(merged_dfs$lca.rank, levels = c("no identification", colnames(merged_dfs)))
```

## plot number of taxa found per rank by bitscore setting

Bitscore 8 has a stronger bias towards genus level identifications because the it takes fewer reads into account for the lca determination so higher chance that theres only 1 read to do taxa determination with,

```
myPlot <- function(){
  merged_dfs %>%
    ggplot(aes(x= lca.rank, y = ..count.., group = Bitscore_setting)) +
    geom_bar(aes(fill=`Bitscore_setting`,
                 position = "dodge", alpha = 0.8) +
    geom_text(stat = "count",
              aes(label = ..count.., colour = Bitscore_setting),
              position = position_dodge(0.9),
              vjust = -0.5, size = 3) +
    scale_fill_jco() +
    #scale_fill_brewer(type = "qual", palette = "Pastel2") +
    #scale_fill_manual(values = alpha(c("#00AFBB", "#FC4E07"), 0.8)) +
    theme_minimal() +
    scale_color_manual(values = c("gray30", "gray8"),
                       guide = F) +
    scale_y_log10() +
    labs(title = "Number of LCA identifications per rank",
         subtitle = "by bitscore setting",
         x = "Rank",
         y = "Count (log10)",
         fill = "Bitscore setting") +
    theme(plot.title = element_text(size = 15, vjust = 1),
          text = element_text(size = 20),
          axis.text.x = element_text(angle = 45, hjust =1, size = 15))}
p <- myPlot()
p
```

## Number of LCA identifications per rank by bitscore setting

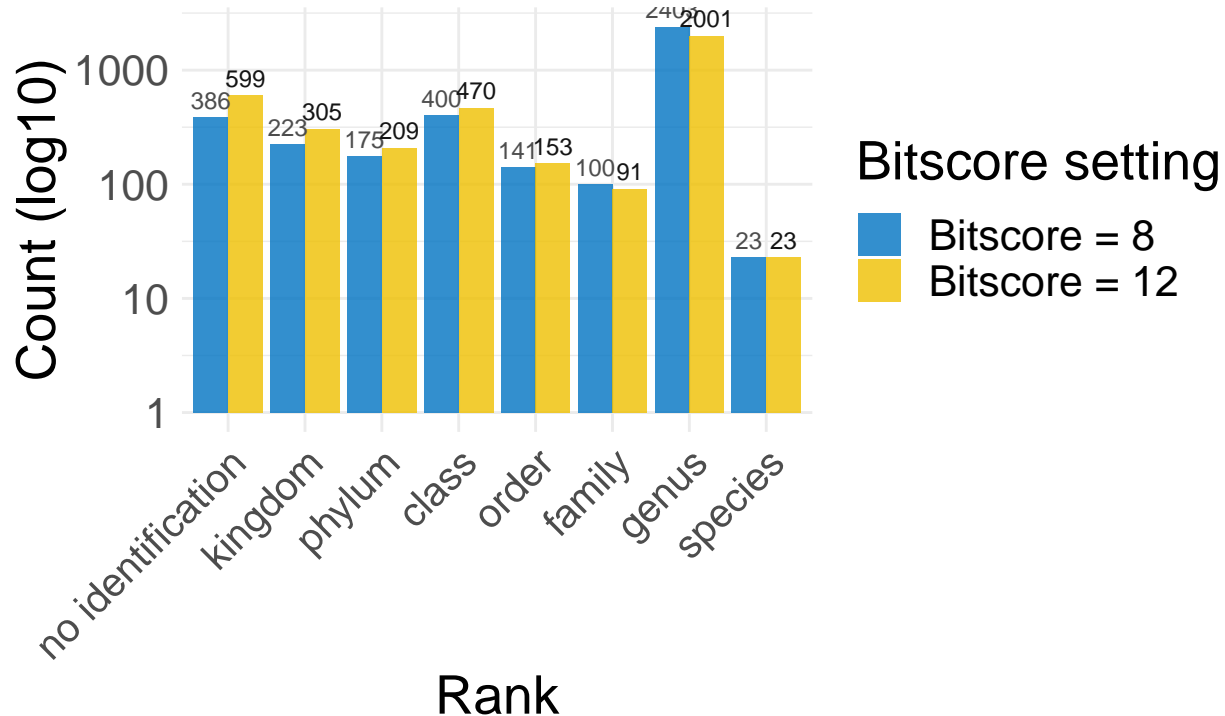

```
ggsave(filename = "Bitscore plot", p, device = "png", width = 10, height = 7.5)
```

The plot shows that bitscore 12 has less identifications but also less of a bias toward genus level, as it takes more reads into the LCA step.

## Combine OTU and sampling location data

Compare the number of centroids supplied to the blast file to the number of blast hits found that had at least one blast hit of 70% identity and 70% coverage. The LCA file with bitscore 12 is chosen. get LCA: numbers

```
merge_otu_lca <- function(){
  otu <- rownames_to_column(otu, var = "Query")
  df_otu_lca <- merge(otu, lcas[[2]], by='Query', all.x = TRUE)
  total_otu <- nrow(otu)
  OTUs_hit <- length(unique(lcas[[2]]$Query))
  lca_hit <- length(lcas[[2]]$lca.rank[lcas[[2]]$lca.rank != "no identification"])
  cat(paste("\tnumber of rows in OTU file (number of OTUs found):\t", total_otu,
            "\n\n",
            "\tnumber of rows in LCA file (OTUs that had at least one blast hit):\t", OTUs_hit,
            "\n\nPercentage of dark taxa is: ", round((1-lca_hit/total_otu)*100,2), "%"))

  return(df_otu_lca)}

otu_lca <- merge_otu_lca()
```

```
## number of rows in OTU file (number of OTUs found): 17948
##
## number of rows in LCA file (OTUs that had at least one blast hit): 3848
##
## Percentage of dark taxa is: 81.87 %
```

## Combine sampling location data with the OTU table

### Functions

```
get_bin_tags <- function(df){
  mdf %>%
    filter(sample %in% colnames(df)) %>%
    mutate(habitat = as.character(habitat)) %>%
    mutate(habitat = replace_na(habitat, "Mixed")) %>%
    mutate(bin = paste(tag, habitat)) %>%
    t() %>%
    as.data.frame() %>%
    row_to_names(1) %>%
    rownames_to_column(var = "Query") %>%
    filter(Query == "bin")
}

get_tags <- function(df){
  mdf %>%
    filter(sample %in% colnames(df)) %>%
    t() %>%
    as.data.frame() %>%
    row_to_names(1) %>%
    rownames_to_column(var = "Query") %>%
    filter(Query == "tag")}

replace_colnames <- function(df){
  df <- df %>% rownames_to_column(var = "Query")
  with_bins <- rbind.fill(tags, df) %>%
  row_to_names(row_number = 1)
  colnames(with_bins)[1] <- "Query"
  return(with_bins)
}

# make a new df with one column calles Query (for merging), bind by col and remove rownames
#otu <- rownames_to_column(otu, var = "Query")
```

### Execution:

```
tags <- get_bin_tags(otu)
for_network <- replace_colnames(otu)
```

```
## Warning in row_to_names(., row_number = 1): Row 1 does not provide unique names.
```



```
## Consider running clean_names() after row_to_names().
```

```
tags <- get_tags(otu)
for_shared <- replace_colnames(otu)
```

```
## Warning in row_to_names(., row_number = 1): Row 1 does not provide unique names.
## Consider running clean_names() after row_to_names().
```

## Prep data for summarising per region

```
mixedmdf <- mdf %>%
  mutate(habitat = as.character(habitat)) %>%
  mutate(habitat = replace_na(habitat, "Mixed")) %>%
  mutate(habitat = gsub(" layer", "", habitat)) %>%
  filter(!habitat == "100 m above bottom") %>%
  filter(!is.na(lat))

try <- otu %>%
  data.matrix() %>%
  t() %>%
  as.data.frame %>%
  rownames_to_column(var = "sample") %>%
  merge(mixedmdf, ., by = "sample", all.y = TRUE)

with_row <- column_to_rownames(try, var = "sample")
with_row[,6:ncol(with_row)][with_row[,6:ncol(with_row)] > 0] <- 1
with_row <- with_row %>% filter(!is.na(lat))


with_row <- with_row[!rowSums(with_row[,6:ncol(with_row)])==0,]
res.pca <- prcomp(with_row[,6:ncol(with_row)],
  center = TRUE, scale. = FALSE)
get_eig(res.pca)
```

```
##          eigenvalue variance.percent cumulative.variance.percent
## Dim.1  1.235636e+02      1.860083e+01      18.60083
## Dim.2   4.133834e+01      6.222927e+00      24.82376
## Dim.3   3.769930e+01      5.675119e+00      30.49888
## Dim.4   3.631158e+01      5.466217e+00      35.96510
## Dim.5   2.106870e+01      3.171608e+00      39.13670
## Dim.6   2.033141e+01      3.060618e+00      42.19732
## Dim.7   1.426110e+01      2.146815e+00      44.34414
## Dim.8   1.287627e+01      1.938348e+00      46.28249
## Dim.9   1.269507e+01      1.911070e+00      48.19356
## Dim.10  1.079537e+01      1.625097e+00      49.81865
## Dim.11  1.029378e+01      1.549589e+00      51.36824
## Dim.12   9.961104e+00      1.499509e+00      52.86775
## Dim.13   9.367197e+00      1.410105e+00      54.27786
## Dim.14   9.019676e+00      1.357790e+00      55.63565
## Dim.15   8.318713e+00      1.252270e+00      56.88792
## Dim.16   8.105968e+00      1.220244e+00      58.10816
## Dim.17   8.056506e+00      1.212798e+00      59.32096
```

## Dim.18	7.999300e+00	1.204186e+00	60.52514
## Dim.19	7.833405e+00	1.179213e+00	61.70436
## Dim.20	7.688611e+00	1.157416e+00	62.86177
## Dim.21	7.593018e+00	1.143026e+00	64.00480
## Dim.22	7.459436e+00	1.122917e+00	65.12772
## Dim.23	7.397463e+00	1.113588e+00	66.24130
## Dim.24	7.249856e+00	1.091368e+00	67.33267
## Dim.25	7.128307e+00	1.073070e+00	68.40574
## Dim.26	7.104494e+00	1.069485e+00	69.47523
## Dim.27	6.996115e+00	1.053170e+00	70.52840
## Dim.28	6.936785e+00	1.044239e+00	71.57264
## Dim.29	6.902948e+00	1.039145e+00	72.61178
## Dim.30	6.660621e+00	1.002666e+00	73.61445
## Dim.31	6.501130e+00	9.786571e-01	74.59310
## Dim.32	6.407848e+00	9.646147e-01	75.55772
## Dim.33	6.306231e+00	9.493177e-01	76.50704
## Dim.34	6.256552e+00	9.418392e-01	77.44888
## Dim.35	6.210241e+00	9.348676e-01	78.38374
## Dim.36	6.112079e+00	9.200906e-01	79.30383
## Dim.37	5.929396e+00	8.925902e-01	80.19642
## Dim.38	5.763768e+00	8.676572e-01	81.06408
## Dim.39	5.631673e+00	8.477721e-01	81.91185
## Dim.40	5.450972e+00	8.205700e-01	82.73242
## Dim.41	5.389881e+00	8.113736e-01	83.54380
## Dim.42	5.323411e+00	8.013674e-01	84.34516
## Dim.43	5.267317e+00	7.929232e-01	85.13809
## Dim.44	5.056815e+00	7.612351e-01	85.89932
## Dim.45	4.881622e+00	7.348621e-01	86.63418
## Dim.46	4.844067e+00	7.292086e-01	87.36339
## Dim.47	4.763941e+00	7.171468e-01	88.08054
## Dim.48	4.637051e+00	6.980453e-01	88.77859
## Dim.49	4.560209e+00	6.864777e-01	89.46506
## Dim.50	4.440668e+00	6.684825e-01	90.13355
## Dim.51	4.281621e+00	6.445401e-01	90.77809
## Dim.52	4.097152e+00	6.167707e-01	91.39486
## Dim.53	3.960984e+00	5.962724e-01	91.99113
## Dim.54	3.905791e+00	5.879640e-01	92.57909
## Dim.55	3.783217e+00	5.695120e-01	93.14860
## Dim.56	3.588145e+00	5.401466e-01	93.68875
## Dim.57	3.485210e+00	5.246511e-01	94.21340
## Dim.58	3.460860e+00	5.209855e-01	94.73439
## Dim.59	3.422107e+00	5.151519e-01	95.24954
## Dim.60	3.350430e+00	5.043619e-01	95.75390
## Dim.61	3.237250e+00	4.873241e-01	96.24123
## Dim.62	3.000120e+00	4.516274e-01	96.69285
## Dim.63	2.251840e+00	3.389840e-01	97.03184
## Dim.64	2.221142e+00	3.343628e-01	97.36620
## Dim.65	2.051549e+00	3.088329e-01	97.67503
## Dim.66	1.950424e+00	2.936099e-01	97.96864
## Dim.67	1.563194e+00	2.353176e-01	98.20396
## Dim.68	1.406802e+00	2.117750e-01	98.41574
## Dim.69	1.358941e+00	2.045701e-01	98.62031
## Dim.70	1.274400e+00	1.918436e-01	98.81215
## Dim.71	1.101545e+00	1.658226e-01	98.97797


```
## Dim.72 1.001609e+00      1.507787e-01      99.12875
## Dim.73 8.549059e-01      1.286945e-01      99.25745
## Dim.74 8.429984e-01      1.269020e-01      99.38435
## Dim.75 7.747584e-01      1.166294e-01      99.50098
## Dim.76 7.136975e-01      1.074375e-01      99.60841
## Dim.77 6.076474e-01      9.147308e-02      99.69989
## Dim.78 5.186211e-01      7.807138e-02      99.77796
## Dim.79 4.197801e-01      6.319220e-02      99.84115
## Dim.80 3.859904e-01      5.810562e-02      99.89926
## Dim.81 3.474255e-01      5.230020e-02      99.95156
## Dim.82 3.218061e-01      4.844355e-02     100.00000
## Dim.83 2.292289e-25      3.450731e-26     100.00000
```

```
fviz_eig(res.pca)
```

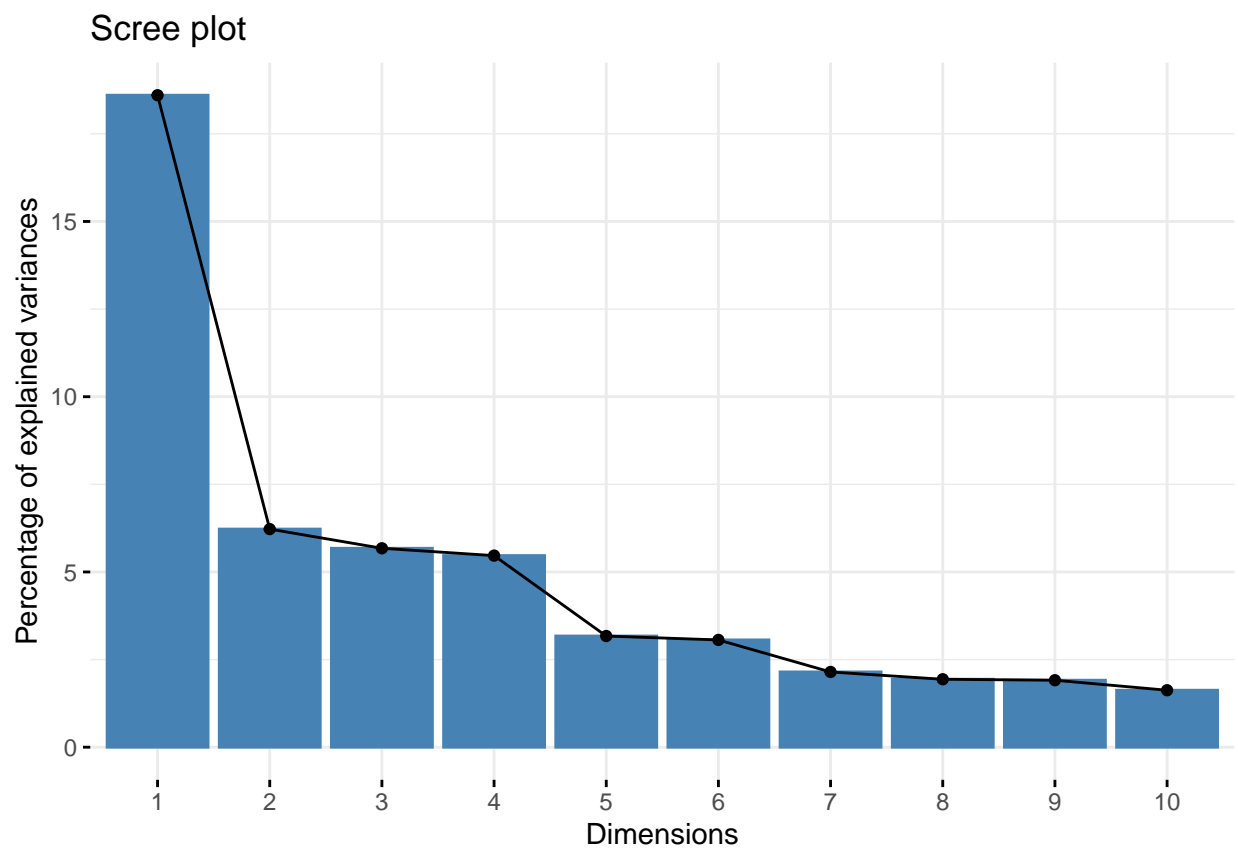

```
p <- fviz_pca_ind(res.pca,
  label = "none",
  alpha.ind = 0) + scale_color_brewer(palette = "Set2") + geom_point(aes(color = with_row$ha
p
```

# Individuals – PCA

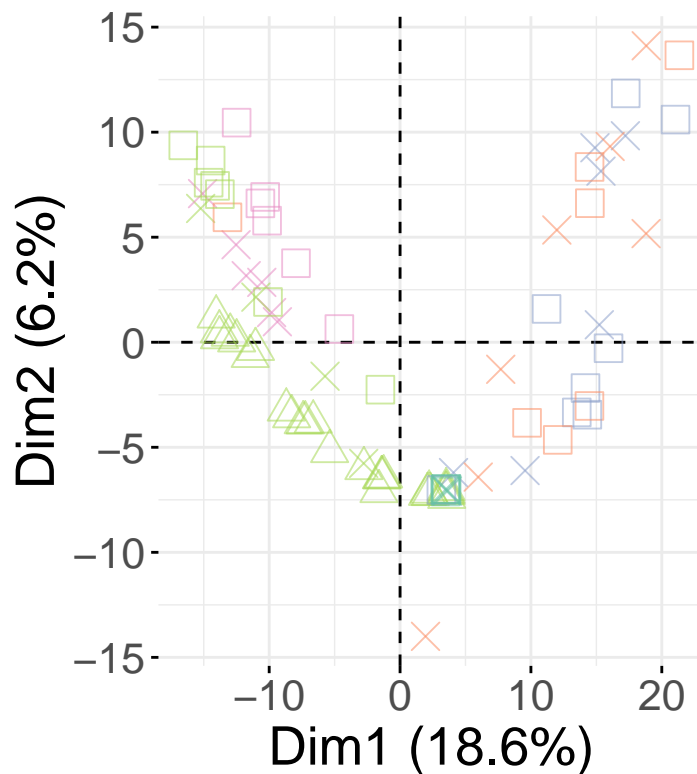

## Region

- × Saba North
- Saba South
- △ Statia

## Habitat

- 0,05 m above bottom
- 50 m above bottom
- 5 m above bottom
- Chlorofil max
- Mixed

```
ggsave(p, filename = "pcatest", device = "png", height = 7, width = 12)
```

```
# sum the values per row
summed <-
  data.matrix(for_shared[,-1]) %>% t(.) %>%
  rowsum(., group = sub("\\.\\d+$", "", rownames(.))) %>%
  t() %>%
  data.frame %>% `rownames<-` (for_shared[,1]) %>%
  rownames_to_column(var = "Query")

plotdf <- melt(summed, id.vars = "Query", value.name = "total_present")

# make dummy: 0=not found & 1 = found
plotdf$dummy <- ifelse(plotdf$total_present > 0, yes=1, no=0)

plotdfcomb <- plotdf %>%
  group_by(variable) %>%
  mutate(presence = if_else(dummy == 1,
                            ifelse(variable == 'Saba.North', 'SB North',
                                    ifelse(variable == 'Saba.South', 'SB South', 'Statia')),
                            NULL)) %>%

  na.omit() %>%
  group_by(Query) %>%
  summarise(presence = paste(presence, collapse = ' & '), .groups = 'drop') %>%
  mutate(shortpresence = ifelse(presence == 'SB North & SB South & Statia', 'All',
                                ifelse(presence == 'SB North & SB South', 'SB North & South',
```

```


presence)))

pres <-
  data.frame(table(plotdfcomb$shortpresence)) %>%
  setNames(c('Region', 'Freq')) %>%
  arrange(desc(Freq))

pres$Region<- factor(pres$Region, levels = reorder(pres$Region, -pres$Freq))

pres %>%
  ggplot() +
  geom_bar(aes(x = Region,
               y = Freq,
               fill = Region),
           stat = 'identity') +
  theme_minimal() +
  theme(axis.text.x = element_text(angle = 45, hjust = 1, size = '10'),
        legend.title = element_blank()) +
  labs(title = 'Regions where OTUs was detected',
       x = 'Region',
       y = 'Number of OTUs') +
  scale_fill_jco()

```

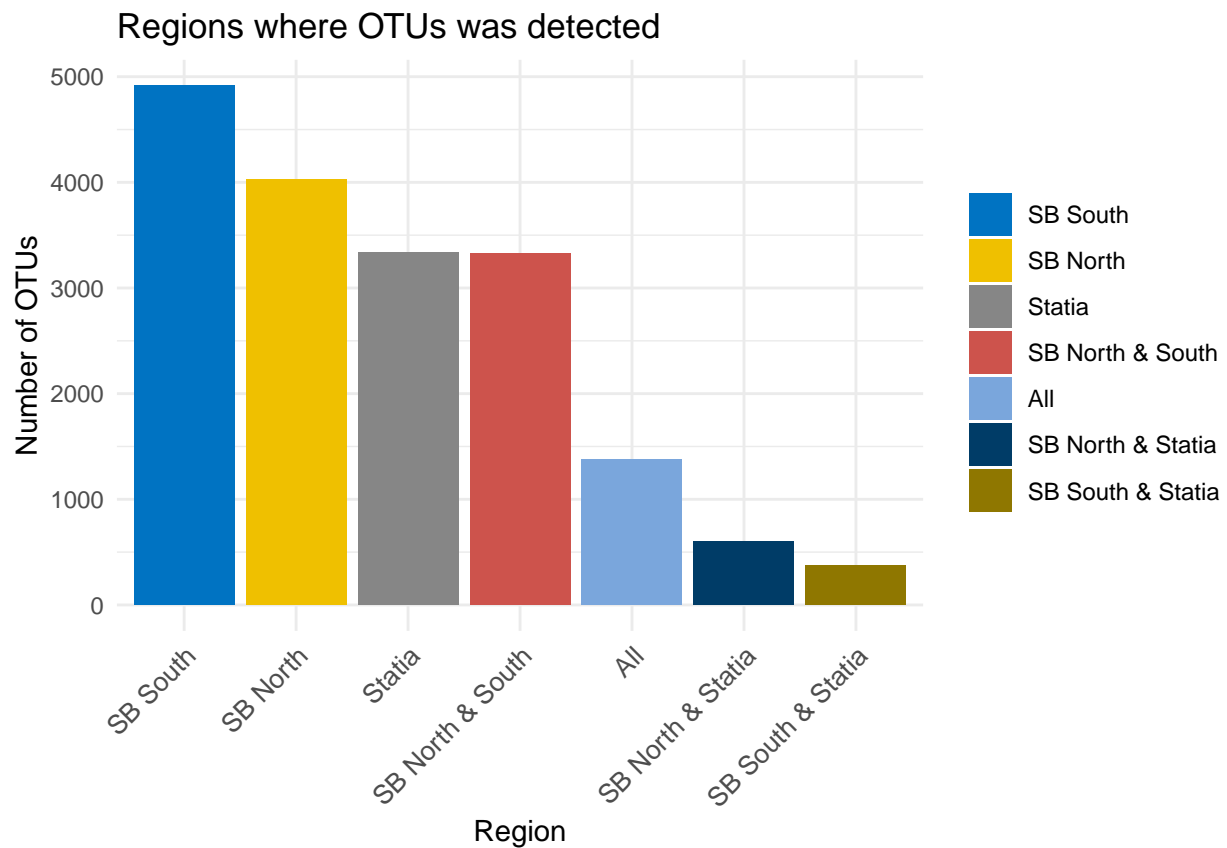

## Region plot

```

lat = c(17.25, 17.65, 17.5, NA, NA, NA, NA)
long = c(-63.4, -63.55, -63.0, NA, NA, NA, NA)
lat_text <- c(NA, NA, NA, mean(c(17.25, 17.65)), mean(c(17.25, 17.65, 17.5)), mean(c(17.65, 17.5))+0.04)
long_text <- c(NA, NA, NA, mean(c(-63.4, -63.55))-0.06, mean(c(-63.4, -63.55, -63.0)), mean(c(-63.55, -63.0))+0.06)
coordinates <- cbind(lat, long, lat_text, long_text)
test <- cbind(pres, coordinates)

northlength <- length(grep("Saba North", colnames(for_shared)))
southlength <- length(grep("Saba South", colnames(for_shared)))
statiallength <- length(grep("Statia", colnames(for_shared)))

test$Freq <- round((test$Freq/c(southlength, northlength, statiallength,
                             mean(c(southlength, northlength)),
                             mean(c(southlength, northlength, statiallength)),
                             mean(c(northlength, statiallength)),
                             mean(c(southlength, statiallength)))) * 25, 0)

allregions <- paste("OTUs present in all regions: ", test[5,2])
test <- test %>% filter(!Region == "All")

p <- ggplot(data=test, aes(x0=long, y0=lat, r=Freq/(8*max(Freq)), fill = Region)) +
  geom_segment(aes(x=long[1],
                  y=lat[1],
                  xend=long[2],
                  yend=lat[2]), size = test$Freq[4]/250, color = "gray50") +
  geom_segment(aes(x=long[2],
                  y=lat[2],
                  xend=long[3],
                  yend=lat[3]), size = test$Freq[5]/250, color = "gray50") +
  geom_segment(aes(x=long[3],
                  y=lat[3],
                  xend=long[1],
                  yend=lat[1]), size = test$Freq[6]/250, color = "gray50") +
  geom_circle() +
  geom_text(data = test, aes(x=long, y=lat, label = paste(Region, "\n", as.character(Freq), sep = ""))) +
  geom_text(data = test, aes(x =long_text, y=lat_text, label = Freq)) +
  theme_minimal() +
  labs(
    #title = "OTUs that are shared between regions",
    #subtitle = "Circle correspond to number of OTUs found per region\nnthickness of line corresponds to
    x = "longitude",
    y = "latitude") +
  theme(text = element_text(size = 20), panel.grid = element_blank(),
        panel.grid.minor = element_blank(),
        legend.position = "none") +
  scale_fill_brewer(type = "qual", palette = "Pastel2") +
  annotate(geom = "text", label = allregions, x = Inf, y = -Inf, hjust = 1.3, vjust = -2)


```

p

```
## Warning: Removed 3 rows containing non-finite values (stat_circle).
```

```
## Warning: Removed 3 rows containing missing values (geom_text).
```

```
## Warning: Removed 3 rows containing missing values (geom_text).
```

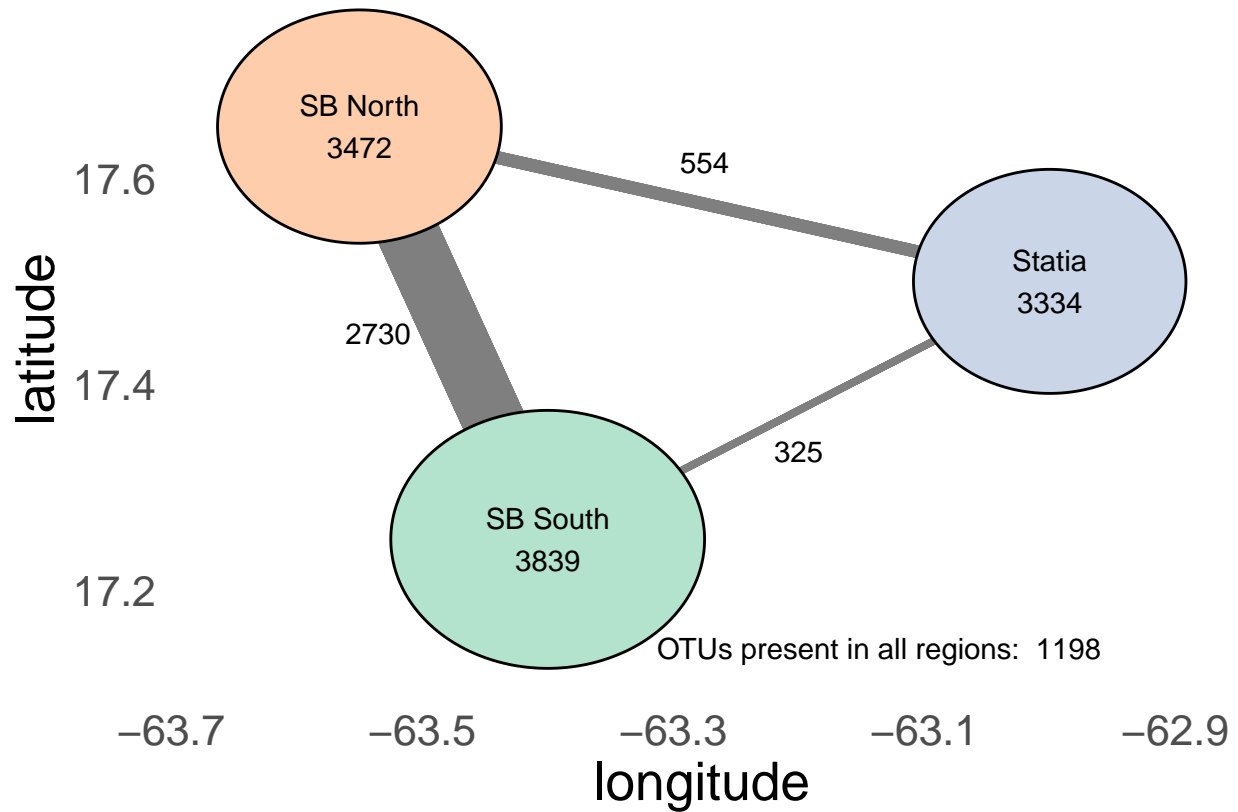

```
ggsave("regions", p, device = "png")
```

```
## Saving 6.5 x 4.5 in image
```

```
## Warning: Removed 3 rows containing non-finite values (stat_circle).
```

```
## Warning: Removed 3 rows containing missing values (geom_text).
```

```
## Warning: Removed 3 rows containing missing values (geom_text).
```

prepare data for summarising per habitat

```
prep <- function(df){  
  df %>%  
    `rownames<-`(NULL) %>%  
    column_to_rownames(var = "Query") %>%  
    data.matrix() %>%  
    t() %>%
```

```

as.data.frame() %>%
rownames_to_column(var = "habitat") %>%
filter(!habitat == "Saba.North.100.m.above.bottom") %>%
mutate(habitat = sub("\\.\\d+$", "", habitat)) %>%
filter(!habitat == "Saba.North.100.m.above.bottom")
}

aggr <- function(df){
  aggregate(df[, -1], list(habitat = df$habitat), mean) %>%
    mutate(habitat = habitat %>%
      sub("Saba.South", "SS", .) %>%
      sub("Saba.North", "SN", .) %>%
      sub(".above.bottom", "ab", .) %>%
      sub(".layer", "", .) %>%
      gsub("\\.", " ", .) %>%
      sub("0 05", "0.05", ., fixed = TRUE)) %>%
    column_to_rownames(var = "habitat") %>%
    t() %>%
    as.data.frame %>%
    rownames_to_column(var = "habitat")
}

```

Execution:

```

try <- prep(for_network)

try[, -1][try[, -1] > 0] <- 1

agr <- try %>% aggr()

```

```

myPca <- function(df){
  res.pca <- prcomp(column_to_rownames(df, var = "habitat"),
                    center = TRUE, scale. = TRUE)
  print(get_eig(res.pca))
  fviz_eig(res.pca)
  fviz_pca_biplot(res.pca,
    label = "var",
    col.var = "contrib",
    gradient.cols = c("#00AFBB", "#E7B800", "#FC4E07"),
    col.ind = "gray80",
    repel = TRUE,
    geom.ind = "point",
    geom.var = "text",
    labels = labelsize = 6) + theme_minimal() + theme(text = element_text(size = 20))
}

p_agr <- myPca(agr) +
  labs(title = "Presence-absence per bin",
        subtitle = "includes all OTUs") + xlim(-12.5, 12.5)

```

```


##          eigenvalue variance.percent cumulative.variance.percent
## Dim.1    3.4579667      31.436061      31.43606
## Dim.2    2.7160396      24.691269      56.12733

```



```
## Dim.3  0.9972303      9.065730      65.19306
## Dim.4  0.9955104      9.050094      74.24315
## Dim.5  0.7590921      6.900837      81.14399
## Dim.6  0.5116063      4.650966      85.79496
## Dim.7  0.4595809      4.178008      89.97297
## Dim.8  0.3532729      3.211572      93.18454
## Dim.9  0.2794858      2.540780      95.72532
## Dim.10 0.2540913      2.309921      98.03524
## Dim.11 0.2161238      1.964762     100.00000
```

```
p_agr
```

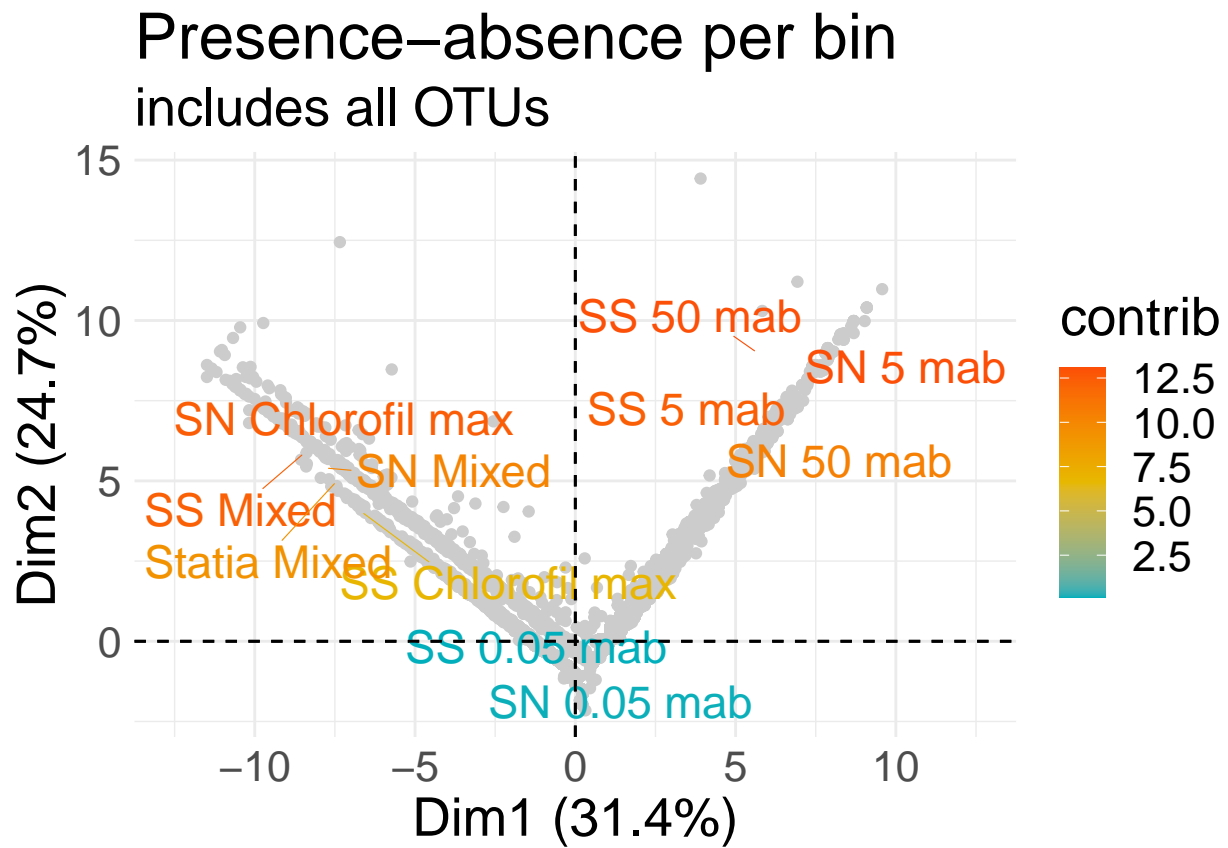

```
ggsave("finalpcapresence", p_agr, device = "png")
```

```
## Saving 6.5 x 4.5 in image
```