



***Online Remittance API
Version***

● Version History

Version	Date	Author	Description
	17-JAN-22	UNIR	Added the Oauth Related Changes.
V1	31-JAN-22	UNIR	Added Bill Payment and getTxStatusDetails API
V2	23-MAR-22	UNIR	Added generateMfa API, Modified ExternalQuickQuote API Request, Added Transaction Receipt API and Modified getTxStatusDetails API
V3	07-APR-22	UNIR	Updated the getTxStatusDetails API (URL, request param)
V4	12-May-22	UNIR	Added VerifyEmail and regenerateVerificationEmail API of GET type
V5	26-Oct-22	UNIR	Addition of new API(DeactivateAccount) for deactivation of user account.
V6	30-Jan-23	UNIR	Updated the ExternalQuickQuote API(Response Param)
V7	22-Feb-23	UNIR	Added WALLET as a reception Method.
V8	04-APR-23	UNIR	Updated Error codes
v8	25-05-24	UNIR	Removed the StateDisclaimer API
v9	20-06-24	UNIR	Added API UpdateSecurityQuestionAnswer
V10	02-02-2025	UNIR	Added details of Api EditContactInfo and Edit Email

V10	02-02-2025	UNIR	Added details of Api Tx Aggregate and FAQ section
V11	28-03-2025	UNIR	Added details of API Logout
v14	09/05/2025	UNIR	Added Wallet Reception method (sample request and response) in AddBeneficiary API
v14	30/05/2025	UNIR	Added sample response in API PayerWithReceptionMethodList , AddBeneficiary , ExternalQuickQuote , SendMoneyPreview for payer exito payer handling.
v15	07/08/2025	UNIR	Added sample response in API ExternalQuickQuote for without userId.
v15	09/10/2025	UNIR	Update the (DeactivateAccount) API to deactivate non accessible user accounts.
V16	18/11/2025	UNIR	Introduced a new response attribute - stateFee in the ExternalQuickQuotes , SendMoneyPreview , SendMoneyConfirm , TransactionDetail and TransactionReceipt APIs.
v17	26/03/2026	UNIR	Added new environment domain
V18	24/08/2026	UNIR	Added new responseCode 59906008 in SendMoneyPreview API response for Minnesota state compliance.
V19	15/09/2026	UNIR	Added sample response in API SendMoneyPreview for External FX rate.

Table of Contents

•	Version History.....	2
1.	Introduction.....	17
1.1	Business Purpose.....	17
1.2	Purpose.....	17
1.3	Implementation Overview.....	17
2	Overview of communication of with Online Remittances API.....	17
2.1	Restful web services	18
2.2	Supported Request and Response Formats	18
3	Call Structure.....	19
3.1	Service Endpoint.....	19
3.2	Security in Restful Web Services	19
3.2.1	HTTPS Access.....	19

3.2.2	OAuth2.0.....	19
3.2.3	API request header parameter to call the Online Remittance API:.....	32
4	Let's Start API Integration.....	32
4.1	Register user.....	33
4.2	Setup profile	33
4.3	Add Beneficiary	34
4.4	Add Sending Methods.....	35
4.5	Send Money	37
4.6	Cancel Transaction	38
5	API Reference	40
5.1	CheckDuplicateUser (Requires Client-Credentials Grant).....	41
5.1.1	Sample JSON Request.....	42
5.1.2	Sample JSON Response.....	42
5.1.3	Sample JSON Request.....	43
5.1.4	Sample JSON Response.....	43
5.2	SignupSecurityQuestionsList (Requires Client-Credentials Grant).....	43
5.2.1	Sample JSON Request.....	44
5.2.2	Sample JSON Response.....	44
5.3	Signup (Requires Client-Credentials Grant)	45
5.3.1	Sample JSON Request:.....	47
5.3.2	Sample JSON Response:.....	47
5.3.3	Sample JSON Request (With Address):.....	47
5.3.4	Sample JSON Response:.....	47
5.4	VerifyEmail(Requires Client Credential Grant)	48
5.4.1	Sample JSON Request.....	49

5.4.2	Sample JSON Response.....	49
5.5	RegenerateVerificationEmail(Requires Client Credential Grant).....	49
5.5.1	Sample JSON Request.....	49
5.5.2	Sample JSON Response.....	50
5.6	CalculateProfileCompleteness (Requires Password Grant)	50
5.6.1	Sample JSON Request.....	51
5.6.2	Sample JSON Response.....	51
5.7	SetupPersonalInfo (Requires Password Grant)	52
5.7.1	Sample JSON Request.....	54
5.7.2	Sample JSON Response.....	54
5.8	InformationVerification (Requires Password Grant)	54
5.8.1	Sample JSON Request.....	56
5.8.2	Sample JSON Response.....	56
5.9	Add Beneficiary (Requires Password Grant)	57
5.9.1	Sample JSON Request with USD.....	58
5.9.2	Sample JSON Response with USD	58
5.9.3	Sample JSON Request (with AdditionalField):.....	59
5.9.4	Sample JSON Response (with AdditionalField):	60
5.9.5	Sample JSON Request (with PayerBranch):	62
5.9.6	Sample JSON Response (with PayerBranch):	62
5.9.7	Sample JSON Request (with WALLET as receptionMethod):	63
5.9.8	Sample JSON Response (with WALLET as receptionMethod):.....	63
5.9.9	Sample JSON Request with Local Currency (Regex of payment Amount):.....	64
5.9.10	Sample JSON Response with Local Currency (Regex of payment Amount):.....	64
5.10	BeneficiarySummaryList (Requires Password Grant)	65

5.10.1	Sample JSON Request.....	67
5.10.2	Sample JSON Response.....	67
5.11	BeneficiaryDetail (Requires Password Grant)	67
5.11.1	Sample JSON Request.....	68
5.11.2	Sample JSON Response.....	69
5.12	EditBeneficiary (Requires Password Grant)	69
5.12.1	Sample JSON Request.....	70
5.12.2	Sample JSON Response.....	71
5.12.3	Sample JSON Request(ReceptionMethod as WALLET)	71
5.12.4	Sample JSON Response(ReceptionMethod as WALLET)	71
5.13	DeactivateBeneficiary (Requires Password Grant)	72
5.13.1	Sample JSON Request.....	73
5.13.2	Sample JSON Response.....	74
5.14	SendingMethodSummaryList (Requires Password Grant).....	74
5.14.1	Sample JSON Request.....	75
5.14.2	Sample JSON Response.....	75
5.15	AddSendingMethod (Requires Password Grant)	75
5.15.1	Sample JSON Request:.....	79
5.15.2	Sample JSON Response:.....	79
5.16	SendingMethodDetail (Requires Password Grant)	79
5.16.1	Sample JSON Request.....	81
5.16.2	Sample JSON Response.....	81
5.17	EditCCDC (Requires Password Grant).....	81
5.17.1	Sample Json Request	83
5.17.2	Sample Json Response:.....	83

5.18	EditCard (Requires Password Grant).....	84
5.18.1	Sample Json Request :	86
5.18.2	Sample Json Response:.....	86
5.19	DeactivateSendingMethod (Requires Password Grant)	86
5.19.1	Sample JSON Request:.....	88
5.20	CurrentExchangeRate (Requires Password Grant)	88
5.20.1	Sample JSON Request.....	89
5.20.2	Sample JSON Response.....	89
5.21	getExternalQuickQuotes (Requires Client Credentials Grant)	90
5.21.1	Sample JSON Request with USD.....	92
5.21.2	Sample JSON Response with USD	92
5.21.3	Sample JSON Request with Local Currency	92
5.21.4	Sample JSON Response with Local Currency	92
5.21.5	Sample JSON Request with Local Currency without UserId	93
5.21.6	Sample JSON Response with Local Currency without UserId	93
5.22	UserCreditLimit (Requires Password Grant).....	93
5.22.1	Sample JSON Request.....	95
5.22.2	Sample JSON Response.....	95
5.23	UserComplianceLimit (Requires Password Grant).....	95
5.23.1	Sample JSON Request.....	96
5.23.2	Sample JSON Response.....	96
5.24	SendMoneyPreview (Requires Password Grant).....	97
5.24.1	Sample JSON Request with USD:.....	100
5.24.2	Sample JSON Response with USD:	100
5.24.3	Sample JSON Request (With AutoPromotion)	101

5.24.4	Sample JSON Response (With AutoPromotion)	101
5.24.5	Sample JSON Request with Local Currency:	101
5.24.6	Sample JSON Response with Local Currency:	101
5.24.7	Sample JSON Request with External FX Rate:	102
5.24.8	Sample JSON Response with External FX Rate:	102
5.25	SendMoneyConfirm (Requires Password Grant)	103
5.25.1	Sample JSON Request	106
5.25.2	Sample JSON Response	106
5.25.3	Sample JSON Request (With AutoPromotion)	107
5.25.4	Sample JSON Response (With AutoPromotion)	107
5.25.5	Sample JSON Request (With Manual Promotion)	108
5.25.6	Sample JSON Response (With Manual Promotion)	108
5.26	CancelTransaction (Requires Password Grant)	108
5.26.1	Sample JSON Request	110
5.26.2	Sample JSON Response	110
5.27	TransactionSummary (Requires Password Grant)	110
	• Sample JSON Request	113
	• Sample JSON Response	113
5.28	TransactionDetail (Requires Password Grant)	115
5.28.1	Sample JSON Request	116
5.28.2	Sample JSON Response	116
5.29	ContactList (Requires Password Grant)	117
5.29.1	Sample JSON Request	118
5.29.2	Sample JSON Response	118
5.30	BillersWithOperations (Requires Client Credential Grant)	120
5.30.1	Sample JSON Request	121

5.30.2	Sample JSON Response.....	122
5.31	AddBillerContact (Requires Password Grant)	123
5.31.1	Sample JSON Request.....	124
5.31.2	Sample JSON Response.....	124
5.32	BillerAdditionalFields (Requires Client Credential Grant)	125
5.32.1	Sample JSON Request.....	126
5.32.2	Sample JSON Response.....	126
5.33	VerifyBillerAccount (Requires Password Grant)	126
5.33.1	Sample JSON Request.....	128
5.33.2	Sample JSON Response.....	128
5.34	UtilityPaymentPreview (Requires Password Grant)	128
5.34.1	Sample JSON Request.....	131
5.34.2	Sample JSON Response.....	131
5.35	UtilityPaymentConfirm (Requires Password Grant)	132
5.35.1	Sample JSON Request.....	135
5.35.2	Sample JSON Response.....	135
5.36	BillPaymentReceipt (Requires Password Grant)	135
5.36.1	Sample JSON Request.....	138
5.36.2	Sample JSON Response.....	138
5.37	TransactionReceipt (Requires Password Grant)	140
5.37.1	Sample JSON Request.....	142
5.37.2	Sample JSON Response.....	142
5.38	Tx Aggregate (Requires Password Grant).....	144
5.38.1	Sample JSON Request.....	146
5.38.2	Sample JSON Response.....	146

6	Other Required API:	147
6.1	Security API Resources:.....	147
6.1.1	ResendUIC (Requires Password Grant).....	147
	• Sample JSON Request	148
	• Sample JSON Response	148
6.1.2	Logout (Requires Password Grant).....	148
6.2	Profile Management API.....	150
6.2.1	UserProfileInfo (Requires Password Grant)	150
	• Sample JSON Request	151
	• Sample JSON Response	152
6.2.2	EditUserProfileInfo (Requires Password Grant)	152
	• Sample JSON Request	153
	• Sample JSON Response	153
✦	6.2.3. DeactivateAccount.....	154
	• Sample JSON Request Step 1:	155
	• Sample JSON Request for non accessible account.....	156
	• Sample JSON Response for non accessible account.....	157
6.2.4	EditContactInfo	157
	• Sample JSON Request (SendIdentificationCode):	159
	• Sample JSON Response(SendIdentificationCode) :	159
	• Sample JSON Request (verifyIdentificationCode):	160
	• Sample JSON Response(verifyIdentificationCode) :	160
6.2.5	EditEmailAddress.....	160
	• Sample JSON Request (Action: EditEmail) :	162
	• Sample JSON Response((Action: EditEmail)):.....	162
	• Sample JSON Request (Action: EnterMobileIdentificationCode) :.....	162
	• Sample JSON Response((Action: EnterMobileIdentificationCode)):	162
	• Sample JSON Request (Action: EnterEmailAddress) :	163
	• Sample JSON Response((Action: EnterEmailAddress)):	163

• Sample JSON Request (Action: EnterEmailIdentificationCode) :.....	163
• Sample JSON Response((Action: EnterEmailIdentificationCode)):	163
6.3 Remittance API	164
6.3.1 TxSMSAlert (Requires Password Grant).....	164
• Sample JSON Request	165
• Sample JSON Response	165
6.3.2 ApplyPromotionCode (Requires Password Grant)	165
6.3.3 UpdateSecurityQuestionAnswer (Requires Password Grant).....	167
6.4 Common API (Requires Client-Credentials or Password Grant)	169
6.4.1 LicensedStates.....	169
• Sample JSON Request	170
• Sample JSON Response	170
6.4.2 v2/DestCountries.....	171
6.4.3 DestCountries.....	172
• Sample JSON Request	173
• Sample JSON Response	173
6.4.4 CountryStates.....	174
• Sample JSON Request	175
• Sample JSON Response	175
6.4.5 CountryCurrencies.....	176
• Sample JSON Request	177
• Sample JSON Response	177
6.4.6 DestCountryWithCurrency.....	177
• Sample JSON Request	179
• Sample JSON Response	179
6.4.7 PayerWithReceptionMethodsList	179
• Sample JSON Request with USD	181
• Sample JSON Response with USD	181
• Sample JSON Request with Local Currency.....	184

•	Sample JSON Response with Local Currency	184
6.4.8	SendingMethodsName	186
•	Sample JSON Request	187
•	Sample JSON Response	187
6.4.9	PayerBranches.....	187
•	Sample JSON Request	189
•	Sample JSON Response	189
6.4.10	getPayerDetails()	189
•	Sample JSON Request	190
•	Sample JSON Response	190
6.4.11	getPayerAdditionalFields	191
•	Sample JSON Request	192
•	Sample JSON Response	193
•	Sample JSON Request 2:	194
•	Sample JSON Response 2:	195
6.4.12	Transaction Search (Requires Password Grant)	195
•	Sample Request Param	196
•	Sample JSON Response	197
7	Appendix 'A'	197
7.1	ExtraField	197
7.2	RemitterPersonalInfo	198
7.3	Address	200
7.4	UICReceiptMode	200
7.5	SecurityQuestion	200
7.6	SecurityAnswer	201
7.7	securityQuestionAnswersResult	201
↵	201	
7.8	State	201

7.9	Country	201
7.10	Payer	201
7.11	Currency	202
7.12	DestCountryWithCurrency.....	202
7.13	PayerWithReceptionMethods	202
7.14	ReceiptMethod.....	202
7.15	PayerBranch	203
7.16	ServiceFee.....	203
7.17	Beneficiary details	203
↘	205	
7.18	SendingMethodDetail	205
7.19	VerificationQuestionAnswer	206
7.20	VerificationQuestion.....	206
7.21	AnswerOption.....	206
7.22	SendingMethodSummary	206
7.23	TransactionSummary	207
7.24	TransactionDetail	208
7.25	ExchangeRate	209
7.26	CreditLevel	209
7.27	ComplianceLevel	209
7.28	PayerSummary	210
7.29	AdditionalFieldInfo.....	210
7.30	FieldOption	210
↘	210	
7.31	PromotionDetails.....	210

7.32	ITransactionDto.....	211
7.33	TxStatuses.....	211
7.34	ApplicablePromotions	211
7.35	ContactSummary	211
7.36	BillersDetail	213
7.37	Biller	213
7.38	Operation.....	213
7.39	BillerSummary.....	213
7.40	TopUpPlan	215
7.41	BillerServiceSummary.....	216
7.42	PartnerCodeInfo	216
7.43	PayerSummary	217
7.44	VerificationQuestion.....	217
7.45	SearchPage.....	217
7.46	FieldError	217
8	Appendix 'B'	218
8.1	User's profile status.....	218
8.2	Transaction Status Types	218
8.3	Flow of APIs.....	219
8.3.1	Signup, OAuth Login and Setup profile.....	219
8.3.2	Add Sending Method	225
8.3.3	Promotion	227
9	Appendix 'C'	230
9.1	Response codes and its description	230
10	Appendix 'D'	238

•	Beneficiary Rules	238
•	Sending Methods Limit.....	239
11	Appendix 'E'	240
11.1	Terminologies.....	240
11.2	Identification code.....	240
11.3	UNIR System.....	240
11.4	Information Verification	240
11.5	Sending Methods	240
11.6	Payer.....	240
11.7	Reception Method.....	240
12	Appendix 'F'	240

1. Introduction

1.1 Business Purpose

The business purpose of this document is to provide a generic interface to business partners who want to integrate with online remittances services of UniTeller. The business partners could be a financial Web Portal or a financial service provider through Mobile Applications etc. This interface allows the business partners to seamlessly communicate with the UniTeller server by providing access to the UNIR API (Online Remittance API of UniTeller). For the scope of this document the acronym UNIR stands for "UniTeller Internet Remittances".

1.2 Purpose

The purpose of this document is to introduce online remittances Application Programming Interface (API). API makes all the methods available for integration along with their request and response. This is a business as well as a technical document, and in conjunction with the UNIR API Reference, a complete specification. It should allow any partner with the requisite programming knowledge to adapt its systems to seamlessly integrate into UNIR.

1.3 Implementation Overview

When a business partner integrates with UNIR they need to have secure access to the UNIR API. This integration is achieved by either creating a site-to-site VPN (Virtual Private Network) for making API method calls over the VPN; or having HTTPS (Hypertext Transfer Protocol Secure) restricted access to the UNIR servers. Over one of these secure connections UniTeller will provide access to the testing/integration servers for the partner. Once the technical implementation is complete by the partner, a set of certification tests will be performed and on successful completion, production deployment will be done on both sides.

2 Overview of communication of with Online Remittances API

There are two possible ways to communicate with UNIR, either partner can have its own server which will communicate with UNIR server (partner can have their own front end e.g. Mobile App, web portal, IVR or call center) or partner can have just front end and directly communicating with UNIR server (partner can have their own Mobile App or web portal).

Making an API Call

This section explains how to make the Online Remittances API call. It provides an overview of the formats and standards you can use with the UNIR API.

2.1 Restful web services

This API is based on Restful web services. The Restful web services are based on HTTP methods and the concept of REST. [Representational State Transfer \(REST\)](#) is a key design idiom that embraces a stateless client-server architecture in which the web services are viewed as resources and can be identified by their URLs. Web service clients that want to use these resources access a particular representation by transferring application content using a small globally defined set of remote methods that describe the action to be performed on the resource. REST is an analytical description of the existing web architecture, and thus the interplay between the style and the underlying HTTP protocol appears seamless.

2.2 Supported Request and Response Formats

This API supports JSON request and response formats that can be submitted using HTTP POST. Here's an example of a JSON request that can be submitted via HTTP POST:

```
{
  "employee": {
    "name": "John",
    "age": 30,
    "city": "New York",
    "cars": ["Ford", "BMW", "Fiat"]
  }
}
```

3 Call Structure

Each Remittances API call consists of the following elements:

3.1 Service Endpoint

Remittances API requests are sent to the server endpoint. The complete path to a resource is based on the below sample base URL.

`https://<domain>/UTLROnlineRemitAPI/<API Type>/<API Resource name>`

Sample URL

Production: <https://send.uniteller.com>

Test Server: sendsandbox.uniteller.org

Example:

`https://sendsandbox.uniteller.org/UTLROnlineRemitAPI/Common/LicensedStates`

3.2 Security in Restful Web Services

This API is based on HTTP methods, so the following two types of security are implemented.

3.2.1 HTTPS Access


API is accessible over HTTPS only to make the secure end to end communication, which means all the requests and responses are being done over HTTPS.

3.2.2 OAuth2.0


The OAuth 2.0 authorization framework is a protocol that allows a user to grant a third-party website or application access to the user's protected resources, without necessarily revealing their long-term credentials or even their identity.

Types of Grant Type:

Client Credentials: Using this grant type, an API partner can access the Online Remittance System API's which doesn't deal with user's read-write information (E.g.: CountryStates , Signup).

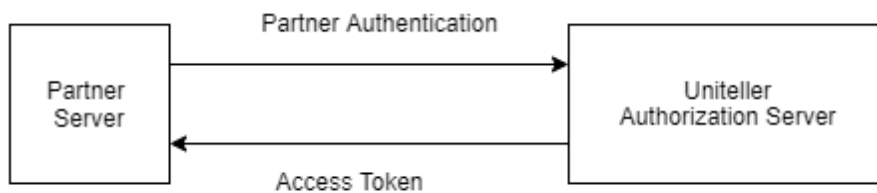

Password: Using Password grant type, a partner can access the Online Remittance System API's which deals with user's read-write information (E.g.: AddBeneficiary, EditBeneficiary, SendMoneyPreview).

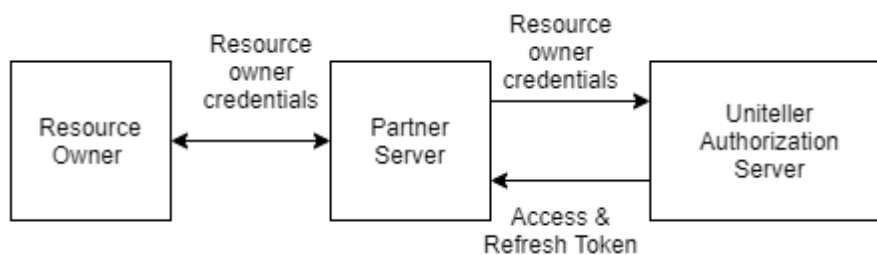

Refresh token: Using this grant type, one can refresh the expired Access token through refresh token, that we got in the response of Client Credentials or Password grant flow. Refresh tokens have single use only so cannot be reused, and when they are used they also invalidate the token they are associated with.

NOTE: APIs which don't deal with user's read-write information can be accessed using both Client Credentials and Password grant type.

JWT(JSON Web Token):

Access Token: This JWT token contains authorities encoded inside its payload so we don't need to create session and store authorization, rather we are using a stateless session policy.

Refresh Token: In the case of expiration of access token, refresh token is used to get a new access token. To get an access token using refresh token a request is sent to the *authorization server* with a refresh token, authorization grant type (i.e. refresh_token grant type) and Partner Secret Key. In response, a new JWT access token and a refresh token with new validity are returned.

How to Generate the JWT Tokens:

To get an access token and refresh token a request is sent to the authorization server with the Partner Secret key and authorization grant type (i.e. Client Credentials /password). In response,

a JWT access token and a JWT refresh token is returned. An access token has less validity than a refresh token.

URI: <https://<domain>/oauth/token>

HTTP Method: POST

E.g.: <https://sendsandbox.uniteller.org/oauth/token>

REQUEST HEADER:

Key	Value
Authorization	Basic < Partner Secret Key >
application_version	1.0
PLATFORM	IOS
X-Forwarded-For	User's IP Address

Authorization: Partner Secret Key is confidential so, it will be provided through an Email by the UniTeller Team and it should be stored in a secured way on the Partner Side.

Application version: Providing an Application version in each header request is not mandatory but is recommended. We can have some server-side control on the application and can be used if required.

PLATFORM: Platform name is used to identify the request device platform. We use the following values: IOS, WEB, ANDROID.

X-Forwarded-For: User's IP Address should be passed.

NOTE: Header remains the same for all the API's only Request Body differs depending upon the grant type.

CLIENT CREDENTIALS GRANT:

REQUEST BODY:

The Partner requests the token endpoint by adding the following parameters using the "application/x-www-form-urlencoded".

The grant_type is REQUIRED and its value MUST be set to "client_credentials".

Key	Value
-----	-------

grant_type	client_credentials
-------------------	--------------------

RESPONSE:

Attribute	Description	Type
Access_token	JWT token generated based upon the grant type	JWT
Token_type	Type of JWT token(E.g. Bearer)	String
Expires_in	The Expiry Time in which the Token will expire(in Seconds)	Integer
Scope	The scope of the client(read)	String

EXAMPLE:

POST <https://sendsandbox.uniteller.org/oauth/token>

Authorization: Basic <Partner Secret Key>

Content-Type: application/x-www-form-urlencoded

Request:

grant_type:client_credentials

Response:

```
{ "access_token": "eyJhbGciOiJIUzUxMiIsInR5cCI6IkpXVCJ9.eyJleHAiOjE2MjgyMjc3NzEsImF1dGhvcmI0aWVZljpblkdFVFf9SRU1JVFRFUl9RVUVTVElPTk5BSVJFIiwieUE9TVFf9CQURNSU5fVVBEQVRFX1BBU1NXT1JEliwiR0VUX0RPQ1VNRU5UX0RPV05MT0FEliwiR0VUX01FVEFEQVRBliwiUE9TVFf9DUKVBVEVfQUMiLCJQT1NUX0NSRUfURV9CVVNJTktVTU19BRE1JTilSiIlBPU1RfVVBEQVRFX1BTRCIsIkdfVFf9FWElTVEIOR19VU0VSliwiUE9TVFf9SRU1JVFRFUl9RVUVTVElPTk5BSVJFIiwiaR0VUX1VTRVJfQUdSRUVNRU5UiwiR0VUX0RPQ1VNRU5UX1VQTE9BRCIsIlBPU1RfUkvTRVRfUEFTU1dPukRfQURNSU4iLCJHRVRft0FVVEhfQ0hfFQ0tfVE9LRU4iLCJHRVRfvkvSSUZJRURfRU1BSUwiLCJHRVRfQkvfVU5JUUVVFX0RPQ1VNRU5UiwiR0VUX1VQTE9BREVEEX0RPQ1VNRU5UiwiR0VUX09BVVRlX1VTRVJfSU5GTyIsIlBPU1RfVVBEQVRFX1BBU1NXT1JEX0FETUIOlwiUE9TVFf9SRVNFVF9QU0QiLCJQT1NUX0JVU0VSX1VQREFURV9QQVNTV09SRCIsIkdfVFf9WRVJJRllfQ09NUEFZX1VTRVJfSU5WSVRBVEIPTiIsIkdfVFf9WRVJJRllfQURNsu5fsU5WSVRBVEIPTiIsIlBPU1RfQ1JfQVRFX0NPTVBBlfVFNfuIsIlBPU1RfVVBMT0FEX0RPQyJdfQ_TjtEyuAlsZZXGEiyYB3GtyBFv8Tm7htCmza5B9ffkBl70QtjQPXZ6gQdBnpWaev2nZsf-jEZbDIj2YdF6Giw",
```

```
"token_type": "bearer",
```

```
"expires_in": 1199,  
"scope": "read write" }
```

PASSWORD GRANT:

The Partner requests the token endpoint by adding the following parameters using the "application/x-www-form-urlencoded".

grant_type REQUIRED. the value MUST be set to "password".

deviceinfo MANDATORY. the value MUST be generated through the JS script, which will be shared through an Email.

username REQUIRED. the value MUST be the User's Email Address.

REQUEST:

Key	Value
grant_type	Password
deviceinfo	{"flash":"NA","canvas":"dbc418051fbfeef53caf58d8ec6f0c0","networkType":"4g","cookieEnabled":true,"os":"Windows","timezone":5.5,"touchSupport":false,"plugins":"Chrome/80.0.3987.163 Safari/537.36","silverlight":"NA","audio":"2875c00d19f6220ec0b20ad4455"}
username	oauth01@mailinator.com

RESPONSE:

Attribute	Description	Type
access_token	JWT token generated based upon the grant type	JWT
token_type	Type of JWT Token	String
refresh_token	This token is used when JWT accessToken is expired to generate new Access and Refresh Token	JWT
expires_in	The Expiry Time in which the Token will expire(in Seconds)	Integer
scope	Scope of the client	String
responseCode	Response Code	String
responseMessage	Response Message	String


```
NSU4iLCJHRVRfT0FVVEhfVVNFUI9JTkZPlwiUE9TVF9CVVNFUI9VUERBVEVFUEFTU1dPUkQiLC
JQT1NUX0NSRUFURV9DT01QQU5ZX1VTRViLCJQT1NUX1VQTE9BRF9ET0MiXX0.XL4e26NO9c
YWkpIxPv_9c6Qd4KxAwQvjc0J4WHDIY6CuHCnn1SDNKMtH5Efz3OehjHx6ABbJW2YuVgFkiJyO
rQ",
  "responseCode": "10105001",
  "responseMessage": "Please provide MFA Code. The MFA Code is sent on your Device."
}
```

MFA GRANT:

The Partner requests the token endpoint by adding the following parameters using the "application/x-www-form-urlencoded".

grant_type REQUIRED. The value MUST be set to "mfa".

mfa_token REQUIRED. The refresh token was HTTP issued to the partner.

mfa_code REQUIRED. The Value received on the Register device(Mobile).

Is_trusted REQUIRED. The value must be YES(Save the Device) or NO(Don't want to save the device)

REQUEST:

Key	Value
grant_type	Mfa
mfa_token	<MFA Token >
mfa_code	<MFA Code>
is_trusted	<YES or NO>

RESPONSE:

Attribute	Description	Type
access_token	JWT token generated based upon the grant type	JWT
token_type	Type of JWT Token	String
refresh_token	This token is used when JWT accessToken is expired to generate new Access and Refresh Token	JWT
expires_in	The Expiry Time in which the Token will expire(in Seconds)	Integer
Scope	Scope of the client	String

responseCode	Response Code	String
responseMessage	Response Message	String

EXAMPLE:

Request:

grant_type:mfa

```
mfa_token:eyJhbGciOiJIUzUxMiIsInR5cCI6IkpXVCJ9.eyJleHAiOjE2NDI0MTk4ODYsImF1dGhvcmcl  
0aWVzIjpblkdFVF9SRU1JVFRFUl9RVUVTVElPTk5BSVJFIiwieUE9TVF9CQURNSU5fVVBEQVRFX1  
BBU1NXT1JElwiUE9TVF9DUkVBVEVfQUmiLCJHRVRfRWhJU1RJTkdfVVNFUiIsIlBPU1RfUkVNSV  
RURVJfUVVfU1RJTO5OUISRSIsIkdfVF9VUU0VSX0FHUkvFTUVOVCIsIkdfVF9ETONVTUVOVF9V  
UExPQUQiLCJHRVRfvkVSSUZJRURfRU1BSUwiLCJHRVRft0FVVEhfQ0hfQ0tfe9LRU4iLCJQT1N  
UX1JFU0VUX1BTRCIsIkdfVF9WRVJJRllfQ09NUEFOWV9VUU0VSX0IOVklUQVRJT04iLCJHRU5FUK  
FURV9NRKEiLCJHRVRfvkVSSUZZX0FETUIOX0IOVklUQVRJT04iLCJHRVRfRE9DVU1FTIRfRE9XT  
kxPQUQiLCJHRVRftUVUQURBVEEiLCJQT1NUX0NSRUFURV9CVVNJTktVTU19BRE1JTilSiIlBPU1R  
fVVBEQVRFX1BTRCIsIlBPU1RfUkVTRVRfUEFTU1dPUkrfQURNSU4iLCJHRVRfQkvfVU5JUVVFX  
ORPQ1VN RU5UliwiR0VUX1VQTE9BREVE X0RPQ1VN RU5UliwiUE9TVF9VUERBVEVfUEFTU1dP  
UkrfQURNSU4iLCJHRVRft0FVVEhfVVNFUI9JTkZPliwieUE9TVF9CVVNFUI9VUERBVEVfUEFTU1  
dPUKQiLCJQT1NUX0NSRUFURV9DT01QQU5ZX1VTRViLCJQT1NUX1VQTE9BRF9ETOMiXX0.XL  
4e26NO9cyWkplXPv_9c6Qd4KxAwQvj c0J4WHDIY6CuHCnn1SDNKMtH5Efz30ehjHx6ABBJW2Y  
uVgFKijyOrQ  
mfa_code:22112211  
is_trusted:false
```

Response:

```
{
  "access_token":
"eyJhbGciOiJIUzUxMiIsInR5cCI6IkpXVCJ9.eyJmbm0iOi0m51bGwslmV4cCI6MTY0MjQyMDEzOCwiZmVzY2Vuc2VNZXNzYWdlIjoiaMDAwMDAwMDAiLCJhdXR3JpdGllcyI6WyJHRVRfUkVNSVRURVJfUUVVfU1RJT05OUiSRSlSllBPU1RfQkFETUOX1VQREFURV9QQVNTV09SRCIsIlBPU1RfQ1JFQVRFX0FDIiwiaWwiOiR0VUX0VYSVNUSU5HX1VTRVh1LCJQT1N1X1JFTU1UVEVSX1FVRVNUSU90TkFJUkU1LCJHRVRfVFNfU19BR1JFRU1FTlQiLCJHRVRfRE9DVU1FTlRfVVBMT0FElwiR0VUX09BVVRlX0NIRUNLX1RPS0VOIiwiaWwiR0VUX1ZFUklGSUVEX0VNQUIMiwiUE9TVF9SRVNFVF9QU0QiLCJHRVRfVfVSSUZZX0NPTVBBTllfVFNfU19JTlZJVEFUSU90IiwiaWwiR0VUX1ZFUklGWV9BRE1JTl9JTlZJVEFUSU90IiwiaWwiR0VUX0RPQ1VNRU5UX0RPV05MT0FElwiR0VUX01FVEFEQVRBlwiUE9TVF9DUkVBVEVfQlVTSU5FU1NfQURNSU4iLCJQT1N1X1VQREFURV9QU0QiLCJQT1N1X1JFU0VUX1BBU1NXT1JEX0FETUOIiwiaWwiR0VUX0JFX1VOSVFRV9ET0NVTUVOVCIsIkdfVF9VUEXpQURFRF9ET0NVTUVOVCIsIkdfVF9PQVVSU9VU0VSX0IOrk8iLCJQT1N1X1VQREFURV9QQVNTV09SRF9BRE1JTlSllPTEVfUkVNSVRURVh1LCJQT1N1X0JFU0VSX1VQREFURV9QQVNTV09SRCIsIlBPU1RfQ1JFQVRFX0NPTVBBTllfVFNfU19BR1JFRU1FTlRfVVBMT0FEX0RPQyJdLCJyZXNwb25zZUNvZGU1OiIwMDAwMDAwMCJ9.9R2XdpLbfxvgc6lNdqvC1RupkTNEKQkFvZl6oy7faTG2pCIMkxV2j4Xf-jSDVgKOAgULRAXw_ojbl30lrRtXxA",
  "token_type": "bearer",
  "refresh_token":
"eyJhbGciOiJIUzUxMiIsInR5cCI6IkpXVCJ9.eyJleHAiOi0jE2NDI0MjA3MzgsImF1dGhvcml0aWVzIjpbIkdFVF9SRU1JVFRFURV9RVUVTVElPtK5BSVJFIiwiaWwiUE9TVF9CQURNSU5fVVBQVRFX1BBU1NXT1JElwiUE9TVF9DUkVBVEVfQUMiLCJHRVRfRVh1RJTkdFVFNfU19BR1JFRU1RfUkVNSVRURVJfUUVVfU1RJT05OUiSRSlSllBPU1RfUkVFTUVOVCIsIkdfVF9VU0VSX0FHUkVFTUVOVCIsIkdfVF9ET0NVTUVOVF9VUEXpOUU0"
```

```
iLCJHRVRfT0FVVEhfQ0hFQ0tFVE9LRU4iLCJHRVRfVkvSSUZJRURfRU1BSUwiLCJQT1NUX1JFU0V
UX1BTRCIsIkdfVF9WRVJJRllfQ09NUEFOWV9VU0VSX0lOVklUQVRJT04iLCJHRVRfVkvSSUZZX0
FETUOX0lOVklUQVRJT04iLCJHRVRfRE9DVU1FTlRfRE9XTkxPQUQiLCJHRVRfTUVUQURBVEEiL
CJQT1NUX0NSRUFURV9CVVNJTkVTU19BRE1JTlIsIlBPU1RfVVBQVRFX1BTRCIsIlBPU1RfUkVT
RVRfUEFTU1dPUkrfQURNSU4iLCJHRVRfQkvfVU5JUUVFX0RPQ1VNRU5UliwiR0VUX1VQTE9BR
EVEX0RPQ1VNRU5UliwiR0VUX09BVVRiX1VTRVJfSU5GTyIsIlBPU1RfVVBQVRFX1BBU1NXT1J
EX0FETUOX0lOVklUk9MRV9SRU1JVFRFUiIsIlBPU1RfQlVTRVJfVVBQVRFX1BBU1NXT1JElwiUE9
TVF9DUkVBVEVfQ09NUEFOWV9VU0VSlwiUE9TVF9VUEXPQURfRE9DI19zMHP_z_7oDdVl0vG
ZiT-YFY80zYDQtgLaVqkvo1bYaWU-pDBxRgbc9Z0c7KOF5t8P7UXzbPJsdnngnKfQ1atA",
  "expires_in": 1186,
  "scope": "read write",
  "responseCode": "00000000",
  "responseMessage": "00000000"
}
```

REFRESH TOKEN GRANT:

If the authorization server issued a refresh token to the client, the client makes a refresh request to the token endpoint by adding the following parameters using the "application/x-www-form-urlencoded".

grant_type REQUIRED. The value MUST be set to "refresh_token".

refresh_token REQUIRED. The refresh token was HTTP issued to the partner.

REQUEST:

Key	Value
grant_type	refresh_token
refresh_token	<Refresh Token >

RESPONSE:

Attribute	Description	Type
access_token	JWT token generated based upon the grant type	JWT
token_type	Type of JWT Token	String
refresh_token	This token is used when JWT accessToken is expired to generate new Access and Refresh Token	JWT
expires_in	The Expiry Time in which the Token will expire(in Seconds)	Integer

Scope	Scope of the client	String
responseCode	Response Code	String
responseMessage	Response Message	String

EXAMPLE:

Request:

grant_type:refresh_token

refresh_token:eyJhbGciOiJIUzUxMiIsInR5cCI6IkpXVCJ9.eyJleHAiOiJlMjgyMjE2ODgsImF1dGhvcml0aWVzIjpbIkdFVF9SRU1JVFRFU19RVUVTVElPTk5BSVJFliwiUE9TVF9CQURNSU5fVVBEBQVRFX1BBU1NXT1JElwiUE9TVF9DUkVBVEVfQUMiLCJHRVRfRVhJU1RJTkdFVFNfUiIsIlBPU1RfUkVNSVRURVJfUUVFU1RJT05OQUISRSIsIkdFVF9VU0VSX0FHUkVFTUVOVCIsIkdFVF9ET0NTUVOVF9VUEXPUQILCJHRVRfT0FVVEhfQ0hFQ0tFVE9LRU4iLCJHRVRfVGVSSUZZJRURfRU1BSUwiLCJQT1N1UX1JFU0VUX1BTRCIIsIkdFVF9WRVJJRllfQURNSU5fSU5WSVRBVElPTiIsIkdFVF9ET0NTUVOVF9ET1dOTE9BRCIsIkdFVF9NRVRBREUFUSIsIlBPU1RfQ1JFQVRFX0JVU0I0RVNTX0FETU0IiwieUE9TVF9VUERBVEVfUENELiwiUE9TVF9SRVNFVF9CQVNTV09SRF9BRE1JTiIsIkdFVF9CRV9VTklRVUVRfRE9DVU1FTlQiLCJHRVRfVVBMT0FERURfRE9DVU1FTlQiLCJHRVRfT0FVVEhfVFNfU1RJTkdFVF9VUERBVEVfUEFTU1dPUkRfQURNSU4iLCJST0x0FX1JFTU0IiwieUE9TVF9CVVNFU19VUERBVEVfUEFTU1dPUkRfQILCJHRVRfVGVSSUZZX0NPTVBBWV9VU0VSX0I0VklUQVRJT04iLCJQT1N1UX0NSRUFURV9DT01QQU5ZX1VTRViiLCJQT1N1UX1VQTE9BRF9ET0MiXX0.JbIX3Cy5Sqk-RHT04DLjxYunAbjRKaujSD9Vc0q-qe3IMKKA_xALBgIgtqYwgeJ40C0oQcSD1bM_K3CTJP937g

Response:

```
{
  "access_token": "eyJhbGciOiJIUzUxMiIsInR5cCI6IkpXVCJ9.eyJmbm0iOiM5MTBzGwsImV4cCI6MTYyODIzMDA1MCIwcmVzZG9uc2VNZXNzYWdlIjoiaMDAwMDAwMDAiLCJhdXR0b3JpdGllcyI6WyJHRVRfUkVNSVRURVJfUUVFU1RJT05OQUISRSIsIlBPU1RfQkFETU0X1VQREFURV9CQVNTV09SRClSIlBPU1RfQ1JFQVRFX0FDIiwiaR0VUX0VYSVNU5H5X1VTRViiLCJQT1N1UX1JFTU0IiwieUE9TVF9SRVNFVF9QU0QILCJHRVRfVGVSSUZZX0FETU0I0VklUQVRJT04iLCJHRVRfRE9DVU1FTlRfRE9XTkxPQUQILCJHRVRfTUVUQURBVEEiLCJQT1N1UX0NSRUFURV9CVVNFJTkVU19BRE1JTiIsIlBPU1RfVVBEBQVRFX1BTRCIIsIlBPU1RfUkVTRVRfUEFTU1dPUkRfQURNSU4iLCJHRVRfQkVfVU5JUUVFX0RPQ1VNRU5UIiwiR0VUX1VQTE9BREVE9RPQ1VNRU5UIiwiR0VUX09BVVRlX1VTRVJfSU5GTyIsIlBPU1RfVVBEBQVRFX1BBU1NXT1JEX0FETU0IiwieUE9TVF9SRVNFVF9CQVNTV09SRF9BRE1JTiIsIkdFVF9CRV9VTklRVUVRfRE9DVU1FTlQiLCJHRVRfT0FVVEhfVFNfU1RJTkdFVF9VUERBVEVfUEFTU1dPUkRfQURNSU4iLCJST0x0FX1JFTU0IiwieUE9TVF9CVVNFU19VUERBVEVfUEFTU1dPUkRfQILCJHRVRfVGVSSUZZX0NPTVBBWV9VU0VSX0I0VklUQVRJT04iLCJQT1N1UX0NSRUFURV9DT01QQU5ZX1VTRViiLCJQT1N1UX1VQTE9BRF9ET0MiXX0.JbIX3Cy5Sqk-RHT04DLjxYunAbjRKaujSD9Vc0q-qe3IMKKA_xALBgIgtqYwgeJ40C0oQcSD1bM_K3CTJP937g",
  "token_type": "bearer",
  "refresh_token": "eyJhbGciOiJIUzUxMiIsInR5cCI6IkpXVCJ9.eyJleHAiOiJlMjgyMjE2ODgsImF1dGhvcml0aWVzIjpbIkdFVF9SRU1JVFRFU19RVUVTVElPTk5BSVJFliwiUE9TVF9CQURNSU5fVVBEBQVRFX1BBU1NXT1JElwiUE9TVF9DUkVBVEVfQUMiLCJHRVRfRVhJU1RJTkdFVFNfUiIsIlBPU1RfUkVNSVRURVJfUUVFU1RJT05OQUISRSIsIkdFVF9VU0VSX0FHUkVFTUVOVCIsIkdFVF9ET0NTUVOVF9VUEXPUQILCJHRVRfT0FVVEhfQ0hFQ0tFVE9LRU4iLCJHRVRfVGVSSUZZJRURfRU1BSUwiLCJQT1N1UX1JFU0VUX1BTRCIIsIkdFVF9WRVJJRllfQURNSU5fSU5WSVRBVElPTiIsIkdFVF9ET0NTUVOVF9ET1dOTE9BRCIsIkdFVF9NRVRBREUFUSIsIlBPU1RfQ1JFQVRFX0JVU0I0RVNTX0FETU0IiwieUE9TVF9VUERBVEVfUENELiwiUE9TVF9SRVNFVF9CQVNTV09SRF9BRE1JTiIsIkdFVF9CRV9VTklRVUVRfRE9DVU1FTlQiLCJHRVRfVVBMT0FERURfRE9DVU1FTlQiLCJHRVRfT0FVVEhfVFNfU1RJTkdFVF9VUERBVEVfUEFTU1dPUkRfQURNSU4iLCJST0x0FX1JFTU0IiwieUE9TVF9CVVNFU19VUERBVEVfUEFTU1dPUkRfQILCJHRVRfVGVSSUZZX0NPTVBBWV9VU0VSX0I0VklUQVRJT04iLCJQT1N1UX0NSRUFURV9DT01QQU5ZX1VTRViiLCJQT1N1UX1VQTE9BRF9ET0MiXX0.JbIX3Cy5Sqk-RHT04DLjxYunAbjRKaujSD9Vc0q-qe3IMKKA_xALBgIgtqYwgeJ40C0oQcSD1bM_K3CTJP937g"
```

```
RfUkVNSVRURVJfUUVFU1RJTO5OQULSRISlkdFVF9VU0VSX0FHUkVFTUVOVCIsIkdFVF9ET0NV
TUVOVF9VUEXPQUQiLCJHRVRfT0FVVEhfQ0hFQ0tfVE9LRU4iLCJHRVRfVkvSSUZJRURfRU1BSU
wiLCJQT1NUX1JFU0VUX1BTRCIsIkdFVF9WRVJJRllfQURNSU5fSU5WSVRBVEIPTiIsIkdFVF9ET0
NVTUVOVF9ET1dOTE9BRCIsIkdFVF9NRVRBREFUQSiIsIBPU1RfQ1JFQVRFX0JVU0IORVNTX0FE
TUI0IiwiUE9TVF9VUERBVEVfUFNEliwiUE9TVF9SRVNFVF9QQVNTV09SRF9BRE1JTilIsIkdFVF9
CRV9VTklRVUVfRE9DVU1FTlQiLCJHRVRfVVBMT0FERURfRE9DVU1FTlQiLCJHRVRfT0FVVEhfV
VNFU19JTkZPlwiUE9TVF9VUERBVEVfUEFTU1dPUkRfQURNSU4iLCJST0xFOX1JFTUIUVEVSlwiU
E9TVF9CVVNFU19VUERBVEVfUEFTU1dPUkQiLCJHRVRfVkvSSUZZX0NPTVBBWV9VU0VSX0IOV
klUQVRJT04iLCJQT1NUX0NSRUFURV9DT01QQU5ZX1VTRViLCJQT1NUX1VQTE9BRF9ET0MiX
X0.kevs-
Kv3wXunhghXI_er6618veMPIwYk3kCQnl7xvWdQefRPHGBGM9tv6SGJedikzjreU_HKeTLJF4vhp
FaSQg",
  "expires_in": 119,
  "scope": "read write",
  "responseCode": "00000000",
  "responseMessage": "00000000"
}
```

LOGOUT:

This will invalidate the user's session.

URI: https://<domain>/oauth/logout?refresh_token=<Refresh Token>

HTTP Method: DELETE

RESPONSE:

Attribute	Description	Type
responseCode	Response Code	String
responseMessage	Response Message	String
Errors	Error if any	String

EXAMPLE:

```
https://sendsandbox.uniteller.org/oauth/logout?refresh_token=eyJhbGciOiJIUzUxMiIsInR5cCI6
IkpXVCJ9.eyJleHAiOiJlE2MjgyNjE5MDYsImF1dGhvcml0aWVzIjpbIkdFVF9SRU1JVFRFUI9RVUVTV
ElPTk5BSVJfIiwieUE9TVF9CQURNSU5fVVBEBEQVRFX1BBU1NXT1JElwiUE9TVF9DUkVBVEVfQU
MiLCJHRVRfRVhJU1RJTkdfVWVNFU1IsIiBPU1RfUkVNSVRURVJfUUVFU1RJTO5OQULSRISlkdFVF9
VU0VSX0FHUkVFTUVOVCIsIkdFVF9ET0NVTUVOVF9VUEXPQUQiLCJHRVRfT0FVVEhfQ0hFQ0tf
VE9LRU4iLCJHRVRfVkvSSUZJRURfRU1BSUwiLCJQT1NUX1JFU0VUX1BTRCIsIkdFVF9WRVJJRllf
QURNSU5fSU5WSVRBVEIPTiIsIkdFVF9ET0NVTUVOVF9ET1dOTE9BRCIsIkdFVF9NRVRBREFU
QSiIsIBPU1RfQ1JFQVRFX0JVU0IORVNTX0FETUI0IiwiUE9TVF9VUERBVEVfUFNEliwiUE9TVF9S
RVNFVF9QQVNTV09SRF9BRE1JTilIsIkdFVF9CRV9VTklRVUVfRE9DVU1FTlQiLCJHRVRfVVBMT0
FERURfRE9DVU1FTlQiLCJHRVRfT0FVVEhfVWVNFU19JTkZPlwiUE9TVF9VUERBVEVfUEFTU1dP
UkRfQURNSU4iLCJST0xFOX1JFTUIUVEVSlwiUE9TVF9CVVNFU19VUERBVEVfUEFTU1dPUkQiLCJ
```

HRVRfVkvSSUZZX0NPTVBBWV9VU0VSX0IOVklUQVRJT04iLCJQT1NUX0NSRUFURV9DT01QQU
5ZX1VTRViLCJQT1NUX1VQTE9BRF9ET0MiXX0.SV-
FBe4Jx9uRE2M0F3lEjO_iS67V1qrOU79n3Yk2x2cq3nbFnWkZtpR394uGajKDFL1loBC6pcJ8d_AE
RJ3f2Q

Response:

```
{
  "responseCode": "00000000",
  "responseMessage": "success",
  "errors": null
}
```

REGENERATE MFA:

Description: This API is used to regenerate the MFA Code which is sent on the user's registered Mobile Number.

URI: </oauth/generateMfa> (GET)

REQUEST HEADER:

application_version:**1.0**

Content-Type:**application/json**

Authorization:**Bearer <mfa_token>**

X-Forwarded-For:<**User's Ip Address**>

RESPONSE:

Attribute	Description	Type
responseCode	Response Code	String
responseMessage	Response Message	String
Errors	Error if any	String

EXAMPLE:

Response:

```
{"responseCode":"00000000","responseMessage":"success","errors":null}
```

POSSIBLE RESPONSE CODES:

Response Code	Response Message	Http Status Code	Http Status Description
00000000	Success	200	Ok
		400	Bad Request
		401	Unauthorized
		403	Forbidden
		404	Not Found
		422	Unprocessable Entity
		500	Internal Server Error
		503	Service Unavailable

3.2.3 API request header parameter to call the Online Remittance API:

application_version:1.0

Content-Type: **application/json**

Authorization: **Bearer <Access Token>**

X-Forwarded-For: **<User's Ip Address>**

authentication_Code: **<Shared authentication_Code>**

4 Let's Start API Integration

This section explains the way to introduce the UNIR API into a partner's web or mobile application. This workflow just provides a high level review of the process/features of the remittances services. There could be other workflows possible for various use cases requirements of the partners..

In order to send money, user has to go through several processes, as mentioned below-

- **Register user:** User has to register in the UniTeller system.
- **Setup profile:** Once User has logged in, they need to setup their profile. This step has some sub steps, which is explained below in the "[Setup profile](#)" section.

- **Add Beneficiary:** After successful completion of setup profile, user's can add beneficiaries to transfer the funds.
- **Add Sending Methods:** In order to send money, users need to add sending methods to their profile to make payments.
- **Send Money:** After completing all the above steps, the user is ready to send money to their added beneficiaries. Send Money itself has some sub steps, explained below in the "Send Money" section.

Users will have Edit Profile, Edit Beneficiaries, Edit Sending Methods, Deactivate Beneficiaries, Deactivate Sending Methods etc. capabilities also.

Here are the use cases of different modules mentioned above-

3.

4.1 Register user

In order to register in the UniTeller System, user's have to provide some basic information. This includes the user's name, email address, date of birth and his/her preferred destination country etc. Registration has following steps-

- 1) User provides Email address (**after registration Email will be used as user ID and will be used to send email to the user**), Name, date of birth and his/her preferred destination country.
- 2) System checks if a user already exists in the UNIR system in any status. The UNIR system has two rules to check existing users, if user ID (Email Address) exists or combination of user's first name, last name and date of birth exists. Then the UNIR system assumes that the user is already registered and takes action based on the user's status etc.

If a user is registered with the UNIR system. The UNIR System does not allow users to create another account.

- 3) If a user does not exist in the UNIR system, then it is registered in the UNIR system and an authentication code is sent to the user's registered email address.

4.2 Setup profile

Once a user is registered and logged in, he/she needs to set up a profile to be able to add a sending method and send money. This module has following steps-

1) **Complete personal info:** First step of setup profile is submitting user's personal information.

2) After successful submission of user's personal information, information verification API is called. Here are possible scenarios-

2.1) User may pass information verification and the user becomes **APPROVED** (*an APPROVED user can add sending methods and send money to his/her beneficiaries*).

[Click here for detailed technical flow](#)

4.3 Add Beneficiary

After a successful login, a user can add beneficiaries/recipients. This is the process of associating a beneficiary/recipient with a payer. It is important to mention that a PAYER can have additional fields as well as a payer branch. Therefore for adding a beneficiary, API Partner should first call [/UTLROnlineRemitAPI/Common/v2/PayerWithReceptionMethodsList](#)

The API [PayerWithReceptionMethodsList](#) will return an object of [payerWithReceptionMethods](#). Apart from other details of a payer, [payerWithReceptionMethods](#) object hold two more important fields - [isPayerBranchRequired](#) [possible values: YES or NO] & [isAdditionalFieldRequired](#) [possible values : YES or NO].

Based on configuration, Payer can have

- Payer Branch and Additional Fields (call both API [PayerBranches](#) & [PayerAdditionalField](#))
- Either Payer Branch or Additional Fields (call either API [PayerBranches](#) & [PayerAdditionalField](#))
- Neither Payer Branch nor Additional Fields (No need to call API [PayerBranch](#) and [PayerAdditionalField](#))


These information can be retrieved from below two APIs

1. [/UTLROnlineRemitAPI/Common/PayerBranches](#)

1. [/UTLROnlineRemitAPI/Common/v2/PayerAdditionalField](#)

For a better understanding of the flow, the below flow diagram can also be referred to.

Add Beneficiary Flow Chart

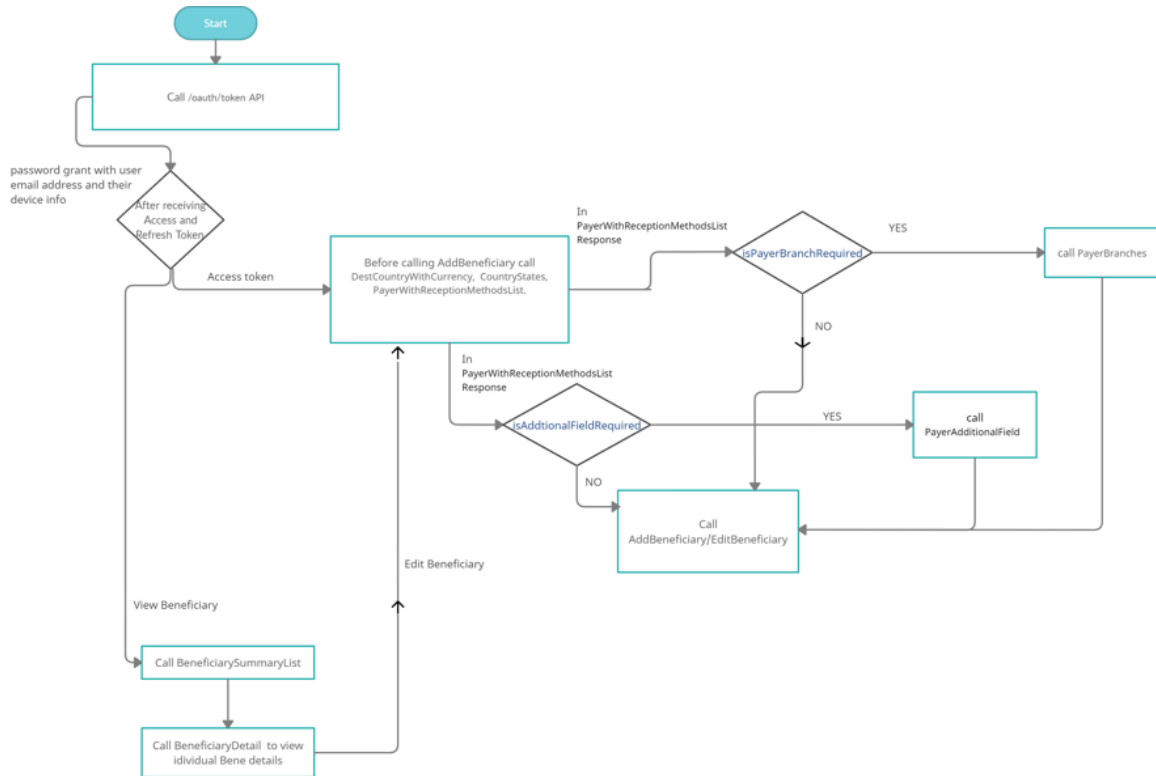

Please note that the maximum allowed number of beneficiaries/recipients for a Remitter is 6. But this should not be treated as a static value. This number is configurable in the UNIR system and in the future, this can change based on business requirements.

1) If Payer Branch is not required or Payer Branch is provided in Add Beneficiary's request, then new beneficiary will be added and success response (response code **00000000**) will be returned.

4.4 Add Sending Methods

To make a payment while sending money, the user needs to add at least one Sending Method. If the user's information verification is already done and the user's profile is in APPROVED status, then only a sending method can be added. Here are the steps to add sending method:

- 1) Sending method's (Card/Bank Account) details collected.
- 2) Validation is done.

- 3) After successful validation, UNIR System checks Sending Method Limit and if limit is exceeded then, UNIR System does not allow adding more sending methods.
- 4) If the user is allowed to add more sending methods, the UNIR system checks the sending method type.
- 5) If Sending method is Credit Card, then-
 - 5.1. The UNIR system checks Credit Card Limits. If the limit is exceeded, then the Credit Card will not be added to the user's profile.
 - 5.2. System also checks if the Credit Card is already added to the user's profile or not, if already added then, it does not allow adding the Credit Card again, else Credit Card will be added.
- 6) If Sending method is Debit Card, then-
 - 6.1. The UNIR system checks Debit Card Limits. If the limit is exceeded, then the Debit Card will not be added to the user's profile.
 - 6.2. System also checks if the Debit Card is already added to the user's profile or not, if already added then, it does not allow adding the Debit Card again, else the Debit Card will be added.

For Test Environment the below Test details should be used:

Test Cards - Approved

Test Cards - Approved							
Card type	Card Number	Exp	Address	City	State	Zip	CVV
Visa	4111 1111 1111 1111	04/19	123 Test St.	Somewhere	CA	90001	123
MasterCard	5411 1111 1111 1115	04/19	4000 Main St.	Anytown	AZ	85001	777
American Express	3411 1111 1111 111	04/19	12 Colorado Blvd.	Elsewhere	IL	54321	4000
Discover	6011 1111 1111 1117	04/19	6789 Green Ave.	Nowhere	MA	12345	555
Diner's Club	3648 4444 4444 46	04/19	7390 Del Mar Blvd.	Atown	NY	01101	-
JCB	2131 2222 2222 221	04/19	350 Madison Ave.	Springfield	OH	40000	-

[Click here for more detailed technical flow](#)

4.5 Send Money

If a user has added beneficiaries, he/she can send money to his/her registered beneficiaries. The Send Money process consists of two steps Send Money Preview and Send Money Confirm, described in the API reference section.

Note: In the UNIR system, a payer may have a payer-limit which refers to the amount of money payer can accept. If a user is sending more than the payer-limit then the UNIR system could not process the request. This check is applied on SendMoneyPreview API.

For example, if a user is sending \$501 to a payer that has a limit of \$500, the system will return a response code and it should be handled by an API partner. Below is the Response from SendMoneyPreview API refers to the same scenario.

```
{
  "responseCode": "59903002",
  "responseMessage": "The amount you are sending exceeds the allowed amount of $500 for the
  selected payer. Please change the amount or select another payer."
},
```

User Transaction Limit based on User level:

LEVEL_NAME	DAILY_LIMIT	WEEKLY_LIMIT
SILVER	1999	3999
GOLD	2999	4999
PLATINUM	4999	8999
DIAMOND	9999	12999

Number of days hold on transaction based on User level (Configurable):

Number of day Hold on Transaction based on User Level

Number of day hold on transaction based on User Level							
Country		Cash pick up		Account credit		Home delivery	
All other countries		ACH	CC/DC/UC	ACH	CC/DC/UC	ACH	CC/DC/UC
	SILVER	4 buss days	3 calendar days	4 buss days	1 calendar day	4 calendar days	4 calendar days
	GOLD						
	PLATINUM						
	DIAMOND						

TxSMSAlert: In order to send the Sms and Email to the Beneficiary TxSmsAlert API should be called based upon sendMoneyConfirm response (**isOptedInSMSAlert:YES**).

4.6 Cancel Transaction

The UNIR system allows only PAYABLE transactions to be cancelled.

In UNIR System Transaction can be cancelled by:

- Remitter
- UNIR System

The status of the transaction in the UNIR will be updated based on settlement time. If the REFUND to the customer is given before the settlement time, then status will be treated as VOID otherwise it will be considered as REFUND.

This is to note that VOID transaction status will be displayed as **CANCELLED** to the Remitter inside the application.

4.1. Promotion

Online Remittance service provides the promotion feature to promote the remittance business.

Use the promotion

1. Auto Apply Promotion.
2. Manual Apply Promotion

Auto Apply Promotion: Auto promotion will apply via the system based on promotion configuration. Auto applied promotion information will get on sendMoneyPreview response. You will get promotion name, promotion discount and other promotion information.

Manual Promotion: Manual promotion will apply only when user provide the promotion code during the send money.

Promotion Value

Uniteller support three type of promotion-

1. **Discount on service fee:** Discount on service fee promotion applies only to the service fee amount. The User's can get the discount from 0.1 to 100%.

Example: it is a dummy value to explain the promotion.

Sending Amount	Service fee	Promotion	Service Fee after promotion
100\$	3\$	100% service fee discount(PROM)	0\$

2. **Absolute promotion:** Absolute promotion will apply on service fee. Service fee discount applies up to absolute service fee.

Sending Amount	Service fee	Promotion	Service Fee after promotion
100\$	3\$	2\$ Absolute	1\$
1000\$	25\$	6\$ Absolute	19\$


Gift card. The User's will get a Gift card coupon like Amazon gift card.

[Please refer the flowchart.](#)

4.2. Bill Payment

This service is used to make payments for utility services, to the required institutions or utility providers against bills issued by them.

Please refer to the below flow chart for the Bill payment API calls.

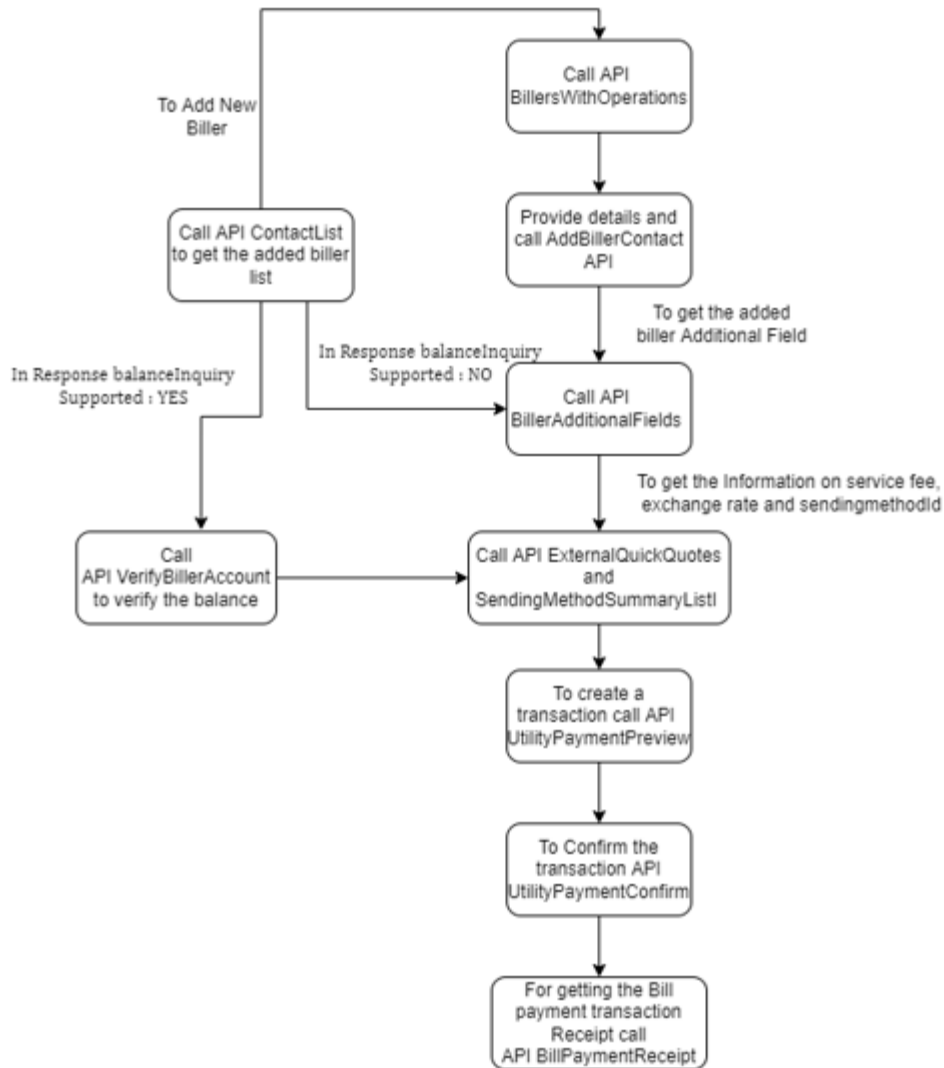

5 API Reference

This section describes the complete protocol for system integration with UNIR, irrespective of the implementation type. It provides the details of various methods available in the API, which are for universal use in any implementation.

This API divides the methods module wise so that they can be easily understandable. Method definition explains about each and every method along with their description. It includes method name, request & response. Parameters of the request and response are defined in the API Reference docs.

Note:-

There are some instructions must follow the in all request:

- **Request Header Information**
 - Must provide the version number so we can easily identify the request app version.
- **Request Body Information.**
 - Mobile number/phone number should be without ISD code.

5.1 CheckDuplicateUser (Requires Client-Credentials Grant)

Description: CheckDuplicateUser API verifies whether the details provided by the user are Unique in Uniteller's system, generally this api is used before calling sign up to verify whether the email or the combination of First Name, Last Name & Date of Birth is unique.

Note:* Suppose “ABC” is a Partner who has some function and owns a database and stores the user’s personal information. In this case a partner can store the flag signal to avoid calls again and again during CheckDuplicateUser and Signup API.

URI: /UTLROnlineRemitAPI/Security/CheckDuplicateUser

Possible Response codes return: [00000000, 59906002, 59906005, 59903005, 50103003, 59903001, and 50107007] ([See Appendix C for detail of Response codes](#))

UNIR Request: [VerifyUserRequest](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same way as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track the requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided on request, by default it would be English.	String

firstName	Conditional (Required if emailAddress is Empty.)	Remitter First Name.	String(1-30 Characters)
lastName	Conditional (Required if emailAddress is Empty.)	Remitter Last Name	String(2-30 Characters)
birthDate	Conditional (Required if emailAddress is Empty.)	Remitter Date of Birth	String(8 Digits)
emailAddress	Conditional	Remitter Email id	String(5-50 Characters)

UNIR Response: [VerifyUserResponse](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code.	String
responseMessage	Returns Response Message.	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A

5.1.1 Sample JSON Request

```
{ "emailAddress": "asheesh36@gmail.com", "partnerCode": "Uniteller", "interactionId":  
"123456789", "locale": "En" }
```

5.1.2 Sample JSON Response

```
{ "requestTimestamp": "09162019061740", "responseTimestamp": "09162019061740",  
  "executionTimestamp": 44, "interactionId": "123456789", "responseCode": "00000000",  
  "responseMessage": "Success." , "extraFields": null }
```

5.1.3 Sample JSON Request

```
{ "partnerCode": "Uniteller", "interactionId": "123456789", "locale": "En", "firstName": "Asheesh",  
  "lastName": "kumar", "birthDate": "09092001" }
```

5.1.4 Sample JSON Response

```
{ "requestTimestamp": "09162019062548", "responseTimestamp": "09162019062548",  
  "executionTimestamp": 9, "interactionId": "123456789", "responseCode": "00000000",  
  "responseMessage": "Success." , "extraFields": null }
```

5.2 SignupSecurityQuestionsList (Requires Client-Credentials Grant)

Description: This method fetched the security questions selected by the user during the signup and which are used for the device registration purpose, during the login.

URI: /UTLROnlineRemitAPI/ProfileManagement/SignupSecurityQuestions

Possible Response Code: [00000000, 59906002, 59903005, 50103003 and 59903001] ([See Appendix C for Response Code details.](#))

UNIR Request: SignupSecurityQuestionsReq

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same way as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional. Valid values are EN	Locale. If no input is provided in request, by default it would be	String

	(English) or ES (Spanish).	English	
--	-------------------------------	---------	--

UNIR Response: [SignupSecurityQuestionsResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code.	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
securityQuestion	List of all security questions	Array of SecurityQuestion. See Appendix A

5.2.1 Sample JSON Request

```
{ "partnerCode": "Uniteller", "interactionId": "12345678", "locale": "en" }
```

5.2.2 Sample JSON Response

```
{ "extraFields": null, "interactionId": "12345678", "executionTimestamp": 9, "requestTimestamp": "12142021090927", "responseTimestamp": "12142021090927", "responseCode": "00000000", "responseMessage": "Success.", "securityQuestion": [ { "question": "What was your childhood nickname?", "questionId": 1, "questionHint": null }, { "question": "In what city did you meet your spouse/significant other?", "questionId": 2, "questionHint": null }, { "question": "What is your oldest cousins first and last name?", "questionId": 7, "questionHint": null }, { "question": "What is your maternal grandmother's maiden name?", "questionId": 13, "questionHint": null }, { "question": "Where were you when you first heard about 9/11?", "questionId": 16, "questionHint": null }, { "question": "What is the name of the company of your first job?", "questionId": 17, "questionHint": null }, { "question": "What was your favorite place to visit as a child?", "questionId": 18, "questionHint": null }, { "question": "What is the" }
```

country of your ultimate dream vacation?","questionId":19,"questionHint":null},{ "question": "What is your preferred musical genre?","questionId":36,"questionHint":null},{ "question": "What is the name of the first school you attended?","questionId":40,"questionHint":null}}]

5.3 Signup (Requires Client-Credentials Grant)

Description: This method saves signup information (with some basic information) and provides an authentication code (on registered email address if required otherwise skip verifying email address based on Partner configuration).

After successful authentication, the user will be able to login into the application. Now the user can use almost all the features of the application except send money and add a sending method until they completes anyd verifies their personal information.

URI: </UTLROnlineRemitAPI/Security/v2/Signup>

Possible Response codes return: [00000000, 59906002, 59906005, 59903005, 50103003, 59903001, 50107007, 50107004, and 50107005] ([See Appendix C for detail of Response codes](#))

UNIR Request: [SignupReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same way as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English.	String

remitterPersonalInfo	Mandatory	Remitter's personal information.	RemitterPersonalInfo. See Appendix A
privacyPolicyAgreement	Mandatory. Possible values are YES or NO	Privacy policy agreement. The Users have to agree to the UniTeller's privacy policy agreement. So the user can sign up only if the request field contains "YES" in the request.	String(1-30 Characters)
remitterReferral	Optional.	User's referral information	String
userIPAddress	Optional IPv4 is accepted only.	If the end user device is directly communicating with the UniTeller server, then this field will be optional, but if a request is being received from the client server to the UniTeller server then this field must be filled.	String
agreementLocale	Optional Values should be either EN (English) or ES (Spanish)	The User Agreement document will be downloaded in the selected language.	String
questionId	Mandatory	Selected signup security question's Id.	Integer
Answer	Mandatory Max 255 Characters	Question's answer and it is being asked when the server needs to check the user's credibility.	String(1-60 Characters)
answerHint	Optional. Max 255 Characters	Answer's hint which will be useful when the user forgets his answer.	String(1-60 Characters)

UNIR Response: [SignupResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long

interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code.	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A

5.3.1 Sample JSON Request:

```
{
  "remitterPersonalInfo": {
    "emailAddress": "arch009@mailinator.com",
    "firstName": "Archana",
    "middleName": "",
    "lastName": "Joshi",
    "secondLastName": "",
    "birthDate": "04051992",
    "cellPhone": "7894562102",
    "destinationCountryISOCode": "MX",
    "isdCode": "+1"
  },
  "questionId": "13",
  "answer": "test",
  "privacyPolicyAgreement": "Yes",
  "partnerCode": "Uniteller",
  "interactionId": "12345678",
  "locale": "en"
}
```

5.3.2 Sample JSON Response:

```
{
  "extraFields": [
    {
      "name": "SIFT_USER_ID",
      "value": "48243_48648"
    }
  ],
  "interactionId": "12345678",
  "executionTimestamp": 4968,
  "requestTimestamp": "12152021021639",
  "responseTimestamp": "12152021021644",
  "responseCode": "00000000",
  "responseMessage": "Please verify your email address by entering the activation code sent to your email address."
}
```

5.3.3 Sample JSON Request (With Address):

```
{
  "partnerCode": "Uniteller",
  "interactionId": "4812032a-dcd7-4e18-badc-e940c7f0e139",
  "locale": null,
  "extraFields": null,
  "privacyPolicyAgreement": "YES",
  "remitterReferral": null,
  "userIPAddress": "172.58.36.10",
  "agreementLocale": null,
  "questionId": "1",
  "answer": "answer",
  "answerHint": "answer",
  "remitterPersonalInfo": {
    "emailAddress": "welleam@gmail.com",
    "firstName": "WILLIAMS",
    "middleName": null,
    "lastName": "THOMAS",
    "secondLastName": null,
    "gender": "",
    "birthDate": "02251984",
    "cellPhone": "6787824001",
    "workPhone": null,
    "homePhone": null,
    "address": {
      "address1": "222333 PEACHTREE PLACE",
      "address2": null,
      "city": "Los Angeles",
      "state": "CA",
      "stateName": "California",
      "country": "USA",
      "countryISOCode": "US",
      "zipCode": "90001"
    },
    "destinationCountryISOCode": "MX"
  }
}
```

5.3.4 Sample JSON Response:

```
{ "requestTimestamp": "08282019023836", "responseTimestamp": "08282019023836", "executionTimestamp": 162, "interactionId": "4812032a-dcd7-4e18-badc-e940c7f0e139", "responseCode": "00000000", "responseMessage": "Congratulations! You have signed up successfully." }
```

Note: If the partner have all required information then call the Sample JSON Request (With Address) so you can skip the setupPersonal API Request.

5.4 VerifyEmail(Requires Client Credential Grant)

Description: This API is used to verify the Email Address by providing the generated email verification token in the request.

Note: The **request parameters** should be passed in the **request params** and not in the request body

URI(GET): </oauth/verifyEmail>

Example:

[oauth/verifyEmail?verificationToken=93439708&username=alohani303@mailinator.com](#)

Possible Response Code: [00000000, 19906002, 19903009] ([See Appendix C for Response Code details.](#))

UNIR Request Param:

Attribute	Validation Rule	Description	Type
userName	Mandatory	This User registered email address	String(5-50 Characters)
verificationToken	Mandatory	The received email verification code in the registered Email Address	String(8 Digits)

UNIR Response: Response

Attribute	Description	Type
responseCode	The Response code	String
responseMessage	The Response Message	String
Errors	The Returned error list.	Array of FieldError. See Appendix A

5.4.1 Sample JSON Request

</oauth/verifyEmail?verificationToken=93439708&username=alohani303@mailinator.com>

5.4.2 Sample JSON Response

```
{"responseCode":"00000000","responseMessage":"success","errors":null}
```

5.5 RegenerateVerificationEmail(Requires Client Credential Grant)

Description: This Api is used to regenerate the email verification token.

Note: The **request parameters** should be passed in the **request params** and not in the request body

URI(GET): </oauth/regenerateVerificationEmail>

Example:

{{base_url}}/oauth/regenerateVerificationEmail?username=alohani303@mailinator.com

Possible Response Code: [00000000, 19906002] ([See Appendix C for Response Code details.](#))

UNIR Request Param:

Attribute	Validation Rule	Description	Type
userName	Mandatory	This User registered email address	String(5-50 Characters)

UNIR Response: Response

Attribute	Description	Type
responseCode	The Response code	String
responseMessage	The Response Message	String
Errors	The Returned error list.	Array of FieldError. See Appendix A

5.5.1 Sample JSON Request

</oauth/regenerateVerificationEmail?username=alohani303@mailinator.com>

5.5.2 Sample JSON Response

```
{"responseCode":"00000000","responseMessage":"success","errors":null}
```

5.6 CalculateProfileCompleteness (Requires Password Grant)

Description: This method returns the user's profile completeness percentage with their status.

URI: [/UTLROnlineRemitAPI/ProfileManagement/CalculateProfileCompleteness](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 50105002] ([See Appendix C for Response Code details.](#))

UNIR Request: CalculateProfileCompletenessReq

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory It must be [5-50] characters long.	User ID. Registered with UniTeller.	String(5-50 Characters)

UNIR Response: CalculateProfileCompletenessResp

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String

executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track request and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
isPersonalInfoComplete	The is personal info setup	String
isInformationVerificationComplete	The information is verified.	String
isSecurityImageComplete	This is a security image setup.	String
isSecurityQuestionsComplete	The is security questions setup	String
personalInfoCompleteness	The personal info completeness.	Int
informationVerificationCompleteness	The information verification completeness.	Int
securityImageCompleteness	The security image is complete.	Int
securityQuestionCompleteness	The security question completeness.	Int
totalProfileCompleteness	The total profile completeness.	Int

5.6.1 Sample JSON Request

```
{ "userId": "nsharma@cognam.com ", "partnerCode": "Uniteller",
  "interactionId": "123456789", "locale": "EN" }
```

5.6.2 Sample JSON Response

```
{ "requestTimestamp": "06132017152335", "responseTimestamp": "06132017152337",
  "executionTimestamp": 2064, "interactionId": "123456789", "responseCode": "00000000",
  "responseMessage": "Success.", "extraFields": null, "isPersonalInfoComplete": "YES",
  "isInformationVerificationComplete": "YES", "isSecurityImageComplete": "YES",
  "isSecurityQuestionsComplete": "YES", "personalInfoCompleteness": 100,
```

"informationVerificationCompleteness": 100, "securityImageCompleteness": 100,
"securityQuestionCompleteness": 100, "totalProfileCompleteness": 100}

5.7 SetupPersonalInfo (Requires Password Grant)

Description: This method set up personal information of a user as he/she has signed up with some basic information. This method should be called for providing rest of personal Information. The Partner's can Skip this API if they send all information(including Address) during Signup ([example](#)).

URI: /UTLROnlineRemitAPI/ProfileManagement/SetupPersonalInfo

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 50105002 and 50102007] ([See Appendix C for Response Code details.](#))

UNIR Request: SetupPersonalInfoReq

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory	User ID. Registered with UniTeller.	String(5-50 Characters)
cellphone	Mandatory It would contain digit [0-9] only.	The cell phone number(without ISD Code).	String(10-15 Digits)

workPhone	Mandatory it would contain digit [0-9] only.	The work phone number.	String(10-15 Digits)
homePhone	Mandatory it would contain digit [0-9] only.	The home phone number.	String(10-15 Digits)
address	Mandatory 1) Address1 in Address. 2) Address2 in Address (Optional). Address1 and address2 must be [1-100] characters long. 3) City name in Address. City name must be [1-30] characters long. 4) Zip code in Address Zip code must be [5-10] characters long. 5) State in Address. State ISO code in state field. State ISO code must be [1-10] characters long.	Remitter's Address	Address. See Appendix A
preferredLanguage	Optional This can either EN (English) or ES (Spanish)	User's preferred language. By default, it is EN (English)	String
gender	Optional This can be either M (Male) or F (Female)	Gender of user.	String

UNIR Response: [SetupPersonalInfoResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A

5.7.1 Sample JSON Request

```
{ "userId": "msharma0234@cognam.com", "cellPhone": "7836040440", "address": { "address1": "123 Main St.", "city": "McLean", "state": "TX", "stateName": "Texas", "country": "US", "zipCode": "90001" }, "preferredLanguage": "EN", "gender": "M", "token": "cnf4vn-45fj5-ba3k4-djrb4", "partnerCode": "Uniteller", "interactionId": "456789", "locale": "EN" }
```

5.7.2 Sample JSON Response

```
{ "responseCode": "00000000", "responseMessage": "Success.", "responseTimestamp": "08112016 171800", "executionTimestamp": 788, "requestTimestamp": "08112016171759", "interactionId": "456789", "extraFields": null }
```

5.8 InformationVerification (Requires Password Grant)

Description: Information verification is one step of profile completion. On the basis of provided information, UniTeller verifies his/her identification and returns response code as SUCCESS and FAIL. If the response code returns SUCCESS, it means information verification is completed and If FAIL then the user can not be allowed in the UniTeller system.

URI: [/UTLROnlineRemitAPI/ProfileManagement/InformationVerification](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 50105002, 50108001, 50105007, 50102005, 50201002, 50205002 and 50105004] ([See Appendix C for Response Code details.](#))

UNIR request: **InformationVerificationReq**

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and response. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory	User ID. Registered with UniTeller.	String(5-50 Characters)
sSN	Optional	The Social security number. It will never be stored by UniTeller.	String(4 or 9 or 11 digit)
verificationQuestionAnswer	Mandatory It must be [positive integer] integer value.	The question and answer array. If a user gets questions set in response	Array of VerificationQuestionAnswer See Appendix A

		then it will be required.	
--	--	---------------------------	--

UNIR Response: [InformationVerificationResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses 05 325. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
verificationStatus	Verification status.	String
VerificationQuestion	Verification question.	Array of VerificationQuestion See Appendix A
documentType	Document type.	String

5.8.1 Sample JSON Request

```
{ "userId": "msharma0234@cognam.com", "sSN": "666440532", "partnerCode": "Uniteller",  
  "interactionId": "12345678", "extraFields": [], "locale": "EN" }
```

5.8.2 Sample JSON Response

```
{ "requestTimestamp": "10272016234943", "responseTimestamp": "10272016234943", "executionTimestamp": 1, "responseCode": "00000000", "responseMessage": "Success." }
```

5.9 Add Beneficiary (Requires Password Grant)

Description: This method adds a new beneficiary for a user id. Beneficiary's personal information, remittance currency, selected payer and receipt method etc. are passed as the input.

NOTE: For Wallet Reception method, the benePhone is mandatory and should be passed as additional field depending upon the Wallet configuration(which can be checked in payerAdditionalField API) in AddBeneficiary API request. For Wallet Reception Method all the field are mandatory which are required for Account Credit except account Number.

URI: /UTLROnlineRemitAPI/ProfileManagement/AddBeneficiary

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 50105002, 59903008, 59908013, 59903006, 50105008 and 59903007] ([See Appendix C for Response Code details.](#))

UNIR Request: AddBeneficiaryReq

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory It must be 5-50 characters long.	User ID. Registered with UniTeller.	String(5-50 Characters)
beneficiarySummary	Mandatory	This field in request will have all the beneficiary details.	BeneficiarySummary. See appendix A

--	--	--	--

UNIR Response: [AddBeneficiaryResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
beneficiarySummary	Summary of beneficiary added to user's profile.	BeneficiarySummary. See Appendix A

5.9.1 Sample JSON Request with USD

```
{
  "beneficiarySummary": {
    "id": "",
    "firstName": "Advika",
    "midName": "",
    "secLastName": "Neha Sharma",
    "lastName": "joshi",
    "receptionMethod": "Cash Pickup",
    "cellPhone": "7894561223",
    "workPhone": "",
    "homePhone": "",
    "emailId": "",
    "nickName": "Advika-Banorte",
    "address": {
      "address1": "123",
      "country": "Mexico",
      "city": "deerfield",
      "state": "GUA",
      "stateName": "Guanajuato",
      "zipCode": "00000",
      "countryISOCode": "MX"
    },
    "destCountryISOCode": "MX",
    "destCurrencyISOCode": "MXN",
    "payerSpecificCode": "BANORTE",
    "userId": "arch010@mailinator.com",
    "partnerCode": "Uniteller",
    "interactionId": "12345678",
    "locale": "en"
  }
}
```

5.9.2 Sample JSON Response with USD

```
{
  "extraFields": null,
  "interactionId": "12345678",
  "executionTimestamp": 2669,
  "requestTimestamp": "12152021024010",
  "responseTimestamp": "12152021024013",
  "responseCode": "00000000",
  "responseMessage": "Beneficiary added successfully.",
  "beneficiarySummary": {
    "accHolderName": "Advika joshi Neha Sharma",
    "accNumber": null,
    "accType": null,
    "additionalFieldInfo": null,
    "address": {
      "address1": "123",
      "address2": null,
      "city": "deerfield",
      "country": "Mexico",
      "countryISOCode": "MX",
      "state": "GUA",
      "stateName": "Guanajuato",
      "zipCode": "00000"
    },
    "beneDOB": null,
    "beneStatus": "Active",
    "beneVerification": "NOT REQUIRED",
    "cellPhone": "7894561223",
    "contactType": null,
    "destCountryISOCode": "MX",
    "destCurrencyISOCode": "MXN",
    "destinationCurrency": "Mex Pesos",
    "emailId": "",
    "firstName": "Advika",
    "gender": null,
    "homePhone": "",
    "id": 52634,
    "isCulpVerified": null,
    "lastName": "joshi",
    "midName": "",
    "nickName": "Advika-Banorte CashPickup",
    "payer": "Banorte",
    "payerBranchCode": null,
    "payerInfo": {
      "accountRegexMsg": null,
      "address": null,
      "beneAccountRegex": null,
      "id": 0,
      "isPayerBranchRequired": null,
      "name": null,
      "payerSpecificCode": null,
      "phoneNumber1": null,
      "phoneNumber2": null,
      "receptionMethod": {
        "id": 2,
        "isAdditionalFieldRequired": null,
        "name": "Cash Pickup"
      },
      "txAvailableMsgBA": null,
      "txAvailableMsgCard": null
    },
    "status": null,
    "payerSpecificCode": "BANORTE",
    "receptionMethod": "Cash Pickup",
    "secLastName": "Neha Sharma",
    "workPhone": ""
  }
}
```

5.9.3 Sample JSON Request (with AdditionalField):

```
{
  "beneficiarySummary": {
    "id": "",
    "firstName": "Nisha",
    "midName": "",
    "secLastName": "Lohani Verma",
    "lastName": "Verma",
    "receptionMethod": "Cash Pickup",
    "accNumber": "",
    "cellPhone": "56321522322",
    "workPhone": "",
    "homePhone": "",
    "emailId": "",
    "nickName": "Nisha-ARGANI BANK LIMITED CashPickup",
    "address": {
      "address1": "123 Test St",
      "country": "Bangladesh",
      "city": "gvgtfv",
      "state": "BD-C",
      "stateName": "Dhaka",
      "zipCode": "00000",
      "countryISOCode": "BD"
    },
    "destCountryISOCode": "BD",
    "destCurrencyISOCode": "BDT",
    "payerSpecificCode": "TRBD0002",
    "additionalFieldInfo": [
      {
        "fieldName": "beneIdentificationType",
        "fieldValue": "001"
      },
      {
        "fieldName": "beneIdentificationNumber",
        "fieldValue": "412515202"
      },
      {
        "fieldName": "purposeOfTransaction",
        "fieldValue": "001"
      },
      {
        "fieldName": "senderIdentificationType",
        "fieldValue": "002"
      },
      {
        "fieldName": "relationToBeneficiary",
        "fieldValue": "Sister"
      },
      {
        "fieldName": "senderOccupation",
        "fieldValue": "TECH"
      },
      {
        "fieldName": "senderId"
      }
    ]
  }
}
```

```
entificationNumber","fieldValue":"563212325623"},{"fieldName":"sourceOfIncome","fieldValue":
":001"}]],{"userId":"promo332@mailinator.com","partnerCode":"Uniteller","interactionId":"123
45678","locale":"en"}
```

5.9.4 Sample JSON Response (with AdditionalField):

```
{
  "extraFields": null,
  "interactionId": "12345678",
  "executionTimestamp": 3750,
  "requestTimestamp": "09132021070243",
  "responseTimestamp": "09132021070247",
  "beneficiarySummary": {
    "accHolderName": "Nisha Verma Lohani Verma",
    "accNumber": null,
    "accType": null,
    "additionalFieldInfo": [
      {
        "dependentFieldId": null,
        "dependentURI": null,
        "fieldBelongsTo": null,
        "fieldId": 4298,
        "fieldLabel": "Beneficiary Identification Type",
        "fieldName": "benefIdentificationType",
        "fieldOptions": [
          {
            "key": "001",
            "value": "PASSPORT"
          },
          {
            "key": "002",
            "value": "WORK PERMIT"
          },
          {
            "key": "004",
            "value": "SOCIAL SECURITY"
          },
          {
            "key": "005",
            "value": "RESIDENCE PERMIT"
          },
          {
            "key": "099",
            "value": "OTHER"
          }
        ],
        "fieldType": "dropdown",
        "fieldValue": "001",
        "maxLen": null,
        "minLen": null,
        "validationRegex": null,
        "fieldErrorMsg": null
      },
      {
        "dependentFieldId": null,
        "dependentURI": null,
        "fieldBelongsTo": null,
        "fieldId": 4328,
        "fieldLabel": "Purpose of Transaction",
        "fieldName": "purposeOfTransaction",
        "fieldOptions": [
          {
            "key": "001",
            "value": "Medical Expenses"
          },
          {
            "key": "002",
            "value": "Family Assistance"
          },
          {
            "key": "003",
            "value": "Education Expenses"
          },
          {
            "key": "004",
            "value": "Building a Home"
          }
        ],
        "fieldType": "dropdown",
        "fieldValue": "001",
        "maxLen": null,
        "minLen": null,
        "validationRegex": null,
        "fieldErrorMsg": null
      },
      {
        "dependentFieldId": null,
        "dependentURI": null,
        "fieldBelongsTo": null,
        "fieldId": 4364,
        "fieldLabel": "Sender Identification Type",
        "fieldName": "senderIdentificationType",
        "fieldOptions": [
          {
            "key": "099",
            "value": "NON DRIVERS LICENSE PHOTO ID"
          },
          {
            "key": "002",
            "value": "DRIVERS LICENSE"
          },
          {
            "key": "001",
            "value": "PASSPORT"
          },
          {
            "key": "010",
            "value": "ALIEN REGISTRATION CARD"
          },
          {
            "key": "006",
            "value": "MATRICULA CONSULAR"
          },
          {
            "key": "003",
            "value": "CREDENCIAL DE ELECTOR"
          },
          {
            "key": "004",
            "value": "US GOVERNMENT ISSUED ID"
          }
        ],
        "fieldType": "dropdown",
        "fieldValue": "002",
        "maxLen": null,
        "minLen": null,
        "validationRegex": null,
        "fieldErrorMsg": null
      },
      {
        "dependentFieldId": null,
        "dependentURI": null,
        "fieldBelongsTo": null,
        "fieldId": 4383,
        "fieldLabel": "Relation to Beneficiary",
        "fieldName": "relationToBeneficiary",
        "fieldOptions": null,
        "fieldType": "text",
        "fieldValue": "Sister",
        "maxLen": null,
        "minLen": null,
        "validationRegex": null,
        "fieldErrorMsg": null
      }
    ]
  }
}
```

```

entFieldId":null,"dependentURI":null,"fieldBelongsTo":null,"fieldId":4301,"fieldLabel":"Benefici
ary
Identification
Number","fieldName":"beneIdentificationNumber","fieldOptions":null,"fieldType":"text","fieldV
alue":"412515202","maxLen":null,"minLen":null,"validationRegex":null,"fieldErrorMsg":null},"
dependentFieldId":null,"dependentURI":null,"fieldBelongsTo":null,"fieldId":4390,"fieldLabel":"S
ender
Occupation","fieldName":"senderOccupation","fieldOptions":[{"key":"HLTH","value":"HEALTHC
ARE"}, {"key":"AGR","value":"AGRICULTURE"}, {"key":"CNST","value":"CONSTRUCTION"}, {"key":
"RLST","value":"REAL
ESTATE"}, {"key":"LNDSCP","value":"LANDSCAPING"}, {"key":"DMCLNSER","value":"DOMESTIC/
CLEANING
SERVICES"}, {"key":"SALS","value":"SALES"}, {"key":"DIVR","value":"DRIVER"}, {"key":"CRUS","val
ue":"CRUISE
SHIP"}, {"key":"TECH","value":"TECHNOLOGY"}, {"key":"RESTHOSP","value":"RESTAURANT/HO
SPITALITY"}, {"key":"RTD","value":"RETIRED/PENSION"}],"fieldType":"dropdown","fieldValue":
"TECH","maxLen":null,"minLen":null,"validationRegex":null,"fieldErrorMsg":null},"dependentF
ieldId":null,"dependentURI":null,"fieldBelongsTo":null,"fieldId":4398,"fieldLabel":"Sender
Identification
Number","fieldName":"senderIdentificationNumber","fieldOptions":null,"fieldType":"text","field
Value":"563212325623","maxLen":null,"minLen":null,"validationRegex":null,"fieldErrorMsg":n
ull},"dependentFieldId":null,"dependentURI":null,"fieldBelongsTo":null,"fieldId":4403,"fieldLa
bel":"Source
of
Income","fieldName":"sourceOfIncome","fieldOptions":[{"key":"001","value":"SALARY"}, {"key":
"002","value":"BUSINESS"}, {"key":"003","value":"SAVINGS"}, {"key":"004","value":"LOTTERY"}, {"
key":"005","value":"GIFT"}],"fieldType":"dropdown","fieldValue":"001","maxLen":null,"minLen"
:null,"validationRegex":null,"fieldErrorMsg":null},"address":{"address1":"123
Test
St","address2":null,"city":"gvgtfv","country":"Bangladesh","countryISOCode":"BD","state":"BD-
C","stateName":"Dhaka","zipCode":"00000"},"beneDOB":null,"beneStatus":"Active","beneVerific
ation":"NOT
REQUIRED","cellPhone":"56321522322","contactType":null,"destCountryISOCode":"BD","destC
urrencyISOCode":"BDT","destinationCurrency":"Bangladesh
Taka","emailId":"","firstName":"Nisha","gender":null,"homePhone":"","id":47234,"isCulpVerifie
d":null,"lastName":"Verma","midName":"","nickName":"Nisha-ARGANI
BANK
LIMITED

```

```
CashPickup","payer":"ARGANI BANK
LIMITED","payerBranchCode":null,"payerInfo":{"accountRegexMsg":null,"address":null,"beneAc
countRegex":null,"id":0,"isPayerBranchRequired":null,"name":null,"payerSpecificCode":null,"ph
oneNumber1":null,"phoneNumber2":null,"receptionMethod":null,"status":null},"payerSpecificC
ode":"TRBD0002","receptionMethod":"Cash Pickup","secLastName":"Lohani
Verma","workPhone":""}}
```

5.9.5 Sample JSON Request (with PayerBranch):

```
{"beneficiarySummary":{"id":"","firstName":"pari","midName":"","secLastName":"","lastName":"
sharma","receptionMethod":"Cash
Pickup","cellPhone":"323232","workPhone":"","homePhone":"","emailId":"","nickName":"pari-
Intermex
CashPickup","address":{"address1":"878","country":"Mexico","city":"deerfield","state":"COL","st
ateName":"Colima","zipCode":"00000","countryISOCode":"MX"},"destCountryISOCode":"MX","d
estCurrencyISOCode":"MXN","payerSpecificCode":"INTERMEX","payerBranchCode":"INTERMEX
-
04250"},"userId":"promo332@mailinator.com","partnerCode":"Uniteller","interactionId":"1234
5678","locale":"en"}
```

5.9.6 Sample JSON Response (with PayerBranch):

```
{"extraFields":null,"interactionId":"12345678","executionTimestamp":1496,"requestTimestamp
":"09132021071258","responseTimestamp":"09132021071300","beneficiarySummary":{"acc
HolderName":"pari
sharma","accNumber":null,"accType":null,"additionalFieldInfo":null,"address":{"address1":"878
","address2":null,"city":"deerfield","country":"Mexico","countryISOCode":"MX","state":"COL","st
ateName":"Colima","zipCode":"00000"},"beneDOB":null,"beneStatus":"Active","beneVerification
":"NOT
REQUIRED","cellPhone":"323232","contactType":null,"destCountryISOCode":"MX","destCurrenc
yISOCode":"MXN","destinationCurrency":"Mex
Pesos","emailId":"","firstName":"pari","gender":null,"homePhone":"","id":47235,"isCurpVerified
":null,"lastName":"sharma","midName":"","nickName":"pari-Intermex
```

```
CashPickup","payer":"Intermex","payerBranchCode":null,"payerInfo":{"accountRegexMsg":null,
"address":null,"beneAccountRegex":null,"id":0,"isPayerBranchRequired":null,"name":null,"paye
rSpecificCode":null,"phoneNumber1":null,"phoneNumber2":null,"receptionMethod":null,"statu
s":null},"payerSpecificCode":"INTERMEX","receptionMethod":"Cash
Pickup","secLastName":"","workPhone":""}}
```

5.9.7 Sample JSON Request (with WALLET as receptionMethod):

```
{"beneficiarySummary":{"id":"","firstName":"abc","midName":"","secLastName":"","last
Name":"uwu","receptionMethod":"WALLET","cellPhone":"555555555555","emailId":"","
nickName":"abc-TIGO WALLET","address":{"address1":"123 test,
123","country":"Guatemala","city":"ANYCITY","state":"GT-
SA","stateName":"Sacatepequez","zipCode":"90001","countryISOCode":"GT"},"destCoun
tryISOCode":"GT","destCurrencyISOCode":"GTQ","payerSpecificCode":"TGM94","additio
nalFieldInfo":[{"fieldName":"benePhone","fieldValue":"555555555555"}],"userId":"sma
nohar@mailinator.com","token":"b08b3d4d-1c17-4b35-8473-
6d4c6628ef34","partnerCode":"Uniteller","interactionId":"12345678","locale":"en"}
```

5.9.8 Sample JSON Response (with WALLET as receptionMethod):

```
{"errorCode":{"errorCode":"00000000","errorMessage":"Beneficiary added
successfully","errorType":"DEFAULT"},"extraFields":null,"interactionId":"12345678","executio
nTimestamp":545,"requestTimestamp":"02202023060413","responseTimestamp":"022020230
60414","responseCode":"00000000","responseMessage":"Beneficiary added
successfully","beneficiarySummary":{"accHolderName":"abc
uwu","accNumber":null,"accType":null,"additionalFieldInfo":[{"dependentFieldId":null,"depend
entURI":null,"fieldBelongsTo":null,"fieldId":13755,"fieldLabel":"Beneficiary Phone
Number","fieldName":"benePhone","fieldOptions":null,"fieldType":"text","fieldValue":"5555555
5555","maxLen":"8","minLen":"1","validationRegex":"^(?={1,20})$)[0-
9]*$","fieldErrorMsg":null,"groupId":null,"groupInfo":null,"fieldMsg":null}],address":{"address
1":"123 test,
123","address2":null,"city":"ANYCITY","country":"Guatemala","countryISOCode":"GT","state":"G
```

T-

```
SA", "stateName": "Sacatepequez", "zipCode": "90001"}, "beneDOB": null, "beneStatus": "Active", "beneVerification": "NOT
REQUIRED", "cellPhone": "55555555555", "contactType": null, "destCountryISOCode": "GT", "destC
urrencyISOCode": "GTQ", "destinationCurrency": "Quetzales", "emailId": "", "firstName": "abc", "gend
er": null, "homePhone": null, "id": 62824, "isCurpVerified": null, "lastName": "uwu", "midName": "", "ni
ckName": "abc-TIGO
WALLET", "payer": "TIGO", "payerBranchCode": null, "payerInfo": {"accountRegexMsg": null, "addre
ss": null, "beneAccountRegex": null, "id": 0, "isPayerBranchRequired": null, "name": null, "payerSpecif
icCode": null, "payerLogo": null, "phoneNumber1": null, "phoneNumber2": null, "receptionMethod":
null, "status": null, "accountNumberDisplayName": null}, "payerSpecificCode": "TGM94", "reception
Method": "WALLET", "secLastName": "", "workPhone": null, "extraFields": null, "paymentAmountRe
gex": null}}
```

5.9.9 Sample JSON Request with Local Currency (Regex of payment Amount):

```
{"beneficiarySummary":{"firstName":"Rajat","lastName":"Talreja","receptionMethod":"Cash
Pickup","cellPhone":"65655855","nickName":"Rajat-GRUPOEXITO
CashPickup","address":{"address1":"123 Test St.","country":"Colombia","city":"demo
city","state":"CO-
DC","stateName":"Bogota","zipCode":"00000","countryISOCode":"CO"},"destCountryISOCode":"
CO","destCurrencyISOCode":"COP","payerSpecificCode":"EXITOTN"},"userId":"vipin.mca41@ya
hoo.in","token":"aeda6a8c-41aa-4519-bd6e-
92a116726254","partnerCode":"Uniteller","interactionId":"12345678","locale":"en"}
```

5.9.10 Sample JSON Response with Local Currency (Regex of payment Amount):

```
{"errorCode":{"errorCode":"00000000","errorMessage":"Beneficiary added
successfully"},"errorType":"DEFAULT"},"extraFields":[{"name":"offerDisclaimerMsg","value":nul
l}],"interactionId":"12345678","executionTimestamp":649,"requestTimestamp":"05152025064
```

```
546,"responseTimestamp":"05152025064547","responseCode":"00000000","responseMessage":"Beneficiary added successfully.,"contextId":"API_f447976f8d8e54e2_55ea921f7d2c9154","beneficiarySummary":{"accHolderName":"Rajat Talreja","accNumber":null,"accType":null,"additionalFieldInfo":null,"address":{"address1":"123 Test St.,"address2":null,"city":"demo city","country":"Colombia","countryISOCode":"CO","state":"CO-DC","stateName":"Bogota","zipCode":"00000"},"beneDOB":null,"beneStatus":"Active","beneVerification":"NOT REQUIRED","cellPhone":"65655855","contactType":null,"destCountryISOCode":"CO","destCurrencyISOCode":"COP","destinationCurrency":"COL Pesos","emailId":"","firstName":"Rajat","gender":null,"homePhone":null,"id":1995672,"isCurpVerified":null,"lastName":"Talreja","midName":"","nickName":"Rajat-GRUPOEXITO CashPickup","payer":"GRUPO EXITO","payerBranchCode":null,"payerInfo":{"accountRegexMsg":null,"address":null,"beneAccountRegex":null,"id":0,"isPayerBranchRequired":null,"name":null,"payerSpecificCode":null,"payerLogo":null,"phoneNumber1":null,"phoneNumber2":null,"receptionMethod":null,"status":null,"accountNumberDisplayName":null,"extraFields":null,"paymentAmountRegex":null},"payerSpecificCode":"EXITOTN","receptionMethod":"Cash Pickup","secLastName":"","workPhone":null,"extraFields":[{"name":"validationMsg","value":"Only multiples of 50 in COP are allowed for this payer. Please enter a value in COP rounded off to the closest hundred."}],type":null,"paymentAmountRegex":"^[0-9]*(00|50)$","sendAmountRegex":null,"serviceType":null,"isService":null}}
```

5.10 BeneficiarySummaryList (Requires Password Grant)

Description: This user specific method fetches the list of beneficiaries for the provided user id as input and returns the beneficiary list.

URI: </UTLROnlineRemitAPI/ProfileManagement/BeneficiarySummaryList>

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004 and 50105002] ([See Appendix C for Response Code details.](#))

UNIR Request: [BeneficiarySummaryListReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory It must be 5-50 characters long.	User ID. Registered with UniTeller.	String(5-50 Characters)
partialOrFull	Optional Possible values are P or F only.	This field in request tells UniTeller system, if beneficiary's detail needed in details of some basic information is needed only. By default it is F (full information)	String

UNIR Response: [BeneficiarySummaryListResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
beneficiarySummaryList	List of beneficiaries added to user's profile.	Array of BeneficiarySummary. See Appendix A

5.10.1 Sample JSON Request

```
{ "userId": "msharma0234@cognam.com", "partialOrFull": "P", "partnerCode": "Uniteller",
  "interactionId": "12345678", "extraFields": [], "locale": "EN" }
```

5.10.2 Sample JSON Response

```
{ "beneficiarySummaryList": [ { "address": { "state": "BCS", "country": "Mexico", "stateName": "Baja
California Sur", "city": "San jose", "address1": "267 N Creek Dr", "address2": null,
"zipCode": "95139", "countryISOCode": "MX"}, "id": "1150", "nickName": "Satish - Banorte
CashPickup", "firstName": "Satish", "lastName": "Mishra", "cellPhone": "7836040442",
"receptionMethod": "Cash Pickup", "gender": "M", "workPhone": "7836040442",
"homePhone": "7836040442", "emailId": null, "payer": "Banorte", "payerSpecificCode": null,
"destinationCurrency": "Mex Pesos", "accNumber": "",
"accType": null, "beneStatus": "Active", "beneDOB": "01011992", "accHolderName": null, "midName":
null, "secLastName": "Mishra", "payerBranchCode": null, "destCountryISOCode": null, "destCurren
cyISOCode": null } ], "responseCode": "00000000", "responseMessage": "Success.", "responseTimest
amp": "08162016132345", "executionTimestamp": 63, "interactionId": "123456789", "extraFields"
: null, "requestTimestamp": "08162016132345" }
```

5.11 BeneficiaryDetail (Requires Password Grant)

Description: This is a user specific method which fetches the details of the beneficiary for the provided user id and beneficiary id as input and returns the beneficiary detail.

URI: [/UTLROnlineRemitAPI/ProfileManagement/BeneficiaryDetail](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 50105002, 59903002] ([See Appendix C for Response Code details.](#))

UNIR Request: [BeneficiaryDetailReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in	String

		request will be returned in response.	
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory	User ID. Registered with UniTeller.	String(5-50 Characters)
beneficiaryId	Mandatory	Beneficiary id.	Integer(Positive Integer)

UNIR Response: [BeneficiaryDetailResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
beneficiarySummary	Contains remitter information.	Beneficiary details See Appendix A

5.11.1 Sample JSON Request

```
{"userId":"msharma0234@cognam.com","beneficiaryId":630,"partnerCode":"Uniteller","extraFields":[],"locale":"EN"}
```

5.11.2 Sample JSON Response

```
{
  "beneficiarySummary": {
    "id": "1110",
    "gender": "M",
    "firstName": "vipin",
    "lastName": "kumar",
    "nickName": "Allied Bank-vipin",
    "accHolderName": "vipin kumar",
    "accNumber": "1111111111111111",
    "address": {
      "address1": "www",
      "city": "www",
      "state": "PH-00",
      "stateName": "Manila Metropolitan",
      "country": "Philippines",
      "countryISOCode": "PH",
      "zipCode": "90001"
    },
    "beneDOB": "03141989",
    "homePhone": "4444444444",
    "cellPhone": "4444444444",
    "workPhone": "4444444444",
    "beneStatus": "Active",
    "payer": "Allied Bank",
    "receptionMethod": "Account Credit",
    "destinationCurrency": "Philippine Pesos",
    "destCountryISOCode": "PH",
    "destCurrencyISOCode": "PHP",
    "payerSpecificCode": "F1ALF_PH_ABC03"
  },
  "requestTimestamp": "10272016233645",
  "responseTimestamp": "10272016233648",
  "executionTimestamp": 2912,
  "interactionId": "12345678",
  "responseCode": "00000000",
  "responseMessage": "Success."
}
```

5.12 EditBeneficiary (Requires Password Grant)

Description: This method edits an existing beneficiary for a user. Beneficiary's personal information, remittance currency, selected payer and reception method etc. are passed as the input. Some fields might be restricted to be edited.

URI: </UTLROnlineRemitAPI/ProfileManagement/EditBeneficiary>

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 50105002, 59903002, 59903008 and 50105008] ([See Appendix C for Response Code details.](#))

UNIR Request: `EditBeneficiaryReq`

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A

locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory It must be 5-50 characters long.	User ID. Registered with UniTeller.	String(5-50 Characters)
beneficiarySummary	Mandatory	This field in request will have all the beneficiary details.	Beneficiary details. See appendix A

UNIR Response: [EditBeneficiaryResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
beneficiarySummary	Summary of beneficiary added to user's profile.	Beneficiary details. See Appendix A

5.12.1 Sample JSON Request

```
{
  "beneficiarySummary": {
    "id": "52634",
    "firstName": "Advika",
    "midName": "",
    "secLastName": "Neha Sharma",
    "lastName": "joshi",
    "receptionMethod": "Cash Pickup",
    "cellPhone": "7894561223",
    "workPhone": "",
    "homePhone": "",
    "emailId": "",
    "nickName": "A"
  }
}
```

Advika-Banorte Cash

```
Pickup","address":{"address1":"123","country":"Mexico","city":"deerfield","state":"JAL","stateName":"Jalisco","zipCode":"00000","countryISOCode":"MX"},"destCountryISOCode":"MX","destCurrencyISOCode":"MXN","payerSpecificCode":"BANORTE"},"userId":"arch010@mailinator.com","token":"7c1c65b6-7123-414c-b583-11a877abf8c1","partnerCode":"Uniteller","interactionId":"12345678","locale":"en"}
```

5.12.2 Sample JSON Response

```
{"extraFields":null,"interactionId":"12345678","executionTimestamp":1579,"requestTimestamp":"12152021025507","responseTimestamp":"12152021025509","responseCode":"00000000","responseMessage":"Success","beneficiarySummary":{"accHolderName":"Advika joshi Neha Sharma","accNumber":null,"accType":null,"additionalFieldInfo":null,"address":{"address1":"123","address2":null,"city":"deerfield","country":"Mexico","countryISOCode":"MX","state":"JAL","stateName":"Jalisco","zipCode":"00000"},"beneDOB":null,"beneStatus":"Active","beneVerification":null,"cellPhone":"7894561223","contactType":null,"destCountryISOCode":"MX","destCurrencyISOCode":"MXN","destinationCurrency":"Mex Pesos","emailId":null,"firstName":"Advika","gender":null,"homePhone":"7894561223","id":52634,"isCurpVerified":null,"lastName":"joshi","midName":"","nickName":"Advika-Banorte Cash Pickup","payer":"Banorte","payerBranchCode":null,"payerInfo":null,"payerSpecificCode":"BANORTE","receptionMethod":"Cash Pickup","secLastName":"Neha Sharma","workPhone":"7894561223"}}
```

5.12.3 Sample JSON Request(ReceptionMethod as WALLET)

```
{"beneficiarySummary":{"id":62824,"firstName":"abc","midName":"","secLastName":"","lastName":"uwu","receptionMethod":"WALLET","cellPhone":"5555555555","workPhone":null,"homePhone":null,"emailId":"","nickName":"abc-TIGO WALLET","address":{"address1":"123 test, 123","country":"Guatemala","city":"ANYCITY","state":"GT-SA","stateName":"Sacatepequez","zipCode":"90001","countryISOCode":"GT"},"destCountryISOCode":"GT","destCurrencyISOCode":"GTQ","payerSpecificCode":"TGM94","additionalFieldInfo":[{"fieldName":"benePhone","fieldValue":"5555555555"}]},"userId":"smanohar@mailinator.com","token":"ab085267-a357-43a2-9d51-6e3aa2c1f1f8","partnerCode":"Uniteller","interactionId":"12345678","locale":"en"}
```

5.12.4 Sample JSON Response(ReceptionMethod as WALLET)

```
{
  "errorCode": {
    "errorCode": "00000000",
    "errorMessage": "Success.",
    "errorType": "DEFAULT"
  },
  "extraFields": null,
  "interactionId": "12345678",
  "executionTimestamp": 1887,
  "requestTimestamp": "02202023084951",
  "responseTimestamp": "02202023084953",
  "responseCode": "00000000",
  "responseMessage": "Success.",
  "beneficiarySummary": {
    "accHolderName": "abcuwu",
    "accNumber": null,
    "accType": null,
    "additionalFieldInfo": [
      {
        "dependentFieldId": null,
        "dependentURI": null,
        "fieldBelongsTo": null,
        "fieldId": 13755,
        "fieldLabel": "Beneficiary Phone Number",
        "fieldName": "benePhone",
        "fieldOptions": null,
        "fieldType": "text",
        "fieldValue": "555555555555",
        "maxLen": "8",
        "minLen": "1",
        "validationRegex": "^(?=({1,20})$)[0-9]*$",
        "fieldErrorMsg": null,
        "groupId": null,
        "groupInfo": null,
        "fieldMsg": null
      }
    ],
    "address": {
      "address1": "123 test, 123",
      "address2": null,
      "city": "ANYCITY",
      "country": "Guatemala",
      "countryISOCode": "GT",
      "state": "G T-SA",
      "stateName": "Sacatepequez",
      "zipCode": "90001"
    },
    "beneDOB": null,
    "beneStatus": "Active",
    "beneVerification": null,
    "cellPhone": "555555555555",
    "contactType": null,
    "destCountryISOCode": "GT",
    "destCurrencyISOCode": "GTQ",
    "destinationCurrency": "Quetzales",
    "emailId": null,
    "firstName": "abc",
    "gender": null,
    "homePhone": "555555555555",
    "id": 62824,
    "isCarpVerified": null,
    "lastName": "uwu",
    "midName": "",
    "nickName": "abc-TIGO WALLET",
    "payer": "TIGO",
    "payerBranchCode": null,
    "payerInfo": null,
    "payerSpecificCode": "TGM94",
    "receptionMethod": "WALLET",
    "secLastName": "",
    "workPhone": "555555555555",
    "extraFields": null,
    "paymentAmountRegex": null
  }
}
```

5.13 DeactivateBeneficiary (Requires Password Grant)

Description: This method is used to deactivate beneficiary. If the transaction is “IN PROCESS” or “PAYABLE” related to that beneficiary then you can’t deactivate. After the transaction gets paid, refund, and cancel one can deactivate the beneficiary.

URI: [/UTLROnlineRemitAPI/ProfileManagement/DeactivateBeneficiary](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 50105002 and 59903002] ([See Appendix C for Response Code details.](#))

UNIR Request: [DeactivateBeneficiaryReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)

interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory	User ID. Registered with UniTeller.	String(5-50 Characters)
beneficiaryId	Mandatory	Beneficiary id.	Integer(Positive Integer)

UNIR Response: [DeactivateBeneficiaryResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A

5.13.1 Sample JSON Request

```
{"userId":"msharma0234@cognam.com", "beneficiaryId":685, "token":"d1ca758e-c879-406d-b126-a0a948714c50", "partnerCode":"Uniteller", "interactionId":"12345678"}
```

5.13.2 Sample JSON Response

```
{ "requestTimestamp": "10272016234943", "responseTimestamp": "10272016234943", "executionTimestamp": 1, "responseCode": "00000000", "responseMessage": "Success." }
```

5.14 SendingMethodSummaryList (Requires Password Grant)

Description: This method fetches the list of sending methods with information e-sending method type, sending method name, sending method id, sending method number etc.

URI: [/UTLROnlineRemitAPI/ProfileManagement/SendingMethodSummaryList](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004 and 50105002] ([See Appendix C for Response Code details.](#))

UNIR Request: [SendingMethodsSummaryReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory	User ID. Registered with UniTeller.	String(5-50 Characters)
sendingMethodName	Mandatory Possible values are- Credit Card or Debit Card	This field in request will have all the beneficiary details.	String
sendingMethodStatus	Optional	User can get his/her Sending methods by their Sending method status and it could be Active or All	String

UNIR Response: [SendingMethodsSummaryResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
SendingMethodSummary	Summary of sending method.	Array SendingMethodSummary. See Appendix A

5.14.1 Sample JSON Request

```
{"userId":"arch010@mailinator.com","sendingMethodStatus":"All","partnerCode":"Uniteller","interactionId":"12345678","locale":"en"}
```

5.14.2 Sample JSON Response

```
{"extraFields":null,"interactionId":"12345678","executionTimestamp":249,"requestTimestamp":"12152021023334","responseTimestamp":"12152021023335","responseCode":"00000000","responseMessage":"Success.,"sendingMethodSummary":[{"accVerifySource":null,"address":null,"allowEditandDeactivate":true,"bankName":null,"id":20469,"nickName":null,"publicToken":null,"sendingMethodName":"Debit Card","sendingMethodNumber":"*****1111","sendingMethodType":"Visa","isHashInfoAvailable":"YES","routingNumber":null,"status":"Verified"}]}
```

5.15 AddSendingMethod (Requires Password Grant)

Description: This method adds a new Sending Method for a user id. If the Sending Method is Credit Card or Debit Card then, Card number, card type, cvv, billing address etc. are passed as

input. After successful addition, for credit card or debit card two small amounts credit to the card.

Note*:- Visa and Mastercard Allow.

URI: /UTLROnlineRemitAPI/ProfileManagement/AddSendingMethod

Possible Response Code: [00000000, 59903005, 59906002, 50103003, 59903001, 50105002, 50108004, 50105003, 59903003, 51104001, 59903006, 59908003, 59908001, 59908002, 59908004, 59908006, 59908007, 59908008, 59908009, 59908005, 59908010, 59908011]

([See Appendix C for Response Code details.](#))

UNIR Request: AddSendingMethodReq

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory	User ID. Registered with UniTeller.	String(5-50 Characters)
SendingMethodName	Mandatory Possible values are- Credit Card or Debit Card	Name of the sending method which need to be added in user's profile.	String(10-20 Characters)
Nickname	Optional.	Nick name of added bank account sending method. If not provided System will generate it.	String(4-60 Characters)

cardType	Conditional This field must be filled if the Sending Method name is Credit Card or Debit Card. Possible values are [Visa, Master Card]	Card type.	String(4-60 Characters)
cardNumber	Conditional This field must be filled if the Sending Method name is Credit Card or Debit Card.	Debit or Credit Card number	String(16 Digits)
expireDate	Conditional This field must be filled if the Sending Method name is Credit Card or Debit Card. Valid format is MMYYYY (i.e. month, year) with no separator between year, month. The Expiration date must be [6] digit long and it would contain digit only.		String(6 Digits)
cvvNumber	Conditional It must be [3-4] long.	Remitter's credit/debit card cvv number. This field must be filled if the Sending Method name is Credit Card or Debit Card.	String(3-4 Characters)
billingAddress	Conditional	Remitter's credit/debit card billing Address. This field must be filled if the Sending Method	Object of address See Appendix A

		name is Credit Card or Debit Card.	
billingPhone	Conditional it would contain digit [0-9] only.	Remitter's credit/debit card billing phone. This field must be filled if the Sending Method name is Credit Card or Debit Card.	String(10-15 Characters)
allowCreditDebitTwoAmounts	Mandatory Possible values are [YES, NO]	Remitter has to verify his sending method and to do so he has to pass yes within this field. By doing this UniTeller will credit and debit two small amounts in his Sending Method. At the time of verification Remitter has to fill these two amounts to verify the account. Allowed values for this field are 'YES' or 'NO'.	String

UNIR Response: [AddSendingMethodResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
ExecutionTimestamp	Total time taken in processing of request at UniTeller	Long
InteractionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
ExtraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
SendingMethodDetails	Details of Sending method added.	SendingMethodDetail. See Appendix A

5.15.1 Sample JSON Request:

```
{
  "userId": "arch010@mailinator.com",
  "sendingMethodName": "Debit Card",
  "cardType": "Visa",
  "cardNumber": "4111111111111111",
  "expireDate": "042022",
  "cvvNumber": "123",
  "billingAddress": {
    "address1": "12",
    "zipCode": "90001",
    "city": "deerfield",
    "state": "GA",
    "countryISOCode": "US"
  },
  "allowCreditDebitTwoAmounts": "YES",
  "partnerCode": "Uniteller",
  "interactionId": "12345678",
  "locale": "en"
}
```

5.15.2 Sample JSON Response:

```
{
  "extraFields": null,
  "interactionId": "12345678",
  "executionTimestamp": 1843,
  "requestTimestamp": "12152021023332",
  "responseTimestamp": "12152021023334",
  "responseCode": "00000000",
  "responseMessage": "Your Debit Card added successfully.",
  "sendingMethodDetails": {
    "accVerifySource": null,
    "address": null,
    "allowEditandDeactivate": false,
    "bankName": null,
    "id": 0,
    "nickName": null,
    "publicToken": null,
    "sendingMethodName": null,
    "sendingMethodNumber": null,
    "sendingMethodType": null,
    "isHashInfoAvailable": null,
    "routingNumber": null,
    "status": null
  }
}
```

5.16 SendingMethodDetail (Requires Password Grant)

Description: This method is used to provide the details of each sending method added by the user.

URI: </UTLROnlineRemitAPI/ProfileManagement/SendingMethodDetail>

Possible Response Code: [00000000, 50108004, 59906002, 59903001, 50105002, 59902003]

([See Appendix C for Response Code details.](#))

UNIR Request: [SendingMethodDetailReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and	String

		responses. The interaction ID received in request will be returned in response.	
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory It must be [5-50] characters long.	User ID. Registered with UniTeller.	User ID. Registered with UniTeller. (5-50 Characters)
sendingMethodName	Mandatory Possible values are- Credit Card or Debit Card	Sending Method Name	String(10-20 Characters)
sendingMethodId	Mandatory	Sending Method Id	String(Positive Integer)

UNIR Response: [SendingMethodDetailResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
sendingMethodSummary	Sending Method Summary	Object of SendingMethodSummary. See Appendix A

5.16.1 Sample JSON Request

```
{ "userId": "vkumar@cognam.com", "sendingMethodName": "Credit Card",
  "sendingMethodId": "165", "partnerCode": "Uniteller", "interactionId": "12345678", "locale": "en" }
```

5.16.2 Sample JSON Response

```
{ "requestTimestamp": "11122018134108", "responseTimestamp": "11122018134108",
  "executionTimestamp": 116, "interactionId": "12345678", "responseCode":
  "00000000", "responseMessage": "Success.", "extraFields": null, "sendingMethodSummary":
  { "id": 165, "nickName": null, "sendingMethodName": "Credit Card", "sendingMethodNumber":
  "*****1111", "sendingMethodType": "Visa", "bankName": null, "accVerifySource":
  null, "address": { "address1": "123 Test St.2", "address2": null, "city": null, "state":
  null, "stateName": null, "country": null, "countryISOCode": null, "zipCode": "90001" }, "allowEdit":
  true, "publicToken": null, "routingNumber": null, "status": "Verified", "isHashInfoAvailable":
  "YES" } }
```

5.17 EditCCDC (Requires Password Grant)

Description: This method is used to edit the sending method - Credit card or Debit card when received Response Code “**51104003**” in SendMoneyPreview API.

URI: /UTLROnlineRemitAPI/ProfileManagement/EditCCDC

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 59903003, 50105002, 59903006] ([See Appendix C for Response Code details.](#))

UNIR Request: EditCCDCRequest

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provide	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The	String

		interaction ID received in request will be returned in response.	
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. if no input is provided in request, by default it would be English	String
userId	Mandatory.	User ID. Registered with UniTeller.	String(5-50 Characters)
sendingMethodName	Mandatory	Sending Method name	String(10-20 Characters)
sendingMethodId	Mandatory	The sending method id.	String(1-40 Characters)
cardType	Mandatory.	The Card Type	String(4-60 Characters)
expireDate	Mandatory The Expiration date must be [6] digit long and it would contain digit only.	Remitter's credit/debit card expiration date. Valid format is MMYYYY (i.e. month, year) with no separator between year, month. This field must be filled if Sending Method name is Credit Card or Debit Card.	String
cvvNumber	Mandatory It must be [3-4] long.	Remitter's credit/debit card cvv number. This field must be filled if Sending Method name is Credit Card or Debit Card.	String(3-4 Characters)
billingAddress	Mandatory	Remitter's credit/debit card billing Address. This field must be filled if Sending Method name is Credit Card or Debit Card.	Address. See Appendix A : <Address>
cardNumber	Mandatory	Remitter's credit/debit number. This field must be filled if Sending Method name is Credit Card or Debit Card.	String(16 Digits)
billingPhone	Conditional	Remitter's credit/debit	String(10-15 Digits)

	it would contain digit [0-9] only.	card billing phone. This field must be filled if Sending Method name is Credit Card or Debit Card.	
--	------------------------------------	--	--

UNIR Response: EditCCDCResponse

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
SendingMethodDetail	The sending method details.	Sending method details. See Appendix A

5.17.1 Sample Json Request

```
{ "userId": "nsharma@cognam.com", "partnerCode": "Uniteller", "interactionId": "123456789",
  "locale": "EN", "sendingMethodName": "Debit Card", "sendingMethodId": "257",
  "cardType": "Master Card", "expireDate": "042019", "cvvNumber": "777",
  "billingAddress": { "address1": "4000 Main St.", "city": "Anytown", "state": "AZ",
  "stateName": "Azerbaijan", "countryISOCODE": "US", "zipCode": "85001" },
  "cardNumber": "5411111111111115", "billingPhone": "8269019311" }
```

5.17.2 Sample Json Response:

```
{ "requestTimestamp": "06142017114818", "responseTimestamp": "06142017114936",  
  "executionTimestamp": 78029, "interactionId": "123456789", "responseCode": "00000000",  
  "responseMessage": "Success." , "extraFields": null, "sendingMethodDetails": null }
```

5.18 EditCard (Requires Password Grant)

Description: This method is used to edit the sending method - Credit card or Debit. Currently only once user can edit their card (CC/DC).

URI: /UTLROnlineRemitAPI/ProfileManagement/EditCard

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 59903003, 50105002, 59903006] ([See Appendix C for Response Code details.](#))

UNIR Request: EditCardReq

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provide	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. if no input is provided in request, by default it would be English	String
userId	Mandatory.	User ID. Registered with UniTeller.	String(5-50 Characters)
sendingMethodName	Mandatory	Sending Method name	String(10-20 Characters)
sendingMethodId	Mandatory	The sending method id.	String(Positive Integer)

cardType	Mandatory. It must Master Card or Visa.	The Card Type	String(4-60 Characters)
expireDate	Mandatory it would contain digit only.	Remitter's credit/debit card expiration date. Valid format is MMYYYY (i.e. month, year) with no separator between year, month. This field must be filled if the Sending Method name is Credit Card or Debit Card.	String(6 Digits)
cvvNumber	Mandatory.	Remitter's credit/debit card cvv number. This field must be filled if the Sending Method name is Credit Card or Debit Card.	String(3-4 Digits)
billingAddress	Conditional	Remitter's credit/debit card billing Address. This field must be filled if the Sending Method name is Credit Card or Debit Card.	Address. See Appendix A : <Address>
cardNumber	Mandatory	Remitter's credit/debit number. This field must be filled if Sending the Method name is Credit Card or Debit Card.	String(16 Digits)
billingPhone	Conditional it would contain digit [0-9] only.	Remitter's credit/debit card billing phone. This field must be filled if the Sending Method name is Credit Card or Debit Card.	String(10-15 Digits)

UNIR Response: EditCardResp

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
SendingMethodDetail	The sending method details.	Sending method details. See Appendix A

5.18.1 Sample Json Request :

```
{ "userId": "pari21@mailinator.com", "sendingMethodId": 14394, "sendingMethodName": "Debit Card", "cardType": "Visa", "cardNumber": "4111111111111111", "expireDate": "042021", "cvvNumber": "123", "billingAddress": { "address1": "123 Test St.", "address2": null, "city": null, "state": null, "stateName": null, "country": null, "countryISOCode": null, "zipCode": "90001" }, "partnerCode": "Uniteller", "interactionId": "12345678", "locale": "en" }
```

5.18.2 Sample Json Response:

```
{ "responseCode": "00000000", "responseMessage": "Success.", "extraFields": null, "interactionId": "12345678", "executionTimestamp": 868, "requestTimestamp": "01132021020630", "responseTimestamp": "01132021020631", "sendingMethodDetails": null }
```

5.19 DeactivateSendingMethod (Requires Password Grant)

Description: This method is used to deactivate the added sending method.

URI: /UTLROnlineRemitAPI/ ProfileManagement / DeactivateSendingMethod

Possible Response Code: [00000000, 50108004, 59906002, 50103003, 59903005, 59903001, 50105002, 50105003, 59902003] ([See Appendix C for Response Code details.](#))

UNIR request: DeactivateSendingMethodReq

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track request and response. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory.	User ID. Registered with UniTeller.	String(5-50 Characters)
sendingMethodName	Mandatory Possible values are- Credit Card or Debit Card	Sending Method Name	String(10-20 Characters)
sendingMethodId	Mandatory	Sending Method Id	String(Positive Integer)

UNIR response: [DeactivateSendingMethodResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String

responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A

5.19.1 Sample JSON Request:

```
{ "userId": "pari25@mailinator.com", "sendingMethodName": "Credit Card", "sendingMethodId": 9937, "partnerCode": "Uniteller", "interactionId": "12345678", "locale": "en" }
```

Sample JSON Response:

```
{ "responseCode": "00000000", "responseMessage": "Success.", "extraFields": null, "interactionId": "12345678", "executionTimestamp": 244, "requestTimestamp": "01182021043025", "responseTimestamp": "01182021043025" }
```

5.20 CurrentExchangeRate (Requires Password Grant)

Description: This method fetches the latest exchange rate for a given country and currency.

URI: /UTLROnlineRemitAPI/Remittance/CurrentExchangeRate

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 59903006 and 59903007] (See [Appendix C](#) for Response Code details.)

UNIR Request: CurrentExchangeRateReq

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN	Locale. If no input is provided in request, by	String

	(English) or ES (Spanish).	default it would be English	
countryIsoCode	Mandatory.	Country ISO Code.	String(2 Characters)
currencyIsoCode	Mandatory.	Currency ISO Code.	String(3 Characters)
payerSpecificCode	Conditional.	Payer Specific Code	String
receptionMethodName	Conditional. It could be Account Credit Or Cash Pickup as in request.	The Reception Method Name is how to pay money to beneficiary.	String
UserId	Mandatory	User ID. Registered with UniTeller.	String(5-50 Characters)

UNIR Response: CurrentExchangeRateResp

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
exchangeRate	Exchange rate.	ExchangeRate. See Appendix A

5.20.1 Sample JSON Request

```
{"countryIsoCode":"MX","currencyIsoCode":"MXN","partnerCode":"Uniteller","interactionId":"12345678","locale":"EN"}
```

5.20.2 Sample JSON Response

```
{
  "requestTimestamp": "10282016074225",
  "responseTimestamp": "10282016074225",
  "executionTimestamp": 87,
  "interactionId": "12345678",
  "responseCode": "00000000",
  "responseMessage": "Success.",
  "extraFields": null,
  "exchangeRate": {
    "destCountryISOCode": "MX",
    "destCurrencyISOCode": "MXN",
    "exchangeRate": 12.731
  }
}
```

5.21 getExternalQuickQuotes (Requires Client Credentials Grant)

Description: Gets QuickQuotes from outside the application without login. This will return Exchange Rate, Service Fee and State Fee on the basis of provided input.

URI: [/UTLROnlineRemitAPI/Common/ExternalQuickQuotes](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 59903008, 59903006 and 59903007] (See [Appendix C](#) for Response Code details.)

UNIR Request: ExternalQuickQuotesReq

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Mandatory. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
destCountryISOCode	Mandatory.	The destination country ISO code.	String(2 Characters)
destCurrencyISOCode	Mandatory.	The destination currency ISO code.	String(3 Characters)
transactionAmount	Conditional	Amount to be sent. It must be Positive integer value. If requested for	String(Positive Integer)

		service then this field will be mandatory.	
payerSpecificCode	Mandatory.	The payer specific code is payer unique code. If requested for service then this field will be mandatory.	String(2-30 Characters)
sendingMethodName	Optional. Possible values are [Credit Card and Debit Card]	The sending method name.	String
receptionMethodName	Mandatory. It could be Account Credit Or Cash Pickup as requested.	The Reception Method Name is how to pay money to the beneficiary.	String
originStateIsoCode	Optional	The Remitter State ISO Code	String

UNIR Response: ExternalQuickQuotesResp

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
transactionAmount		Double
exchangeRate		Double
quickQuotes		Array of Service Fee. See Appendix A
bestExchangeRate	Best exchange configured among all sending method.	Double
bestExchangeRateForDashboard	Best exchange rate for New user's	Double
bestExchangeRateForExistingUser	Best exchange rate for	Double

	Existing user's	
stateFee	This field provides Transfer Taxes [Federal Remittance Tax]	String

5.21.1 Sample JSON Request with USD

```
{
  "transactionAmount": "30",
  "paymentAmount": "",
  "destCountryISOCode": "PH",
  "destCurrencyISOCode": "PHP",
  "payerSpecificCode": "F1LHF",
  "receptionMethodName": "Cash Pickup",
  "partnerCode": "Uniteller",
  "interactionId": "12345678",
  "locale": "en",
  "originStateIsoCode": "OK"
}
```

5.21.2 Sample JSON Response with USD

```
{
  "errorCode": {
    "errorCode": "00000000",
    "errorMessage": "Success.",
    "errorType": "DEFAULT"
  },
  "extraFields": null,
  "interactionId": "12345678",
  "executionTimestamp": 931,
  "requestTimestamp": "03232022060830",
  "responseTimestamp": "03232022060831",
  "responseCode": "00000000",
  "responseMessage": "Success.",
  "exchangeRate": 47.09,
  "quickQuotes": [
    {
      "receivedAmount": 1412.7,
      "sendingMethodName": "Bank Account",
      "serviceFee": 3.99,
      "totalTransactionAmount": 33.99
    },
    {
      "receivedAmount": 1412.7,
      "sendingMethodName": "Credit Card",
      "serviceFee": 4.99,
      "totalTransactionAmount": 34.99
    },
    {
      "receivedAmount": 1412.7,
      "sendingMethodName": "Debit Card",
      "serviceFee": 4.99,
      "totalTransactionAmount": 34.99
    }
  ],
  "transactionAmount": 30.0,
  "bestExchangeRate": null,
  "bestExchangeRateForDashboard": 47.09,
  "bestExchangeRateForExistingUser": 47.09,
  "stateFee": "5.0"
}
```

5.21.3 Sample JSON Request with Local Currency

```
{
  "userId": "vipin.mca41@yahoo.in",
  "transactionAmount": "29.86",
  "paymentAmount": "123450",
  "destCountryISOCode": "CO",
  "destCurrencyISOCode": "COP",
  "payerSpecificCode": "EXITOTN",
  "receptionMethodName": "Cash Pickup",
  "partnerCode": "Uniteller",
  "interactionId": "12345678",
  "locale": "en"
}
```

5.21.4 Sample JSON Response with Local Currency

```
{
  "errorCode": {
    "errorCode": "00000000",
    "errorMessage": "Success.",
    "errorType": "DEFAULT"
  },
  "extraFields": [
    {
      "name": "paymentAmountRegex",
      "value": "^[0-9]*(00|50)$"
    },
    {
      "name": "validationMsg",
      "value": "Only multiples of 50 in COP are allowed for this payer. Please enter a value in COP rounded off to the closest hundred."
    }
  ],
  "interactionId": "12345678",
  "executionTimestamp": 699,
  "requestTimestamp": "05152025065203",
  "responseTimestamp": "05152025065204",
  "responseCode": "00000000",
  "responseMessage": "Success."
}
```

```
eMessage":"Success.,"contextId":"API_f447976f8d8e54e2_5b0b33bc2842f659","exchangeRate":4160.0,"quickQuotes":[{"receivedAmount":123450.0,"sendingAmount":"29.89","sendingMethod": "Ulink Card","serviceFee":0.0,"totalTransactionAmount":29.68}, {"receivedAmount":123450.0,"sendingAmount":"29.86","sendingMethod": "Wlp Wallet","serviceFee":0.0,"totalTransactionAmount":29.68}, {"receivedAmount":123450.0,"sendingAmount":"29.89","sendingMethod": "Bank Account","serviceFee":3.99,"totalTransactionAmount":33.67}, {"receivedAmount":123450.0,"sendingAmount":"30.04","sendingMethod": "Debit Card","serviceFee":3.99,"totalTransactionAmount":33.67}, {"receivedAmount":123450.0,"sendingAmount":"30.13","sendingMethod": "Credit Card","serviceFee":4.99,"totalTransactionAmount":34.67}], "transactionAmount":29.68,"bestExchangeRate":{"Credit Card":4097.6,"Wlp Wallet":4135.04,"Ulink Card":4130.88,"Bank Account":4130.88,"Debit Card":4110.08}, "bestExchangeRateForDashboard":0.0,"bestExchangeRateForExistingUser":0.0,"stateFee":"0.00","exchangeRatePromotionMsg":null,"bestFxExchangeRate":null,"localCurrencyGroupForBestExchangeRate":null,"bestExchangeRateGroup":null}
```

5.21.5 Sample JSON Request with Local Currency without UserId

```
{"destCountryISOCode":"MX","destCurrencyISOCode":"MXN","transactionAmount":1000.0,"payerSpecificCode":"BANORTE","sendingMethodName":"Bank Account","receptionMethodName":"Cash Pickup","partnerCode":"Uniteller","extraFields":[],"locale":"EN"}
```

5.21.6 Sample JSON Response with Local Currency without UserId

```
{"errorCode":{"errorCode":"00000000","errorMessage":"Success.,"errorType":"DEFAULT"},"extraFields":null,"interactionId":null,"executionTimestamp":571,"requestTimestamp":"08072025233653","responseTimestamp":"08072025233654","responseCode":"00000000","responseMessage":"Success.,"contextId":"API_1935503231","exchangeRate":18.64,"quickQuotes":[{"receivedAmount":18640.0,"sendingAmount":"1000.0","sendingMethod": "Bank Account","serviceFee":3.46,"totalTransactionAmount":1003.46}, {"receivedAmount":18640.0,"sendingAmount":"1000.0","sendingMethod": "Bank Account","serviceFee":3.46,"totalTransactionAmount":1003.46}], "transactionAmount":1000.0,"bestExchangeRate":{"Credit Card":18.19264,"Bank Account":18.4536,"Debit Card":18.32312}, "bestExchangeRateForDashboard":18.4536,"bestExchangeRateForExistingUser":19.0128,"stateFee":"0.00","exchangeRatePromotionMsg":null,"bestFxExchangeRate":null,"localCurrencyGroupForBestExchangeRate":null,"bestExchangeRateGroup":null}
```

5.22 UserCreditLimit (Requires Password Grant)

Description: This method fetches the whole table of credit limits applicable for the user based on his user level. This includes the daily and weekly limits for bank accounts, credit card and debit cards.

URI: /UTLROnlineRemitAPI/Remittance/UserCreditLimit

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004 and 50105002] (See [Appendix C](#) for Response Code details.)

UNIR request: UserCreditLimitReq

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory.	User ID. Registered with UniTeller.	String(5-50 Characters)

UNIR response: UserCreditLimitResp

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in	String

	response.	
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
creditLevelLimit	Credit level limit.	CreditLevel. See Appendix A

5.22.1 Sample JSON Request

```
{ "userId": "anukumarrag@gmail.com", "partnerCode": "Uniteller", "interactionId": "12345678", "extraFields": [], "locale": "EN" }
```

5.22.2 Sample JSON Response

```
{ "requestTimestamp": "10282016085430", "responseTimestamp": "10282016085431", "executionTimestamp": 491, "interactionId": "12345678", "responseCode": "00000000", "responseMessage": "Success.", "extraFields": null, "creditLevelLimit": { "levelName": "PLATINUM", "cCDailyLimit": 1000, "cCWeeklyLimit": 500, "dCDailyLimit": 1000, "dCWeeklyLimit": 500, "bADailyLimit": 350, "bAWeeklyLimit": 500, "cCDailyLimitTrusted": 2999, "cCWeeklyLimitTrusted": 500, "dCDailyLimitTrusted": 2999, "dCWeeklyLimitTrusted": 500, "bADailyLimitTrusted": 2999, "bAWeeklyLimitTrusted": 500, "uLinkCardDailyLimit": 350, "uLinkCardWeeklyLimit": null, "uLinkCardDailyLimitTrusted": null, "uLinkCardWeeklyLimitTrusted": null } }
```

5.23 UserComplianceLimit (Requires Password Grant)

Description: This method fetches the whole table of compliance limits applicable for the user based on his user level. This includes the 1 day, 4 day, 7 day, 30day, 60day, 90 day and 180days limits. NOTE: Days for limits above are configurable and may change.

URI: [/UTLROnlineRemitAPI/Remittance/UserComplianceLimit](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004 and 50105002] (See [Appendix C](#) for Response Code details.)

UNIR request: [UserComplianceLimitReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to	String

		track requests and responses. The interaction ID received in request will be returned in response.	
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory.	User ID. Registered with UniTeller.	String(5-50 Characters)

UNIR response: UserComplianceLimitResp

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
complianceLevelLimit	compliance level limit	ComplianceLevel. See Appendix A

5.23.1 Sample JSON Request

```
{"userId":"anukumarrag@gmail.com","partnerCode":"Uniteller","interactionId":"12345678","extraFields":[],"locale":"EN"}
```

5.23.2 Sample JSON Response

```
{"requestTimestamp":"10282016085922","responseTimestamp":"10282016085923","executionTimestamp":487,"interactionId":"12345678","responseCode":"00000000","responseMessage":"Success.,"extraFields":null,"complianceLevelLimit":{"levelName":null,"limitOfDays1":5000,"li
```

```
mitOfDays4":5499,"limitOfDays14":5999,"limitOfDays30":9999,"limitOfDays60":14999,"limitOfDays90":19999}}
```

5.24 SendMoneyPreview (Requires Password Grant)

Description: This method creates the remittance transaction for preview of the user. It checks user limits, checks restrictions, calculates fee and exchange rate etc and present to the user as a preview of a receipt. Only the transaction number is not shown at this point.

Note: For payers (like Payer Exito) that require the amount to be entered in local currency, the regex for validating the amount can be retrieved from the /PayerWithReceptionMethodList API response. When the amount is expected in local currency, the following fields are also required: paymentAmount and selectedCurrencyIsoCode (must be set to the local currency)

URI: /UTLROnlineRemitAPI/Remittance/SendMoneyPreview

Possible Response Code: [00000000,59903005, 59906002, 50103003,50108004, 59903001, 50105002, 59903002, 59903007, 51102903,50105003, 59903003, 51107002, 51104002, 51104003, 51104004, 51107001, 51102904, 50105004, 51108002, 51104001, 59905003, 59905004, 59906004, 19906005, 19906002, 59906008] ([See Appendix C for Response Code details.](#))

UNIR request: SendMoneyPreviewReq

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A

locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory.	User ID. Registered with UniTeller.	String(5-50 Characters)
beneficiaryId	Mandatory It must be [positive integer] integer value.	ID of beneficiary to whom money is being sent	Integer
sendingMethodId	Mandatory It must be [positive integer] integer value.	ID of Sending method ID being used for payment.	Integer
sendingMethodName	Mandatory Possible values are [Credit Card, Debit Card]	Sending method Name being used for payment.	String(10-20 Characters)
transactionAmount	Mandatory It must be [positive double] double value	Sending Amount	Double
transactionCurrencyISOCode	Mandatory.	Sending Amount currency ISO code	String(3 Characters)
additionalFieldInfo	Conditional	Payer additional field	Array of AdditionalFieldInfo. See Appendix A
paymentAmount	Conditional	Receiving Amount	Double
selectedCurrencyIsoCode	Conditional, Mandatory if sending paymentAmount in Request	Selected Amount Currency ISO Code, can be sending Amount or Receiving Amount	String

UNIR response: [SendMoneyPreviewResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of	Long

	request at UniTeller	
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
remitterFirstname	Remitter's First Name	String
remitterMiddleName	Remitter's Middle Name	String
remitterLastName	Remitter's Last Name	String
remitterSLastName	Remitter's Second Last Name	String
sendingMethodName	Remitter's Sending Method Name	String
sendingMethodType	Remitter's Sending Method Type	String
sendingMethodLast4Digits	Remitter's Sending Method Last Four digits	String
beneficiaryFirstname	Beneficiary's First Name	String
beneficiaryMiddleName	Beneficiary's Middle Name	String
beneficiaryLastName	Beneficiary's Last Name	String
beneficiarySLastName	Beneficiary's Second Last Name	String
beneficiaryAddress	Beneficiary's Address.	Object of Address See Appendix A
beneficiaryPhone	Beneficiary's Phone	String
bankName	Beneficiary's Bank Name	String
receptionMethodName	Beneficiary's Reception Method	String
transactionInternalReference	Transaction reference number	Integer
txAmount	Transaction amount	Double
txCurrency	Transaction currency	String
exchangeRate	Exchange rate	Double
serviceFee	Transaction service charge	Double
paymentAmount	Pay amount	Double
paymentCurrency	Transaction payment currency	String
createDate	Transaction creation time	String
processingDate	Transaction processing time	String

uicReceiptMode	UIC receipt mode list	Array of UICReceiptMode. See Appendix A
additionalFieldInfo	Payer additional fields	Array of AdditionalFieldInfo. See Appendix A
baseExchangeRate	Base exchange rate	Double
stateFee	This field provides Transfer Taxes [Federal Remittance Tax]	String

5.24.1 Sample JSON Request with USD:

```
{ "userId": "promo112@mailinator.com", "transactionCurrencyId": 5, "additionalFieldInfo": [], "transactionAmount": 29, "sendingMethodName": "Debit Card", "sendingMethodId": 13163, "beneficiaryId": 34658, "paymentAmount": 638.77, "selectedCurrencyIsoCode": "USD", "partnerCode": "Uniteller", "interactionId": "12345678", "locale": "en" }
```

5.24.2 Sample JSON Response with USD:

```
{ "responseCode": "00000000", "responseMessage": "Success.", "extraFields": null, "interactionId": "12345678", "executionTimestamp": 2536, "requestTimestamp": "01142021035336", "responseTimestamp": "01142021035339", "additionalFieldInfo": null, "applicablePromotions": { "discountAmount": null, "serviceFeeAfterDiscount": null, "txAmountAfterDiscount": null, "promotionDetails": null }, "bankName": "Banorte", "beneficiaryAddress": { "address1": "105", "address2": null, "city": "deerfield", "country": "MX", "countryISOCode": null, "state": "MOR", "stateName": "Morelos", "zipCode": "78455" }, "beneficiaryFirstname": "Rishi", "beneficiaryLastName": "Nigam", "beneficiaryMiddleName": null, "beneficiaryPhone": "455612415215", "beneficiarySLastName": null, "createDate": "01142021035435", "exchangeRate": 22.0264, "baseExchangeRate": 21.4892, "paymentAmount": 638.77, "paymentCurrency": "MXN", "processingDate": null, "receptionMethodName": "Cash Pickup", "remitterFirstname": "promo", "remitterLastName": "onenotone", "remitterMiddleName": null, "remitterSLastName": null, "sendingMethodLast4Digits": "1111", "sendingMethodName": "Debit Card", "sendingMethodType": "Visa", "serviceFee": 2.99, "stateFee": 5.0, "transactionInternalReference": 54152, "txAmount": 29.0, "txCurrency": "USD", "uicReceiptMode": null }
```

5.24.3 Sample JSON Request (With AutoPromotion)

```
{ "userId": "asheesh05@mailinator.com", "beneficiaryId": "7673", "sendingMethodId": "1172", "sendingMethodName": "Credit Card", "transactionAmount": "56", "transactionCurrencyId": "5", "partnerCode": "Uniteller", "interactionId": "12345678", "locale": "en" }
```

5.24.4 Sample JSON Response (With AutoPromotion)

```
{ "extraFields": [ { "name": "FINGERPRINT_POPUP", "value": "YES" }, { "name": "ORG_ID", "value": "f33p1vkc" }, { "name": "WEB_SESSION_ID", "value": "101_2" } ], "interactionId": "12345678", "executionTimestamp": "3269", "requestTimestamp": "09022021072929", "responseTimestamp": "09022021072932", "responseCode": "00000000", "responseMessage": "Success.", "additionalFieldInfo": null, "applicablePromotions": { "discountAmount": null, "serviceFeeAfterDiscount": null, "txAmountAfterDiscount": null, "promotionDetails": null }, "bankName": "Banorte", "beneficiaryAddress": { "address1": "1234 Test St.", "address2": null, "city": "Somewhere", "country": "MX", "countryISOCode": null, "state": "GUA", "stateName": "Guanajuato", "zipCode": "90001" }, "beneficiaryFirstname": "asheesh", "beneficiaryLastName": "kumar", "beneficiaryMiddleName": null, "beneficiaryPhone": "8269019311", "beneficiarySLastName": null, "createDate": "09022021073026", "exchangeRate": "13.55", "baseExchangeRate": "0.0", "paymentAmount": "758.8", "paymentCurrency": "MXN", "processingDate": null, "receptionMethodName": "Cash Pickup", "remitterFirstname": "Alberta", "remitterLastName": "Charleson", "remitterMiddleName": "Bobbeth", "remitterSLastName": null, "sendingMethodLast4Digits": "1111", "sendingMethodName": "Credit Card", "sendingMethodType": "Visa", "serviceFee": "3.9", "transactionInternalReference": "19422", "txAmount": "56.0", "txCurrency": "USD", "uicReceiptMode": null }
```

5.24.5 Sample JSON Request with Local Currency:

```
{ "userId": "testkamlesh34@mailinator.com", "token": "dc522502-7aad-4640-a5dc-0d88aa694fe0", "transactionCurrencyId": "5", "additionalFieldInfo": [], "transactionAmount": "25", "sendingMethodName": "Credit Card", "sendingMethodId": "7533", "beneficiaryId": "84823", "paymentAmount": "250000", "selectedCurrencyIsoCode": "COP", "partnerCode": "Uniteller", "interactionId": "12345678", "locale": "en" }
```

5.24.6 Sample JSON Response with Local Currency:

```
{ "errorCode": { "errorCode": "00000000", "errorMessage": "Success.", "errorType": "DEFAULT" }, "extraFields": [ { "name": "SENDING_METHOD_ALERT_MSG", "value": "The charge will be reflected as \\\nMoney Trsfr Uniteller\\n in your Credit Card Statement." }, { "name": "rewardValue", "value": "64" } ], "interactionId": "12345678", "executionTimestamp": "1859", "requestTimestamp": "05262025085246", "responseTimestamp": "05262025085248", "responseCode": "00000000", "responseMessage": "Success.", "contextId": "API_71facb9f4c9c0c81_54cfc4975488d28a", "additionalFieldInfo": null, "applicablePromotions": { "discountAmount": null, "serviceFeeAfterDiscount": null, "txAmountAfterDiscount": null, "promotionDetails": null }, "ba
```

```
nkName":"GRUPO
EXITO","beneficiaryAddress":{"address1":"wirejir","address2":null,"city":"fudifd","country":"CO
","countryISOCode":null,"state":"CO-
AMA","stateName":"Amazonas","zipCode":"00000"},"beneficiaryFirstname":"slkdjs","beneficiar
yLastName":"ksfjsdkrfj","beneficiaryMiddleName":null,"beneficiaryPhone":"7532149638","ben
eficiarySLastName":null,"createDate":"05262025085246","exchangeRate":3870.71,"baseExcha
ngeRate":0.0,"paymentAmount":250000.0,"paymentCurrency":"COP","processingDate":null,"rec
eptionMethodName":"Cash
Pickup","remitterFirstname":"Kamlesh","remitterLastName":"Test","remitterMiddleName":null,
"remitterSLastName":null,"sendingMethodLast4Digits":"9999","sendingMethodName":"Credit
Card","sendingMethodType":"Visa","stateFee":null,"serviceFee":3.0,"transactionInternalReferen
ce":138691,"txAmount":64.59,"txCurrency":"USD","uicReceiptMode":null,"actualServiceFee":3.0
,"actualTotalTxAmount":67.59,"fundingDetailsId":"50161","sendingMethodId":"7533","showRef
erralCodeBlock":false,"billingAddress":{"address1":"4000 Main
Street","address2":null,"city":"Anytown","country":null,"countryISOCode":"US","state":"AK","sta
teName":null,"zipCode":"85001"}}}
```

5.24.7 Sample JSON Request with External FX Rate:

```
{"userId":"apizapp9320@mailinator.com","beneficiaryId":328412,"sendingMethodId":17595,"s
endingMethodName":"Credit
Card","transactionAmount":"30","transactionCurrencyId":5,"partnerCode":"Uniteller","interacti
onId":"12345678","locale":"en","extraFields":[{"name":"EXTERNAL_FX_RATE","value":"17.38"
}]}
```

5.24.8 Sample JSON Response with External FX Rate:

```
{"errorCode":{"errorCode":"00000000","errorMessage":"Success.,"errorType":"DEFAULT"},"ex
traFields":[{"name":"SENDING_METHOD_ALERT_MSG","value":"This service is powered by
Servicio UniTeller Inc. The charge will be reflected as \"Money Trsfr Uniteller\" in your Credit
Card
Statement."},{\"name\":\"rewardValue\",\"value\":\"0\"}],\"interactionId\":\"12345678\",\"executionTimes
tamp\":1040,\"requestTimestamp\":\"09152026031956\",\"responseTimestamp\":\"0915202603195
7\",\"responseCode\":\"00000000\",\"responseMessage\":\"Success.,\"contextId\":\"API_728114ba5830
660c_749d051adb31ac1b\",\"additionalFieldInfo\":null,\"applicablePromotions\":{\"discountAmoun
t\":null,\"serviceFeeAfterDiscount\":null,\"txAmountAfterDiscount\":null,\"promotionDetails\":null},\"
bankName\":\"Banorte\",\"beneficiaryAddress\":{\"address1\":\"Address1\",\"address2\":null,\"city\":\"yun
aski\",\"country\":\"MX\",\"countryISOCode\":null,\"state\":\"MEX\",\"stateName\":\"Estado De
```

```
Mexico","zipCode":"12345"},"beneficiaryFirstname":"Omari","beneficiaryLastName":"mishra","
beneficiaryMiddleName":null,"beneficiaryPhone":"7836040442","beneficiarySLastName":null,"
createDate":"09152026031956","exchangeRate":17.38,"baseExchangeRate":12.5,"payment
Amount":521.4,"paymentCurrency":"MXN","processingDate":null,"receptionMethodName":"Cas
h
Pickup","remitterFirstname":"Delpha","remitterLastName":"THOMAS","remitterMiddleName":n
ull,"remitterSLastName":null,"sendingMethodLast4Digits":"1111","sendingMethodName":"Cred
it
Card","sendingMethodType":"Visa","stateFee":"0.00","serviceFee":3.0,"transactionInternalRefer
ence":814839,"txAmount":30.0,"txCurrency":"USD","uicReceiptMode":null,"actualServiceFee":3.
0,"actualTotalTxAmount":33.0,"fundingDetailsId":"218054","sendingMethodId":"17595","show
ReferralCodeBlock":false,"billingAddress":{"address1":"123
Test
St.,"address2":null,"city":"nd","country":null,"countryISOCode":"US","state":"CA","stateName":
null,"zipCode":"90001"}}}
```

5.25 SendMoneyConfirm (Requires Password Grant)

Description: This method creates the remittance transaction for payment to the beneficiary. It does payment processing, creates a transaction number and email receipt to the user. If any promotion coupon is applied on transaction successfully then must be provide promotion coupon in confirmation transaction request otherwise transaction would be treated without promotion.

URI: /UTLROnlineRemitAPI/Remittance/SendMoneyConfirm

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 50105002, 59904001, 59906005, 51103002, 50102010, 51102001, 51108001, 59906005, 51102002 and 59906007] ([See Appendix C for Response Code details.](#))

UNIR Request: [SendMoneyConfirmReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory.	User ID. Registered with UniTeller.	String(5-50 Characters)
transactionInternalReference	Mandatory	Transaction internal reference id which is provided at the time of send money preview in response.	Integer
promotionCode	Optional	Promotion code is a code which was used to apply on transaction and gave discount on service fee after applying. If promotion is not applied for this transaction then there is no need to give in request.	String
uicReceiptMode	Conditional Possible values are [Email, Mobile].	The UniTeller Identification Code receipt mode.	String
uic	Conditional	The UniTeller Identification Code	String

UNIR Response: [SendMoneyConfirmResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
txNumber	Transaction number.	String
txStatus	Transaction status.	String
txSubStatus	Transaction sub status.	
creationTimestamp	The creation timestamp in form MMDDYYYYHH24MISS (i.e. year, month, day, hour in 24, minute, second) with no separator between year, month, day, hour, minute, second	String
availableDate	Available date.	String
transactionAmount	Transaction amount.	Double
serviceFee	Service fee.	Double
totalReceivableAmount	Total receivable amount.	Double
exchangeRate	Exchange rate.	Double
totalChargedAmount	Total charged amount.	Double
beneficiaryFirstName	Beneficiary first name.	String
beneficiaryMiddleName	Beneficiary middle name.	String
beneficiaryLastName	Beneficiary last name.	String
beneficiarySecondLastName	Beneficiary second last name.	String
receptionMethod	Reception method.	String
payerName	Payer name.	String
bankName	Bank name.	String
payAccountNumber	Pay account number.	String
remitterFirstName	Remitter first name.	String
remitterMiddleName	Remitter middle name.	String
remitterLastName	Remitter last name.	String

remitterSecondLastName	Remitter second last name.	String
sendingMethodName	Sending method name.	String
sendingMethodType	Sending method type.	String
sendingMethodNumber	Sending method number.	String
payCurrency	Pay currency.	String
txCurrency	Transaction currency.	String
txDisplayStatus	The transaction display status is transaction process status. It could be [IN PROCESS,HOLD, PAYABLE, PAID, CANCELLED, REFUND]	String
discountAmount	Discount on service fee.	Double
actualServiceFee	The actual service fee is the actual fee which is applied on transaction before applying the promotion coupon.	Double
actualTotalTxAmount	The actual total transaction amount is before the discount.	Double
isOptedInSMSAlert	Opted-in for transaction SMS alert.	String
beneCellPhone	Beneficiary's cell phone(without ISD Code)	String
remiCellPhone	Remitter's cell phone(without ISD Code)	String
baseExchangeRate	Exchange Rate	Double
stateFee	This field provides Transfer Taxes [Federal Remittance Tax]	String

5.25.1 Sample JSON Request

```
{"userId":"promo112@mailinator.com","extraFields":[],"transactionInternalReference":54152,"promotionCode":"","partnerCode":"Uniteller","interactionId":"12345678","locale":"en"}
```

5.25.2 Sample JSON Response

```
{"responseCode":"00000000","responseMessage":"Success.,"extraFields":[{"name":"TRUST_PILOT_URL","value":"https://www.trustpilot.com/evaluate/embed/ulinkremit.com?a=p42189o&b=cHJvbW8xMTJAbWFpbGluYXRvci5jb20=&c=promoonenotone&e=848eb884fe5b69841489f8e16337f7f132c9ea4b"}],"interactionId":"12345678","executionTimestamp":2965,"requestTimestamp":"01142021035424","responseTimestamp":"01142021035427","actualServiceFee":2.99,"actualTotalTxAmount":31.99,"availableDate":"01152021","bankName":null,"beneCellPhone":"455612415215","beneficiaryFirstName":"Ris"}
```

```
hi","beneficiaryLastName":"Nigam","beneficiaryMiddleName":null,"beneficiarySecondLastName":null,"creationTimestamp":"01142021035424","discountAmount":null,"documentType":null,"exchangeRate":22.0264,"baseExchangeRate":0.0,"isOptedInSMSAlert":"NO","payAccountNumber":null,"payCurrency":"MXN","payerName":"Banorte","receptionMethod":"Cash Pickup","remiCellPhone":"7547569855","remitterFirstName":"promo","remitterLastName":"on enotone","remitterMiddleName":null,"remitterSecondLastName":null,"sendingMethodName":"Debit Card","sendingMethodNumber":"1111","sendingMethodType":"Visa","serviceFee":2.99,"stateFee":"5.0","totalChargedAmount":31.990000000000002,"totalReceivableAmount":638.77,"transactionAmount":29.0,"txCurrency":"USD","txDisplayStatus":"IN PROCESS","txNumber":"60068194653","txStatus":"HOLD","txSubStatus":"HOLD_FOR_REVIEWE D,BSA_HOLD","verificationQuestion":null}
```

5.25.3 Sample JSON Request (With AutoPromotion)

```
{"userId":"asheesh05@mailinator.com","transactionInternalReference":"19421","partnerCode":"Uniteller","interactionId":"12345678","locale":"en"}
```

5.25.4 Sample JSON Response (With AutoPromotion)

```
{"extraFields":[{"name":"TRUST_PILOT_URL","value":"null?a=A12390C&b=YXNoZWVzaDA1QG1haWxpbmF0b3luY29t&c=AlbertaCharleson&e=3a8fd4ec719a2086db8365d6ade3e466be442c36"},{"name":"REVIEW_HOLD_MESSAGE","value":null}], "interactionId":"12345678","executionTimestamp":5812,"requestTimestamp":"09022021064724","responseTimestamp":"09022021064730","responseCode":"00000000","responseMessage":"Success","actualServiceFee":3.9,"actualTotalTxAmount":29.9,"availableDate":"09032021","bankName":null,"beneCellPhone":"8269019311","beneficiaryFirstName":"asheesh","beneficiaryLastName":"kumar","beneficiaryMiddleName":null,"beneficiarySecondLastName":null,"creationTimestamp":"09022021064724","discountAmount":0.78,"documentType":null,"exchangeRate":13.55,"baseExchangeRate":0.0,"isOptedInSMSAlert":"NO","payAccountNumber":null,"payCurrency":"MXN","payerName":"Banorte","receptionMethod":"Cash Pickup","remiCellPhone":"9788973987","remitterFirstName":"Alberta","remitterLastName":"Charleson","remitterMiddleName":"Bobbeth","remitterSecondLastName":null,"sendingMethodName":"Credit Card","sendingMethodNumber":"1111","sendingMethodType":"Visa","serviceFee":3.12,"totalChargedAmount":29.12,"totalReceivableAmount":352.3,"transactionAmount":26.0,"txCurrency":"USD","txDisplayStatus":"IN PROCESS","txNumber":"60089431871","txStatus":"HOLD","txSubStatus":"HOLD_FOR_REVIEWE D","reminderPopUp":null,"verificationQuestion":null}
```

5.25.5 Sample JSON Request (With Manual Promotion)

```
{ "userId": "asheesh05@mailinator.com", "transactionInternalReference": "19422", "partnerCode": "Uniteller", "interactionId": "12345678", "locale": "en", "promotionCode": "PROMOMANUAL" }
```

5.25.6 Sample JSON Response (With Manual Promotion)

```
{ "extraFields": [ { "name": "TRUST_PILOT_URL", "value": "null?a=A12391C&b=YXNoZWVzaDA1QG1haWxpbmF0b3luY29t&c=AlbertaCharleson&e=1f8d0ce7352bba2b1e0e64d892d22ada417adc" }, { "name": "REVIEW_HOLD_MESSAGE", "value": null } ], "interactionId": "12345678", "executionTimestamp": "4980", "requestTimestamp": "09022021074107", "responseTimestamp": "09022021074112", "responseCode": "00000000", "responseMessage": "Success.", "actualServiceFee": 3.9, "actualTotalTxAmount": 59.9, "availableDate": "09032021", "bankName": null, "beneficiaryCellPhone": "8269019311", "beneficiaryFirstName": "asheesh", "beneficiaryLastName": "kumar", "beneficiaryMiddleName": null, "beneficiarySecondLastName": null, "creationTimestamp": "09022021074107", "discountAmount": 2.0, "documentType": null, "exchangeRate": 13.55, "baseExchangeRate": 0.0, "isOptedInSMSAlert": "NO", "payAccountNumber": null, "payCurrency": "MXN", "payerName": "Banorte", "receptionMethod": "Cash Pickup", "remiCellPhone": "9788973987", "remitterFirstName": "Alberta", "remitterLastName": "Charleson", "remitterMiddleName": "Bobbeth", "remitterSecondLastName": null, "sendingMethodName": "Credit Card", "sendingMethodNumber": "1111", "sendingMethodType": "Visa", "serviceFee": 1.9, "totalChargedAmount": 57.9, "totalReceivableAmount": 758.8, "transactionAmount": 56.0, "txCurrency": "USD", "txDisplayStatus": "IN PROCESS", "txNumber": "60089420371", "txStatus": "HOLD", "txSubStatus": "HOLD_FOR_REVIEWED", "reminderPopUp": null, "verificationQuestion": null }
```

5.26 CancelTransaction (Requires Password Grant)

Description: This method cancels an existing unpaid (Payable) remittance transaction in UNIR. In certain cases cancel might be asynchronous, in which case requests will be received and processed later after some time.

URI: [/UTLROnlineRemitAPI/Remittance/CancelTransaction](#)

Possible Response Code: [00000000, 59903005, 59906002, 50103003, 59903001, 50108004, 50105002, 51103001, 51104010, 51104011, 51102005, 51104012, 59906005, 51102004, 51104013] ([See Appendix C for Response Code details.](#))

UNIR Request: `CancelTransactionReq`

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory It must be [5-50] characters long	User ID. Registered with UniTeller.	String(5-50 Characters)
transactionNumber	Mandatory It must be [8-12] characters long.	The transaction number is a unique number which is provided to the remitter after doing a transaction.	String(8-12 Characters)
reasonforCancel	Mandatory It must be [5-50] characters long.	The reason for cancelling the transaction.	String(5-50 Characters)
Comments	Mandatory It must be [2-100] characters long.	The Comments of canceling transaction.	String(2-100 Characters)

UNIR Response: [CancelTransactionResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long

interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
transactionStatus	Transaction status.	String
result	Result is that the transaction could be cancelled or not.	String

5.26.1 Sample JSON Request

```
{"userId":"anukumarrag@gmail.com","transactionNumber":"5640043287","reasonforCancel":"Beneficiary not able to collect", "comments":"Test is done.", "partnerCode":"Uniteller", "interactionId":"12345678", "locale":"en"}
```

5.26.2 Sample JSON Response

```
{"result":"SUCCESS","requestTimestamp":"10282016084250","responseTimestamp":"10282016084252","executionTimestamp":2133,"interactionId":"12345678","responseCode":"00000000","responseMessage":"Success."}
```

5.27 TransactionSummary (Requires Password Grant)

Description: This method fetches the list of transactions, based on various criteria as inputs. These criteria could be time period, user id and transaction number etc. Transaction list returned contains transaction objects with some limited fields.

URI: [/UTLROnlineRemitAPI/Remittance/TransactionSummaryList](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 59903003 and 50105002] (See [Appendix C for Response Code details.](#))

UNIR Request: TransactionSummaryReq

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory.	User ID. Registered with UniTeller.	String(5-50 Characters)
transactionNumber	Optional	The transaction number is unique number which gets at the time of confirm	String(8-12 Characters)
transactionStatus	Optional	The transaction status could be paid, cancel, hold, payable, refund, replaced for searching transactions based on status.	String
thisWeek	Optional	The ThisWeek request parameter is used for getting current week transactions and it should be ThisWeek as string in request.	String
lastWeek	Optional	The LastWeek request parameter is used for getting previous week transactions and it should be LastWeek as string in request.	String
thisMonth	Optional	The ThisMonth request parameter is used for getting current month transactions and it should be ThisMonth as string in request.	String
lastMonth	Optional	The LastMonth request parameter use for getting	String

		previous month transactions and it should be LastMonth as string in request.	
toDate	Optional (should be used with fromDate)	The todte should be in string form MMDDYYYY (i.e. month, day, year) with no separator between year, month, day.	String(8 Digits)
fromDate	Optional (should be used with toDate)	The fromdate should be in string format MMDDYYYY (i.e. month, day and year) with no separator between year, month, day.	String(8 Digits)
beneficiaryNickName	Optional.	The beneficiary nickname is the name where the user saves beneficiary details with nickname at the time of adding beneficiary.	String(1-100 Characters)
maxTransactionCount	Mandatory	The maximum transaction count is the number of transactions and it is 5 by default and provides the latest 5 transactions from the last 6 month.	Integer

UNIR Response: TransactionSummaryResp

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
transactionSummary	Provides transaction information.	Array of TransactionSummary See Appendix A

- **Sample JSON Request**

```
{ "userId": "arch003@mailinator.com", "maxTransactionCount": 10, "fromDate": "01132021", "toDate": "01132022", "partnerCode": "Uniteller", "interactionId": "12345678", "locale": "en" }
```

- **Sample JSON Response**

```
{ "extraFields": null, "interactionId": "12345678", "executionTimestamp": 393, "requestTimestamp": "01132022090233", "responseTimestamp": "01132022090234", "responseCode": "00000000", "responseMessage": "Success.", "transactionSummary": [ { "beneficiaryFirstName": "Sneha", "beneficiaryId": 53135, "beneficiaryLastName": "Ullal", "beneficiaryMiddleName": "", "beneficiarySecondLastName": "rashmi singh", "beneficiaryStatus": "Active", "destCountryISOCode": "MX", "payerName": "Banorte", "paymentAmount": 553.35, "paymentCurrency": "MXN", "receptionMethodName": "Cash Pickup", "sendingMethodId": 12225, "sendingMethodLast4Digits": "1111", "sendingMethodName": "Bank Account", "sendingMethodStatus": "Verified", "transactionAmount": 25.0, "transactionCreateDate": "01032022075929", "transactionCurrency": "USD", "transactionNumber": "60088114388", "transactionStatus": "PAID", "transactionType": "Remittance", "transactionCurrency": null, "trustReferenceNumber": null, "txDisplayStatus": "PAID", "transactionStatus": "PAID" }, { "beneficiaryFirstName": "Sneha", "beneficiaryId": 53135, "beneficiaryLastName": "Ullal", "beneficiaryMiddleName": "", "beneficiarySecondLastName": "rashmi singh", "beneficiaryStatus": "Active", "destCountryISOCode": "MX", "payerName": "Banorte", "paymentAmount": 597.61, "paymentCurrency": "MXN", "receptionMethodName": "Cash Pickup", "sendingMethodId": 12225, "sendingMethodLast4Digits": "1111", "sendingMethodName": "Bank Account", "sendingMethodStatus": "Verified", "transactionAmount": 27.0, "transactionCreateDate": "01032022075450", "transactionCurrency": "USD", "transactionNumber": "60088114724", "transactionStatus": "PAID", "transactionType": "Remittance", "transactionCurrency": null, "trustReferenceNumber": null, "txDisplayStatus": "PAID", "transactionStatus": "PAID" }, { "beneficiaryFirstName": "Sneha", "beneficiaryId": 53135, "beneficiaryLastName": "Ullal", "beneficiaryMiddleName": "", "beneficiarySecondLastName": "rashmi singh", "beneficiaryStatus": "Active", "destCountryISOCode": "MX", "payerName": "Banorte", "paymentAmount": 804.55, "paymentCurrency": "MXN", "receptionMethodName": "Cash Pickup", "sendingMethodId": 11324, "sendingMethodLast4Digits": "1111", "sendingMethodName": "Bank Account", "sendingMethodStatus": "Verified", "transactionAmount": 27.0, "transactionCreateDate": "01032022075450", "transactionCurrency": "USD", "transactionNumber": "60088114724", "transactionStatus": "PAID", "transactionType": "Remittance", "transactionCurrency": null, "trustReferenceNumber": null, "txDisplayStatus": "PAID", "transactionStatus": "PAID" } ] }
```

"Debit

Card","sendingMethodStatus":"Verified","transactionAmount":36.0,"transactionCreateDate":"12282021014207","transactionCurrency":"USD","transactionNumber":"60088261499","transactionStatus":"PAYABLE","transactionType":"Remittance","transactionCurrency":null,"trustReferenceNumber":null,"txDisplayStatus":"PAYABLE","transactionStatus":"PAYABLE"},{"beneficiaryFirstName":"Nishant","beneficiaryId":53131,"beneficiaryLastName":"Chopra","beneficiaryMiddleName":"","beneficiarySecondLastName":"","beneficiaryStatus":"Active","destCountryISOCode":"MX","payerName":"Banorte","paymentAmount":1050.39,"paymentCurrency":"MXN","receptionMethodName":"Cash

Pickup","sendingMethodId":11324,"sendingMethodLast4Digits":"1111","sendingMethodName":"Debit

Card","sendingMethodStatus":"Verified","transactionAmount":47.0,"transactionCreateDate":"12282021013656","transactionCurrency":"USD","transactionNumber":"60088286083","transactionStatus":"PAYABLE","transactionType":"Remittance","transactionCurrency":null,"trustReferenceNumber":null,"txDisplayStatus":"PAYABLE","transactionStatus":"PAYABLE"},{"beneficiaryFirstName":"Nishant","beneficiaryId":53131,"beneficiaryLastName":"Chopra","beneficiaryMiddleName":"","beneficiarySecondLastName":"","beneficiaryStatus":"Active","destCountryISOCode":"MX","payerName":"Banorte","paymentAmount":938.65,"paymentCurrency":"MXN","receptionMethodName":"Cash

Pickup","sendingMethodId":11324,"sendingMethodLast4Digits":"1111","sendingMethodName":"Debit

Card","sendingMethodStatus":"Verified","transactionAmount":42.0,"transactionCreateDate":"12282021013347","transactionCurrency":"USD","transactionNumber":"60088292825","transactionStatus":"PAYABLE","transactionType":"Remittance","transactionCurrency":null,"trustReferenceNumber":null,"txDisplayStatus":"PAYABLE","transactionStatus":"PAYABLE"},{"beneficiaryFirstName":"Nishant","beneficiaryId":53131,"beneficiaryLastName":"Chopra","beneficiaryMiddleName":"","beneficiarySecondLastName":"","beneficiaryStatus":"Active","destCountryISOCode":"MX","payerName":"Banorte","paymentAmount":960.99,"paymentCurrency":"MXN","receptionMethodName":"Cash

Pickup","sendingMethodId":11324,"sendingMethodLast4Digits":"1111","sendingMethodName":"Debit

Card","sendingMethodStatus":"Verified","transactionAmount":43.0,"transactionCreateDate":"12282021011704","transactionCurrency":"USD","transactionNumber":"60088221771","transactionStatus":"PAYABLE","transactionType":"Remittance","transactionCurrency":null,"trustReferenceNumber":null,"txDisplayStatus":"PAYABLE","transactionStatus":"PAYABLE"},{"beneficiaryFirstName":"Nishant","beneficiaryId":53131,"beneficiaryLastName":"Chopra","beneficiaryMiddleName":"","beneficiarySecondLastName":"","beneficiaryStatus":"Active","destCountryISOCode":"MX","payerName":"Banorte","paymentAmount":938.65,"paymentCurrency":"MXN","receptionMethodName":"Cash

	ES (Spanish).	default it would be English	
userId	Mandatory	User ID. Registered with UniTeller.	String(5-50 Characters)
transactionNumber	Mandatory	The transaction number is unique number which provides to remitter after doing transaction.	String(8-12 Characters)

UNIR Response: TransactionDetailResp

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
transactionDetail	Whole transaction detail.	TransactionDetail. See Appendix A

5.28.1 Sample JSON Request

```
{"userId":"arch003@mailinator.com","transactionNumber":"60088261499","partnerCode":"Uniteller","interactionId":"12345678","locale":"en"}
```

5.28.2 Sample JSON Response

```
{"extraFields":null,"interactionId":"12345678","executionTimestamp":462,"requestTimestamp":"01132022090751","responseTimestamp":"01132022090752","responseCode":"00000000","responseMessage":"Success.","transactionDetail":{"actualServiceFee":3.91,"actualTotalTxAmount":44.91,"beneficiarySummary":{"accHolderName":null,"accNumber":null,"accType":null,"additionalFieldInfo":[],"address":{"address1":"1599","address2":null,"city":"deerfield","country":"Mexico","countryISOCode":"MX","state":"MEX","stateName":"Estado De Mexico","zipCode":"78455"},"beneDOB":null,"beneStatus":null,"beneVerification":null,"cellPhone":"4325546525","contactType":null,"destCountryISOCode":null,"destCurrencyISOCode":null,"destinationCurrency":null,"emailId":null,"firstName":"Sneha","gender":null,"homePhone":null,"id
```

```

":53135,"isCarpVerified":null,"lastName":"Ullal","midName":null,"nickName":null,"payer":"Ban
orte","payerBranchCode":null,"payerInfo":null,"payerSpecificCode":null,"receptionMethod":"Ca
sh
Pickup","secLastName":"rashmi
singh","workPhone":null},"discountAmount":null,"exchangeRate":22.3487,"payCurrency":{"id":
0,"isoCode":"MXN","name":"Mex
Pesos"},"payerSummary":{"branchId":0,"branchName":null,"id":0,"payerName":"Banorte"},"pay
ingAmount":804.55,"remitterInfo":{"address":{"address1":"105","address2":null,"city":"deerfiel
d","country":"USA","countryISOCode":"US","state":"OK","stateName":"Oklahoma","zipCode":"78
455"},"birthDate":"01011997","cellPhone":"7894561235","destinationCountryISOCode":null,"d
estinationCountryName":null,"emailAddress":null,"firstName":"Harsi","gender":null,"homePhon
e":null,"lastName":"Joshi","middleName":null,"optOutAffiliates":null,"optOutExternal":null,"opt
OutUniteller":null,"optOutWlp":null,"preferredLanguage":null,"secondLastName":null,"workPh
one":null,"isdCode":null},"sendingMethodSummary":{"accVerifySource":null,"address":null,"allo
wEditandDeactivate":false,"bankName":null,"id":11324,"nickName":null,"publicToken":null,"se
ndingMethodName":"Debit
Card","sendingMethodNumber":"*****1111","sendingMethodType":"Visa"},"serviceFee":
3.91,"totalTransactionAmount":44.91,"transactionAmount":36.0,"transactionCreateDate":"1228
2021014207","transactionCurrency":{"id":0,"isoCode":"MXN","name":"Mex
Pesos"},"transactionNumber":"60088261499","transactionStatus":"PAYABLE","transactionType
":"Remittance","txDisplayStatus":"PAYABLE","partnerExchangeRate":null,"partnerFxCurrency":
null,"stateFee":"5.0"}}

```

5.29 ContactList (Requires Password Grant)

Description: This method fetches the added bill payment contacts.

URI: /UTLROnlineRemitAPI/ ProfileManagement/ContactList

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 50105002, 59903006, 59903007 and 51108002] ([See Appendix C for Response Code details.](#))

UNIR Request: ContactReq

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned	String

		in response.	
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory	User ID. Registered with UniTeller.	String(5-50 Characters)
contactType	Mandatory	Contact Type . Accepted value is BILL PAYMENT	String(2-50 Characters)

UNIR Response: [ContactResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
ContactSummary	The Added Contact details.	ContactSummary. See Appendix A

5.29.1 Sample JSON Request

```
{ "userId": "promo112@mailinator.com", "token": "1079ab3c-4f49-4559-9422-b76b9bac1f66", "contactType": "BILL PAYMENT", "partnerCode": "Uniteller", "interactionId": "12345678", "locale": "en" }
```

5.29.2 Sample JSON Response

```
{ "extraFields": null, "interactionId": "12345678", "executionTimestamp": 548, "requestTimestamp": "01282022032317", "responseTimestamp": "01282022032317", "responseCode": "00000000", "responseMessage": "Success.", "contactSummary": { "errorCode": null, "extraFields": null, "interactio" }
```

nId":null,"executionTimestamp":null,"requestTimestamp":null,"responseTimestamp":null,"responseCode":null,"responseMessage":null,"accHolderName":null,"accNumber":"","accType":null,"additionalFieldInfo":null,"address":{"address1":"Not Known","address2":null,"city":"Not Known","country":"Mexico","countryISOCode":"MX","state":"AGU","stateName":"Aguascalientes","zipCode":"111111"},"balanceInquirySupported":"YES","beneDOB":null,"beneStatus":"Active","beneVerification":"NOT REQUIRED","billerSpecificCode":"484000000000265","billerSupportsExcessPayment":"NO","billerSupportsPartialPayment":"NO","billerSupportsPastduePayment":"YES","cellPhone":"8144103556","contactType":"BILL PAYMENT","destCountryISOCode":"MX","destCurrencyISOCode":"MXN","destinationCurrency":"Mex Pesos","emailId":null,"firstName":"archana","gender":null,"homePhone":null,"id":39523,"isCarp Verified":null,"lastName":"lohani","midName":null,"nickName":"archana - Comision Estatal de Aguas - Queretaro","operation":"Water (Queretaro)","payer":"Comision Estatal de Aguas - Queretaro","payerBranchCode":null,"payerInfo":null,"payerSpecificCode":null,"receptionMethod":"Bill Payment","secLastName":null,"serviceType":"Utility","topUpPlans":null,"workPhone":null,"isStateDeactivated":null},{ "errorCode":null,"extraFields":null,"interactionId":null,"executionTimestamp":null,"requestTimestamp":null,"responseTimestamp":null,"responseCode":null,"responseMessage":null,"accHolderName":null,"accNumber":"","accType":null,"additionalFieldInfo":null,"address":{"address1":"Not Known","address2":"Not Known","city":"Not Known","country":"Mexico","countryISOCode":"MX","state":"CA","stateName":"California","zipCode":"111111"},"balanceInquirySupported":"NO","beneDOB":null,"beneStatus":"Active","beneVerification":"NOT REQUIRED","billerSpecificCode":"484000000000213","billerSupportsExcessPayment":"NO","billerSupportsPartialPayment":"NO","billerSupportsPastduePayment":"NO","cellPhone":"7547569855","contactType":"BILL PAYMENT","destCountryISOCode":"MX","destCurrencyISOCode":"MXN","destinationCurrency":"Mex Pesos","emailId":null,"firstName":"Ridhi","gender":null,"homePhone":null,"id":35637,"isCarp Verified":null,"lastName":"Sharma","midName":null,"nickName":"Ridhi - Gas Natural Fenosa","operation":"Natural gas","payer":"Naturgy","payerBranchCode":null,"payerInfo":null,"payerSpecificCode":null,"receptionMethod":"Bill Payment","secLastName":null,"serviceType":"Utility","topUpPlans":null,"workPhone":null,"isStateDeactivated":null},{ "errorCode":null,"extraFields":null,"interactionId":null,"executionTimestamp":null,"requestTimestamp":null,"responseTimestamp":null,"responseCode":null,"responseMessage":null,"accHolderName":null,"accNumber":"","accType":null,"additionalFieldInfo":null,"address":{"address1":"Not Known","address2":"Not Known","city":"Not Known","country":"Mexico","countryISOCode":"MX","state":"CA","stateName":"California","zipCode":"111111"},"balanceInquirySupported":"YES","beneDOB":null,"beneStatus":"Active","beneVerification":"NOT REQUIRED","billerSpecificCode":"4840000000002006666","billerSupportsExcessPayment":"N

```
O","billerSupportsPartialPayment":"NO","billerSupportsPastduePayment":"YES","cellPhone":"7
547569855","contactType":"BILL
PAYMENT","destCountryISOCode":"MX","destCurrencyISOCode":"MXN","destinationCurrency":"
Mex
Pesos","emailId":null,"firstName":"tyrtyr","gender":null,"homePhone":null,"id":34376,"isCurpV
erified":null,"lastName":"rtryrty","midName":null,"nickName":"tyrtyr
CFE","operation":"Electricity","payer":"CFE","payerBranchCode":null,"payerInfo":null,"payerSp
ecificCode":null,"receptionMethod":"Bill
Payment","secLastName":null,"serviceType":"Utility","topUpPlans":null,"workPhone":null,"isSta
teDeactivated":null},{ "errorCode":null,"extraFields":null,"interactionId":null,"executionTimesta
mp":null,"requestTimestamp":null,"responseTimestamp":null,"responseCode":null,"responseM
essage":null,"accHolderName":null,"accNumber":"","accType":null,"additionalFieldInfo":null,"ad
dress":{"address1":"Not Known","address2":"Not Known","city":"Not
Known","country":"Mexico","countryISOCode":"MX","state":"ID","stateName":"Idaho","zipCode"
:"111111"},"balanceInquirySupported":"NO","beneDOB":null,"beneStatus":"Active","beneVerific
ation":"NOT
REQUIRED","billerSpecificCode":"484000000000213","billerSupportsExcessPayment":"NO","bil
lerSupportsPartialPayment":"NO","billerSupportsPastduePayment":"NO","cellPhone":"8144103
556","contactType":"BILL
PAYMENT","destCountryISOCode":"MX","destCurrencyISOCode":"MXN","destinationCurrency":"
Mex
Pesos","emailId":null,"firstName":"xcxfd","gender":null,"homePhone":null,"id":41732,"isCurpVe
rified":null,"lastName":"dff","midName":null,"nickName":"xcxfd - Naturgy","operation":"Natural
gas","payer":"Naturgy","payerBranchCode":null,"payerInfo":null,"payerSpecificCode":null,"rece
ptionMethod":"Bill
Payment","secLastName":null,"serviceType":"Utility","topUpPlans":null,"workPhone":null,"isSta
teDeactivated":null}}}
```

5.30 BillersWithOperations (Requires Client Credential Grant)

Description: This method gets the billers with their operation based on country and currency.

URI: </UTLROnlineRemitAPI/Common/BillersWithOperations>

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 59903006, 59903007 and 59903008] (See [Appendix C](#) for Response Code details.)

UNIR Request: [OperationBasedBillersReq](#)

Attribute	Validation Rule	Description	Type
-----------	-----------------	-------------	------

partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
categoryType	Mandatory	Bill payment Category	String(8-15 Characters)
countryIsoCode	Mandatory	The Biller's country ISO Code	String(0-60 Characters)
currencyISOCode	Mandatory	The Biller's currency ISO Code	String(3 Characters)

UNIR Response: [OperationBasedBillersResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
billersDetail	Biller details based upon the respective country and currency.	List of BillersDetail. See Appendix A

5.30.1 Sample JSON Request

```
{ "countryIsoCode": "MX", "categoryType": "Pay
Bills", "currencyISOCode": "MXN", "partnerCode": "Uniteller", "interactionId": "12345678", "locale":
"en" }
```

5.30.2 Sample JSON Response

```
{ "errorCode": { "errorCode": "00000000", "errorMessage": "Success.", "errorType": "DEFAULT" }, "extraFields": null, "interactionId": "12345678", "executionTimestamp": 36, "requestTimestamp": "01282022050908", "responseTimestamp": "01282022050908", "responseCode": "00000000", "responseMessage": "Success.", "billersDetail": { "billers": [ { "address": { "address1": null, "address2": "NO", "city": null, "country": "", "countryISOCode": "", "state": "", "stateName": "", "zipCode": "" }, "billerSpecificCode": "484000000000339", "description": "Catalog Sales", "id": 1670, "logoLocation": null, "name": "Tupperware", "operation": null, "phoneNumber1": null, "phoneNumber2": null, "serviceType": "Online Shopping" }, { "address": { "address1": null, "address2": "NO", "city": null, "country": "", "countryISOCode": "", "state": "", "stateName": "", "zipCode": "" }, "billerSpecificCode": "484000000000200666", "description": "Electricity", "id": 513, "logoLocation": null, "name": "CFE", "operation": null, "phoneNumber1": null, "phoneNumber2": null, "serviceType": "Utility" }, { "address": { "address1": null, "address2": "NO", "city": null, "country": "", "countryISOCode": "", "state": "", "stateName": "", "zipCode": "" }, "billerSpecificCode": "484000000000316", "description": "Internet", "id": 1671, "logoLocation": null, "name": "BlueTelecom", "operation": null, "phoneNumber1": null, "phoneNumber2": null, "serviceType": "Utility" }, { "address": { "address1": null, "address2": "NO", "city": null, "country": "", "countryISOCode": "", "state": "", "stateName": "", "zipCode": "" }, "billerSpecificCode": "484000000000317", "description": "Gas", "id": 2313, "logoLocation": null, "name": "Engie MaxiGas", "operation": null, "phoneNumber1": null, "phoneNumber2": null, "serviceType": "Utility" }, { "address": { "address1": null, "address2": "NO", "city": null, "country": "", "countryISOCode": "", "state": "", "stateName": "", "zipCode": "" }, "billerSpecificCode": "484000000000213", "description": "Natural gas", "id": 518, "logoLocation": null, "name": "Naturgy", "operation": null, "phoneNumber1": null, "phoneNumber2": null, "serviceType": "Utility" }, { "address": { "address1": null, "address2": "NO", "city": null, "country": "", "countryISOCode": "", "state": "", "stateName": "", "zipCode": "" }, "billerSpecificCode": "484000000000326", "description": "Online Shopping", "id": 1669, "logoLocation": null, "name": "Elektra.com", "operation": null, "phoneNumber1": null, "phoneNumber2": null, "serviceType": "Online Shopping" }, { "address": { "address1": null, "address2": "NO", "city": null, "country": "", "countryISOCode": "", "state": "", "stateName": "", "zipCode": "" }, "billerSpecificCode": "484000000000368", "description": "Online shopping", "id": 1668, "logoLocation": null, "name": "Petco", "operation": null, "phoneNumber1": null, "phoneNumber2": null, "serviceType": "Online Shopping" }, { "address": { "address1": null, "address2": "NO", "city": null, "country": "", "countryISOCode": "", "state": "", "stateName": "", "zipCode": "" }, "billerSpecificCode": "484000000000203", "description": "Satellite" } ] }
```

```
TV","id":515,"logoLocation":null,"name":"SKY","operation":null,"phoneNumber1":null,"phoneN
umber2":null,"serviceType":"Utility"}],"operation":"Satellite
TV"},"billers":[{"address":{"address1":null,"address2":"NO","city":null,"country":"","countryISO
Code":"","state":"","stateName":"","zipCode":""},"billerSpecificCode":"484000000000325","desc
ription":"Bus
Tickets","id":1666,"logoLocation":null,"name":"Transpasis","operation":null,"phoneNumber1":n
ull,"phoneNumber2":"Mexico","serviceType":"Transportation"}],"operation":"Transportation"},
{"billers":[{"address":{"address1":null,"address2":"NO","city":null,"country":"","countryISOCode
":"","state":"","stateName":"","zipCode":""},"billerSpecificCode":"484000000000355","descriptio
n":"Water
(Ensenada)","id":1667,"logoLocation":null,"name":"Agua
de
Ensenada","operation":null,"phoneNumber1":null,"phoneNumber2":null,"serviceType":"Utility"
},"address":{"address1":null,"address2":"NO","city":null,"country":"","countryISOCode":"","stat
e":"","stateName":"","zipCode":""},"billerSpecificCode":"484000000000265","description":"Wat
er
(Queretaro)","id":963,"logoLocation":null,"name":"Comision Estatal de Aguas
-
Queretaro","operation":null,"phoneNumber1":null,"phoneNumber2":null,"serviceType":"Utility
"}],"operation":"Water"}]}
```

5.31 AddBillerContact (Requires Password Grant)

Description: This method is used to add the contact for the respective biller service category.

URI: /UTLROnlineRemitAPI/ProfileManagement/AddBillerContact

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 50105002, 51103001, 59903008, 59903006, 59908027, 59908023, 59908024, 59908025, 59908026 and 59903007] (See [Appendix C](#) for Response Code details.)

UNIR Request: [AddBillerContactReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or	Locale. If no input is provided in request, by	String

	ES (Spanish).	default it would be English	
userId	Mandatory	User ID. Registered with UniTeller.	String(5-50 Characters)
billerSummary	Mandatory	Biller's Information	BillerSummary. See Appendix A

UNIR Response: [AddBillerContactResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
billerSummary	Biller Information.	BillerSummary. See Appendix A

5.31.1 Sample JSON Request

```
{
  "userId": "promo112@mailinator.com",
  "token": "951b236b-3695-4885-8ded-79a2b97c78f0",
  "billerSummary": {
    "id": "",
    "firstName": "Archana",
    "midName": "",
    "secLastName": "",
    "lastName": "Joshi",
    "destCountryISOCode": "MX",
    "destCurrencyISOCode": "MXN",
    "billerSpecificCode": "484000000002006666",
    "serviceType": "Utility",
    "operation": "Electricity",
    "additionalFieldInfo": [],
    "partnerCode": "Uniteller",
    "interactionId": "12345678",
    "locale": "en"
  }
}
```

5.31.2 Sample JSON Response

```
{
  "errorCode": {
    "errorCode": "00000000",
    "errorMessage": "Biller added successfully.",
    "errorType": "DEFAULT"
  },
  "extraFields": null,
  "interactionId": "12345678",
  "executionTimestamp": 2848,
  "requestTimestamp": "01282022050948",
  "responseTimestamp": "01282022050951",
  "responseCode": "00000000",
  "responseMessage": "Biller added successfully.",
  "billerSummary": {
    "additionalFieldInfo": [],
    "address": {
      "address1": "Not Known",
      "address2": "Not Known",
      "city": "Not Known",
      "country": "Mexico",
      "countryISOCode": "MX",
      "state": "GA",
      "stateName": "Georgia",
      "zipCode": ""
    }
  }
}
```

```
de":"111111"},"balanceInquirySupported":"YES","beneDOB":null,"billerBranchCode":null,"billerSpecificCode":"4840000000002006666","billerSupportsExcessPayment":"NO","billerSupportsPartialPayment":"NO","billerSupportsPastduePayment":"YES","cellPhone":"7358331460","destCountryISOCode":"MX","destCurrencyISOCode":"MXN","destinationCurrency":"Mex Pesos","emailId":null,"firstName":"Archana","homePhone":null,"id":54777,"isService":null,"lastName":"Joshi","midName":"","nickName":"Archana CFE","operation":"Electricity","receptionMethod":"Bill Payment","secLastName":"","serviceType":"Utility","topUpPlans":null,"workPhone":null}}
```

5.32 BillerAdditionalFields (Requires Client Credential Grant)

Description: This API fetches the bill payment required additional Fields based on the biller.

URI: </UTLROnlineRemitAPI/Common/BillerAdditionalFields>

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001 and 59903008] (See [Appendix C](#) for Response Code details.)

UNIR Request: [BillerAdditionalFieldReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
billerSpecificCode	Mandatory	The Biller specific code is Biller unique code.	String(2-30 Characters)
operation	Mandatory	The Biller Service Category	String(3-50 Characters)
serviceType	Mandatory	The Biller Service type	String(5-30 Characters)

UNIR Response: **BillersAdditionalFieldResp**

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
AdditionalFieldInfo	Billers additional fields.	AdditionalFieldInfo. See Appendix A

5.32.1 Sample JSON Request

```
{ "billerspecificCode": "484000000000213", "serviceType": "Utility", "operation": "Natural gas", "partnerCode": "Uniteller", "interactionId": "12345678", "locale": "en" }
```

5.32.2 Sample JSON Response

```
{ "extraFields": null, "interactionId": "12345678", "executionTimestamp": 19, "requestTimestamp": "01282022032323", "responseTimestamp": "01282022032323", "responseCode": "00000000", "responseMessage": "Success.", "additionalFieldInfo": [{"dependentFieldId": null, "dependentURI": null, "fieldBelongsTo": "Transaction", "fieldId": 875, "fieldLabel": "Barcode", "fieldName": "Barcode", "fieldOptions": null, "fieldType": "text", "fieldValue": null, "maxLen": "28", "minLen": "28", "validationRegex": "^(?=({28,28}))$)[0-9]*$", "fieldErrorMsg": "Please enter Barcode up to 28 digits only."}] }
```

5.33 VerifyBillersAccount (Requires Password Grant)

Description: This method is used to verify the balance of the biller where balance inquiry is required.

URI: [/UTLROnlineRemitAPI/ProfileManagement/VerifyBillersAccount](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 50105002, 59903006, 59903007 and 51108002] (See [Appendix C](#) for Response Code details.)

UNIR Request: [VerifyBillPaymentAccountReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory	User ID. Registered with UniTeller.	String(5-50 Characters)
additionalFieldInfo	Mandatory	Biller's Information	List of AdditionalFieldInfo. See Appendix A
billerId	Mandatory	The Biller Id	int
serviceType	Mandatory	The service type	String

UNIR Response: [VerifyBillPaymentAccountResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A

amountDue	Biller Information.	BillerSummary. See Appendix A
billDueDate	Bill Due Date	String
billerName	The biller's name	String
customerName	The customer name	String
exchangeRate	The Exchange Rate	String
paymentCountry	The Payment Country	String
paymentCurrency	The Payment Currency	String
paymentLocation	The Biller Payment Location	String
paymentType	The Biller Payment Type	String
paymentValue	The Biller Payment Value	String
paymentValue2	The Biller Payment Value 2	String
serviceFee	The service fee	String
totalAmount	The total amount	String

5.33.1 Sample JSON Request

```
{ "userId": "promo112@mailinator.com", "token": "ea96fdf7-7f49-4157-b5a5-0d346fa41ffb", "billerId": 108450, "serviceType": "Utility", "additionalFieldInfo": [{"fieldName": "Servicenum", "fieldValue": "014171200505"}], "partnerCode": "Uniteller", "interactionId": "12345678", "locale": "en", "extraFields": [] }
```

5.33.2 Sample JSON Response

```
{ "amountDue": "176.0000", "billDueDate": "02122022", "billerName": "CFE", "customerName": "", "exchangeRate": "20.35", "paymentCountry": "MX", "paymentCurrency": "MXN", "paymentLocation": "CFE", "paymentValue": "014171200505", "serviceFee": "2.99", "totalAmount": "11.64", "errorCode": {"errorCode": "00000000", "errorMessage": "Success."}, "interactionId": "12345678", "executionTimestamp": "5441", "requestTimestamp": "01312022090233", "responseTimestamp": "01312022090238", "responseCode": "00000000", "responseMessage": "Success." }
```

5.34 UtilityPaymentPreview (Requires Password Grant)

Description: This method creates the bill payment transaction for preview of the user. It checks user limits, checks restrictions, calculates fee and exchange rate etc and presents to the user as a preview of a receipt. Only the transaction number is not shown at this point.

URI: [/UTLROnlineRemitAPI/Remittance/UtilityPaymentPreview](#)

Possible Response Code [00000000, 59903005, 59906002, 50103003, 50108004, 59903001, 50105002, 59903002, 59903007, 51102903, 50105003, 59903003, 51107002, 51104002,

51104003, 51104004, 51107001, 51102904, 50105004, 51108002, 51104001, 59905003, 59905004, 59906004, 19906005, 19906002] ([See Appendix C for Response Code details.](#))

UNIR Request: [BillPaymentPreviewReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory	User ID. Registered with UniTeller.	String(5-50 Characters)
additionalFieldInfo	Mandatory	Biller Information	AdditionalFieldInfo. See Appendix A
billerId	Mandatory It must be [positive integer] integer value.	The Biller id.	Integer
paymentAmount	Conditional	Receiving Amount	Double
sendingMethodId	Mandatory It must be [positive integer] integer value.	ID of Sending method ID being used for payment.	Integer
sendingMethodName	Mandatory Possible values are Credit Card, Debit Card	Sending method Name being used for payment.	String(8-20 Characters)
transactionCurrencyISOCode	Mandatory.	Sending Amount currency ISO code	String(3 Characters)
selectedCurrencyIsoCode	Conditional, Mandatory if sending paymentAmount	Selected Amount Currency ISO Code, can be sending Amount or	String

	in Request	Receiving Amount	
transactionAmount	Mandatory It must be [positive double] double value	Sending Amount	Double

UNIR Response: [BillPaymentPreviewResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
additionalFieldInfo	Payer additional fields	Array of AdditionalFieldInfo. See Appendix A
applicablePromotions	Applicable Promotion applied on transaction	ApplicablePromotions
bankName	Biller's Bank Name	String
billerAddress	Biller's Address	Address
billerFirstname	Biller's First Name	String
billerLastName	Biller's Last Name	String
billerMiddleName	Biller's Middle Name	String
billerPhone	Biller's Phone Number	String
billerSLastName	Biller's Second Last Name	String
createDate	Transaction creation time	String
exchangeRate	Exchange rate	Double
paymentAmount	Pay amount	Double
paymentCurrency	Transaction payment currency	String
processingDate	Transaction processing time	String
receptionMethodName	Biller's Reception Method	String
remitterFirstname	Remitter's First Name	String
remitterLastName	Remitter's Last Name	String
remitterMiddleName	Remitter's Middle Name	String
remitterSLastName	Remitter's Second Last Name	String

sendingMethodLast4Digits	Remitter's Sending Method Last Four digits	String
sendingMethodName	Remitter's Sending Method Name	String
sendingMethodType	Remitter's Sending Method Type	String
serviceFee	Transaction service charge	Double
transactionInternalReference	Transaction reference number	String
txAmount	Transaction amount	Double
txCurrency	Transaction currency	String
uicReceiptMode	UIC receipt mode list	Array of UicReceiptMode
actualServiceFee	The actual service fee is the actual fee which is applied on transaction before applying the promotion coupon	Double
actualTotalTxAmount	The actual total transaction amount is before the discount	Double
partnerExchangeRate	Exchange rate received from biller	String
partnerFxCurrency	Fx Currency received from biller	String
baseExchangeRate	Base exchange rate	double

5.34.1 Sample JSON Request

```
{
  "userId": "promo112@mailinator.com",
  "token": "1079ab3c-4f49-4559-9422-b76b9bac1f66",
  "transactionCurrencyId": 5,
  "additionalFieldInfo": {
    "dependentFieldId": null,
    "dependentURI": null,
    "fieldBelongsTo": "Transaction",
    "fieldId": 875,
    "fieldLabel": "Barcode",
    "fieldName": "Barcode",
    "fieldOptions": null,
    "fieldType": "text",
    "fieldValue": "111111111111111111111111",
    "maxLen": "28",
    "minLen": "28",
    "validationRegex": "^(?=(?:{28,28}))$)[0-9]*$",
    "fieldErrorMsg": "Please enter Barcode up to 28 digits only."
  },
  "transactionAmount": "1.91",
  "sendingMethodName": "Debit Card",
  "sendingMethodId": 16364,
  "billerId": 35637,
  "paymentAmount": "41",
  "partnerCode": "Unite",
  "interactionId": "12345678",
  "locale": "en"
}
```

5.34.2 Sample JSON Response

```
{
  "extraFields": null,
  "interactionId": "12345678",
  "executionTimestamp": 2965,
  "requestTimestamp": "01282022032418",
  "responseTimestamp": "01282022032421",
  "responseCode": "59901001",
  "responseMessage": "Your card ending in 1111 is about to expire. Please be sure to use a card with an extended expiration date to avoid possible declines.",
  "additionalFieldInfo": null,
  "applicablePromotions": {
    "discountAmount": null,
    "serviceFeeAfterDiscount": null,
    "txAmountAfterDiscount": null,
    "promotionDetails": null
  },
  "bankName": "Natura",
  "billerAddress": {
    "address1": "Not Known",
    "address2": "Not Known",
    "city": "Not Known",
    "country": "MX",
    "countryISOCode": null,
    "state": "CA",
    "stateName": "California",
    "zipCode": "111111"
  },
  "billerFirstname": "Ridhi",
  "billerLastName": "Sharma",
  "billerMiddleName": null,
  "billerPhone": "7547569855",
  "billerSLastName": null,
  "createDate": "01282022032542",
  "exchangeRate": 22.3487,
  "paymentAmount": 41.0,
  "paymentCurrency": "MXN",
  "processingDate": null,
  "receptionMethodName": "Bill"
}
```

```
Payment","remitterFirstname":"promo","remitterLastName":"onenotone","remitterMiddleName":null,"remitterSLastName":null,"sendingMethodLast4Digits":"1111","sendingMethodName":"Debit Card","sendingMethodType":"Visa","serviceFee":0.0,"transactionInternalReference":73312,"txAmount":1.83,"txCurrency":"USD","uicReceiptMode":null,"actualServiceFee":0.0,"actualTotalTxAmount":1.83,"partnerExchangeRate":null,"partnerFxCurrency":null,"baseExchangeRate":21.4892,"stateFee":null}
```

5.35 UtilityPaymentConfirm (Requires Password Grant)

Description: This method creates the Bill payment remittance transaction for payment to the biller. It does payment processing, creates a transaction number. If any promotion coupon is applied on transaction successfully then must be provide promotion coupon in confirmation transaction request otherwise transaction would be treated without promotion.

URI: [/UTLROnlineRemitAPI/Remittance/UtilityPaymentConfirm](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 50105002, 59904001, 59906005, 51103002, 50102010, 51102001, 51108001, 59906005, 51102002, 50105004 and 59905005] ([See Appendix C for Response Code details.](#))

UNIR Request: [BillPaymentConfirmReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A

Locale	Optional Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory.	User ID. Registered with UniTeller.	String(5-50 Characters)
transactionInternalReference	Mandatory	Transaction internal reference id which is provided at the time of send money preview in response.	Integer
promotionCode	Optional	Promotion code is a code which was used to apply on transaction and gave discount on service fee after applying. If promotion is not applied for this transaction then there is no need to give in request.	String
uicReceiptMode	Conditional Possible values are [Email, Mobile].	The UniTeller Identification Code receipt mode.	String
Uic	Conditional	The UniTeller Identification Code	String

UNIR Response: [BillPaymentConfirmResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String

txNumber	Transaction number.	String
txStatus	Transaction status.	String
txSubStatus	Transaction sub status.	
creationTimestamp	The creation timestamp in form MMDDYYYYHH24MISS (i.e. year, month, day, hour in 24, minute, second) with no separator between year, month, day, hour, minute, second	String
availableDate	Available date.	String
transactionAmount	Transaction amount.	Double
serviceFee	Service fee.	Double
totalBillingAmount	Total receivable amount.	Double
exchangeRate	Exchange rate.	Double
totalChargedAmount	Total charged amount.	Double
billerFirstName	Beneficiary first name.	String
billerMiddleName	Beneficiary middle name.	String
billerLastName	Beneficiary last name.	String
billerSecondLastName	Beneficiary second last name.	String
receptionMethod	Reception method.	String
payerName	Payer name.	String
bankName	Bank name.	String
payAccountNumber	Pay account number.	String
remitterFirstName	Remitter first name.	String
remitterMiddleName	Remitter middle name.	String
remitterLastName	Remitter last name.	String
remitterSecondLastName	Remitter second last name.	String
sendingMethodName	Sending method name.	String
sendingMethodType	Sending method type.	String
sendingMethodNumber	Sending method number.	String
payCurrency	Pay currency.	String
txCurrency	Transaction currency.	String
txDisplayStatus	The transaction display status is transaction process status. It could be [IN PROCESS,HOLD, PAYABLE, PAID, CANCELLED, REFUND,REPLACED]	String
discountAmount	Discount on service fee.	Double
actualServiceFee	The actual service fee is the actual fee which is applied on transaction before applying the promotion coupon.	Double
actualTotalTxAmount	The actual total transaction amount is before the discount.	Double

isOptedInSMSAlert	Opted-in for transaction SMS alert.	String
billerCellPhone	Beneficiary's cell phone(without ISD Code)	String
remiCellPhone	Remitter's cell phone(without ISD Code)	String
baseExchangeRate	Exchange Rate	Double
VerificationQuestion	Verification Questions	Array of VerificationQuestion
reminderPopUp	Bill payment Reminder	Boolean
documentType	List of Document	Array of String

5.35.1 Sample JSON Request

```
{ "userId": "promo112@mailinator.com", "token": "1079ab3c-4f49-4559-9422-b76b9bac1f66", "extraFields": [], "transactionInternalReference": 73313, "promotionCode": "", "partnerCode": "Uniteller", "interactionId": "12345678", "locale": "en" }
```

5.35.2 Sample JSON Response

```
{ "extraFields": [ { "name": "TRUST_PILOT_URL", "value": "https://www.trustpilot.com/evaluate/embed/ulinkremit.com?a=p55823o&b=chJvbW8xMTJAbWFpbGluYXRvci5jb20=&c=promooneotone&e=76fb1a2953f5843b46ce85f3f39fa262990834c9" } ], "interactionId": "12345678", "executionTimestamp": 7190, "requestTimestamp": "01282022032528", "responseTimestamp": "01282022032536", "responseCode": "00000000", "responseMessage": "Success.", "actualServiceFee": 0.0, "actualTotalTxAmount": 1.85, "availableDate": "02012022", "bankName": "Naturgy", "billerCellPhone": "7547569855", "billerFirstName": "Ridhi", "billerLastName": "Sharma", "billerMiddleName": null, "billerSecondLastName": null, "creationTimestamp": "01282022032529", "discountAmount": null, "documentType": null, "exchangeRate": 22.1338, "isOptedInSMSAlert": "NO", "payAccountNumber": null, "payCurrency": "MXN", "payerName": "Naturgy", "receptionMethod": "Bill Payment", "remiCellPhone": "7358331460", "remitterFirstName": "promo", "remitterLastName": "oneotone", "remitterMiddleName": null, "remitterSecondLastName": null, "sendingMethodName": "Bank Account", "sendingMethodNumber": "1111", "sendingMethodType": "savings", "serviceFee": 0.0, "totalBillingAmount": 41.0, "totalChargedAmount": 1.85, "transactionAmount": 1.85, "txCurrency": "USD", "txDisplayStatus": "PAYABLE", "txNumber": "5240945423", "txStatus": "PAYABLE", "txSubStatus": null, "reminderPopUp": false, "partnerExchangeRate": null, "partnerFxCurrency": null, "stateFee": null, "verificationQuestion": null }
```

5.36 BillPaymentReceipt (Requires Password Grant)

Description: This method is used to get the Bill Payment transaction receipt.

URI: [/UTLROnlineRemitAPI/Remittance/BillPaymentReceipt](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 50105002 and 51103001] ([See Appendix C for Response Code details.](#))

UNIR Request: `BillerTransactionReceiptReq`

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory.	User ID. Registered with UniTeller.	String(5-50 Characters)
transactionNumber	Mandatory	The transaction Number of Bill payment transaction.	String(8-20 Characters)

UNIR Response: `BillerTransactionReceiptResp`

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String

responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
actualServiceFee	The actual service fee is actual fee which is applied on transaction before applied the promotion coupon.	Double
actualTotalTxAmount	The actual total transaction amount is before the discount.	String
additionalFieldInfo	The AdditionalField Information	AdditionalFieldInfo
billerSummary	The Biller's Information	BillerServiceSummary
disclaimer	State based Disclaimer shown on receipt	String
discountAmount	The discount on service fee.	Double
exchangeRate	The exchange rate	Double
partnerCodeInfo	The partner code information	PartnerCodeInfo
payCurrency	The pay currency	Currency
payerSummary	The payer's information	PayerSummary
payingAmount	The paying amount	Double
remitterInfo	The remitter's information	RemitterPersonalInfo
sendingMethodSummary	The Sending method summary details	SendingMethodSummary
serviceFee	The service fee	Double
totalTransactionAmount	The total transaction amount	Double
transactionAmount	The transaction amount	Double
transactionCreateDate	The transaction create time stamp in form MMDDYYYYHH24MISS (i.e year,month, day, hour in 24, minute, second) with no separator between year,month, day, hour, minute, second	String
transactionCurrency	The transaction currency	Currency
transactionNumber	The transaction number is unique number which provides to remitter after doing transaction	String
transactionPayableDate	The transaction payable date in form MMDDYYYY.(i.e month, day,year) with no separator between year, month, day	String
transactionStatus	The transaction status	String
partnerExchangeRate	The Partner exchange rate	String
partnerFxCurrency	The partner's Fx Currency	String

the rate given to customers and the rate received by UniTeller is kept by UniTeller. Refunds of principal amount and cancellation of the money transfer will be made upon written request of the sender, if payment to the beneficiary has not yet been made at the time the request is processed. Refunds of service fees can be made upon written request of the Sender if the money transfer is not available to the Receiver within the time specified by UniTeller for the selected service. UniTeller will have no liability for return of funds or any claims under any circumstances if the account number is not correct for remittances sent to bank accounts.

PRIVACY POLICY: UniTeller does not disclose or sell your personal information to unaffiliated parties except (i) as required by law, (ii) to government agencies, (iii) to entities that process or pay transactions or provide other services or products to or for us, or (iv) as deemed necessary or appropriate by UniTeller to service you.

Usted tiene el derecho de discutir errores en su transacción. Si cree que hay un error, contáctenos dentro de 180 días al 1-800-456-3492 o www.uniteller.com. También puede contactarnos para obtener una explicación escrita de sus derechos. Puedes cancelar el envío y recibir un reembolso total dentro de 30 minutos de haber realizado el pago, a no ser que los fondos hayan sido recogidos o depositados. Para preguntas o presentar una queja sobre Servicio UniTeller Inc. ("UniTeller"), contacte a: Georgia Department of Banking & Finance (DBF) : 800-436-7442 <http://dbf.georgia.gov/> Consumer Financial Protection Bureau: 855-411-2372 / 844-729-2372 (TTY / TDD) www.consumerfinance.gov

TERMINOS: Servicio UniTeller Inc. ("UniTeller") está localizado en el 218 Route 17 North-Suite 402, Rochelle Park, NJ 07662. Además de las cuotas por servicio correspondientes a esta transacción, esta siendo aplicado el tipo de cambio de moneda. Cualquier ganancia por la diferencia entre la tarifa ofrecida a los clientes y la tarifa recibida por UniTeller será conservada por UniTeller. Los reembolsos del monto invertido y la cancelación de la transferencia de dinero se efectuarán mediante solicitud por escrito del Remitente, si el pago al beneficiario aun no se ha realizado en el momento de que la solicitud sea procesada. Los reembolsos de las cuotas por servicio se pueden efectuar mediante la solicitud por escrito del Remitente, si la transferencia de dinero no está disponible para el Receptor dentro del tiempo especificado por UniTeller para el servicio seleccionado. UniTeller no asume responsabilidad alguna por la devolución de los fondos ni por reclamación alguna, bajo ninguna circunstancia, si el número de cuenta no es correcto para las remesas de dinero enviadas a las cuentas bancarias.

POLITICA DE PRIVACIDAD: UniTeller no revela ni vende la información personal de usted a terceras partes que no son filiales, excepto (i) conforme lo exija la ley, (ii) a agencias gubernamentales, (iii) a entidades que procesan o pagan las transacciones o proveen otros servicios o productos a UniTeller, o (iv) cuando UniTeller lo considera necesario o adecuado para prestarle servicio a usted.

,"discountAmount":null,"exchangeRate":22.1338,"partnerCodeInfo":{"address":{"address1":"218 Route 17 North","address2":"Rochelle Park, NJ 07662","city":"Rochelle

```

Park", "country": null, "countryISOCode": "USA", "state": "NJ", "stateName": null, "zipCode": null}, "cell
Phone": "1.800.456.3492", "faxNumber": "1.866.235.3279", "partnerCode": "Uniteller"}, "payCurre
ncy": {"id": 0, "isoCode": "MXN", "name": "Mex
Pesos"}, "payerSummary": {"branchId": 0, "branchName": null, "id": 0, "payerName": "Elektra.com"},
"payingAmount": 26.0, "remitterInfo": {"address": {"address1": "123
St.", "address2": null, "city": "deerfield", "country": "USA", "countryISOCode": "US", "state": "GA", "state
Name": "Georgia", "zipCode": "90001"}, "birthDate": "01011997", "cellPhone": "7358331460", "desti
nationCountryISOCode": null, "destinationCountryName": null, "emailAddress": null, "firstName": "
promo", "gender": null, "homePhone": null, "lastName": "onenotone", "middleName": null, "optOutAff
iliates": null, "optOutExternal": null, "optOutUniteller": null, "optOutWlp": null, "preferredLanguage"
: null, "secondLastName": null, "workPhone": null, "isdCode": null}, "sendingMethodSummary": {"acc
VerifySource": null, "address": null, "allowEditandDeactivate": false, "bankName": "Chase", "id": 0, "ni
ckName": null, "publicToken": null, "sendingMethodName": "Bank
Account", "sendingMethodNumber": "*****1111", "sendingMethodType": "savings"}, "serviceFee":
0.99, "totalTransactionAmount": 2.17, "transactionAmount": 1.18, "transactionCreateDate": "01312
022051605EST", "transactionCurrency": {"id": 0, "isoCode": "USD", "name": "US
Dollar"}, "transactionNumber": "01312022051309", "transactionPayableDate": "02022022", "tran
sactionStatus": "PAYABLE", "partnerExchangeRate": null, "partnerFxCurrency": null, "stateFee": nul
l}

```

5.37 TransactionReceipt (Requires Password Grant)

Description: This method is used to get the Send Money transaction receipt.

URI: [UTLROnlineRemitAPI/Remittance/TransactionReceipt](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 50105002 and 51103001] ([See Appendix C for Response Code details.](#))

UNIR Request: [TransactionReceiptReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A

Locale	Optional Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory.	User ID. Registered with UniTeller.	String(5-50 Characters)
transactionNumber	Mandatory	The transaction Number of Send Money transaction.	String(8-20 Characters)

UNIR Response: [TransactionReceiptResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
actualServiceFee	The actual service fee is actual fee which is applied on transaction before applied the promotion coupon.	Double
actualTotalTxAmount	The actual total transaction amount is before the discount.	String
BeneficiarySummary	The Beneficiary's Information	BeneficiarySummary
disclaimer	State based Disclaimer shown on receipt	String
discountAmount	The discount on service fee.	Double
exchangeRate	The exchange rate	Double
partnerCodeInfo	The partner code information	PartnerCodeInfo
payCurrency	The pay currency	Currency
payerSummary	The payer's information	PayerSummary
payingAmount	The paying amount	Double
remitterInfo	The remitter's information	RemitterPersonalInfo

sendingMethodSummary	The Sending method summary details	SendingMethodSummary
serviceFee	The service fee	Double
totalTransactionAmount	The total transaction amount	Double
transactionAmount	The transaction amount	Double
transactionCreateDate	The transaction create time stamp in form MMDDYYYYHH24MISS (i.e year,month, day, hour in 24, minute, second) with no separator between year,month, day, hour, minute, second	String
transactionCurrency	The transaction currency	Currency
transactionNumber	The transaction number is unique number which provides to remitter after doing transaction	String
transactionPayableDate	The transaction payable date in form MMDDYYYY.(i.e month, day,year) with no separator between year, month, day	String
transactionStatus	The transaction status	String
stateFee	This field provides Transfer Taxes [Federal Remittance Tax]	String

5.37.1 Sample JSON Request

```
{"userId":"arch003@mailinator.com","transactionNumber":"60071344743","partnerCode":"Uni  
teller","interactionId":"12345678","locale":"en"}
```

5.37.2 Sample JSON Response

```
{"errorCode":{"errorCode":"00000000","errorMessage":"Success.","errorType":"DEFAULT"},"ex  
traFields":[{"name":"TRUST_REF_NUMBER","value":null}], "interactionId":"12345678","executio  
nTimestamp":246,"requestTimestamp":"03232022161626","responseTimestamp":"032320221  
61626","responseCode":"00000000","responseMessage":"Success.,"actualServiceFee":3.2,"actu  
alTotalTxAmount":44.2,"beneficiarySummary":{"accHolderName":null,"accNumber":null,"accTy  
pe":null,"additionalFieldInfo":null,"address":{"address1":"123","address2":null,"city":"deerfield  
","country":"Mexico","countryISOCode":"MX","state":"MIC","stateName":"Michoacan","zipCode":  
"78455"},"beneDOB":null,"beneStatus":null,"beneVerification":null,"cellPhone":"93654632563",  
"contactType":null,"destCountryISOCode":null,"destCurrencyISOCode":null,"destinationCurrenc  
y":null,"emailId":null,"firstName":"Neha","gender":null,"homePhone":null,"id":4826,"isCurpVeri  
fied":null,"lastName":"Sharma","midName":null,"nickName":null,"payer":"Banorte","payerBranc  
hCode":null,"payerInfo":null,"payerSpecificCode":null,"receptionMethod":"Cash  
Pickup","secLastName":null,"workPhone":null},"disclaimer":"<span style=\
```

*FUNDS MAY BE IMMEDIATELY AVAILABLE, depending on Beneficiary's Time Zone, and local operating hours (El pago puede estar DISPONIBLE INMEDIATAMENTE, si la zona horaria del beneficiario y las horas de

[illegible]

STYLE="font-size:14pt; font-family:Arial, Verdana, Sans-serif; text-align:justify">

<U>TERMS:</U> Servicio UniTeller Inc. ("UniTeller") is located at 218 Route 17 North-Suite 402, Rochelle Park, NJ 07662. In addition to the service fees applicable to this transaction, a currency exchange rate is being applied. Any profit in the difference between the rate given to customers and the rate received by UniTeller is kept by UniTeller. Refunds of principal amount and cancellation of the money transfer will be made upon written request of the sender, if payment to the beneficiary has not yet been made at the time the request is processed. Refunds of service fees can be made upon written request of the Sender if the money transfer is not available to the Receiver within the time specified by UniTeller for the selected service. UniTeller will have no liability for return of funds or any claims under any circumstances if the account number is not correct for remittances sent to bank accounts.

<U>PRIVACY POLICY:</U> UniTeller does not disclose or sell your personal information to unaffiliated parties except (i) as required by law, (ii) to government agencies, (iii) to entities that process or pay transactions or provide other services or products to or for us, or (iv) as deemed necessary or appropriate by UniTeller to service you.

","discountAmount":null,"exchangeRate":18.999,"partnerCodeInfo":{"address":{"address1":"218 Route 17 North","address2":"Rochelle Park, NJ 07662","city":"Rochelle Park","country":null,"countryISOCode":"USA","state":"NJ","stateName":null,"zipCode":null},"cellPhone":"1.866.235.3279","faxNumber":"1.866.235.3279","partnerCode":"Uniteller"},"payCurrency":{"id":0,"isoCode":"MXN","name":"Mex Pesos"},"payerSummary":{"branchId":0,"branchName":null,"id":0,"payerName":"Banorte"},"payingAmount":776.51,"remitterInfo":{"address":{"address1":"123 Test St.","address2":null,"city":"deerfield","country":"USA","countryISOCode":"US","state":"IN","stateName":"Indiana","zipCode":"90001"},"birthDate":"04021992","cellPhone":"9632156325","destinationCountryISOCode":null,"destinationCountryName":null,"emailAddress":null,"firstName":"archana","gender":null,"homePhone":null,"lastName":"Lohani","middleName":null,"optOutAffiliates":null,"optOutExternal":null,"optOutUniteller":null,"optOutWlp":null,"preferredLanguage":null,"secondLastName":null,"workPhone":null,"isdCode":null},"sendingMethodSummary":{"accVerifySource":null,"address":null,"allowEditandDeactivate":false,"bankName":null,"id":0,"nickname":null,"publicToken":null,"sendingMethodName":"Debit Card","sendingMethodNumber":"*****1111","sendingMethodType":"Visa"},"serviceFee":3.2,"totalTransactionAmount":44.2,"transactionAmount":41.0,"transactionCreateDate":"11262021191933EST","transactionCurrency":{"id":0,"isoCode":"USD","name":"USDOLLAR"},"transactionNumber":"60071344743","transactionPayableDate":"11272021","transactionStatus":"HOLD","stateFee":null}

5.38 Tx Aggregate (Requires Password Grant)

Description: This method is used to fetch the limits related to the transaction of the requested user based on the projection type provided.

URI: /UTLROnlineRemitAPI/remittance/txAggregate

Possible Response Code: [00000000, 59904006, 59903005] ([See Appendix C for Response Code details.](#))

UNIR Request: TxAggregateReq

Attribute	Validation Rule	Description	Type
userId	Mandatory.	User ID. Registered with UniTeller.	String(5-50 Characters)
subWlpCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided. (PartnerCode)	String
projectionType	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided. POSSIBLE VALUE: send_money	String

UNIR Response: TxAggregateResp

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
levelDisplayName	Remitter Level of the user.	String
page	For pagination purposes and for future use.	Integer
sort	For pagination purposes and for future use.	String
totalPages	For pagination purposes and for future use.	Integer
totalRecords	For pagination purposes and for future use.	Integer

resultSize	For pagination purposes and for future use.	Integer
results	It contains all the limit details of user	Results See Appendix A

5.38.1 Sample JSON Request

https://sendsandbox.uniteller.org/UTLROnlineRemitAPI/remittance/txAggregate?userId=test150505@mailinator.com&WlpCode=XXXX&projectionType=send_money

5.38.2 Sample JSON Response

```
{
  "responseCode": "00000000",
  "responseMessage": "success",
  "errors": null,
  "interactionId": null,
  "executionTimestamp": 132,
  "requestTimestamp": "05212024153902",
  "responseTimestamp": "05212024153903",
  "page": null,
  "sort": null,
  "totalPages": null,
  "totalRecords": null,
  "resultSize": null,
  "results": [
    {
      "level": "DIA",
      "splayName": "SILVER",
      "flag": true,
      "creditLimit": [
        {
          "limitType": "ALL",
          "timePeriodLimit": [
            {
              "timePeriod": "Daily",
              "maxLimit": 0,
              "usedLimit": 0,
              "remainingLimit": 0
            },
            {
              "timePeriod": "Weekly",
              "maxLimit": 0,
              "usedLimit": 0,
              "remainingLimit": 0
            }
          ],
          "complianceLimit": [
            {
              "limitType": "ALL",
              "timePeriodLimit": [
                {
                  "timePeriod": "1 Day",
                  "maxLimit": 1999,
                  "usedLimit": 0,
                  "remainingLimit": 1999
                },
                {
                  "timePeriod": "4 Day",
                  "maxLimit": 2999,
                  "usedLimit": 0,
                  "remainingLimit": 2999
                },
                {
                  "timePeriod": "7 Day",
                  "maxLimit": 3999,
                  "usedLimit": 0,
                  "remainingLimit": 3999
                },
                {
                  "timePeriod": "30 Day",
                  "maxLimit": 4999,
                  "usedLimit": 0,
                  "remainingLimit": 4999
                },
                {
                  "timePeriod": "60 Day",
                  "maxLimit": 6999,
                  "usedLimit": 0,
                  "remainingLimit": 6999
                },
                {
                  "timePeriod": "90 Day",
                  "maxLimit": 8999,
                  "usedLimit": 0,
                  "remainingLimit": 8999
                },
                {
                  "timePeriod": "180 Day",
                  "maxLimit": 14999,
                  "usedLimit": 0,
                  "remainingLimit": 14999
                }
              ]
            }
          ],
          "allLevelLimit": [
            {
              "level": "DIA",
              "timePeriodOfLimit": [
                {
                  "timePeriod": "Daily",
                  "maxLimit": 9999
                },
                {
                  "timePeriod": "Weekly",
                  "maxLimit": 12999
                }
              ]
            },
            {
              "level": "GOLD",
              "timePeriodOfLimit": [
                {
                  "timePeriod": "Daily",
                  "maxLimit": 0
                },
                {
                  "timePeriod": "Weekly",
                  "maxLimit": 0
                }
              ]
            },
            {
              "level": "PLATINUM",
              "timePeriodOfLimit": [
                {
                  "timePeriod": "Daily",
                  "maxLimit": 0
                }
              ]
            }
          ]
        }
      ]
    }
  ]
}
```

Limit

```
"4999},{\"timePeriod\":\"Weekly\",\"maxLimit\":8999}}},{\"level\":\"SILVER\",\"timePeriodOfLimit\":{\"timePeriod\":\"Daily\",\"maxLimit\":0},{\"timePeriod\":\"Weekly\",\"maxLimit\":0}}}]}}
```

6 Other Required API:

These API will help and support to other API. We divide it in following category-

6.1 Security API Resources:

6.1.1 ResendUIC (Requires Password Grant)

Description: This method uses for resending UIC if user does not get UIC in process but this method could not be used for first time getting UIC.

URI: </UTLROnlineRemitAPI/Security/v2/ResendUic>

Possible Response Code return: [00000000, 59903005, 59906002, 50103003, 50108004, 59903001, 50105002, 50105003, 50105004, 50102010] (See [Appendix C](#) for detail of Response codes.)

UNIR Request: [ResendUicReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A

Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory It must be [5-50] characters long.	User ID. Registered with UniTeller.	String(5-50 Characters)
uicReceiptMode	Mandatory	UIC Receipt mode.	String(5-10 Characters)

UNIR Response: ResendUicResp

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
isLogout	Result of Logout request	Boolean

- **Sample JSON Request**

```
{ "uicReceiptMode": "Email", "userId": "msharma0234@cognam.com", "partnerCode": "Uniteller", "interactionId": "456789", "locale": "EN" }
```

- **Sample JSON Response**

```
{ "responseCode": "50102010", "responseMessage": "Success.", "extraFields": null, "requestTimestamp": "08112016132229", "executionTimestamp": 1, "responseTimestamp": "08112016132229", "interactionId": "456789" }
```

6.1.2 Logout (Requires Password Grant)

Description: This method is used to invalidate the user's session

URI: </UTLROnlineRemitAPI/Security/LogOut>

Possible Response Code: [00000000, 59906002, 59903005] ([See Appendix C for Response Code details.](#))

UNIR Request: LogoutReq

Attribute	Validation Rule	Description	Type
userId	Mandatory It must be [5-50] characters long.	User ID. Registered with UniTeller.	String
Partner code	Mandatory.	This information is provided by UniTeller and it should be exactly the same as provided.	String
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields used in future.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String

UNIR Response: LogoutResp

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track request and response. The interaction ID received in	String

	request and same is being returned in response.	
errorCode	Contains response details. It has response code and details of the response	ErrorCode. See Appendix A
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
responseMessage	Returns Response Message	String
contextId	The Reference id specific to the request made	String
logout	The Confirmation for logout.	Boolean

Sample JSON Request

```
{"userId":"apiUniteller5160@mailinator.com","partnerCode":"Uniteller","interactionId":"456789","locale":"EN"}
```

Sample JSON Response

```
{"errorCode":{"errorCode":"00000000","errorMessage":"Success.,"errorType":"DEFAULT"},"extraFields":null,"interactionId":"456789","executionTimestamp":431,"requestTimestamp":"03212025142442","responseTimestamp":"03212025142443","responseCode":"00000000","responseMessage":"Success.,"contextId":"API_64b98b1a1d6c2f56_29c2bcf877bc9da8","logOut":true}
```

6.2 Profile Management API

6.2.1 UserProfileInfo (Requires Password Grant)

Description: This method fetches the personal information of the user like name, date of birth, address etc.

URI: [/UTLROnlineRemitAPI/ProfileManagement/UserProfileInfo](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004 and 50105002] ([See Appendix C for Response Code details.](#))

UNIR Request: [UserProfileInfoReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)

interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory	User ID. Registered with UniTeller.	String(5-50 Characters)

UNIR response: [UserProfileInfoResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
remitterPersonalInfo	Contains remitter information.	Remitter's personal information. See Appendix A
toDayLimit	Current day limit for remitter. He/she can send up to this amount.	Integer
remitterLevel	Remitter level, this can be BASIC, SILVER, GOLD or PLATINUM.	String
remitterCurrency	Remitter's sending currency ISO Code. For now, it is USD (US Dollar) only.	String
deactivationRequested	Result of the deactivation request by user.	Boolean

- Sample JSON Request**

```
{"userId":"msharma0234@cognam.com","partnerCode":"Uniteller","interactionId":"456789","locale":"EN"}
```

- **Sample JSON Response**

```
{
  "remitterPersonalInfo": {
    "address": {
      "state": null,
      "country": "USA",
      "stateName": null,
      "countryISO Code": "US",
      "zipCode": null,
      "address1": null,
      "address2": null,
      "city": null
    },
    "firstName": "Oscer",
    "lastName": "Guitierrez",
    "emailAddress": "msharma0234@cognam.com",
    "cellPhone": "7836040442",
    "optOutAffiliates": "NO",
    "optOutExternal": "NO",
    "destinationCountryISOCode": "MX",
    "destinationCountryName": null,
    "secondLastName": null,
    "optOutUniTeller": "NO",
    "birthDate": "11301986",
    "optOutWlp": null,
    "middleName": null,
    "gender": null,
    "homePhone": null,
    "workPhone": null
  },
  "remitterCurrency": "USD",
  "remitterLevel": "BASIC",
  "toDayLimit": 350,
  "responseCode": "00000000",
  "responseMessage": "Success.",
  "responseTimestamp": "08112016161017",
  "executionTimestamp": 1458,
  "requestTimestamp": "08112016161015",
  "interactionId": "456789",
  "extraFields": null,
  "deactivationRequested": false
}
```

6.2.2 EditUserProfileInfo (Requires Password Grant)

Description: This method modifies the personal information provided as an input and returns the success or error accordingly. Some user information might not be allowed to be changed.

URI: </UTLROnlineRemitAPI/ProfileManagement/EditUserProfile>

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 50105002 and 59902003] (See [Appendix C](#) for Response Code details.)

UNIR Request: [EditUserProfileInfoReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional. Valid	Locale. If no input is	String

	values are EN (English) or ES (Spanish).	provided in request, by default it would be English	
userId	Mandatory	User ID. Registered with UniTeller.	String(5-50 Characters)
remitterPersonalInfo	Contains remitter information.	Remitter's personal information.	RemitterPersonalInfo. See Appendix A

UNIR response: [EditUserProfileInfoResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
remitterPersonalInfo	Contains remitter information.	RemitterPersonalInfo. See Appendix A

- **Sample JSON Request**

```
{
  "userId": "msharma0234@cognam.com",
  "remitterInfo": {
    "cellPhone": "7836040440",
    "address": {
      "address1": "125 Main bSt.",
      "city": "McLean",
      "state": "TX",
      "stateName": "Texas",
      "country": "US",
      "zipCode": "90001"
    }
  },
  "partnerCode": "Uniteller",
  "interactionId": "456789",
  "locale": "EN"
}
```

- **Sample JSON Response**

```
{
  "remitterPersonalInfo": {
    "address": {
      "state": "TX",
      "country": "USA",
      "stateName": "Texas",
      "country ISOCode": "US",
      "zipCode": "90001",
      "address1": "125 Main St.",
      "address2": null,
      "city": "McLean"
    },
    "firstName": "Oscer",
    "lastName": "Guitierrez",
    "emailAddress": "msharma0234@cognam.com",
    "cellPhone": "7836040440",
    "optOutAffiliates": "NO",
    "optOutExternal": "NO",
    "destinationCountryISOCode": "MX",
    "destinationCountryName": "Mexico",
    "secondLastName": null,
    "optOutUniTeller": "NO",
    "birthDate": "11301986",
    "optOutWlp": null,
    "middleName": null,
    "gender": "M",
    "homePhone": null,
    "workPhone": null,
    "responseCode": "00000000"
  }
}
```

```
"responseMessage":"Your profile has been successfully changed.",
"responseTimestamp":"08112016173219", "executionTimestamp":21308,
"requestTimestamp":"08112016173157","interactionId":"456789","extraFields":null}
```

✦ 6.2.3. DeactivateAccount

Description: This method is used to deactivate the user account based upon the user's request. This API should be called when the value of field **deactivationRequested** is **false** in the UserProfileInfo API's response and after the successful submission of request the value of **deactivationRequested** field will be changed to **true**. It will take around 48 hours to approve this request.

URI: </UTLROnlineRemitAPI/ProfileManagement/DeactivateAccount>

Possible Error Code: [00000000, 50102010, 59903001, 50105002, 50103003, 59906005, 59906002] (See [Appendix C](#) for Error Code details.)

UNIR Request: [DeactivateAccountReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track request and response. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A

locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory	User ID. Registered with UniTeller.	String(5-50 Characters)
token	This should be the same which returned in response of successful login	This is a unique String, which is shared with user and for current session only.	String(2-60 Characters)
action	Conditional Possible values are [DeactivateAccount, EnterMobileIdentificationCode].	Action for deactivating user account.	String
identificationCode	Conditional	The UniTeller Identification Code.	String

UNIR response: [DeactivateAccountResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track request and response. The interaction ID received in request and same is being returned in response.	String
errorCode	Contains response details. It has response code and details of the response	ErrorCode. See Appendix A
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A

- Sample JSON Request Step 1:**

```
{ "userId": "rjangid@cognam.com", "token": "07fabb34-f27a-4429-89c1-f0f398386b55", "action": "DeactivateAccount", "partnerCode": "Uniteller", "interactionId": "12345678", "locale": "en" }
```

Sample JSON Response

```
{ "errorCode": { "errorCode": "50102010", "errorMessage": "Identification Code has been sent to the registered mobile.", "errorType": "DEFAULT" }, "extraFields": null, "interactionId": "12345678", "executionTimestamp": 333, "requestTimestamp": "10212022021545", "responseTimestamp": "10212022021545", "responseCode": "50102010", "responseMessage": "Identification Code has been sent to the registered mobile." }
```

Sample JSON Request Step 2:

```
{ "userId": "rjangid@cognam.com", "token": "07fabb34-f27a-4429-89c1-f0f398386b55", "action": "EnterMobileIdentificationCode", "identificationCode": "221122", "partnerCode": "Uniteller", "interactionId": "12345678", "locale": "en" }
```

Sample JSON Response

```
{ "errorCode": { "errorCode": "00000000", "errorMessage": "Your request has been submitted. Your account will be deactivated within 2 to 3 business days.", "errorType": "DEFAULT" }, "extraFields": null, "interactionId": "12345678", "executionTimestamp": 2074, "requestTimestamp": "10212022021612", "responseTimestamp": "10212022021614", "responseCode": "00000000", "responseMessage": "Your request has been submitted. Your account will be deactivated within 2 to 3 business days." }
```

- **Sample JSON Request for non accessible account**

```
{ "userId": "rjangid@cognam.com", "token": "07fabb34-f27a-4429-89c1-f0f398386b55", "action": "DeactivateLossAccessAccount", "partnerCode": "Uniteller", "interactionId": "12345678", "locale": "en" }
```

- **Sample JSON Response for non accessible account**

```
{
  "errorCode": {
    "errorCode": "00000000",
    "errorMessage": "Your account has been deactivated successfully.",
    "errorType": "DEFAULT"
  },
  "extraFields": null,
  "interactionId": "12345678",
  "executionTimestamp": 446,
  "requestTimestamp": "10092025120815",
  "responseTimestamp": "10092025120815",
  "responseCode": "00000000",
  "responseMessage": "Your account has been deactivated successfully.",
  "contextId": "API_887280563_1167939296"
}
```

6.2.4.EditContactInfo

Description: This method is used to update the remitter new phone number with the existing phone number.

URI: </UTLROnlineRemitAPI/ProfileManagement/EditContactInfo>

Possible Error Code: [00000000, 50102010, 59903001, 50105002, 50103003, 59906005, 59906002] (See [Appendix C](#) for Error Code details.)

UNIR Request: [EditPhoneNumberReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track request and	String

		response. The interaction ID received in request will be returned in response.	
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
newCellPhoneNumber	Mandatory	The new phone number which has to be updated	String
remitterISDCode	Mandatory	The country ISD code	String
userId	Mandatory	User ID. Registered with UniTeller.	String(5-50 Characters)
action	Mandatory (Possible values only "SendIdentificationCode", "updatePhone")	Action for updating the phone number	String
identificationCode	Mandatory	The identification code received on new phone number	String

UNIR response: [EditPhoneNumberResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long

interactionId	This information is used to track request and response. The interaction ID received in request and same is being returned in response.	String
errorCode	Contains response details. It has response code and details of the response	ErrorCode. See Appendix A
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
responseMessage	Returns Response Message	String
contextId	The Reference id specific to the request made	String
cellPhone	New updated cell phone number	String
remitterISDCode	The ISD code for the remitter	String

- **Sample JSON Request (SendIdentificationCode):**

```
{ "userId": "test70113@mailinator.com", "newCellPhoneNumber": "7891254561", "action": "SendIdentificationCode", "remitterISDCode": "+1", "partnerCode": "Uniteller", "interactionId": "12345678", "locale": "en" }
```

- **Sample JSON Response(SendIdentificationCode) :**

```
{ "errorCode": { "errorCode": "50102010", "errorMessage": "Identification Code has been sent to the Mobile.", "errorType": "DEFAULT" }, "extraFields": null, "interactionId": "12345678", "executionTimestamp": 188, "requestTimestamp": "12262024050346", "responseTimestamp": "12262024050346", "responseCode": "50102010", "responseMessage": "Identification Code has been sent to the Mobile.", "contextId": "API_295c3ebcc8d1d3ef_295c3ebcc8d1d3ef", "cellPhone": null, "remitterISDCode": null }
```

- **Sample JSON Request (verifyIdentificationCode):**

```
{ "userId": "test70113@mailinator.com",
  "newCellPhoneNumber": "7891254561",
  "action": "verifyIdentificationCode",
  "remitterISDCode": "+1",
  "partnerCode": "Uniteller",
  "interactionId": "12345678",
  "locale": "en",
  "identificationCode": "221122" }
```

- **Sample JSON Response (verifyIdentificationCode) :**

```
{ "errorCode": { "errorCode": "00000000", "errorMessage": "Phone Number has been changed successfully.", "errorType": "DEFAULT" },
  "extraFields": null,
  "interactionId": "12345678",
  "executionTimestamp": 528,
  "requestTimestamp": "12262024045611",
  "responseTimestamp": "12262024045611",
  "responseCode": "00000000",
  "responseMessage": "Phone Number has been changed successfully.",
  "contextId": "API_42b548e480cda638_c4df4e341308ead3",
  "cellPhone": "XXXXXX4561",
  "remitterISDCode": "+1" }
```

6.2.5.EditEmailAddress

Description: This method is used to update the remitter new Email Address with the existing Email Address.

URI: [/UTLROnlineRemitAPI/ProfileManagement/EditEmailAddress](#)

Possible Error Code: [00000000, 50102010, 59903001, 50105002, 50103003, 59906005, 59906002, **50102009**] (See [Appendix C](#) for Error Code details.)

UNIR Request: [EditEmailAddressReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track request and response. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
userId	Mandatory	User ID. Registered with UniTeller.	String(5-50 Characters)
action	Mandatory (only possible value "EditEmail", "EnterMobileIdentificationCode", "EnterEmailAddress", "EnterEmailIdentificationCode")	Action for updating the Email Address	String
newEmailAddress	Mandatory	New Email which has to be updated	String

UNIR response: [EditEmailAddressRes](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at	String

	UniTeller	
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track request and response. The interaction ID received in request and same is being returned in response.	String
errorCode	Contains response details. It has response code and details of the response	ErrorCode. See Appendix A
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
responseMessage	Returns Response Message	String
contextId	The Reference id specific to the request made	String

- **Sample JSON Request (Action: EditEmail) :**

```
{"userId":"testuser@mailinator.com","partnerCode":"Uniteller","interactionId":"12345678","locale":"EN","token":"{{userToken}}","action":"EditEmail"}
```

- **Sample JSON Response((Action: EditEmail)):**

```
{"errorCode":{"errorCode":"50102010","errorMessage":"Identification Code has been sent to the registered mobile"},"errorType":"DEFAULT"},"extraFields":null,"interactionId":"12345678","executionTimestamp":121,"requestTimestamp":"12242024042843","responseTimestamp":"12242024042843","responseCode":"50102010","responseMessage":"Identification Code has been sent to the registered mobile"},"contextId":"API_46640e64fbe57b60_331dda73a865b7cf","securityQuestions":null}
```

- **Sample JSON Request (Action: EnterMobileIdentificationCode) :**

```
{"userId":"testuser@mailinator.com","partnerCode":"Uniteller","interactionId":"12345678","locale":"EN","token":"{{userToken}}","action":"EnterMobileIdentificationCode","identificationCode":"221122"}
```

- **Sample JSON Response((Action: EnterMobileIdentificationCode)):**

```
{
  "errorCode": {
    "errorCode": "50102009",
    "errorMessage": "Please enter your new email address.",
    "errorType": "DEFAULT"
  },
  "extraFields": null,
  "interactionId": "12345678",
  "executionTimestamp": 257,
  "requestTimestamp": "12242024043000",
  "responseTimestamp": "12242024043000",
  "responseCode": "50102009",
  "responseMessage": "Please enter your new email address.",
  "contextId": "API_46640e64fbe57b60_525f684f512a2d76",
  "securityQuestions": null
}
```

- **Sample JSON Request (Action: EnterEmailAddress) :**

```
{
  "userId": "testuser@mailinator.com",
  "partnerCode": "Uniteller",
  "interactionId": "12345678",
  "locale": "EN",
  "token": "{{userToken}}",
  "action": "EnterEmailAddress",
  "newEmailAddress": "cognambambu853834@mailinator.com"
}
```

- **Sample JSON Response((Action: EnterEmailAddress)):**

```
{
  "errorCode": {
    "errorCode": "50102010",
    "errorMessage": "Identification Code has been sent to the registered email.",
    "errorType": "DEFAULT"
  },
  "extraFields": null,
  "interactionId": "12345678",
  "executionTimestamp": 804,
  "requestTimestamp": "12242024043059",
  "responseTimestamp": "12242024043100",
  "responseCode": "50102010",
  "responseMessage": "Identification Code has been sent to the registered email.",
  "contextId": "API_46640e64fbe57b60_661d2798ef020f94",
  "securityQuestions": null
}
```

- **Sample JSON Request (Action: EnterEmailIdentificationCode) :**

```
{
  "userId": "testuser@mailinator.com",
  "partnerCode": "Uniteller",
  "interactionId": "12345678",
  "locale": "EN",
  "token": "{{userToken}}",
  "action": "EnterEmailIdentificationCode",
  "identificationCode": "221122"
}
```

- **Sample JSON Response((Action: EnterEmailIdentificationCode)):**

```
{
  "errorCode": {
    "errorCode": "00000000",
    "errorMessage": "You are now successfully registered with testuser@mailinator.com",
    "errorType": "success"
  },
  "extraFields": null,
  "interactionId": "12345678",
  "executionTimestamp": 618,
  "requestTimestamp": "12242024043150",
  "responseTimestamp": "12242024043151",
  "responseCode": "00000000",
  "responseMessage": "You are now successfully registered with testuser1@mailinator.com",
  "contextId": "API_46640e64fbe57b60_854bdd536206f76c",
  "securityQuestions": null
}
```

6.3 Remittance API

6.3.1 TxSMSAlert (Requires Password Grant)

Description: This API is used to send the SMS Alert to the beneficiary registered phone number and Email to the Beneficiary Email Address added during AddBeneficiary call.

URI: /UTLROnlineRemitAPI/Remittance/TxSMSAlert

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 51103002 and 50105002] (See [Appendix C](#) for Response Code details.)

UNIR Request: TransactionSMSAlertReq

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory	User ID. Registered with	String(5-50

	It must be [5-50] characters long.	UniTeller.	Characters)
transactionNumber	Mandatory.	Transaction number which is provided in the send money confirms API response.	Integer(8-20 Digits)
beneCellPhone	Optional.	Bene cell phone (Without ISD Code)	String(1-20 Digits)
remiCellPhone	Optional.	Remitter cell phone (Without ISD Code)	String(8-15 Digits)

UNIR Response: TransactionSMSAlertResp

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A .

- Sample JSON Request**

```
{"userId":"msharma@cognam.com","transactionNumber":"5639274787","beneCellPhone":"1477258369","remiCellPhone":"","partnerCode":"Uniteller"}
```

- Sample JSON Response**

```
{"requestTimestamp":"03232017033426","responseTimestamp":"03232017033426","executionTimestamp":1,"interactionId":null,"responseCode":"00000000","responseMessage":"Success.,"extraFields":null}
```

6.3.2 ApplyPromotionCode (Requires Password Grant)

Description: This method applying promotion while doing transaction and get discount on service fee. This method must be called after getting success in sendMoneyPreview's response.

For applying promotion, provide transaction reference number which is given in sendMoneyPreview's response and promotion code based on these request parameter this method returns SUCCESS if request values are valid otherwise get corresponding response code and see possible return response response code below.

URI: /UTLROnlineRemitAPI/Remittance/v2/ApplyPromotion

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 50108004, 51103002 and 50105002] ([See Appendix C for Response Code details.](#))

UNIR Request: [ApplyPromotionReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
userId	Mandatory It must be [5-50] characters long.	User ID. Registered with UniTeller.	String
transactionInternalReference	Mandatory.	Transaction internal reference id which is provided at the time of send money preview in response.	Integer
promotionCode	Mandatory.	Promotion code is a code which gives a discount on service fee after applying it on a transaction.	String

UNIR Response: [ApplyPromotionResp](#)

Attribute	Description	Type
-----------	-------------	------

requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
serviceFeeAfterDiscount	The service fee after discount.	Double
discountAmount	The discounted amount on service fee.	Double
txAmountAfterDiscount	Updated transaction amount after getting discount on service fee.	Double
promotionDetails	Promotion Information	Object of promotionDetails. See Appendix A

Sample JSON Request

```
{ "userId": "asheesh05@mailinator.com", "promotionCode": "PROMOMANUAL", "transactionInternalReference": "19422", "partnerCode": "Uniteller", "interactionId": "12345678", "locale": "en" }
```

Sample JSON Response

```
{ "extraFields": null, "interactionId": "12345678", "executionTimestamp": 556, "requestTimestamp": "09022021073832", "responseTimestamp": "09022021073832", "responseCode": "00000000", "responseMessage": "Success.", "discountAmount": 2.0, "serviceFeeAfterDiscount": 1.9, "txAmountAfterDiscount": 57.9, "promotionDetails": [ { "promotionCode": "PROMOMANUAL", "promotionDescription": "test", "promotionId": 306, "promotionNature": "MANUAL", "promotionStatus": "APPLICABLE", "promotionType": "Absolute", "promotionValue": 2.0 } ] }
```

6.3.3 UpdateSecurityQuestionAnswer (Requires Password Grant)

Description: This method is used to update the user's existing set security question and answer.

URI:

[/UTLROnlineRemitAPI/Remittance/SecurityQuestionAnswer/UpdateSecurityQuestionAnswer](#)

Possible Response Code: [00000000, 59906002, 59903005] ([See Appendix C for Response Code details.](#))

UNIR Request: [UpdateSecurityQuestionAnswerRequest](#)

Attribute	Validation Rule	Description	Type
username	Mandatory It must be [5-50] characters long.	User ID. Registered with UniTeller.	String
securityQuestionAnswers	Mandatory.	Security question Id and answer is passed in the object.	Object of SecurityAnswer

UNIR Response: [UpdateSecurityQuestionAnswerResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
responseCode	Returns Response Code	String
responseMessage	Returns Response Message	String
results	Contains the list of transaction details	List of securityQuestionAnswersResult. See Appendix A
page	Contains the page data(page index and records in the page)	SearchPage
totalPages	Total number of pages	String
totalRecords	Total Number of Records Fetched	String
resultSize	Records in single page	String

Sample JSON Request

```
{
  "userName": "archie.9007@gmail.com",
  "securityQuestionAnswers": {
    "questionId": "10",
    "answer": "test"
  }
}
```

Sample JSON Response

```
{
  "responseCode": "00000000",
  "responseMessage": "success",
  "errors": null,
  "interactionId": null,
  "executionTimestamp": 462,
  "requestTimestamp": "06192024133410",
  "responseTimestamp": "06192024133411",
  "page": null,
  "sort": null,
  "totalPages": null,
  "totalRecords": null,
  "resultSize": null,
  "results": [
    {
      "userId": null,
      "userName": "archie.9007@gmail.com",
      "securityQuestionAnswers": {
        "questionId": "10",
        "answer": "test"
      }
    }
  ]
}
```

6.4 Common API (Requires Client-Credentials or Password Grant)

Common API provides different categories (List of countries, List of country's states, list of country's currencies, list of Payers, list of reception method) of methods which are required during the process of Sign up and during send money after login.

6.4.1 LicensedStates

Description: This method fetches licensed states for the provided source country of remittance and returns the list of states. Licensed states are those states where UniTeller has license to provide the remittance services

URI: [/UTLROnlineRemitAPI/Common/LicensedStates](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003 and 59903001]

(See [Appendix C](#) for Response Code details.)

UNIR Request: [LicensedStatesReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A

locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
---------------	--	--	--------

UNIR Response: LicensedStatesResp

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
licensedState	This class provides the list of licensed states. Licensed states are those states where UniTeller has license to provide the remittance services	Array of State See Appendix A

- Sample JSON Request**

```
{"partnerCode":"Uniteller","interactionId":"12345678","extraFields":[],"locale":"EN"}
```

- Sample JSON Response**

```
{"requestTimestamp":"10212016051721","responseTimestamp":"10212016051721","executionTimestamp":46,"interactionId":null,"responseCode":"00000000","responseMessage":"Success.",
"extraFields":null,"licensedState":[{"name":"Alabama","isoCode":"AL"},{"name":"Alaska","isoCode":"AK"},{"name":"Arizona","isoCode":"AZ"},{"name":"Arkansas","isoCode":"AR"},{"name":"California","isoCode":"CA"},{"name":"Colorado","isoCode":"CO"},{"name":"Connecticut","isoCode":"CT"},{"name":"Delaware","isoCode":"DE"},{"name":"District of Columbia","isoCode":"DC"},{"name":"Florida","isoCode":"FL"},{"name":"Georgia","isoCode":"GA"},{"name":"Hawaii","isoCode":"HI"},{"name":"Idaho","isoCode":"ID"},{"name":"Illinois","isoCode":"IL"},{"name":"Indiana","isoCode":"IN"},{"name":"Iowa","isoCode":"IA"},{"name":"Kansas","isoCode":"KS"},{"name":"Kentucky","isoCode":"KY"},{"name":"Louisiana","isoCode":"LA"},{"name":"Maine","isoCode":"ME"},{"name":"Maryland","isoCode":"MD"},{"name":"Massachusetts","isoCode":"MA"},{"name":"Michigan","isoCode":"MI"},{"name":"Minnesota","isoCode":"MN"},{"name":"Mississippi","isoCode":"MS"},{"name":"Missouri","isoCode":"MO"},{"name":"Montana","isoCode":"MT"},{"name":"Nebraska","isoCode":"NE"},{"name":"Nevada","isoCode":"NV"},{"name":"New Hampshire","isoCode":"NH"},{"name":"New Jersey","isoCode":"NJ"},{"name":"New Mexico","isoCode":"NM"},{"name":"New York","isoCode":"NY"},{"name":"North Carolina","isoCode":"NC"},{"name":"North Dakota","isoCode":"ND"},{"name":"Ohio","isoCode":"OH"},{"name":"Oklahoma","isoCode":"OK"},{"name":"Oregon","isoCode":"OR"},{"name":"Pennsylvania","isoCode":"PA"},{"name":"Rhode Island","isoCode":"RI"},{"name":"South Carolina","isoCode":"SC"},{"name":"South Dakota","isoCode":"SD"},{"name":"Tennessee","isoCode":"TN"},{"name":"Texas","isoCode":"TX"},{"name":"Utah","isoCode":"UT"},{"name":"Vermont","isoCode":"VT"},{"name":"Virginia","isoCode":"VA"},{"name":"Washington","isoCode":"WA"},{"name":"West Virginia","isoCode":"WV"},{"name":"Wisconsin","isoCode":"WI"},{"name":"Wyoming","isoCode":"WY"}]}
```

```
Code": "KS"}, {"name": "Kentucky", "isoCode": "KY"}, {"name": "Louisiana", "isoCode": "LA"}, {"name": "Maryland", "isoCode": "MD"}, {"name": "Michigan", "isoCode": "MI"}, {"name": "Minnesota", "isoCode": "MN"}, {"name": "Mississippi", "isoCode": "MS"}, {"name": "Missouri", "isoCode": "MO"}, {"name": "Montana", "isoCode": "MT"}, {"name": "Nebraska", "isoCode": "NE"}, {"name": "Nevada", "isoCode": "NV"}, {"name": "Oklahoma", "isoCode": "OK"}, {"name": "Oregon", "isoCode": "OR"}, {"name": "Rhode Island", "isoCode": "RI"}, {"name": "South Carolina", "isoCode": "SC"}, {"name": "Tennessee", "isoCode": "TN"}, {"name": "Texas", "isoCode": "TX"}, {"name": "Utah", "isoCode": "UT"}, {"name": "Virginia", "isoCode": "VA"}, {"name": "Washington", "isoCode": "WA"}, {"name": "Wisconsin", "isoCode": "WI"}]}
```

6.4.2 v2/DestCountries

Description: This method returns the list of destination countries with country ISD code based on Partner Code provided in the request. Destination countries are those countries where users can send money through the UniTeller's remittance API.

URI: [/UTLROnlineRemitAPI/Common/v2/DestCountries](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003 and 59903001] (See [Appendix C](#) for Response Code details.)

UNIR request: DestCountriesReq

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track a request and response. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
countryIsoCode	Optional	Country Iso code	String

UNIR response: [DestCountriesResp](#)

Attribute	Description	Type
RequestTimestamp	Time (EST) when request is received at UniTeller	String
ResponseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
ExecutionTimestamp	Total time taken in processing of request at UniTeller	Long
InteractionId	This information is used to track a request and response. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
ExtraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
DestinationCountriesList	Provides the list of destination countries.	Array of Country See Appendix A
responseMessage	Returns Response Message	String

6.4.3 DestCountries

Description: This method returns the list of destination countries based on Partner Code provided in the request. Destination countries are those countries where user can send money through the UniTeller's remittance API.

URI: [/UTLROnlineRemitAPI/Common/DestCountries](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003 and 59903001] (See [Appendix C](#) for Response Code details.)

UNIR request: [DestCountriesReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to	String

		track requests and responses. The interaction ID received in request will be returned in response.	
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String

UNIR response: [DestCountriesResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
destinationCountriesList	Provides the list of destination countries.	Array of Country See Appendix A

- **Sample JSON Request**

```
{"partnerCode":"Uniteller","interactionId":"12345678","extraFields":[],"locale":"EN"}
```

- **Sample JSON Response**

```
{"requestTimestamp":"10242016012912","responseTimestamp":"10242016012912","executionTimestamp":28,"interactionId":"12345678","responseCode":"00000000","responseMessage":"Success.","extraFields":null,"destinationCountriesList":[{"name":"Argentina","isoCode":"AR"}, {"name":"Bolivia","isoCode":"BO"}, {"name":"Chile","isoCode":"CL"}, {"name":"Colombia","isoCode":"CO"}, {"name":"Costa Rica","isoCode":"CR"}, {"name":"Dominican Republic","isoCode":"DO"}, {"name":"Ecuador","isoCode":"EC"}, {"name":"El Salvador","isoCode":"SV"}, {"name":"Guatemala","isoCode":"GU"}, {"name":"Honduras","isoCode":"HN"}, {"name":"Nicaragua","isoCode":"NI"}, {"name":"Panama","isoCode":"PA"}, {"name":"Paraguay","isoCode":"PY"}, {"name":"Peru","isoCode":"PE"}, {"name":"Puerto Rico","isoCode":"PR"}, {"name":"Uruguay","isoCode":"UY"}, {"name":"Venezuela","isoCode":"VE"}]}
```

```
"Guatemala", "isoCode": "GT"}, {"name": "Haiti", "isoCode": "HT"}, {"name": "Honduras", "isoCode": "HN"}, {"name": "Mexico", "isoCode": "MX"}, {"name": "Nicaragua", "isoCode": "NI"}, {"name": "Panama", "isoCode": "PA"}, {"name": "Peru", "isoCode": "PE"}, {"name": "Philippines", "isoCode": "PH"}, {"name": "Uruguay", "isoCode": "UY"}, {"name": "Vietnam", "isoCode": "VN"}]}
```

6.4.4 CountryStates

Description: This method returns the list of country's state information (This information includes ID, ISO code and name) based on the country's ISO codes in request.

URI: [/UTLROnlineRemitAPI/Common/CountryStates](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001 and 59903006]

(See [Appendix C](#) for Response Code details.)

UNIR Request: [CountryStatesReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
countryISOCode	Mandatory.	The country ISO code is country specific unique code.	String(2 Characters)

UNIR response: [CountryStatesResp](#)

Attribute	Description	Type
-----------	-------------	------

requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
State	Provides the list of states name with their states ISO codes for a given country's ISO code in request	Array of State See Appendix A

- **Sample JSON Request**

```
{ "partnerCode": "Uniteller", "interactionId": "12345678", "extraFields": [], "locale": "EN", "countryISOCode": "US" }
```

- **Sample JSON Response**

```
{ "requestTimestamp": "10242016022044", "responseTimestamp": "10242016022044", "executionTimestamp": 101, "interactionId": "12345678", "responseCode": "00000000", "responseMessage": "Success.", "extraFields": null, "state": [ { "name": "Alabama", "isoCode": "AL" }, { "name": "Alaska", "isoCode": "AK" }, { "name": "American Samoa", "isoCode": "AS" }, { "name": "Arizona", "isoCode": "AZ" }, { "name": "Arkansas", "isoCode": "AR" }, { "name": "California", "isoCode": "CA" }, { "name": "Colorado", "isoCode": "CO" }, { "name": "Connecticut", "isoCode": "CT" }, { "name": "Delaware", "isoCode": "DE" }, { "name": "District of Columbia", "isoCode": "DC" }, { "name": "Fed St. Of Micronesia", "isoCode": "FM" }, { "name": "Florida", "isoCode": "FL" }, { "name": "Georgia", "isoCode": "GA" }, { "name": "Hawaii", "isoCode": "HI" }, { "name": "Idaho", "isoCode": "ID" }, { "name": "Illinois", "isoCode": "IL" }, { "name": "Indiana", "isoCode": "IN" }, { "name": "Iowa", "isoCode": "IA" }, { "name": "Kansas", "isoCode": "KS" }, { "name": "Kentucky", "isoCode": "KY" }, { "name": "Louisiana", "isoCode": "LA" }, { "name": "Maine", "isoCode": "ME" }, { "name": "Marshall Islands", "isoCode": "MH" }, { "name": "Maryland", "isoCode": "MD" }, { "name": "Massachusetts", "isoCode": "MA" }, { "name": "Michigan", "isoCode": "MI" }, { "name": "Minnesota", "isoCode": "MN" }, { "name": "Mississippi", "isoCode": "MS" }, { "name": "Missouri", "isoCode": "MO" }, { "name": "Montana", "isoCode": "MT" }, { "name": "Nebraska", "isoCode": "NE" }, { "name": "Nevada", "isoCode": "NV" }, { "name": "New Hampshire", "isoCode": "NH" }, { "name": "New Jersey", "isoCode": "NJ" }, { "name": "New Mexico", "isoCode": "NM" }, { "name": "New York", "isoCode": "NY" }, { "name": "North Carolina", "isoCode": "NC" }, { "name": "North Dakota", "isoCode": "ND" }, { "name": "Ohio", "isoCode": "OH" }, { "name": "Oklahoma", "isoCode": "OK" }, { "name": "Oregon", "isoCode": "OR" }, { "name": "Pennsylvania", "isoCode": "PA" }, { "name": "Rhode Island", "isoCode": "RI" }, { "name": "South Carolina", "isoCode": "SC" }, { "name": "South Dakota", "isoCode": "SD" }, { "name": "Tennessee", "isoCode": "TN" }, { "name": "Texas", "isoCode": "TX" }, { "name": "Utah", "isoCode": "UT" }, { "name": "Vermont", "isoCode": "VT" }, { "name": "Virginia", "isoCode": "VA" }, { "name": "Washington", "isoCode": "WA" }, { "name": "West Virginia", "isoCode": "WV" }, { "name": "Wisconsin", "isoCode": "WI" }, { "name": "Wyoming", "isoCode": "WY" } ] }
```

```
gan","isoCode":"MI"},{"name":"Minnesota","isoCode":"MN"},{"name":"Mississippi","isoCode":"M
S"},{"name":"Missouri","isoCode":"MO"},{"name":"Montana","isoCode":"MT"},{"name":"N.Maria
na Islands","isoCode":"MP"},{"name":"Nebraska","isoCode":"NE"}, {"name":"Nevada",
"isoCode":"NV"}, {"name":"New Hampshire","isoCode":"NH"}, {"name":"New Jersey",
"isoCode":"NJ"}, {"name":"New Mexico","isoCode":"NM"}, {"name":"New York","isoCode":"NY"},
{"name":"North Carolina","isoCode":"NC"},{"name":"North Dakota","isoCode":"ND"},
{"name":"Ohio","isoCode":"OH"},{"name":"Oklahoma","isoCode":"OK"},{"name":"Oregon","isoCo
de":"OR"},{"name":"Palau","isoCode":"PW"},{"name":"Pennsylvania","isoCode":"PA"},{"name":"
Puerto Rico","isoCode":"PR"},{"name":"Rhode Island","isoCode":"RI"}, {"name":"South
Carolina","isoCode":"SC"}, {"name":"South Dakota","isoCode":"SD"}, {"name":"Tennessee",
"isoCode":"TN"}, {"name":"Texas","isoCode":"TX"},{"name":"Us Virgin Islands","isoCode":"VI"},
{"name":"Utah","isoCode":"UT"},{"name":"Vermont","isoCode":"VT"},{"name":"Virginia","isoCod
e":"VA"},{"name":"Washington","isoCode":"WA"},{"name":"Wisconsin","isoCode":"WI"},{"name"
:"Wyoming","isoCode":"WY"}]}}
```

6.4.5 CountryCurrencies

Description: This method returns the list of country's currencies (for which UniTeller provide its services) based on the destination country's ISO codes on request. In response there will be an array of currency information (this information includes ID, ISO code and name).

URI: [/UTLROnlineRemitAPI/Common/CountryCurrencies](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001 and 59903006] (See [Appendix C](#) for Response Code details.)

UNIR Request: CountryCurrenciesReq

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField.

			See Appendix A
locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
countryISOCode	Mandatory.	The country ISO code is country specific unique code.	String(2 Characters)

UNIR Response: [CountryCurrenciesResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
countryCurrencies	Provides the list of currencies name with their currencies ISO codes	Array of Currencies See Appendix A

- **Sample JSON Request**

```
{ "partnerCode": "Uniteller", "interactionId": "12345678", "extraFields": [], "locale": "EN", "countryISOCode": "MX" }
```

- **Sample JSON Response**

```
{ "requestTimestamp": "10242016020822", "responseTimestamp": "10242016020822", "executionTimestamp": 87, "interactionId": "12345678", "responseCode": "00000000", "responseMessage": "Success.", "extraFields": null, "countryCurrencies": [ { "id": 1, "name": "Mex Pesos", "isoCode": "MXN" } ] }
```

6.4.6 DestCountryWithCurrency

Description: This method provides list of destination countries with currencies being supported for payment in that country.

URI: /UTLROnlineRemitAPI/Common/DestCountryWithCurrency

Possible Response Code: [00000000, 59906002, 59903005, 50103003 and 59903001] (See [Appendix C](#) for Response Code details.)

UNIR Request: [DestCountryWithCurrencyReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String

UNIR Response: [DestCountryWithCurrencyReq](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
destCountryWithCurrency	Gets the destination country with currency.	Array of DestCountryWithCurrency See Appendix A

- **Sample JSON Request**

```
{"partnerCode":"Uniteller","interactionId":"12345678","extraFields":[],"locale":"EN"}
```

- **Sample JSON Response**

```
{"requestTimestamp":"10242016050330","responseTimestamp":"10242016050330","executionTimestamp":188,"interactionId":"12345678","responseCode":"00000000","responseMessage":"Success","extraFields":null,"destCountryWithCurrency":[{"destinationCountry":{"id":16,"name":"Argentina","isoCode":"AR"},"currency":{"id":4,"name":"US Dollar","isoCode":"USD"}}, {"destinationCountry":{"id":10,"name":"Bolivia","isoCode":"BO"},"currency":{"id":4,"name":"US Dollar","isoCode":"USD"}}, {"destinationCountry":{"id":15,"name":"Chile","isoCode":"CL"},"currency":{"id":4,"name":"US Dollar","isoCode":"USD"}}, {"destinationCountry":{"id":11,"name":"Colombia","isoCode":"CO"},"currency":{"id":7,"name":"COL Pesos","isoCode":"COP"}}, {"destinationCountry":{"id":14,"name":"Costa Rica","isoCode":"CR"},"currency":{"id":4,"name":"US Dollar","isoCode":"USD"}}, {"destinationCountry":{"id":9,"name":"Dominican Republic","isoCode":"DO"},"currency":{"id":6,"name":"DR Pesos","isoCode":"DOP"}}, {"destinationCountry":{"id":7,"name":"Ecuador","isoCode":"EC"},"currency":{"id":4,"name":"US Dollar","isoCode":"USD"}}, {"destinationCountry":{"id":5,"name":"El Salvador","isoCode":"SV"},"currency":{"id":4,"name":"US Dollar","isoCode":"USD"}}, {"destinationCountry":{"id":1,"name":"Guatemala","isoCode":"GT"},"currency":{"id":3,"name":"Quetzales","isoCode":"GTQ"}}, {"destinationCountry":{"id":19,"name":"Haiti","isoCode":"HT"},"currency":{"id":4,"name":"US Dollar","isoCode":"USD"}}, {"destinationCountry":{"id":6,"name":"Honduras","isoCode":"HN"},"currency":{"id":5,"name":"Lempiras","isoCode":"HNL"}}, {"destinationCountry":{"id":2,"name":"Mexico","isoCode":"MX"},"currency":{"id":1,"name":"Mex Pesos","isoCode":"MXN"}}, {"destinationCountry":{"id":8,"name":"Nicaragua","isoCode":"NI"},"currency":{"id":4,"name":"US Dollar","isoCode":"USD"}}, {"destinationCountry":{"id":12,"name":"Panama","isoCode":"PA"},"currency":{"id":4,"name":"US Dollar","isoCode":"USD"}}, {"destinationCountry":{"id":13,"name":"Peru","isoCode":"PE"},"currency":{"id":4,"name":"US Dollar","isoCode":"USD"}}, {"destinationCountry":{"id":3,"name":"Philippines","isoCode":"PH"},"currency":{"id":2,"name":"Philippine Pesos","isoCode":"PHP"},"id":4,"name":"US Dollar","isoCode":"USD"}}, {"destinationCountry":{"id":17,"name":"Uruguay","isoCode":"UY"},"currency":{"id":4,"name":"US Dollar","isoCode":"USD"}}, {"destinationCountry":{"id":18,"name":"Vietnam","isoCode":"VN"},"currency":{"id":4,"name":"US Dollar","isoCode":"USD"}}]}
```

6.4.7 PayerWithReceptionMethodsList

Description: This API will provide the Payer with Reception Methods List based on Country Currency and State ISO code. (There are states in different countries that need payer branch information depending upon the selection of the state related to that specific county).

URI: /UTLROnlineRemitAPI/Common/v2/PayerWithReceptionMethodsList

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 59903006 and 59903007] (See [Appendix C](#) for Response Code details.)

UNIR Request: PayerWithReceptionMethodsReq

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
countryISOCode	Mandatory.	The country ISO code is country specific unique code. Country ISO Code would be destination country ISO code.	String(2 Characters)
currencyISOCode	Mandatory.	The currency ISO code is currency specific unique ISO code. Currency ISO code would be destination currency ISO code.	String(3 Characters)
stateISOCode	Mandatory.	The state ISO code is state specific unique ISO code. State ISO code would be destination state ISO code.	String(6 Characters)

UNIR Response: PayerWithReceptionMethodsListResp

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
payerWithReceptionMethods	Payer with reception methods list.	Array of PayerWithReceptionMethods. See Appendix A

- **Sample JSON Request with USD**

```
{ "countryISOCODE": "GT", "currencyISOCODE": "GTQ", "stateISOCODE": "GT-SR", "partnerCode": "Uniteller", "interactionId": "12345678", "locale": "en" }
```

- **Sample JSON Response with USD**

```
{ "errorCode": { "errorCode": "00000000", "errorMessage": "Success.", "errorType": "DEFAULT" }, "extraFields": null, "interactionId": "12345678", "executionTimestamp": 3251, "requestTimestamp": "02202023054949", "responseTimestamp": "02202023054952", "responseCode": "00000000", "responseMessage": "Success.", "payerWithReceptionMethods": [ { "payer": { "accountRegexMsg": "Account Number must be 10 digits.", "address": null, "beneAccountRegex": "^[0-9]{10}$", "id": 28, "isPayerBranchRequired": "NO", "name": "B. Industrial", "payerSpecificCode": "GCA8", "payerLogo": null, "phoneNumber1": null, "phoneNumber2": null, "receptionMethod": [ { "id": 1, "isAdditionalFieldRequired": "YES", "name": "Account Credit", "txAvailableMsgBA": null, "txAvailableMsgCard": null, "isPayerBranchRequired": "NO", "txnLimit": null, "accountRegexMsg": null, "beneAccountRegex": null }, { "id": 2, "isAdditionalFieldRequired": "NO", "name": "Cash Pickup", "txAvailableMsgBA": null, "txAvailableMsgCard": null, "isPayerBranchRequired": "NO", "txnLimit": "3000", "accountRegexMsg": null, "beneAccountRegex": null } ], "status": null, "accountNumberDisplayName": null }, { "id": 1, "isAdditionalFieldRequired": "YES", "name": "Account Credit", "txAvailableMsgBA": null, "txAvailableMsgCard": null, "isPayerBranchRequired": "NO", "txnLimit": null, "accountRegexMsg": null, "beneAccountRegex": null } ], "receptionMethods": [ { "id": 1, "isAdditionalFieldRequired": "YES", "name": "Account Credit", "txAvailableMsgBA": null, "txAvailableMsgCard": null, "isPayerBranchRequired": "NO", "txnLimit": null, "accountRegexMsg": null, "beneAccountRegex": null } ] }
```

```

Limit":null,"accountRegexMsg":null,"beneAccountRegex":null},{ "id":2,"isAdditionalFieldRequired":"NO","name":"Cash
Pickup","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":"3000","accountRegexMsg":null,"beneAccountRegex":null}},{ "payer":{"accountRegexMs
g":"Account Number must be 10 digits.","address":null,"beneAccountRegex":"^[0-
9]{10}$","id":524,"isPayerBranchRequired":"NO","name":"BANTRAB","payerSpecificCode":"BA
NTRAB","payerLogo":null,"phoneNumber1":null,"phoneNumber2":null,"receptionMethod":[{"i
d":1,"isAdditionalFieldRequired":"NO","name":"Account
Credit","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":"5000","accountRegexMsg":null,"beneAccountRegex":null},{ "id":2,"isAdditionalFieldRequ
ired":"NO","name":"Cash
Pickup","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":"1000","accountRegexMsg":null,"beneAccountRegex":null},"status":null,"accountNumbe
rDisplayName":null,"receptionMethods":[{"id":1,"isAdditionalFieldRequired":"NO","name":"Acc
ount
Credit","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":"5000","accountRegexMsg":null,"beneAccountRegex":null},{ "id":2,"isAdditionalFieldRequ
ired":"NO","name":"Cash
Pickup","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":"1000","accountRegexMsg":null,"beneAccountRegex":null}},{ "payer":{"accountRegexMs
g":"Account Number must be 10 digits.","address":null,"beneAccountRegex":"^[0-
9]{10}$","id":564,"isPayerBranchRequired":"NO","name":"BANCO AGROMERCANTIL DE
GUATEMALA","payerSpecificCode":"BAM","payerLogo":null,"phoneNumber1":null,"phoneNumb
er2":null,"receptionMethod":[{"id":1,"isAdditionalFieldRequired":"YES","name":"Account
Credit","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":"5000","accountRegexMsg":null,"beneAccountRegex":null},{ "id":2,"isAdditionalFieldRequ
ired":"NO","name":"Cash
Pickup","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":"5000","accountRegexMsg":null,"beneAccountRegex":null},"status":null,"accountNumbe
rDisplayName":null,"receptionMethods":[{"id":1,"isAdditionalFieldRequired":"YES","name":"Ac
count
Credit","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":"5000","accountRegexMsg":null,"beneAccountRegex":null},{ "id":2,"isAdditionalFieldRequ
ired":"NO","name":"Cash
Pickup","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":"5000","accountRegexMsg":null,"beneAccountRegex":null}},{ "payer":{"accountRegexMs
g":"Account Number must be 10 digits.","address":null,"beneAccountRegex":"^[0-
9]{10}$","id":30,"isPayerBranchRequired":"NO","name":"Banrural","payerSpecificCode":"GCA1
0","payerLogo":null,"phoneNumber1":null,"phoneNumber2":null,"receptionMethod":[{"id":1,"i
sAdditionalFieldRequired":"NO","name":"Account
Credit","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":"500","accountRegexMsg":null,"beneAccountRegex":null},{ "id":2,"isAdditionalFieldRequir
ed":"NO","name":"Cash

```

Pickup","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txnLimit":"5000","accountRegexMsg":null,"beneAccountRegex":null}},{"status":null,"accountNumberDisplayName":null},"receptionMethods":[{"id":1,"isAdditionalFieldRequired":"NO","name":"Account

Credit","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txnLimit":"500","accountRegexMsg":null,"beneAccountRegex":null},{id":2,"isAdditionalFieldRequired":"NO","name":"Cash

Pickup","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txnLimit":"5000","accountRegexMsg":null,"beneAccountRegex":null}},{"payer":{"accountRegexMsg":null,"address":null,"beneAccountRegex":null,"id":31,"isPayerBranchRequired":"NO","name":"Guatenvios","payerSpecificCode":"GCA12","payerLogo":null,"phoneNumber1":null,"phoneNumber2":null,"receptionMethod":[{"id":2,"isAdditionalFieldRequired":"NO","name":"Cash

Pickup","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txnLimit":"1000","accountRegexMsg":null,"beneAccountRegex":null}},{"status":null,"accountNumberDisplayName":null},"receptionMethods":[{"id":2,"isAdditionalFieldRequired":"NO","name":"Cash

Pickup","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txnLimit":"1000","accountRegexMsg":null,"beneAccountRegex":null}},{"payer":{"accountRegexMsg":"Account Number may have letters and numbers.",address":null,"beneAccountRegex":"^([a-zA-Z0-

9]{1,30})\$","id":1536,"isPayerBranchRequired":"NO","name":"TIGO","payerSpecificCode":"TGM94","payerLogo":null,"phoneNumber1":null,"phoneNumber2":null,"receptionMethod":[{"id":1,"isAdditionalFieldRequired":"NO","name":"Account

Credit","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txnLimit":"1295","accountRegexMsg":null,"beneAccountRegex":null},{id":6,"isAdditionalFieldRequired":"YES","name":"WALLET","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txnLimit":"1295","accountRegexMsg":null,"beneAccountRegex":null}},{"status":null,"accountNumberDisplayName":null},"receptionMethods":[{"id":1,"isAdditionalFieldRequired":"NO","name":"Account

Credit","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txnLimit":"1295","accountRegexMsg":null,"beneAccountRegex":null},{id":6,"isAdditionalFieldRequired":"YES","name":"WALLET","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txnLimit":"1295","accountRegexMsg":null,"beneAccountRegex":null}},

{"payer":{"accountRegexMsg":null,"address":null,"beneAccountRegex":null,"id":2308,"isPayerBranchRequired":"NO","name":"Megapaca","payerSpecificCode":"RCHGT94_7","payerLogo":null,"phoneNumber1":null,"phoneNumber2":null,"receptionMethod":[{"id":2,"isAdditionalFieldRequired":"NO","name":"Cash

Pickup","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txnLimit":"5000","accountRegexMsg":null,"beneAccountRegex":null}},{"status":null,"accountNumberDisplayName":null},"receptionMethods":[{"id":2,"isAdditionalFieldRequired":"NO","name":"Cash

```
Pickup","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":"5000","accountRegexMsg":null,"beneAccountRegex":null}}}}}
```

- **Sample JSON Request with Local Currency**

```
{"countryISOCode":"CO","currencyISOCode":"COP","stateISOCode":"CO-
DC","partnerCode":"Uniteller","interactionId":"12345678","extraFields":[],"locale":"EN"}
```

- **Sample JSON Response with Local Currency**

```
{"errorCode":{"errorCode":"00000000","errorMessage":"Success.","errorType":"DEFAULT"},"ex
traFields":null,"interactionId":"12345678","executionTimestamp":735,"requestTimestamp":"05
262025152630","responseTimestamp":"05262025152631","responseCode":"00000000","resp
onseMessage":"Success.","contextId":"API_85a1734f6cba30a8","payerWithReceptionMethods":[
{"payer":{"accountRegexMsg":"Account Number must be 9-11
digits.","address":null,"beneAccountRegex":"^([0-
9]{9,11})$","id":81,"isPayerBranchRequired":"NO","name":"Davivienda","payerSpecificCode":"C
SA8","payerLogo":"https://unirrespuat.uniteller.com:8443/payer_logo/Colombia/CSA8.jpg","p
honeNumber1":null,"phoneNumber2":null,"receptionMethod":{"id":1,"isAdditionalFieldRequir
ed":"NO","name":"Account
Credit","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":"1500","accountRegexMsg":"Account Number must be 9-11
digits.","additionalFieldInfo":null,"beneAccountRegex":"^([0-
9]{9,11})$","currencies":null},"id":2,"isAdditionalFieldRequired":"NO","name":"Cash
Pickup","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":null,"accountRegexMsg":null,"additionalFieldInfo":null,"beneAccountRegex":null,"curren
cies":null}},"status":null,"accountNumberDisplayName":null,"extraFields":null,"paymentAmoun
tRegex":null,"receptionMethods":[{"id":1,"isAdditionalFieldRequired":"NO","name":"Account
Credit","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":"1500","accountRegexMsg":"Account Number must be 9-11
digits.","additionalFieldInfo":null,"beneAccountRegex":"^([0-
9]{9,11})$","currencies":null},"id":2,"isAdditionalFieldRequired":"NO","name":"Cash
Pickup","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":null,"accountRegexMsg":null,"additionalFieldInfo":null,"beneAccountRegex":null,"curren
cies":null}]},"payer":{"accountRegexMsg":"Account Number must be 11
digits.","address":null,"beneAccountRegex":"^([0-
9]{11})$","id":82,"isPayerBranchRequired":"NO","name":"Bancolombia","payerSpecificCode":"C
SA4","payerLogo":"https://unirrespuat.uniteller.com:8443/payer_logo/Colombia/CSA4.jpg","p
honeNumber1":null,"phoneNumber2":null,"receptionMethod":{"id":1,"isAdditionalFieldRequir
ed":"YES","name":"Account
Credit","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":"1500","accountRegexMsg":"Account Number must be 11
```

```

digits.,"additionalFieldInfo":null,"beneAccountRegex":"^[0-
9]{11})$","currencies":null},{ "id":2,"isAdditionalFieldRequired":"NO","name":"Cash
Pickup","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":null,"accountRegexMsg":null,"additionalFieldInfo":null,"beneAccountRegex":null,"curren
cies":null}}, "status":null,"accountNumberDisplayName":null,"extraFields":null,"paymentAmount
Regex":null,"receptionMethods":[{"id":1,"isAdditionalFieldRequired":"YES","name":"Account
Credit","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":"1500","accountRegexMsg":"Account Number must be 11
digits.,"additionalFieldInfo":null,"beneAccountRegex":"^[0-
9]{11})$","currencies":null},{ "id":2,"isAdditionalFieldRequired":"NO","name":"Cash
Pickup","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":null,"accountRegexMsg":null,"additionalFieldInfo":null,"beneAccountRegex":null,"curren
cies":null}}],{"payer":{"accountRegexMsg":null,"address":null,"beneAccountRegex":null,"id":382
7,"isPayerBranchRequired":"NO","name":"GRUPO
EXITO","payerSpecificCode":"EXITOTN","payerLogo":"https://unirrespuat.uniteller.com:8443/
payer_logo/Colombia/EXITOTN.jpg","phoneNumber1":null,"phoneNumber2":null,"receptionM
ethod":[{"id":2,"isAdditionalFieldRequired":"NO","name":"Cash
Pickup","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":"1000","accountRegexMsg":null,"additionalFieldInfo":null,"beneAccountRegex":null,"cur
rencies":null}}, "status":null,"accountNumberDisplayName":null,"extraFields":[{"name":"validati
onMsg","value":"Only multiples of 50 in COP are allowed for this payer. Please enter a value in
COP rounded off to the closest hundred."}], "paymentAmountRegex":"^[0-
9]*(00|50)$"},"receptionMethods":[{"id":2,"isAdditionalFieldRequired":"NO","name":"Cash
Pickup","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"NO","txn
Limit":"1000","accountRegexMsg":null,"additionalFieldInfo":null,"beneAccountRegex":null,"cur
rencies":null}}],{"payer":{"accountRegexMsg":null,"address":null,"beneAccountRegex":null,"id":
3531,"isPayerBranchRequired":"NO","name":"MOVII","payerSpecificCode":"RTMOVIL","payerL
ogo":"https://unirrespuat.uniteller.com:8443/payer_logo/Colombia/RTMOVIL.jpg","phoneNu
mber1":null,"phoneNumber2":null,"receptionMethod":[{"id":6,"isAdditionalFieldRequired":"YE
S","name":"WALLET","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequir
ed":"NO","txnLimit":"2500","accountRegexMsg":null,"additionalFieldInfo":null,"beneAccountRe
gex":null,"currencies":null}}, "status":null,"accountNumberDisplayName":null,"extraFields":null,
"paymentAmountRegex":null,"receptionMethods":[{"id":6,"isAdditionalFieldRequired":"YES","n
ame":"WALLET","txAvailableMsgBA":null,"txAvailableMsgCard":null,"isPayerBranchRequired":"
NO","txnLimit":"2500","accountRegexMsg":null,"additionalFieldInfo":null,"beneAccountRegex":
null,"currencies":null}}]}

```

Note*:

- a. Please use receptionMethod under the Payer object. Don't use the outer reception method. In Future outer receptionMethod will deprecated.

b. In this API Response for any Payer that you are going to add if **isPayerBranchRequired** field is **YES** then call **/common/PayerBranches** and select one among from the payerBranch List before calling AddBeneficiary API and if **isAdditionalFieldRequired** field is **YES** then call **/common/PayerAdditionalField** and fill the required additional details before calling AddBeneficiary API.

6.4.8 SendingMethodsName

Description: This method provides a list of sending methods name which is used by remitter to pay UniTeller and these could be Credit Card and Debit Card etc.

URI: [/UTLROnlineRemitAPI/Common/SendingMethodsName](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003 and 59903001] (See [Appendix C](#) for Response Code details.)

UNIR Request: [SendingMethodsNameListReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String

UNIR Response: [SendingMethodsNameListResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The	String

	interaction ID received in request and same is being returned in response.	
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
sendingMethodsName	The sending methods name.	Array of String

- **Sample JSON Request**

```
{"partnerCode":"Uniteller","interactionId":"12345678","extraFields":[],"locale":"EN"}
```

- **Sample JSON Response**

```
{"requestTimestamp":"10242016070416","responseTimestamp":"10242016070416","executionTimestamp":1,"interactionId":"12345678","responseCode":"00000000","responseMessage":"Success","extraFields":null,"sendingMethodsName":["Credit Card", "Debit Card"]}
```

6.4.9 PayerBranches

Description: This method provides whole information regarding payer eg- payer location, payer specific code, payer status etc.

URI: [/UTLROnlineRemitAPI/Common/PayerBranches](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 59903006, 59903007 and 59903008] (See [Appendix C](#) for Response Code details.)

UNIR Request: [PayerBranchesReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
payerSpecificCode	Mandatory. Payer code	The payer specific code is payer unique code.	String

	must be 2-30 characters long.		
countryISOCode	Mandatory. Country ISO code must be [2] characters long.	The country ISO code is country specific unique code. Country ISO code would be the destination country ISO code.	String
currencyISOCode	Mandatory. Currency ISO code must be 3 characters long.	The currency ISO code is currency specific unique ISO code. Currency ISO code would be destination currency ISO code.	String
receptionMethodName	Mandatory. Possible values are [Account Credit or Cash Pickup]	The reception method name is how to receive money by beneficiary. It could be only Account Credit or Cash Pickup on request.	String
stateISOCode	Mandatory. ISO code must be [2-10] characters long.	The state ISO code is state specific unique code. State ISO code would be the destination country's state ISO code.	String
city	Optional. City name must be [1-30] characters long.	The name of the city. It must be provided to the state and country on request. In this request the city would belong to the destination country and state.	String

UNIR Response: [PayerBranchesResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See

		Appendix A
payerBranches	The list of payer's branches where the payer provides money to the beneficiary.	Array of PayerBranch. See Appendix A
isPayerBranchRequired	If payer branch required is Yes in the response for this payer then, the User have to send payer branch code at the time of selecting this payer during edit or add beneficiary.	String

- **Sample JSON Request**

```
{
  "payerSpecificCode": "INTERMEX",
  "countryISOCode": "MX",
  "currencyISOCode": "MXN",
  "receptionMethodName": "Cash Pickup",
  "stateISOCode": "DUR",
  "city": "vgdvb",
  "partnerCode": "Uniteller",
  "interactionId": "12345678",
  "locale": "en"
}
```

- **Sample JSON Response**

```
{
  "responseCode": "00000000",
  "responseMessage": "Success.",
  "extraFields": null,
  "interactionId": "12345678",
  "executionTimestamp": 155,
  "requestTimestamp": "01142021045825",
  "responseTimestamp": "01142021045826",
  "isPayerBranchRequired": "Yes",
  "payerBranches": [
    {
      "address": {
        "address1": "Pipila 103 Los Pirules Entre Guadalupe Victoria Y Cuahutemoc",
        "monto": "Max De Pago 500 Usd**",
        "address2": null,
        "city": "Cuencame",
        "country": "Mexico",
        "countryISOCode": "MX",
        "state": "DUR",
        "stateName": "Durango",
        "zipCode": "35805.0"
      },
      "branchCode": "INTERMEX-05525",
      "branchHours": "MON-FRI:0800AM-1000PM SAT:0800AM-0400PM",
      "branchName": "Abarrotes Angel",
      "phoneNumber1": "01 800 733 3300",
      "phoneNumber2": null
    }
  ]
}
```

6.4.10 **getPayerDetails()**

Description: This method provides whole information regarding payer E.g. - payer location, payer specific code, payer status etc.

URI: [/UTLROnlineRemitAPI/Common/PayerDetails](#)

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001 and 59903008] (See [Appendix C](#) for Response Code details.)

UNIR Request: [PayerDetailsReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)

interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
locale	Optional. Valid values are EN (English) or ES (Spanish).	Locale. If no input is provided in request, by default it would be English	String
payerSpecificCode	Mandatory.	The payer specific code is payer unique code.	String(2-30 Characters)

UNIR response: [PayerDetailsResp](#)

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
payerDetail	Regarding payer information	Array of Payer See Appendix A

- Sample JSON Request**

```
{"payerSpecificCode":"BANORTE","partnerCode":"Uniteller","interactionId":"12345678","extraFields":[],"locale":"EN"}
```

- Sample JSON Response**

```
{"requestTimestamp":"10242016082459","responseTimestamp":"10242016082459","executionTimestamp":86,"interactionId":"12345678","responseCode":"00000000","responseMessage":"Success.,"extraFields":null,"payerDetail":{"id":1,"name":"Banorte"},"payerSpecificCode":"BANO"}
```

```
RTE","address":{"address1":"Av. Revolucion 3000 Col.Primavera", "address2":null,
"city":"Monterrey", "state":"NLE","stateName":"Nuevo Leon","country":"Mexico",
"countryISOCode":"MX", "zipCode":null}, "phoneNumber1":null, "phoneNumber2":null,
"status":"Active"}}
```

6.4.11 getPayerAdditionalFields

Description: Gets PayerAdditionalFields from outside the application without login. This will return payer additional fields alongwith their options value as well as type of additional field (text, dropdown,date). Based on payer configuration in the UNIR system, these additional fields will be required at the time of adding beneficiary. To know if the additional fields belong to beneficiary, please refer to the “fieldBelongsTo” attribute of JSON response of PayerAdditionalField.

The types of additionalField for a payer in the UNIR system are:

1. Text
2. Date(MM/DD/YYYY)
3. Dropdown

URI: </UTLROnlineRemitAPI/Common/PayerAdditionalField>

Possible Response Code: [00000000, 59906002, 59903005, 50103003, 59903001, 59903008, 59903006 and 59903007] (See [Appendix C](#) for Response Code details.)

UNIR Request: [AdditionalFieldReq](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
interactionId	Optional	This information is used to track requests and responses. The interaction ID received in request will be returned in response.	String
extraFields	Optional	Extra fields for future use.	Array of ExtraField. See Appendix A
Locale	Optional. Valid values are EN	Locale. If no input is provided in request, by default it would be English	String

	(English) or ES (Spanish).		
currencyISOCode	Mandatory. It must be [3] characters long.	The destination currency ISO code.	String(3 Characters)
payerSpecificCode	Mandatory. Payer code must be [2-30] characters long.	The payer specific code is payer unique code.	String(2-30 Characters)
receptionMethodName	Mandatory. It could be Account Credit, Cash Pickup or WALLET as requested.	The Reception Method Name is how to pay money to the beneficiary.	String

UNIR response: AdditionalFieldResp

Attribute	Description	Type
requestTimestamp	Time (EST) when request is received at UniTeller	String
responseTimestamp	Time (EST) when response is sent to Client from UniTeller	String
executionTimestamp	Total time taken in processing of request at UniTeller	Long
interactionId	This information is used to track requests and responses. The interaction ID received in request and same is being returned in response.	String
responseCode	Returns Response Code	String
responseMessage	Return Response Message	String
extraFields	Extra fields for future use.	Array of ExtraField. See Appendix A
additionalFieldInfo	Payer additional fields.	Array of AdditionalFieldInfo. See Appendix A

- Sample JSON Request**

```
{"payerSpecificCode":"XMIN0005","receptionMethodName":"CashPickup","currencyISOCode":"INR", "partnerCode":"Uniteller"}
```

- **Sample JSON Response**

```
{
  "requestTimestamp": "03232017015117",
  "responseTimestamp": "03232017015117",
  "executionTimestamp": 15,
  "interactionId": null,
  "responseCode": "00000000",
  "responseMessage": "Success.",
  "extraFields": null,
  "additionalFieldInfo": [
    {
      "fieldId": 47,
      "fieldName": "relationToBeneficiary",
      "fieldLabel": "RelationwithBeneficiary",
      "fieldValue": null,
      "fieldType": "text",
      "fieldOptions": null,
      "minLen": "3",
      "maxLen": "50",
      "validationRegex": null,
      "dependentURI": null,
      "dependentFieldId": null
    },
    {
      "fieldId": 44,
      "fieldName": "senderIdentificationIssuedDate",
      "fieldLabel": "Remitter ID issued Date (MM/DD/YYYY)",
      "fieldValue": null,
      "fieldType": "date",
      "fieldOptions": null,
      "minLen": "3",
      "maxLen": "50",
      "validationRegex": null,
      "dependentURI": null,
      "dependentFieldId": null
    },
    {
      "fieldId": 48,
      "fieldName": "senderIdentificationState",
      "fieldLabel": "Remitter Identity State",
      "fieldValue": null,
      "fieldType": "dependent_dropdown",
      "fieldOptions": null,
      "minLen": null,
      "maxLen": null,
      "validationRegex": null,
      "dependentURI": "UTLROnlineRemitAPI/Common/CountryStates",
      "dependentFieldId": null
    },
    {
      "fieldId": 39,
      "fieldName": "senderIdentificationCountry",
      "fieldLabel": "Remitter Identity Country",
      "fieldValue": null,
      "fieldType": "dropdown",
      "fieldOptions": [
        { "key": "VN", "value": "Vietnam" },
        { "key": "HT", "value": "Haiti" },
        { "key": "GT", "value": "Guatemala" },
        { "key": "MX", "value": "Mexico" },
        { "key": "PH", "value": "Philippines" },
        { "key": "US", "value": "USA" },
        { "key": "SV", "value": "El Salvador" },
        { "key": "HN", "value": "Honduras" },
        { "key": "EC", "value": "Ecuador" },
        { "key": "NI", "value": "Nicaragua" },
        { "key": "DO", "value": "Dominican Republic" },
        { "key": "BO", "value": "Bolivia" },
        { "key": "CO", "value": "Colombia" },
        { "key": "PA", "value": "Panama" },
        { "key": "PE", "value": "Peru" },
        { "key": "CR", "value": "Costa Rica" },
        { "key": "CL", "value": "Chile" },
        { "key": "AR", "value": "Argentina" },
        { "key": "UY", "value": "Uruguay" },
        { "key": "IN", "value": "India" },
        { "key": "BR", "value": "Brazil" },
        { "key": "CA", "value": "Canada" }
      ],
      "minLen": null,
      "maxLen": null,
      "validationRegex": null,
      "dependentURI": null,
      "dependentFieldId": [48]
    },
    {
      "fieldId": 42,
      "fieldName": "senderBirthCountry",
      "fieldLabel": "Remitter Birth Country",
      "fieldValue": null,
      "fieldType": "dropdown",
      "fieldOptions": [
        { "key": "VN", "value": "Vietnam" },
        { "key": "HT", "value": "Haiti" },
        { "key": "GT", "value": "Guatemala" },
        { "key": "MX", "value": "Mexico" },
        { "key": "PH", "value": "Philippines" },
        { "key": "US", "value": "USA" },
        { "key": "SV", "value": "El Salvador" },
        { "key": "HN", "value": "Honduras" },
        { "key": "EC", "value": "Ecuador" },
        { "key": "NI", "value": "Nicaragua" },
        { "key": "DO", "value": "Dominican Republic" },
        { "key": "BO", "value": "Bolivia" },
        { "key": "CO", "value": "Colombia" },
        { "key": "PA", "value": "Panama" },
        { "key": "PE", "value": "Peru" },
        { "key": "CR", "value": "Costa Rica" },
        { "key": "CL", "value": "Chile" },
        { "key": "AR", "value": "Argentina" },
        { "key": "UY", "value": "Uruguay" }
      ],
      "minLen": null,
      "maxLen": null,
      "validationRegex": null,
      "dependentURI": null,
      "dependentFieldId": null
    }
  ]
}
```

```
y},{
  "key": "IN", "value": "India",
  "key": "BR", "value": "Brazil",
  "key": "CA", "value": "Canada"
}], "minLen": null, "maxLen": null, "validationRegex": null, "dependentURI": null, "dependentFieldId": null,
{
  "fieldId": 41, "fieldName": "senderNationalityCountry", "fieldLabel": "Remitter Nationality Country",
  "fieldValue": null, "fieldType": "dropdown", "fieldOptions": [
    { "key": "VN", "value": "Vietnam" },
    { "key": "HT", "value": "Haiti" },
    { "key": "GT", "value": "Guatemala" },
    { "key": "MX", "value": "Mexico" },
    { "key": "PH", "value": "Philippines" },
    { "key": "US", "value": "USA" },
    { "key": "SV", "value": "El Salvador" },
    { "key": "HN", "value": "Honduras" },
    { "key": "EC", "value": "Ecuador" },
    { "key": "NI", "value": "Nicaragua" },
    { "key": "DO", "value": "Dominican Republic" },
    { "key": "BO", "value": "Bolivia" },
    { "key": "CO", "value": "Colombia" },
    { "key": "PA", "value": "Panama" },
    { "key": "PE", "value": "Peru" },
    { "key": "CR", "value": "Costa Rica" },
    { "key": "CL", "value": "Chile" },
    { "key": "AR", "value": "Argentina" },
    { "key": "UY", "value": "Uruguay" }
  ], "key": "IN", "value": "India",
  "key": "BR", "value": "Brazil",
  "key": "CA", "value": "Canada"
}], "minLen": null, "maxLen": null, "validationRegex": null, "dependentURI": null, "dependentFieldId": null,
{
  "fieldId": 45, "fieldName": "senderIdentificationExpDate", "fieldLabel": "Remitter ID Exp Date (MM/DD/YYYY)",
  "fieldValue": null, "fieldType": "date", "fieldOptions": null, "minLen": "3", "maxLen": "50",
  "validationRegex": null, "dependentURI": null, "dependentFieldId": null,
  "fieldId": 40, "fieldName": "senderIdentificationIssuedAtCountry", "fieldLabel": "Remitter Identity Issued At Country",
  "fieldValue": null, "fieldType": "dropdown", "fieldOptions": [
    { "key": "VN", "value": "Vietnam" },
    { "key": "HT", "value": "Haiti" },
    { "key": "GT", "value": "Guatemala" },
    { "key": "MX", "value": "Mexico" },
    { "key": "PH", "value": "Philippines" },
    { "key": "US", "value": "USA" },
    { "key": "SV", "value": "El Salvador" },
    { "key": "HN", "value": "Honduras" },
    { "key": "EC", "value": "Ecuador" },
    { "key": "NI", "value": "Nicaragua" },
    { "key": "DO", "value": "Dominican Republic" },
    { "key": "BO", "value": "Bolivia" },
    { "key": "CO", "value": "Colombia" },
    { "key": "PA", "value": "Panama" },
    { "key": "PE", "value": "Peru" },
    { "key": "CR", "value": "Costa Rica" },
    { "key": "CL", "value": "Chile" },
    { "key": "AR", "value": "Argentina" },
    { "key": "UY", "value": "Uruguay" }
  ], "key": "IN", "value": "India",
  "key": "BR", "value": "Brazil",
  "key": "CA", "value": "Canada"
}], "minLen": null, "maxLen": null, "validationRegex": null, "dependentURI": null, "dependentFieldId": null
}
}
```

- **Sample JSON Request 2:**

```
{ "payerSpecificCode": "DRCX000026", "receptionMethodName": "Account  
Credit", "currencyISOCODE": "USD", "partnerCode": "Uniteller", "interactionId": "12345678", "locale":  
"en" }
```

- **Sample JSON Response 2:**

```
{ "responseCode": "00000000", "responseMessage": "Success.", "extraFields": null, "interactionId": "12345678", "executionTimestamp": 19, "requestTimestamp": "01142021055802", "responseTime  
stamp": "01142021055802", "additionalFieldInfo": [ { "dependentFieldId": null, "dependentURI": null, "fieldBelongsTo": null, "fieldId": 356, "fieldLabel": "AccountType", "fieldName": "accountType", "fieldOptions": [ { "key": "01", "value": "Checking" }, { "key": "02", "value": "Savings" } ], "fieldType": "dropdown", "fieldValue": null, "maxLen": null, "minLen": null, "validationRegex": null, "fieldErrorMsg": null } ] }
```

6.4.12 Transaction Search (Requires Password Grant)

Description: This API is used to fetch the transactions status based on the requested filters .The partners have to provide their Admin Users in order to get the access to this API.

NOTE:

- **Accepted values of Status are:** HOLD, PAID, REFUND, PAYABLE, CANCEL and CANCELPENDING.
- **Status** should be **case sensitive**.
- If toDate is not provided in the request then currentDate will be considered as toDate.
- The Fetched Records will be in Ascending Order.
- **If no filter is provided in the request then, last 1 year data will fetched.**
- The **request parameters** should be passed in the **request params** and not in the request body.
- The result will be returned in the Pagination manner, where in without passing page size and page index you'll get the whole records based on the filter applied and when the page size and index is passed in the request then , that index records with sepecified size will be returned.

Example:

[/UTLROnlineRemitAPI/Remittance/transactions/search/?page.size=10&page.index=5&txNumber=5540261924&txNumber=5540232541&startDate=01012022&endDate=04052022](#)

URI: /UTLROnlineRemitAPI/Remittance/transactions/search

UNIR Request: [SearchTransactionRequest](#)

Attribute	Validation Rule	Description	Type
partnerCode	Mandatory	This information is provided by UniTeller and it should be exactly the same as provided.	String(2-20 Characters)
Page	Optional	This information is used to track a request and response. The interaction ID received in request will be returned in response.	SearchPage
Status	Optional.	Requested transaction status	List<String>
txNumber	Optional	Transaction Number	List<String>
startDate	Optional	The startDate should be in string form MMDDYYYY (i.e. month, day, year) with no separator between year, month, day.	String(8 Digits)
endDate	Optional	The endDate should be in string form MMDDYYYY (i.e. month, day, year) with no separator between year, month, day.	String(8 Digits)

UNIR Response: [SearchResponse](#)

Attribute	Description	Type
responseCode	Returns Response Code	String
responseMessage	Returns Response Message	String
Results	Contains the list of transaction details	List of ITransactionDto. See Appendix A
Page	Contains the page data(page index and records in the page)	SearchPage
totalPages	Total number of pages	String
totalRecords	Total Number of Records Fetched	String
resultSize	Records in single page	String

- Sample Request Param**

/UTLROnlineRemitAPI/Remittance/transactions/search/?startDate=01012022&endDate=02052022

- **Sample JSON Response**

```
{
  "responseCode": "00000000",
  "responseMessage": "success",
  "errors": null,
  "page": {
    "size": "100",
    "index": "0"
  },
  "sort": {
    "columns": [
      "id"
    ],
    "direction": "ASC"
  },
  "totalPages": "1",
  "totalRecords": "7",
  "resultSize": "7",
  "results": [
    {
      "txNumber": "60071797824",
      "txReferenceNumber": null,
      "destCurrency": null,
      "destCountry": null,
      "originCountry": null,
      "originCurrency": null,
      "remitter": null,
      "recipient": null,
      "transactionAmount": null,
      "additionalFieldValues": null,
      "status": {
        "code": "HOLD",
        "display": "HOLD"
      },
      "subStatuses": null,
      "payer": null,
      "createTime": "01022022070827",
      "availableDate": null,
      "payment": null,
      "flags": null,
      "cancelTime": null,
      "serviceType": null,
      {
        "txNumber": "5240799508",
        "txReferenceNumber": null,
        "destCurrency": null,
        "destCountry": null,
        "originCountry": null,
        "originCurrency": null,
        "remitter": null,
        "recipient": null,
        "transactionAmount": null,
        "additionalFieldValues": null,
        "status": {
          "code": "HOLD",
          "display": "HOLD"
        },
        "subStatuses": null,
        "payer": null,
        "createTime": "01022022090015",
        "availableDate": null,
        "payment": null,
        "flags": null,
        "cancelTime": null,
        "serviceType": null,
        {
          "txNumber": "5240717194",
          "txReferenceNumber": null,
          "destCurrency": null,
          "destCountry": null,
          "originCountry": null,
          "originCurrency": null,
          "remitter": null,
          "recipient": null,
          "transactionAmount": null,
          "additionalFieldValues": null,
          "status": {
            "code": "PAYABLE",
            "display": "PAYABLE"
          },
          "subStatuses": null,
          "payer": null,
          "createTime": "01022022090256",
          "availableDate": null,
          "payment": null,
          "flags": null,
          "cancelTime": null,
          "serviceType": null,
          {
            "txNumber": "60071759458",
            "txReferenceNumber": null,
            "destCurrency": null,
            "destCountry": null,
            "originCountry": null,
            "originCurrency": null,
            "remitter": null,
            "recipient": null,
            "transactionAmount": null,
            "additionalFieldValues": null,
            "status": {
              "code": "HOLD",
              "display": "HOLD"
            },
            "subStatuses": null,
            "payer": null,
            "createTime": "01032022065618",
            "availableDate": null,
            "payment": null,
            "flags": null,
            "cancelTime": null,
            "serviceType": null,
            {
              "txNumber": "0106202204530",
              "txReferenceNumber": null,
              "destCurrency": null,
              "destCountry": null,
              "originCountry": null,
              "originCurrency": null,
              "remitter": null,
              "recipient": null,
              "transactionAmount": null,
              "additionalFieldValues": null,
              "status": {
                "code": "PAID",
                "display": "PAID"
              },
              "subStatuses": null,
              "payer": null,
              "createTime": "0106202204530",
              "availableDate": null,
              "payment": null,
              "flags": null,
              "cancelTime": null,
              "serviceType": null,
              {
                "txNumber": "0106202205013",
                "txReferenceNumber": null,
                "destCurrency": null,
                "destCountry": null,
                "originCountry": null,
                "originCurrency": null,
                "remitter": null,
                "recipient": null,
                "transactionAmount": null,
                "additionalFieldValues": null,
                "status": {
                  "code": "PAID",
                  "display": "PAID"
                },
                "subStatuses": null,
                "payer": null,
                "createTime": "0106202205013",
                "availableDate": null,
                "payment": null,
                "flags": null,
                "cancelTime": null,
                "serviceType": null,
                {
                  "txNumber": "02012022172115",
                  "txReferenceNumber": null,
                  "destCurrency": null,
                  "destCountry": null,
                  "originCountry": null,
                  "originCurrency": null,
                  "remitter": null,
                  "recipient": null,
                  "transactionAmount": null,
                  "additionalFieldValues": null,
                  "status": {
                    "code": "PAYABLE",
                    "display": "PAYABLE"
                  },
                  "subStatuses": null,
                  "payer": null,
                  "createTime": "02012022172100",
                  "availableDate": null,
                  "payment": null,
                  "flags": null,
                  "cancelTime": null,
                  "serviceType": null
                }
              }
            }
          }
        }
      }
    }
  ]
}
```

7 Appendix 'A'

7.1 ExtraField

Attribute	Validation Rule	Description	Type
Name	Mandatory	The extra information key.	String

Value	Optional	The extra information value.	String
-------	----------	------------------------------	--------

7.2 RemitterPersonalInfo

Attribute	Validation Rule	Description	Typ
emailAddress	Mandatory	It would contain [a-z], [A-Z], [0-9], [. @ _] characters only.	String(5-50 Characters)
firstName	Mandatory	It would contain [a-z], [A-Z] characters only.	String(1-30 Characters)
middleName	Optional	It would contain [a-z], [A-Z] characters only.	String(1-30 Characters)
lastName	Mandatory	It would contain [a-z], [A-Z] characters only.	String(2-30 Characters)
secondLastName	Optional	It would contain [a-z], [A-Z] characters only.	String(1-30 Characters)
Gender	Optional. Valid values are M (Male) or F (Female).	Gender.	String
birthDate	Mandatory. The date of birth should be in string form MMDDYYYY (i.e month, day, year) with no separator between year, month, day.	Date of birth.	String(8 Characters)
cellPhone	Mandatory	Cellphone(Without ISD Code)	String(8-15 Characters)
workPhone	Optional	Work phone	String(8-15 Characters)
homePhone	Optional.	Home phone	String(8-15 Characters)

Address	Optional.	User's address	Address. See Appendix A: <Address>
destinationCountryISOCode	Mandatory. It must be [2] characters long and it would contain [A-Z] characters only	Destination Country	String See Appendix : <DestinationCountry>
optOutUniTeller	Optional. Valid values are YES or NO.	If the user does not want to get UniTeller exclusive Promotions mail then set "YES" and by default is "NO".	String(1-30 Characters)
optOutAffiliates	Optional. Valid values are YES or NO.	If the user does not want to share his personal and transaction information with UniTeller's affiliated companies then set in request "YES" and by default is "NO".	String(1-30 Characters)
optOutExternal	Optional. Valid values are YES or NO.	If the user does not want to share his personal and transaction information with any other outside companies that UniTeller may have contracted to provide other products and services then set in request "YES" and by default is "NO".	String
optOutWlp	Optional. Valid values are	If the remitter does not want to share	String

	YES or NO.	his please do not share my personal and transaction information with Smart World Mobile. then Yes and by default is NO.	
preferredLanguage	Option Valid values are English/Spanish	preferred language use to send sms/Email Alert for Remitter	String

7.3 Address

Attribute	Validation Rule	Description	Type
address1	Mandatory	User's address 1	String(1-60 Characters)
address2	Optional	User's address 2	String
City	Mandatory.	City name	String(1-30 Characters)
State	Mandatory.	State ISO Code	String(1-30 Characters)
stateName	Optional	State name	String
Country	Optional	Country name	
countryISOCode	Mandatory.	Country ISO Code	String(2 Characters)
zipCode	Mandatory.	Zip Code.	String(1-10 Characters)

7.4 UICReceiptMode

Attribute	Description	Type
sourceMode	The source information type.	String
Source	The source value.	String

7.5 SecurityQuestion

Attribute	Description	Type
questionId	Question's Id	Integer
Question	Question	String

questionHint	Answer hint	String
---------------------	-------------	--------

7.6 SecurityAnswer

Attribute	Description	Type
questionId	Question's Id	Integer
Answer	Question	String

7.7 securityQuestionAnswersResult

Attribute	Description	Type
userId	UUID	String
userName	User's registered email address	String
securityQuestionAnswers	User's selected question and answer	Object of SecurityAnswer



7.8 State

Attribute	Description	Type
Name	State name.	String
isoCode	State ISO code. It is state specific unique code.	String

7.9 Country

Attribute	Description	Type
Name	Country name.	String
isoCode	Country ISO code. It is Country specific unique code.	String

7.10 Payer

Attribute	Description	Type
Id	payerId	Int
Name	Country name.	String
payerSpecificCode	Country ISO code. It is Country specific unique code.	String

Address	The address.	Array Of address See Appendix A
phoneNumber1	Phone number1(Without ISD Code)	String
phoneNumber2	Phone number2(Without ISD Code)	String
Status	Status	String
beneAccountRegex	Bene account validation regex	String
accountRegexMsg	Account validation message	String
isPayerBranchRequired	Payer branch required or not for this payer	String
receptionMethod	Bene reception method	Array Of reception method See Appendix A

7.11 Currency

Attribute	Description	Type
Id	Currency Id	Int
Name	Currency name.	String
isoCode	Currency ISO code. It is Currency specific unique code.	String

7.12 DestCountryWithCurrency

Attribute	Description	Type
destinationCountry	The destination country's ISO Code.	String
Currency	The destination countries are those countries where remitter can send money.	Array of Currency See Appendix A

7.13 PayerWithReceptionMethods

Attribute	Description	Type
Payer	The payer detail.	Payer. See Appendix A

7.14 ReceiptMethod

Attribute	Description	Type
Id	The reception method id.	Integer
Name	The reception method name.	String

isAdditionalFieldRequired	Is additional field required.	String
txAvailableMsgBA	Message which describes when the transaction will be available for collection if created using Bank Account	String
txAvailableMsgCard	Message which describes when the transaction will be available for collection if created using card	String

7.15 PayerBranch

Attribute	Description	Type
branchName	Payer branch name.	String
branchCode	Payer branch unique code.	String
branchHours	Payer branch day running time.	String
phoneNumber1	Payer branch phone number.	String
phoneNumber2	Payer branch phone number.	String
Address	Payer branch address.	Address. See Appendix A

7.16 ServiceFee

Attribute	Description	Type
totalTransactionAmount	Total transaction amount is transaction amount with service fee.	Double
serviceFee	Service Fee is a transaction fee.	Double
receivedAmount	Receiving Amount is the amount received by the beneficiary.	Double
sendingMethodName	Name of sending method on which fee is applied.	String

7.17 Beneficiary details

Attribute	Validation Rule	Description	Type
Gender	Optional.	The beneficiary's gender.	String
emailId	Optional.	The beneficiary's email address.	String
firstName	Mandatory.	The beneficiary's first name.	String

midName	Optional.	The beneficiary's middle name.	String
lastName	Mandatory.	The beneficiary's second last name.	String
secLastName	Optional.	The beneficiary's second last name.	String
Nickname	Optional.	The beneficiary's nickname.	String
accHolderName	Conditional.	The account holder name. It will be required if the user provides 'Account credit' as a reception method in request.	String
accNumber	Conditional.	The account number. It will be required if the user provides 'Account credit' as a reception method in request.	String
accType	Conditional.	The account type. It will be required if the user provides 'Account credit' as a reception method on request.	String
Address	Mandatory	The beneficiary address.	Object of Address See Appendix A
homePhone	Optional.	The beneficiary homePhone(Without ISD Code)	String
Cellphone	Mandatory.	The beneficiary cell phone(Without ISD Code)	String
workPhone	Optional.	The beneficiary work phone (Without ISD Code)	String
beneStatus	Optional.	The beneficiary status. It will not require in request at the time of adding beneficiary	String
Payer	Mandatory.	The payer name. It will not require in request at the time of adding beneficiary	String

receptionMethod	Mandatory.	The payment method name. It could be Account Credit, Cash pickup or WALLET.	String
destinationCurrency	Mandatory.	The destination country ISO code.	String
destCountryISOCode	Mandatory.	The destination currency ISO code.	String
destCurrencyISOCode	Mandatory.	The destination currency ISO code.	String
payerSpecificCode	Mandatory.	The payer specific code.	String
payerBranchCode	Conditional.	The payer branch code.	String
beneVerification	Optional.	Bene verification status	String
payerInfo	Mandatory.	Payer information	Object of Payer See Appendix A
additionalFieldInfo	Optional.	Payer additional field	Object of AdditionalFieldInfo See Appendix A



7.18 SendingMethodDetail

Attribute	Validation Rule	Description	Type
Id	Mandatory.	Sending method.	Integer
Nickname	Mandatory.	The sending method nickname.	String
sendingMethodName		The sending method name is Credit Card, Debit Card etc.	String
sendingMethodNumber	Mandatory.	The sending method number is Credit Card, Debit Card number etc.	String
sendingMethodType	Mandatory.	The Sending Method Type is Account or Card type which could be Saving, Visa etc.	String
Status	Optional.	Status of Sending method .The sending method status which could be 'Not Verified', 'Verified', 'Deactivated', 'Locked'.	String

7.19 VerificationQuestionAnswer

Attribute	Validation Rule	Description	Type
answerOption	Mandatory.	The question answer is validated by option index.	AnswerOption See Appendix A
questionType	Not Required	Question type.	String

7.20 VerificationQuestion

Attribute	Validation Rule	Description	Type
Question	Mandatory	Question.	String
questionType	Not Required	Question type.	String
answerOption	Mandatory	The question answer validate by option index.	Array of AnswerOption See Appendix A

7.21 AnswerOption

Attribute	Validation Rule	Description	Type
Index	Mandatory	Index of option.	String
Option	Mandatory	The answer's options which is select by user to verify his identification details	String

7.22 SendingMethodSummary

Attribute	Description	Type
Id	Sending method.	Integer
Nickname	The sending method nickname.	String
sendingMethodName	The sending method name is Credit Card, Debit Card etc.	String
sendingMethodNumber	The sending method number is Credit Card, Debit Card number etc.	String
sendingMethodType	The Sending Method Type is Account or Card type which could be Saving, Visa etc.	String
Address	User's address	Address. See Appendix A <Address>
allowEditandDeactivate	Allow the remitter to edit the card. true mean remitter can edit card information .	Boolean

	false means user can not edit now.	
--	------------------------------------	--

7.23 TransactionSummary

Attribute	Description	Type
transactionNumber	The transaction number is a unique number which is created at the time of doing a transaction.	String
transactionAmount	Transaction amount is the remitter's sending amount.	String
transactionCurrency	The transaction currency is the remitter's currency selected by the remitter at the time of doing the transaction.	String
transactionStatus	The transaction status could be paid, cancel, hold, payable, refund, replaced. It is based on transaction process till the transaction being paid.	String
transactionCreateDate	The transaction create date time stamp in form MMDDYYYYHH24MISS (i.e year, month, day, hour in 24, minute, second) with no separator between year, month, day, hour, minute, second	String
beneficiaryId	Beneficiary id.	Integer
beneficiaryFirstName	Beneficiary first name.	String
beneficiaryMiddleName	Beneficiary middle name.	String
beneficiaryLastName	Beneficiary last name.	String
beneficiarySecondLastName	Beneficiary second last name.	String
receptionMethodName	The reception method name like cash pick up, Account credit etc	String
sendingMethodId	Sending method id	String
sendingMethodName	The sending method name like Credit Card, Debit Card etc.	String
payerName	The payer name. Payer who is making payment to the beneficiary.	String
destCountryISOCode	Destination country ISO code.	String
paymentAmount	Payment amount is acgiven amount to the beneficiary.	String
paymentCurrency	Payment currency is destination country's currency.	String
txDisplayStatus	The transaction display status is transaction process status. It could be [IN	String

	PROCESS,HOLD, PAYABLE, PAID, CANCELLED, REFUND,REPLACED]	
--	---	--

7.24 TransactionDetail

Attribute	Description	Type
remitterInfo	Remitter's personal information.	Object of RemitterPersonalInfo See Appendix A
beneficiarySummary	Beneficiary information.	Object of BeneficiarySummary See Appendix A
payerSummary	Payer information is that who is paying money to beneficiary	Object of payer See Appendix A
transactionNumber	The transaction number is a unique number which is provided to the remitter after doing the transaction.	String
serviceFee	service fee is a fee which applies on a transaction.	Double
exchangeRate	The value of one currency conversion to another currency is called the exchange rate.	Double
transactionAmount	transaction amount is a sending amount which sends by remitter	Double
totalTransactionAmount	Total transaction amount is transaction amount with service fee.	Double
payingAmount	The paying amount (Transaction amount * Exchange rate) is the amount given to the beneficiary.	Double
transactionStatus	The transaction status could be paid, cancel, hold, payable, refund, replaced and It is based on the transaction process till transaction being paid.	String
payCurrency	The payment currency is which beneficiary gets money in the form of his/her currency.	Object of Currency See appendix A
transactionCurrency	The transaction currency is remitter's currency which is used at the time of transaction.	Object of Currency See appendix A
transactionCreateDate	The transaction create time stamp in form MMDDYYYYHH24MISS (i.e year, month, day, hour in 24, minute, second) with no separator between year, month, day, hour, minute, second	String
sendingMethodSummary	The Sending method information is the remitter's payment mode which	Object of SendingMethodSummary

	selects at the time of transaction which could be Credit Card, Debit Card etc.	See Appendix A
txDisplayStatus	The transaction display status is transaction process status. It could be [IN PROCESS, HOLD, PAYABLE, PAID, CANCELLED, REFUND, REPLACED]	Double
discountAmount	Discount on service fee	Double
actualServiceFee	Actual service fee is actual fee which is applied on transaction before applied the promotion coupon	Double
actualTotalTxAmount	Actual total transaction amount is before the discount.	Double
stateFee	This field provides Transfer Taxes [Federal Remittance Tax]	String

7.25 ExchangeRate

Attribute	Description	Type
destCountryISOCode	Destination country ISO code.	String
destCurrencyISOCode	destination currency ISO code	String
exchangeRate	Latest exchange rate.	Double

7.26 CreditLevel

Attribute	Description	Type
levelName	Level name.	String
cCDailyLimit	Credit card daily limit	Integer
cCWeeklyLimit	Credit card weekly limit	Integer
dCDailyLimit	Debit card daily limit	Integer
dCWeeklyLimit	Debit card weekly limit	Integer
bADailyLimit	Bank account daily limit	Integer
BAWeeklyLimit	Bank account weekly limit	Integer
cCDailyLimitTrusted	Credit card daily limit trusted	Integer
cCWeeklyLimitTrusted	Credit card weekly limit trusted	Integer
dCDailyLimitTrusted	Debit card daily limit trusted	Integer
dCWeeklyLimitTrusted	Debit card weekly limit trusted	Integer
bADailyLimitTrusted	Bank account daily limit trusted	Integer
BAWeeklyLimitTrusted	Bank account weekly limit trusted	Integer
uLinkCardDailyLimit	u link card daily limit	Integer
uLinkCardWeeklyLimit	u link card weekly limit	Integer
uLinkCardDailyLimitTrusted	u link card daily limit trusted	Integer
uLinkCardWeeklyLimitTrusted	u link card weekly limit trusted	Integer

7.27 ComplianceLevel

Attribute	Description	Type
levelName	Level name	String
limitOfDays1	Limit of days 1	Integer
limitOfDays4	Limit of days 4	Integer
limitOfDays14	Limit of days 14	Integer
limitOfDays60	Limit of days 60	Integer
limitOfDays90	Limit of days 90	Integer

7.28 PayerSummary

Attribute	Description	Type
Id	Payer id.	Integer
payerName	Payer name.	String
branchId	Branch id.	Integer
branchName	Branch name.	String

7.29 AdditionalFieldInfo

Attribute	Description	Type
fieldId	Field Id	Integer
Fieldname	Field name	String
fieldLabel	Filed label	String
fieldValue	Field value	String
fieldType	Field type	String
fieldOptions	Field options	Object of FieldOption See appendix A
minLen	Field value min length	String
maxLen	Field value max length	String
validationRegex	Field validation regex	String
dependentURI	Dependent field URI	String
dependentFieldId	Dependent field ids	Array of Integer

7.30 FieldOption

Attribute	Description	Type
Key	Field Option key	String
Value	Filed option value	String



7.31 PromotionDetails

Attribute	Description	Type
promotionCode	Promotion Code	String
promotionDescription	Promotion Description	String
promotionId	Promotion Unique Number	Int
promotionNature	Promotion Nature like Manual or Auto Apply.	String

promotionStatus	Promotion Status	
promotionType	Promotion Type Like Percentage or Gift card	String
promotionValue	Promotion Value	Double

7.32 ITransactionDto

Attribute	Description	Type
txNumber	Transaction Number	String
createTime	Transaction Creation Timestamp(Format is MMDDYYYYHH24MISS)	String
cancelTime	Transaction Cancel Timestamp(Format is MMDDYYYYHH24MISS)	String
status	Transaction status to be displayed to the User	TxStatuses

7.33 TxStatuses

Attribute	Description	Type
code	Transaction Status	String
display	Transaction Status	String

7.34 ApplicablePromotions

Attribute	Description	Type
discountAmount	Discount Amount after applying promotion	Double
serviceFeeAfterDiscount	Service Fee after Discount applied	Double
txAmountAfterDiscount	Tx Amount after Discount applied	Double
promotionDetails	Applied Promotion Details	List of PromotionDetails

7.35 ContactSummary

Attribute	Description	Type
accHolderName	Discount Amount after applying promotion	String

accNumber	Service Fee after Discount applied	String
accType	Tx Amount after Discount applied	String
additionalFieldInfo	Payer additional field	AdditionalFieldInfo
Address	The biller's address.	Address
balanceInquirySupported	The balance inquiry supported for biller.	String
beneDOB	The beneficiary's Date of Birth	String
beneStatus	The beneficiary status. It will not require in request at the time of adding beneficiary	String
beneVerification	The Bene verification status	String
billerSpecificCode	The Biller's Specific Code	String
billerSupportsExcessPayment	The Biller's Support Excess Payment	String
billerSupportsPartialPayment	The Biller's support Partial Payment	String
billerSupportsPastduePayment	The Biller's support Past due payment	String
cellPhone	The Biller's cell phone. (Without ISD Code)	String
contactType		String
destCountryISOCode	The destination currency ISO code.	String
destCurrencyISOCode	The destination currency ISO code.	String
destinationCurrency	The destination currency.	String
emailId	The Beneficiary's Email Id	String
firstName	The Biller's First Name	String
Gender	The Biller's gender.	String
homePhone	The beneficiary's homePhone.	String
Id	The Biller's Id	Int
isCurpVerified	The Curp is verified	String
lastName	The biller's last name	String
midName	The biller's mid name	String
nickName	The biller's nick name	String
operation	The biller's service category	String
Payer	The biller	String
payerBranchCode	The beneficiary's payer branch code	String
payerInfo	The beneficiary's payer Info	Payer
payerSpecificCode	The beneficiary's payer specific code	String
receptionMethod	The Reception method	String
secLastName	The biller's second last name	String
serviceType	The service type	String
topUpPlans	The Reload phone topup plans	List of TopUpPlans
workPhone	The beneficiary's work phone	String
isStateDeactivated	Is the beneficiary state deactivated	String

7.36 BillersDetail

Attribute	Description	Type
Billers	The biller's Information.	List of Billers
operation	The biller's service category	String

7.37 Biller

Attribute	Description	Type
address	The Biller's Address	Address
billerSpecificCode	The Biller's specific code	String
description	The Biller's description	String
Id	The Biller's Id	Int
logoLocation	The logo location	String
name	The biller's Name	String
operation	The Biller's service category	List of Operation
phoneNumber1	The Phone Number 1	String
phoneNumber2	The Phone Number 2	String
serviceType	The Biller's Service Type	String

7.38 Operation

Attribute	Description	Type
balanceInquirySupported	The biller's support balance Inquiry	String
id	The Operations Id	Integer
name	The Operation Name	String

7.39 BillerSummary

Attribute	Validation Rule	Description	Type
additionalFieldInfo	Mandatory.	Sending method.	AdditionalFieldInfo
address	Mandatory	The Address details.	Address
balanceInquirySupported	Optional	The biller's support balance inquiry	String
beneDOB	Mandatory	The beneficiary's DOB	String
billerBranchCode	Mandatory	The biller's branch code	String
billerSpecificCode	Mandatory	The biller's specific code	String
billerSupportsExcessPayment	Optional	The biller's support excess payment	String
billerSupportsPartialPayment	Optional	The biller's support partial payment	String
billerSupportsPastduePayment	Optional	The biller's support past due payment	String
cellPhone	Optional	The biller's cellphone(With ISD Code)	String
destCountryISOCode	Mandatory	The destination country ISO Code	String
destCurrencyISOCode	Mandatory	The destination currency ISO Code	String
destinationCurrency	Optional	The destination currency	String
emailId	Optional	The email address	String
firstName	Mandatory	The biller's first name	String
homePhone	Optional	The home phone numbet(without ISD code)	String
Id	Optional	The Biller's id	Int
isService	Optional	Is Service.	String
lastName	Mandatory	The biller's last Name	String
midName	Optional	The biller's Middle Name	String
Nickname	Optional	The biller's Nick Name	String
operation	Mandatory	The biller's service cateory	String

receptionMethod	Optional	The Reception Mehod	String
secLastName	Optional	The biller's second Last Name	String
serviceType	Mandatory	The Service Type	String
topUpPlans	Optional	The Reload phone Top up plans	List of TopUpPlan
workPhone	Optional	The work Phone Number(without ISD Code)	String

7.40 TopUpPlan

Attribute	Description	Type
amount	The Topup Amount	String
amountExternalCode	The Amount External Code	String
Currency	The Currency	String
Description	The Description	String
planCode	The plan code	String

7.41 BillerServiceSummary

Attribute	Description	Type
accType	The account type.It will be required if user provides 'Account credit' as reception method in request	String
additionalFieldInfo	Sending method.	AdditionalFieldInfo
Address	The sending method nickname.	Address
billerStatus	The Biller Status	String
payerBranchCode	The payer's branch code	String
billerVerification	The biller's verification	String
cellphone	The biller's cellphone(With ISD Code)	String
destCountryISOCode	The destination country ISO Code	String
destCurrencyISOCode	The destination currency ISO Code	String
destinationCurrency	The destination currency	String
emailId	The email address	String
firstName	The biller's first name	String
Id	The Biller's id	Int
isService	Is Service.	String
lastName	The biller's last Name	String
midName	The biller's Middle Name	String
Nickname	The biller's Nick Name	String
payerInfo	The payer Information	Payer
receptionMethod	The Reception Mehod	String
secLastName	The biller's second Last Name	String
serviceRefNum	The service reference number	String
serviceType	The Service Type	String

7.42 PartnerCodeInfo

Attribute	Description	Type
address	The Address	Address
cellPhone	The Cell Phone Number without ISD code	String
faxNumber	The Fax Number	String
partnerCode	This partnercode is provided by UniTeller and it should be exactly	String

	same as provided.	
--	-------------------	--

7.43 PayerSummary

Attribute	Description	Type
branchId	The Branch Id	int
branchName	The Branch Name	String
id	The Payer Id	int
payerName	The Payer/Biller Name	String

7.44 VerificationQuestion

Attribute	Description	Type
answerOption	The Answer Options	AnswerOption
question	The Verification Question	String
id	The Question Id	int
questionType	The Question Type	String

7.45 SearchPage

Attribute	Description	Type
size	The Size of the Page	String
index	The Index of the page	String

7.46 FieldError

Attribute	Description	Type
fieldName	Name of the field of the request api which have the wrong value or format.	String
fieldValue	The value provided as input in the field of the request api which have the wrong value or format.	String
errorMessage	The message for the field of the request api which have the wrong value or format	String

8 Appendix 'B'

8.1 User's profile status

User can have different status; these statuses are mentioned below-

- **REGISTRATION NOT COMPLETE:** Once a user is signed up with the UNIR system, his status becomes REGISTRATION NOT COMPLETE. Users cannot login into the UNIR system with this status.
- **REGISTRATION COMPLETE:** After Signup, an authentication code is sent to the user's registered email. User has to provide that authentication code to verify his/her email address and after a successful authentication process, User becomes REGISTRATION COMPLETE. Users can login to the UNIR system with this status and will be able to use some functionalities of the UNIR system.
- **APPROVED:** After login, when a user completes his/her profile setup, he/she becomes APPROVED and can add his/her Sending Methods and Send Money.
- **ACTIVE:** After doing the first transaction of Send Money, the user becomes Active.
- **SUSPENDED:** During setup profile or after setup profile, if user is found with any suspicious activities, either UNIR system or Compliance Team of UNIR will SUSPEND the user. A SUSPENDED user cannot login to the UNIR system.

8.2 Transaction Status Types

Hold - There is some hold on the transaction. To the User it should be displayed as **In Process**.

Payable - From Payable status, Transaction can be Cancelled or Paid on payer side.

Cancel - Either User or Payer cancelled the transaction.

Paid - This is one of the final statuses of the transaction. There is a reversal case where PAID transaction becomes CANCEL from Core System.


Refund - Transaction is cancelled on another accounting day/time. Therefore money needs to be refunded to the user. This is one of the final statuses of the transaction.

CANCELPENDING - Transaction is in transmitted state (Means transaction is moved to the Payer side and it can be Either Paid or can get Cancel).

8.3 Flow of APIs

8.3.1 Signup, OAuth Login and Setup profile

This set of APIs is used to register the user, login the user without password and set up their profile. Here is the flow-

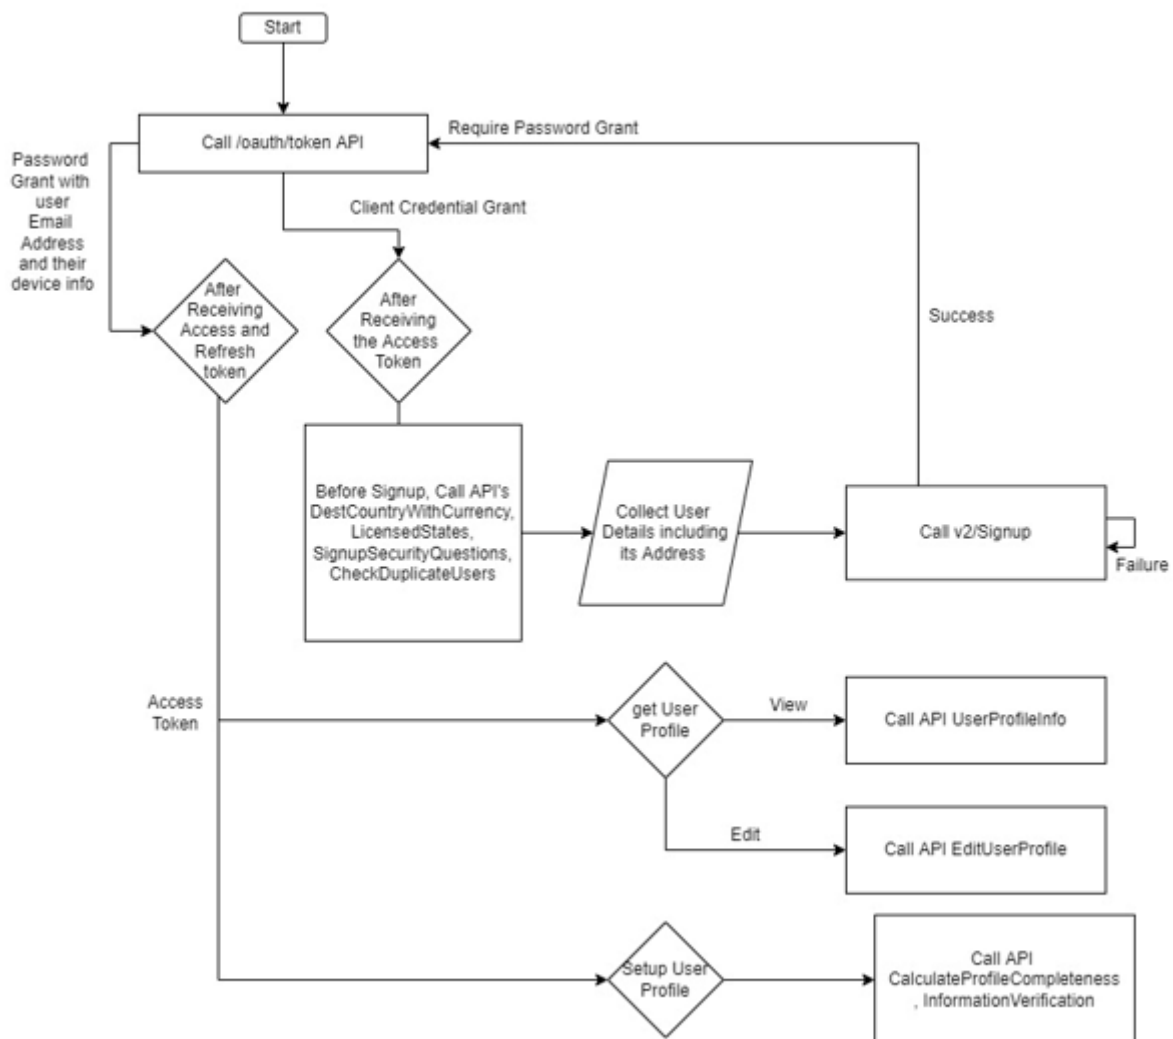


Description: Here is the description of above flow-

1. Required information for signup is collected at client side and including users Address.
2. Collected information is validated.
3. If validation of data is successful then the signup () API method is called, otherwise the user is asked to provide the valid data.
4. If the user is successfully registered with the UNIR system then, its user Profile Status becomes REGISTRATION COMPLETE.
5. After Setup the User's Profile user Profile Status becomes APPROVED.

**Authentication of the user's email can be skipped, if the client has some procedure to verify user's email and then no authentication code will be sent to user's registered email, step steps 5, 6 and 7 will be skipped and user will become REGISTRATION COMPLETE.*

signup () method flow

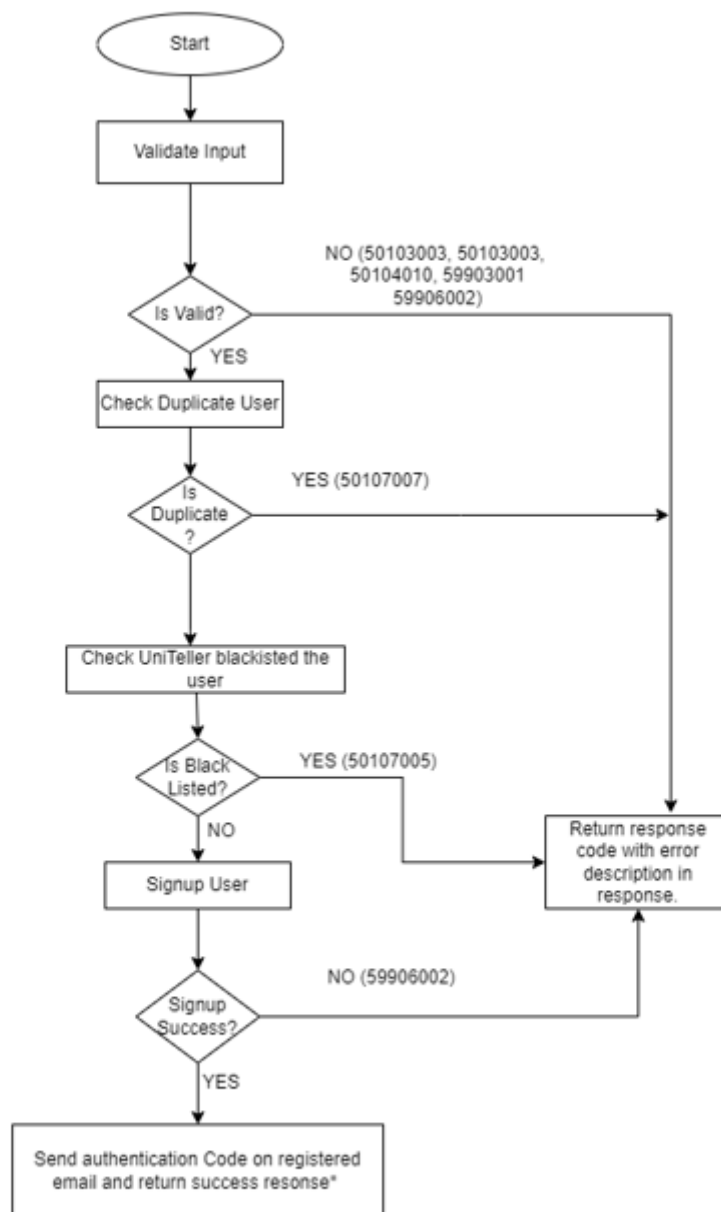

**Note: Email authentication step can be skipped, if user's email is verified by the client*


Description: Here is the description of above flow-

1. Once signup request is received at server, first it is validated.
2. If validation is success, then UNIR system checks if user is duplicate or not, otherwise UNIR system returns response code with error description message.

3. *If user already exists in the UNIR system, then UNIR system returns 50107007 Response code and no signup will be created.*
4. *If user is not duplicate, UNIR checks, that user is blacklisted or not? If found in blacklist, no signup is created and UNIR system returns 50107005.*
5. *Otherwise, Signup is created. If there is any unexpected issue, UNIR system may return response code 59906002 and 59906005. In this case we recommend retry and if problem persists, one should inform Customer Support to get this issue resolved.*

8.3.2 Add Sending Method

Here is the Add Sending method flow-

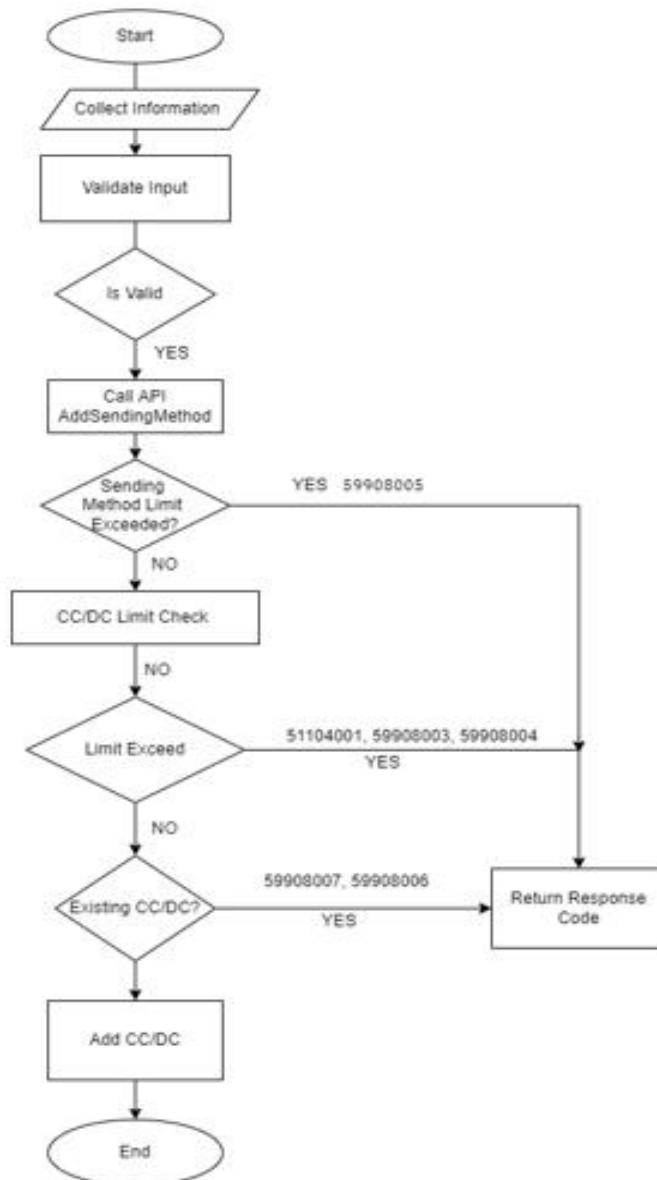


Description: Here is the flow of above diagram-

- 1) Information is collected at client and validation is done.
- 2) If found valid input, addSendingMethod () API method is called.
- 3) UNIR system returns response code **59908005** if user has already added max number of sending methods allowed. And sending method will not be added to user profile.


- 4) *If user is allowed to add sending method, then UNIR system checks sending method type.*
- 4.1) *If Sending Method is Credit Card, then-*
 - 4.2.1) *UNIR system checks number of Credit Card can be added to user profile and if total number of added Credit Cards + Credit Card being added is greater than max allowed Credit Card in one profile, then UNIR system will return response code **59908005** and Credit Card will not be added to user's profile.*
 - 4.2.2) *If same Credit Card is already added then, system will return response codes **59908006** and Credit Card will not be added to user's profile.*
 - 4.2.3) *Otherwise Credit Card will be added as Sending Method.*
- 4.2) *If Sending Method is Debit Card, then-*
 - 4.3.1) *UNIR system checks number of Debit Card can be added to user profile and if total number of added Debit Cards + Debit Card being added is greater than max allowed Debit Card in one profile, then UNIR system will return response code **59908005** and Debit Card will not be added to user's profile.*
 - 4.3.2) *If same Debit Card is already added then, system will return response codes, **59908007** and Debit Card will not be added to user's profile.*
 - 4.3.3) *Otherwise Debit Card will be added as Sending Method.*

8.3.3 Promotion

Auto Promotion

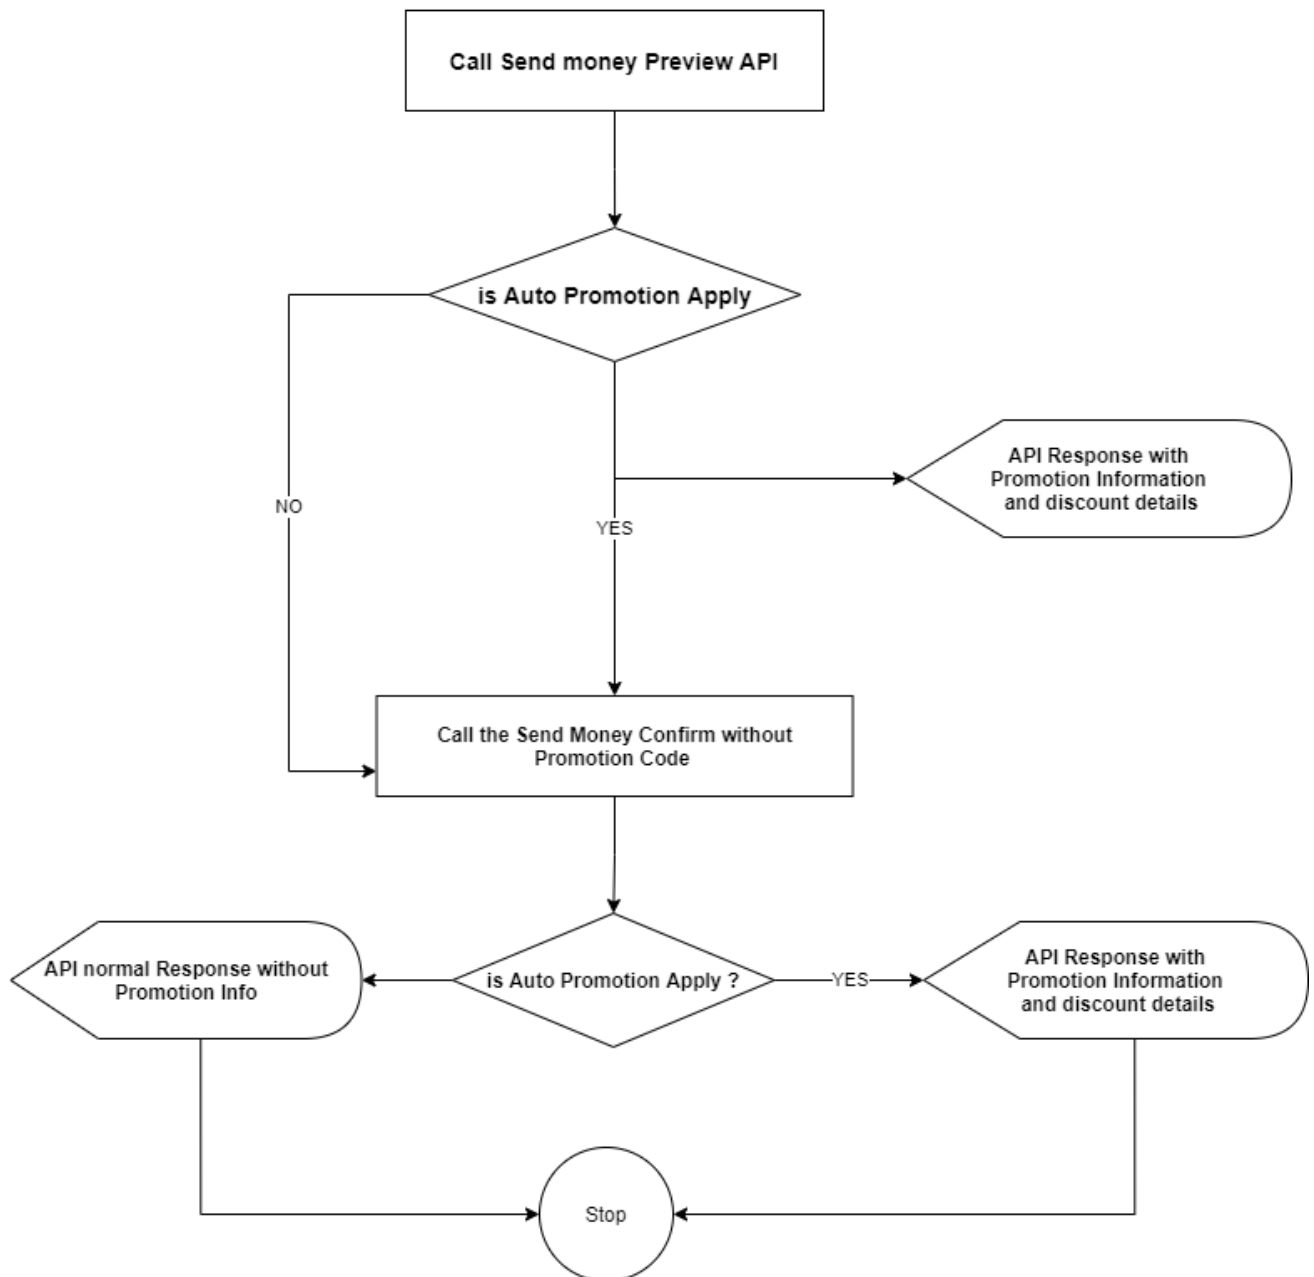

Manual Promotion

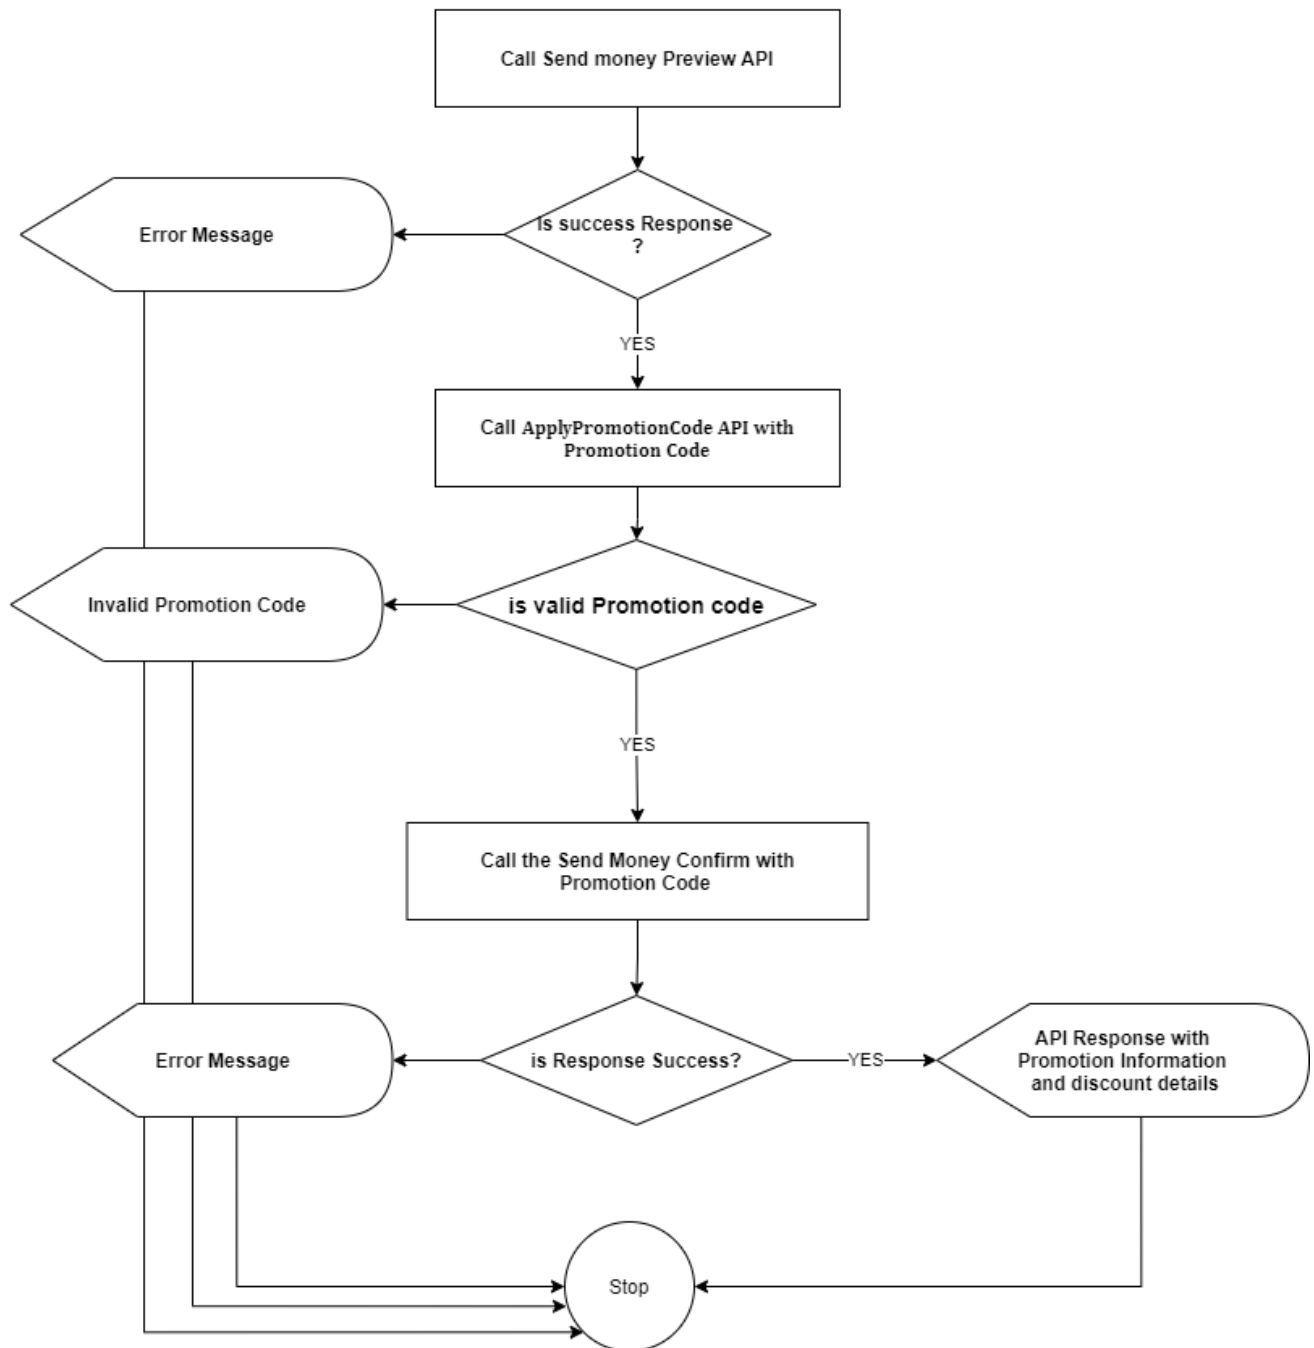

9 Appendix 'C'

9.1 Response codes and its description

ErrorCode	Failure Type	Description
00000000	SUCCESS	This response code is returned if desired response is returned.
10107002	Verification	This response code is returned if user tries to login without verifying their email address.
59906002	System Error	This response code is returned if system fails to execute request.
59906004	System Unavailable	This response code is returned if system is not up.
59906005	Network Problem	This response code is returned if network problem comes.
59907006	Validation	This response code is returned in case of authentication failure.
59903001	Security Validation	This response code is returned if partner code in request is invalid.
51102001	Validation	This response code is returned, someone tries to send more than one transaction with same information within a certain interval. To avoid this situation, it is suggested to change either amount and/or beneficiary.
51102002	Verification	This error is returned if system is not sure that the transaction is created in the system or not. To make sure whether the transaction is created successfully or not, it is suggested to check transaction summary.
59902003	Validation	This response code is returned if edit request is received but the information requested to change already exists in the system and no changes required.
51108001	Validation	This response code is returned if payment fails at payment processor due to some reason. For Example: Low balance, Payment Processor system error,

		authentication failure etc.
51108002	Validation.	This response code is returned if someone tries to confirm a transaction which is already created and confirmed.
51104010	Validation	This response code is returned if someone tries to cancel a transaction which is not in payable status.
50108004	Validation	This response code is returned if user's session is expired.
50105005	Validation	This response code is returned if device is not registered at the time of login.
50107004	Validation	This response code is returned if user caught in black list check at the time of sign up.
50107005	Validation	This response code is returned if user caught in fraud check at the time of sign up.
50102001	Validation	This response code is returned if request is processed and email is not sent due to some error while sending email.
50102002	Validation	This response code returned if user tries to login/sign up with user id already existing with pending status in the system
50102003	Validation	This response code returned if user tries to authenticate already active or provisional active user id.
50102004	Validation	This response code returned if provisional active tries to login. This is warning and it should be considered as success.
50102005	Validation	This response code returned if information verification questions provided in response. This is a warning, it should be considered as success.
50102006	Validation	This response code returned if security questions required.
50102007	Validation	This response code returned if profile is already setup
50102008	Validation	The answer of security question is valid.
50102009	Validation	This response code returned if user gives correct UIC.
50102010	Validation	The UniTeller identification code has been sent successfully.
50104010	Validation	This response code returned if email address entered by user

		doesn't match email address pattern rule.
51102903	Validation	This is a confirmation type warning. This response code returned if remitter's transaction caught in velocity check, If user chooses to do transaction, it will be created in HOLD status.
51102904	Validation	This error code is returned as a warning in Send money preview response, if transaction caught in fraud check. This error code tells user, that transaction will be created in process and, end user has to communicate with Customer Support to clear this transaction.
51104001	Validation	This response code returned if user's Limit allowed to the user is exceeded. More details can be explained in error message.
51104002	Validation	This response code returned if user tries to do transaction with unverified bank account.
51104003	Validation	This response code returned if user tries to do transaction with unverified credit card.
51104004	Validation	This response code returned if user tries to do transaction with unverified debit card.
51104005	Validation	This response code returned if user tries to do transaction with unverified Ulink card.
51104006	Validation	This response code returned if user's bank account transaction amount limit exceeded.
51104007	Validation	This response code returned if user's credit card transaction amount limit exceeded.
51104008	Validation	This response code returned if user's debit card transaction amount limit exceeded.
51104009	Validation	This response code returned if user's Ulink card transaction amount limit exceeded.
50103003	Validation	This response code returned if request does not have all mandatory fields.
59903005	Validation	This response code returned if request does not have correct data.

59903002	Validation	This response code returned if beneficiary id passed in request is not correct.
59903003	Validation	This response code returned if Sending method id/name/type passed in request is not correct.
59908001	Validation	This response code returned if user tries to add a bank account more than once and he/she has already this bank account in his/her sending method list with active status.
59908002	Validation	This response code returned if user tries to add a bank account more than once in the same day. No matter bank account is active or not.
59908003	Validation	This response code is returned if user is trying to add credit card after reaching maximum number of credit cards in his accounts (Allowed credit card number for one account is configurable).
59908004	Validation	This response code is returned if user is trying to add debit card after reaching maximum number of debit cards in his accounts (Allowed debit card number for one account is configurable).
59908005	Validation	This response code is returned if user is trying to add sending method after reaching maximum number of sending methods in his accounts (Allowed sending methods number for one account is configurable).
59908013	Validation	This response code is returned if user is trying to add beneficiaries after reaching maximum number of beneficiaries in his accounts (Allowed beneficiaries number for one account is configurable).
59908006	Validation	This response code returned if user tries to add a credit card more than once and he/she has already this credit card in his/her sending method list with active status.
59908007	Validation	This response code returned if user tries to add a debit card more than once and he/she has already this debit card in his/her sending method list with active status.
59908008	Validation	This response code returned if user tries to add a credit card more than once in the same day. No matter credit card is active or not.

59908009	Validation	This response code is returned if the user tries to add a debit card more than once in the same day. No matter if the debit card is active or not.
59908010	Validation	This response code returns if cvv does not match on the payment processor.
59908011	Validation	This response code is returned if AVS (Address verification system) does not match the payment processor.
59908012	Validation	This response code is returned if the user's bank account is locked.
59908014	Validation	This response code returned if user's credit card is locked.
59908019	Validation	This response code returned if user's debit card is locked.
59908015	Validation	This response code returned if user's tries to verify a bank account which is not allowed.
59908016	Validation	This response code returned if user's tries to verify a Debit card which is not allowed.
59908017	Validation	This response code returned if user's tries to verify a credit card which is not allowed.
50105003	Validation	This response code returned if user's profile is not active/provisional active at the time of login.
50105004	Validation	This response code returned if user's profile is suspended or locked at the time of login.
50107002	Validation	This error code returned if user's temporary password needs to be changed.
50107006	Validation	This response code returned if user's provided security answer doesn't match.
51103001	Validation	This response code returned if provided transaction number is invalid.
59903006	Validation	This response code returned if provided country number is invalid.
59903007	Validation	This response code returned if provided currency is invalid.
59903008	Validation	This response code returned if provided payer is invalid.

51103002	Validation	This response code returned if provided transaction internal reference is invalid.
59902004	Validation	This response code returned if tries to verify, an already verified sending method.
51104011	Validation	This response code returned if cancellation is not allowed for a particular time period.
51102004	Validation	This response code returned if tries to cancel, an already cancelled transaction
51102005	Validation	This response code returned if request has been received and sent to partner bank. A notification of cancellation will be received later.
51104012	Validation	This response code returned if tries to cancel and transaction is in PAID or other status.
51104013	Validation	This response code returned if tries to cancel, and Transaction does not exist
50107007	Validation	This response code returned if someone tried to sign up with already existing email address/user id.
50108001	Validation	This response code returned if user tries to verify his information without completing his/her personal info.
50105007	Validation	This response code returned if user has only way to provide documents to verify his information.
50105008	Validation	This response code is returned, if payer passed in request requires its branch information also.
51107001	Validation	This response code is returned, if transaction exists in payment processing.
59905001	Validation	This response code returned when application must be required to update.
59902005	Validation	This response code returned when uLink pin is required.
59902901	Validation	This response code returned when application is required to update.
50202001	Validation	This response code returned when document image required verifying your information verification.

50201002	Validation	This response code returned when document verification is in under review.
50205002	Validation	This response code returned when document verification would be done by UniTeller customer care.
51107002	Validation	This response code returned when transaction caught in velocity rules.
50107008	Validation	This response code returns if user is already login with same or other device and tries to login again.
59905002	Validation	MFA required.
59905003	Validation	Beneficiary additional field required.
59905004	Validation	Transaction additional field required.
59908023	Validation	This response code is returned when we try to add more than two contacts for a particular biller in a day.
59908024	Validation	This response code is returned when we try to add more than two contacts for a particular biller in a month.
59908025	Validation	This response code is returned when we try to add more than two billers for a particular contact in a day.
59908026	Validation	This response code is returned when we try to add more than two billers for a particular contact in a month.
59908027	Validation	This response code is returned when the request for the duplicate contact of the particular biller is received.
19903009	Validation	Invalid Verification Token
19906002	Validation	Service Not available
10104008	Validation	Bad Credentials or Bad Request or Grant is not Supported.
10104007	Validation	This response code is returned when the entered email verification code is incorrect or Access token is invalid.
10105001	Validation	Please provide MFA Code. The MFA Code is sent on your Device.
10104101	Validation	IP address restricted based on geographical location
59905008	Validation	This error code is returned when user needs to update

		ADDITIONAL FIELD
59901001	Success	This error code returned success with an information message.
59905006	Success	This error code returned success with message.
50105010	Success	This error code returned success without security message answer.
59901003	Validation	This error code is returned when there is a added beneficiary with transaction status In Progress that cannot be deactivated.
59908001	Validation	This error code returned if user tries to add a bank account more than once and he/she has already this bank account in his/her sending method list with active status.
50105009	Success	This error code returned when admin user login successfully.
59904001	Validation	This error code is returned when bank login is required.
59905005	Validation	This error code is returned when users have insufficient balance in their bank account.
50105012	Validation	This error code is returned if the beneficiary needs a payer branch Update.
50104001	Validation	This error code is returned if the user's Id is locked due to certain numbers of failed tries with the wrong password.
59908018	Validation	This error code is returned, if the user logs in using the portal.
59907005	Validation	This error code is returned, if the system identifies a malicious access.
59908022	Validation	This error code is returned, if the user exceeds the limit of adding billers.
50107003	Validation	This error code is returned if the user's password is expired and the server needs only the current password to change password.
50105001	Validation	This error code returns if the user tries to login with an expired Password.
50104004	Validation	This error code returned if the password entered does not

		match with the registered password.
50104009	Validation	This error code is returned if the password entered by the user does not match the password pattern rule.
50107001	Validation	This error code is returned if the user's password is expired and the server needs more verification to reset with the new password.
50105011	Validation	This error code is returned if bypass login uic is enabled at the time of login.
50104008	Validation	This error code is returned if a user tries to change password with previously used passwords (Number of used passwords is configurable at Uniteller side, currently it is 5).
50105006	Validation	This error code returns if user's provided information fail to get questions. In this case a user can provide either SSN or directly go to document upload to verify his/her information.
50105002	Validation	This error code is returned if either user ID or password does not match.
59906007	Validation	This responseCode occurs during the SendMoneyConfirm API call when the transaction confirmation time limit of 60 minutes has been exceeded. If the SendMoneyConfirm API is called after this time limit (after the SendMoneyPreview API call), the transaction will not be confirmed.
59906008	Validation	

10 Appendix 'D'

- Beneficiary Rules**

Beneficiary Rules are the rules to check fraud with beneficiaries. The basis of this check is how many users are sending money to the same beneficiary and how much amount is sent.

Note that the number of users allowed to send money to the same beneficiary and total allowed amount sent to the beneficiary are configurable at UNIR and may change in future. If required, this information can be provided to the client at the time of integration.

- **Sending Methods Limit**

There is a limit of adding Sending Methods in one user profile. For Example, a user can add up to three sending methods only; including all valid sending methods (Debit Card, Credit Card).

Also there is a limit of adding one type of sending methods, like if Credit Card addition limit is one then, user cannot add more than 1 Credit Card even if Sending methods limit is three. Note that the number of Sending Methods allowed for a User are configurable at UNIR and may change in future.

11 Appendix 'E'

11.1 Terminologies

11.2 Identification code

Identification code is a code which can be sent to user at various places during the use of UNIR application. Whenever it is required to send, UNIR system asks for receiving mode. These receiving modes can be either registered email address or registered mobile phone (with capability of receiving text).

11.3 UNIR System

UNIR System is short form of UniTeller Internet Remittances System.

11.4 Information Verification

Information Verification is a process of verifying user's provided data. This can be done without asking for any other additional information.

11.5 Sending Methods

Sending Methods are used by users to make payment at the time of transaction creation. These are Bank Account, Credit Card and Debit Card.

11.6 Payer

Payer is the institution from which the beneficiary will collect the amount. This institution can be a bank or other institutions.

11.7 Reception Method

The Reception Method is the mode of receiving the amount by the beneficiary. This can be either Cash Pickup, Account Credit/Home Delivery and WALLET

12 Appendix 'F'

FAQ

Q. What is the minimum transaction amount to be sent by the user?

A. Min transaction amount is USD - 25\$.

Q. What is the maximum number of beneficiaries that a user can add?

A. Right now a user can add up-to 6 beneficiaries and this number can be increased/decreased after BD Team's approval.

Q. How much time does it take to reflect the remitter's address(Billing Address/Sending Method Address) in the profile section?

A. Instantly

Q. Are receipt's attributes editable?

A. No, receipt is not editable as it is read only and static in nature.

Q. What beneficiary's attributes/fields can be edited?

A. An user cannot edit First name and last name, apart from these attributes, an user can edit every field.

Q. Who can cancel any transaction?

A. A transaction can be cancelled by the user itself and UniTeller Admin.

Q. Is there a possibility that the user can't cancel the transaction? If yes, how would they cancel the transaction?

A. Yes, If the transaction is in "PAID" and "REFUND" Status. In such cases the user cannot cancel the transaction by itself. But if the transaction is in "PAYABLE" and "IN PROCESS" status, the user can cancel them.

Q. Is it possible to edit one cash pickup beneficiary to account credit beneficiary or vice versa?

A. No.

Q. Is additional field associated with every user/remitter?

A. No, Additional fields are related to the payer reception method. It varies from payer to payer, and not all-payers require additional fields, so an user/remitter is not associated with additional fields rather associated with payer branches.

Q. Why is user profile setup required?

A. Without remitter profile setup userComplianceLimit API won't work and many other API's will also not work.

Q. For addBeneficiary, there is an accType field that it says is needed if the user provides a reception method of Account credit - what values are expected for it?

A. This field is required for Account Credit when in API PayerWithReceptionMethodsList Value of isAdditionalFieldRequired is YES. The Value of AccType can be fetched using API PayerAdditionalField.

Q. Will the exchange rate received from CurrentExchangeRate potentially change in value depending on the payer or reception method used, or will it be the same?

A. Exchange rate is not based on Payers or sending method or reception method. In general, Exchange rate is associated with the destination country and destination currency.

Q. Each user will need to call Signup to register themselves with UniTeller, After that they will need to password authorize (email and currently deviceinfo - but device info will be optional) before they can use any of the password credential endpoints?

A. Password Grant type is required for operation related to Remitter.

Q. Is it possible to update a beneficiary's reception method using edit beneficiary?

A. API does not allow changing the Reception Method for a beneficiary using editBeneficiary API. First Name, Last Name, Payment Currency and Payer (only if there is not any transaction in process for that beneficiary) are not editable.

Q. Do all of those fields need to be passed back to UniTeller when adding additional fields for a beneficiary, or are only the fieldId and fieldValue needed at that point?

A. Yes, while calling you will need to pass the additional field details (fieldName and fieldValue) in addBeneficiary API request.

Q. Is there a way to get all payers for a given country without having to provide the state?

A. No, we cannot get all payer of a given country without having to provide a state because Payer is linked with the state because there are states in different countries that may need payer branch information depending upon the selection of the state related to that specific county.

Q. When the value of isAdditionalFieldRequired will be YES in API v2/PayerWithReceptionMethodsList?

A. The isAdditionalFieldRequired will be YES in API v2/PayerWithReceptionMethodsList if there are additional Fields for a payer related to beneficiary or transaction.

Q. If we want to allow more beneficiaries, can the number be changed?

A. Yes, after approval from BD Team.

Q. Are there any format requirements for the beneficiary phone number?

A. There is Min/Max validation for Beneficiary Phone Number (1-20 Digits) and it should not include the country Code.

Q. What is credit level and compliance level?

A. Credit level is how much a remitter can send to all beneficiaries in total and it is set up by the UniTeller's business team and it varies based upon user level (Silver, Gold, Diamond, Platinum) and it is configurable. Compliance level is the source country's state wise limits that is specific to that state and it is configured as day wise intervals (e.g. 4 days, 7 days, 30 days and so on) and is provided by UniTeller's compliance team.

Q. What expires_in field received in response to password and client_credential grant request?

A. This expires_in field is time duration until user session will be kept active/alive and it is received along with access token (In other words it is time duration on this access_token). It's configurable, which means it can be increased or decreased as per requirement.

Q. Is it necessary to call refresh_token API ?

A. Yes, it must be called to keep the user's session active/alive. It expires_in of refresh_token is (access_token expires_in + 10min).