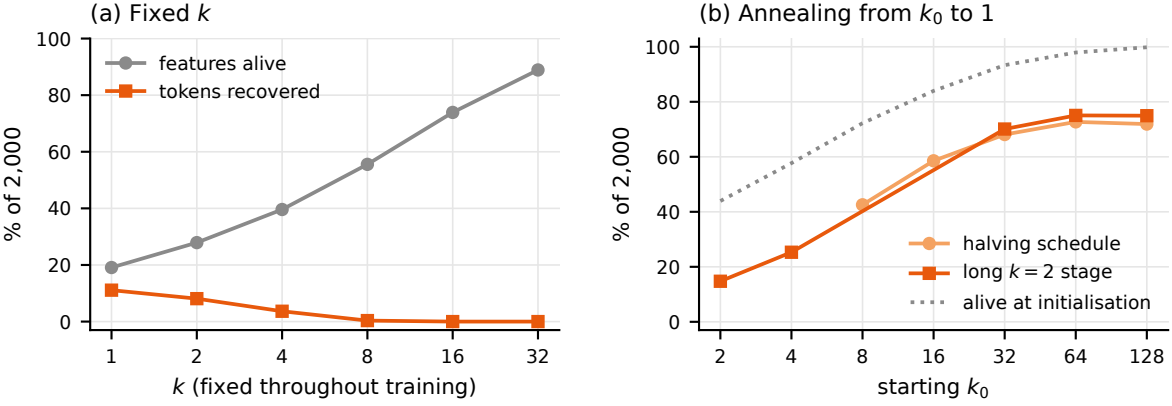
(a) Fixed k
features alive
tokens recovered
% of 2,000
100
80
60
40
20
0
1
2
4
8
16
32
k (fixed throughout training)
(b) Annealing from k_0 to 1
% of 2,000
halving schedule
long $k = 2$ stage
alive at initialisation
2
4
8
16
32
64
128
starting k_0