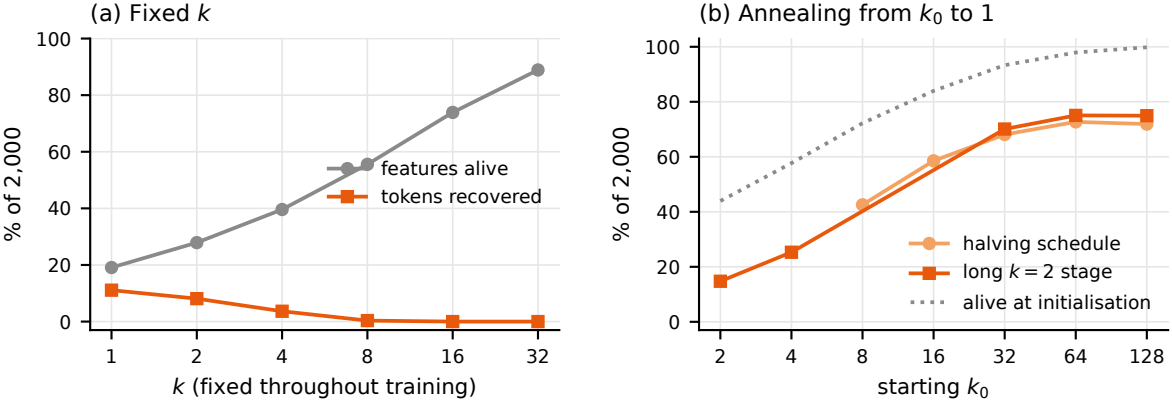
(a) Fixed k
% of 2,000
features alive
tokens recovered
k (fixed throughout training)
(b) Annealing from k_0 to 1
% of 2,000
halving schedule
long $k = 2$ stage
alive at initialisation
starting k_0