


Skill Week 7


Aim

To practice **input redirection in Linux** by creating an input file and using it as input for a command.

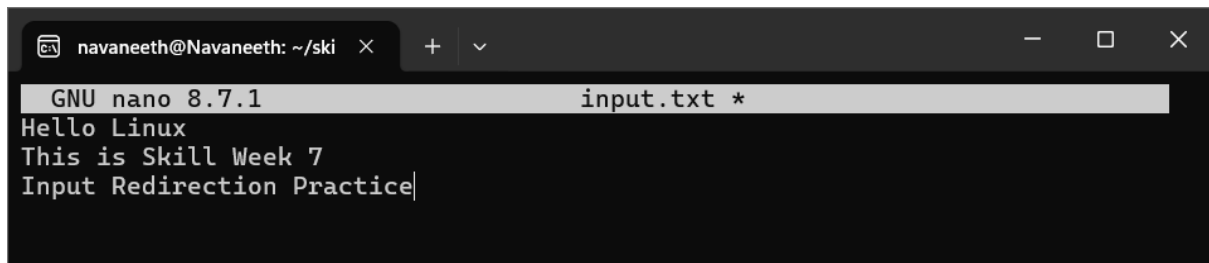

```
navaneeth@Navaneeth: ~/ski × + ▾
GNU nano 8.7.1 input.txt *
Hello Linux
This is Skill Week 7
Input Redirection Practice|
```

Output:

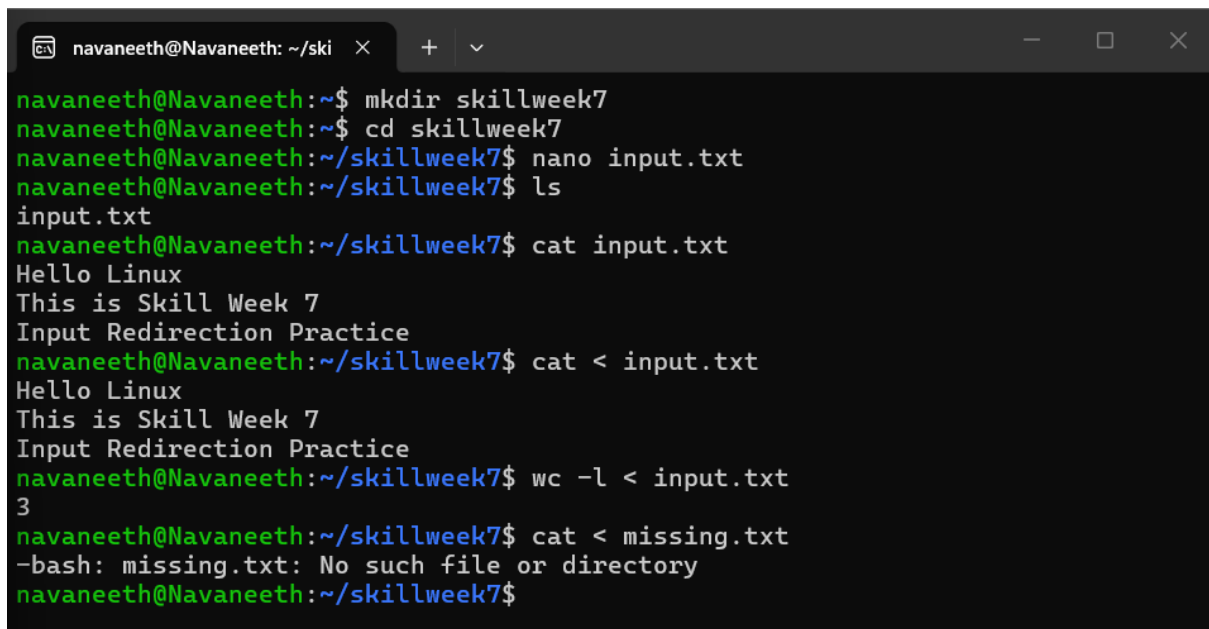

```
navaneeth@Navaneeth: ~/ski × + ▾
navaneeth@Navaneeth:~$ mkdir skillweek7
navaneeth@Navaneeth:~$ cd skillweek7
navaneeth@Navaneeth:~/skillweek7$ nano input.txt
navaneeth@Navaneeth:~/skillweek7$ ls
input.txt
navaneeth@Navaneeth:~/skillweek7$ cat input.txt
Hello Linux
This is Skill Week 7
Input Redirection Practice
navaneeth@Navaneeth:~/skillweek7$ cat < input.txt
Hello Linux
This is Skill Week 7
Input Redirection Practice
navaneeth@Navaneeth:~/skillweek7$ wc -l < input.txt
3
navaneeth@Navaneeth:~/skillweek7$ cat < missing.txt
-bash: missing.txt: No such file or directory
navaneeth@Navaneeth:~/skillweek7$
```

Observation:

Linux displays an error because missing.txt does not exist.

Result:

Successfully tested how Linux handles input redirection when the specified file is missing.

Aim

To learn how to **redirect the output of a Linux command into a file** and then view the saved output.

```
navaneeth@Navaneeth:~/skillweek7$ ls > output.txt
navaneeth@Navaneeth:~/skillweek7$ cat output.txt
input.txt
output.txt
navaneeth@Navaneeth:~/skillweek7$ ls -l >> output.txt
navaneeth@Navaneeth:~/skillweek7$ cat output.txt
input.txt
output.txt
total 8
-rw-r--r-- 1 navaneeth navaneeth 60 Sep 27 06:49 input.txt
-rw-r--r-- 1 navaneeth navaneeth 21 Sep 27 06:54 output.txt
navaneeth@Navaneeth:~/skillweek7$
```

Observation:

The >> operator successfully appended new command output to the existing output.txt file.

Result:

Output redirection and output appending were successfully performed.

Aim

To understand the **append operator >>**, open a file in append mode, preserve existing data, and verify that new data is added without overwriting the old data.

```

navaneeth@Navaneeth:~/skillweek7$ echo "This is appended data" >> output.txt
navaneeth@Navaneeth:~/skillweek7$ cat output.txt
input.txt
output.txt
total 8
-rw-r--r-- 1 navaneeth navaneeth 60 Sep 27 06:49 input.txt
-rw-r--r-- 1 navaneeth navaneeth 21 Sep 27 06:54 output.txt
This is appended data
navaneeth@Navaneeth:~/skillweek7$ echo "Second appended line" >> output.txt
navaneeth@Navaneeth:~/skillweek7$ cat output.txt
input.txt
output.txt
total 8
-rw-r--r-- 1 navaneeth navaneeth 60 Sep 27 06:49 input.txt
-rw-r--r-- 1 navaneeth navaneeth 21 Sep 27 06:54 output.txt
This is appended data
Second appended line
navaneeth@Navaneeth:~/skillweek7$ wc -l output.txt
7 output.txt
navaneeth@Navaneeth:~/skillweek7$ ^C
navaneeth@Navaneeth:~/skillweek7$ tail -n 2 output.txt
This is appended data
Second appended line
navaneeth@Navaneeth:~/skillweek7$ cat output.txt
input.txt
output.txt
total 8
-rw-r--r-- 1 navaneeth navaneeth 60 Sep 27 06:49 input.txt
-rw-r--r-- 1 navaneeth navaneeth 21 Sep 27 06:54 output.txt
This is appended data
Second appended line
navaneeth@Navaneeth:~/skillweek7$ |

```

Aim

To understand **standard error (stderr) redirection** in Linux and redirect error messages from the terminal into a file.

```

navaneeth@Navaneeth:~/skillweek7$ cat missing.txt 2> error.txt
navaneeth@Navaneeth:~/skillweek7$ cat error.txt
cat: missing.txt: No such file or directory
navaneeth@Navaneeth:~/skillweek7$ ls input.txt missing.txt > result.txt 2> e
rror.txt
navaneeth@Navaneeth:~/skillweek7$ cat result.txt
input.txt
navaneeth@Navaneeth:~/skillweek7$ cat error.txt
ls: cannot access 'missing.txt': No such file or directory
navaneeth@Navaneeth:~/skillweek7$ cat result.txt
input.txt
navaneeth@Navaneeth:~/skillweek7$ cat error.txt
ls: cannot access 'missing.txt': No such file or directory
navaneeth@Navaneeth:~/skillweek7$ |

```