




Question 4 of 45	2 answered correctly
How can a robot start an application in Citrix?	
By using a command line.	
By double clicking on a Desktop icon.	
By using an Open Application activity.	
■ By defining a shortcut key for the application and then triggering the app with a Send Hotkey activity.	
Submit	
1h 23m 30s	Show/Hide Timer
Question 5 of 45	2 answered correctly
Can you store a Selector in a variable?	
○ No	
Yes, in a UiElement variable. Yes in a String variable.	
Yes, in a String variable.Submit	
1h 22m 57s	Show/Hide Timer
Question 6 of 45	2 answered correctly
Which statements are true regarding the Write Line and the Log Message activities?	
■ By using a Log Message activity, you can set different levels of tracing.	
Write Line is just a Log Message set on Trace.	
By using any of them, you generate traces in the Output panel and also in the log files.	
Submit	

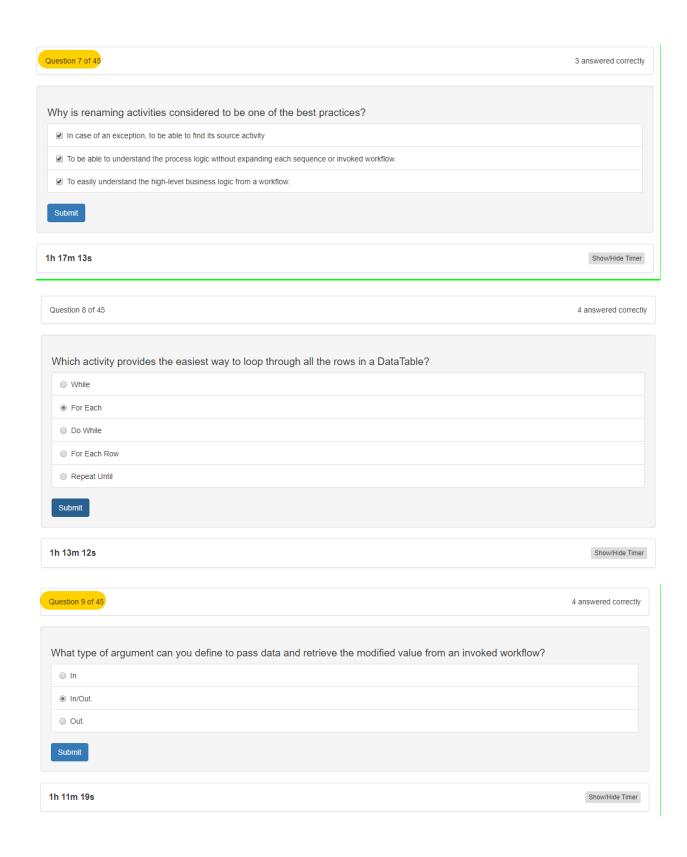

Question 10 of 45	5 answered correctly
Is it possible to write to a text file without using the Write Text File activity? No Yes, using the Invoke Method activity Yes, with the Invoke Power Shell activity	
1h 7m 44s	Show/Hide Timer
Question 11 of 45	5 answered correctly
What happens if the result of a transaction is not set? It is automatically set to Successful after 24 hours It is automatically set to Failed after 24 hours The status is "In Progress" for 24 hours, and then it switches to Abandoned	
1h 3m 58s	Show/Hide Timer
Question 12 of 45	6 answered correctly
What robot state is displayed on the Robots page while a job is being executed? Busy Runnning Pending Submit	
1h 0m 40s	Show/Hide Timer

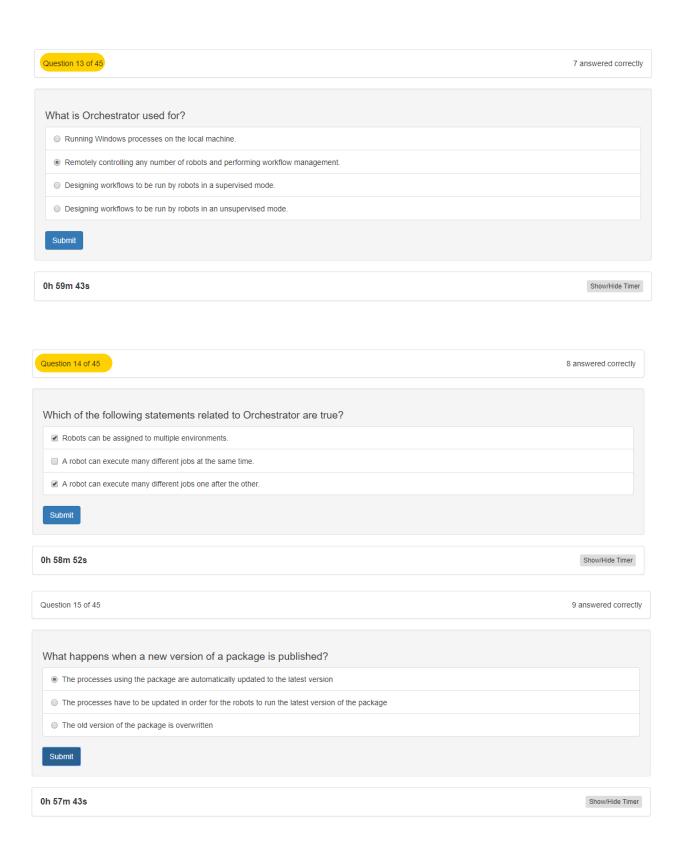

Question 16 of 45	9 answered correctly
Which of the statuses below can a transaction have? Select all the options that apply.	
✓ New	
Pending	
✓ Successful	
✓ Failed	
✓ Retried	
✓ Deleted	
Submit	

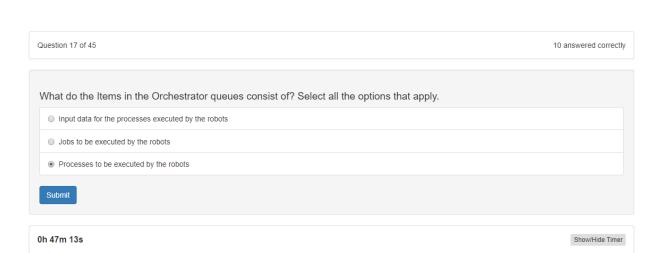



Question 18 of 45	10 answered correctly
Where can you trigger an unattended robot from? Select all the options that apply.	
☐ The UiPath Robot icon in the system tray	
□ UiPath Studio	
Submit	
0h 41m 35s	Show/Hide Timer
Question 19 of 45	10 answered correctly
What types of assets can be stored in Orchestrator?	
Bool, String, Integer, Credential	
Integer, Password, GenericValue, String	
Submit	
0h 40m 11s	Show/Hide Timer
Question 20 of 45	11 answered correctly
When should the "Add Log Fields" activity be used?	
When the standard log message has to be customized by adding new fields to it	
When logs need to be enabled	
When a log message with a maximum number of five visible fields needs to be generated	
Submit	
0h 38m 51s	Show/Hide Timer

Which one of the statements below regarding the GetAppCredentials workflow included in UiPath Robotic Enterprise Frantrue?	mework is
It first requests the credential from user.	
It first tries to fetch a credential from the Windows Credential Manager.	
It first tries to fetch a credential from Orchestrator.	
Submit	
0h 33m 4s	how/Hide Timer
Question 22 of 45 13 answ	wered correctly
Downloading a report from a web application takes a variable amount of time, but a pop-up window is shown when the dofinished. What should you do to check whether the file has been fully downloaded before continuing the process? © Use the On Element Appear activity and indicate the download pop-up window	ownload is
Use the Element Exist activity and indicate the download pop-up window	
Set the WaitForReady property to Complete	
Submit	
0h 32m 4s	Show/Hide Timer
Question 23 of 45	d correctly
One of the steps in your process is to authenticate on a web application. How can you check if the login succeeded or not?	
Place the login activities inside a Try-Catch block. An exception is thrown in case a login problem occurs.	
Use an Element Exist activity to check whether the login succeeded by searching for an element that is only displayed in that case.	
Check the return value of the Login activity.	
Submit	
0h 31m 16s	Hide Timer

Question 24 of 45	14 answered correctly
How should exceptions be handled? Select all the options that apply.	
■ By using Try Catch activities inside the workflow for unexpected application exceptions.	
By validating data using conditional blocks for business exceptions.	
UiPath handles exceptions by default.	
Submit	
0h 30m 40s	Show/Hide Timer
Question 25 of 45	15 answered correc
variable? String Queueltem	
Object Submit	
Dh 30m 7s	Show/Hide Tim
Question 26 of 45	16 answered correc
Which of the following statements are true? Select all the options that apply.	
You cannot use a recorder in a Citrix environment	
✓ The recorder is used to create a skeleton for the UI automation	
▼ The Desktop recorder generates partial selectors	
Submit	
Oh 28m 23s	Show/Hide Tin

Question 27 of 45	17 answered correctly
When requesting a work item from Orchestrator Queues using the Get Transaction Item activity, you need to spece The name of the Queue which contains that specific work item The name of the Queue and the number of items to be retrieved The name of the Queue, the number of items, and a filtering expression	cify the following:
0h 27m 39s	Show/Hide Timer
Question 28 of 45	17 answered correctly
How can you retrieve the value stored in a Queue Item variable? © Use the Deserialize Json activity	
Use the Deserialize Xml activity Use the SpecificContent property	
Oh 27m 14s	Show/Hide Timer
Question 29 of 45	18 answered correctly
In which workflow in the UiPath Robotic Enterprise Framework template is the TransactionNumber global variable default?	e incremented by
Process workflow	
SetTransactionStatus workflow GetTransactionData workflow	
Submit	
0h 26m 30s	Show/Hide Timer

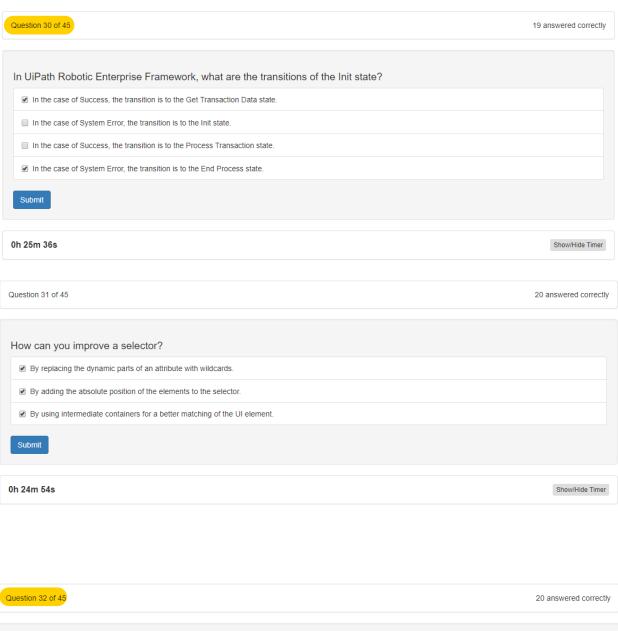

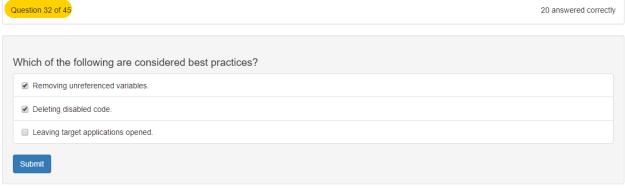

Show/Hide Timer

0h 24m 16s

Question 33 of 45	21 answered correctly
In the UiPath Robotic Enterprise Framework template, if a System Error is encountered in the Init state of the state is executed next?	e Main workflow, which
Get Transaction Data	
⊚ Init	
End Process	
Submit	
0h 23m 51s	Show/Hide Timer
Question 34 of 45	22 answered correctly
How can you pass data between workflows?	
By using arguments.	
By using variables.	
By using a pipe.	
Submit	
0h 23m 14s	Show/Hide Timer
Question 35 of 45	23 answered correctly
In the UiPath Robotic Enterprise Framework template, if a System Error is encountered in the Process Transform Main workflow, which state is executed next?	action state of the
Get Transaction Data	
Init	
End Process	
Submit	
Submit	
0h 22m 37s	Show/Hide Timer

Question 36 of 45	23 answered correc
You want to build a Dispatcher process to populate an Orchestrator Queue for parallel pr should you use to add a queue item for each work item?	rocessing on multiple robots. Which activit
Add Queue Item	
Get Transaction Item	
Add Transaction Item	
Submit	
lh 22m 1s	Show/Hide Time
Question 37 of 45	23 answered correct
What is the best way to select a row with a certain value from a column in Excel?	through the data and identify the element.
Use a Read Range Activity to retrieve the contents of the Excel file, and then use a Select method to identify the decomposition.	esired row.
Use the Find functionality from Excel.	
Oh 21m 31s	Show/Hide Time
nuestion 38 of 45	23 answered correctly
Which is considered to be one of the best practices regarding the process finalization?	
Leave the used applications open, so that a person can inspect the result	
Leave the application in its initial state, so that we can execute the process again	
Leave the application in its initial state, so that we can execute the process again Restart the machine, so that any potential problem can be fixed	

Question 39 of 45 24 answered con	rectly
While automating an installation wizard, a pop-up window may or may not appear. What can you use to close the window withou stopping the workflow?	ıt
Use a Click activity inside a Try Catch activity.	
■ Use a Click activity with the ContinueOnError property set to True.	
Use a Click activity and set its TimeouttMS property to 30.	
Submit	

Show/Hide Timer

0h 19m 50s

Question 40 of 45	24 answered correctly
In which workflow in the UiPath Robotic Enterprise Framework template is the retry mechanism.	sm implemented?
The SetTransactionStatus workflow	
The Main workflow	
The GetTransactionData workflow	
Submit	
Courant Couran	
0h 19m 10s	Show/Hide Timer
Question 41 of 45	25 answered correctly
Where should credentials be stored? Select all the options that apply.	
☐ Directly inside the workflows, as variables.	
Submit	
Question 42 of 45	26 answered correctly
This is a reliable selector for a dynamic web page: webctrl idx='144' tag='IMG'/	
True	
● False	
● False	
○ False Submit	
	Show/Hide Timer

