

## **CIAM/SGO Automation PDF Report**

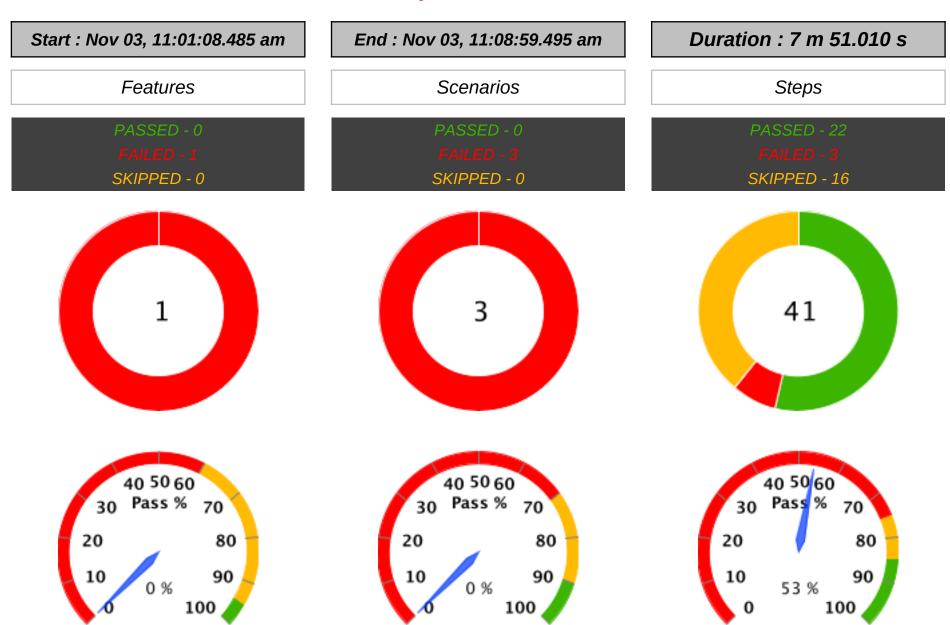


Feature			Scer	nario			St	ер	
Name	Duration	T	P	F	S	T	P	F	S
New_Bank_US04 Transfer/Send Money Test	7 m 51.010 s	3	0	3	0	41	22	3	16

Tag		Scei	nario			Fea	ture		
Name	<i>T</i>	P	F	S	T	P	F	S	
@US06	3	0	3	0	1	0	1	0	
@pay-a-bill-make-a-payment-valid	1	0	1	0	1	0	1	0	
@new-bank	3	0	3	0	1	0	1	0	
@pay-a-bill-make-another-payment-valid	1	0	1	0	1	0	1	0	
@pay-a-bill-invalid	1	0	1	0	1	0	1	0	

FEATURES SUMMARY -- 4

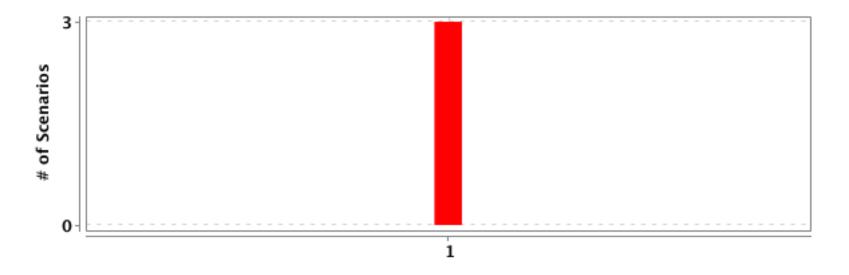

#	Feature Name	T	P	F	S	Duration
1	New_Bank_US04 Transfer/Send Money Test	3	0	3	0	7 m 51.010 s

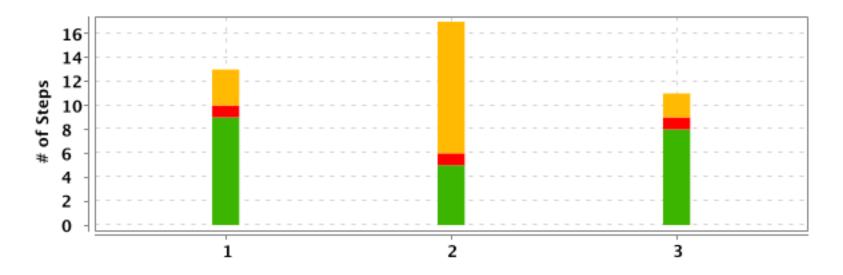


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	New_Bank_US04 Transfer/Send Money Test	US04-01 New_Bank: User can able to Transfer or send money	13	9	1	3	2 m 16.415 s
2	New_Bank_US04 Transfer/Send Money Test	US04-01 New_Bank: User can able to make another payment again	17	5	1	11	2 m 40.855 s
3	New_Bank_US04 Transfer/Send Money Test	US04-02 New_Bank: User cannot able to Transfer or send money if User doesn't provide the same PayeeAccount *	11	8	1	2	2 m 53.470 s


<sup>\*</sup> The feature name and/or scenario name has been cropped to fit in the available space.

DETAILED SECTION -- 6 --

#### New\_Bank\_US04 Transfer/Send Money Test

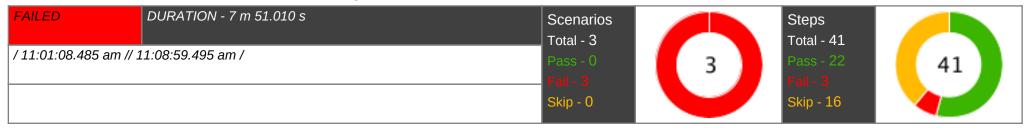

#### **US04-01 New\_Bank: User can able to Transfer or send money**

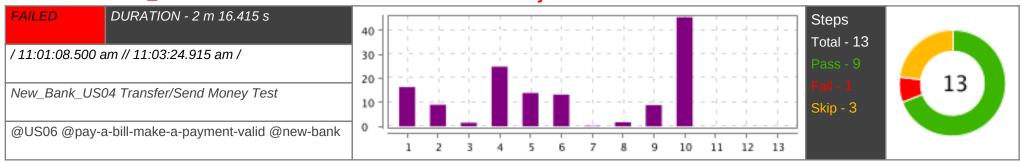

#	Step / Hook Details	Status	Duration
1	Given Setup the Test Environment as "CHROME" and User opens the given URL "NEW_BANK"	PASSED	16.390 s
	User has opened the link:https://bank.ciam.sandbox.ciamsgo.com/ on CHROME browser.		
2	Given User provides access token to Deloitte security page for New Banking App	PASSED	9.042 s
	User is clicked on AccessThroughEntryToken		
	User has provided Access Token		
	User has received the Access to Deloitte		
3	And User verifies the new bank site is accessible	PASSED	1.530 s
	New Bank Page has been appeared as expected		
	Page URI is appeared as expected, URL:https://bank.ciam.sandbox.ciamsgo.com/		
4	And User waits until the login section appears for new Bank app	PASSED	24.917 s
	Login Section has appeared		
5	Given User provides "newbankregistrationviaemail16" and password for new bank app - static	PASSED	13.911 s
	User has provided username		
	User has provided password		
	User has clicked on Sign-On button		
6	Then User should able to login with "automation" and land on dashboard of new Bank app "positive"	PASSED	13.247 s

#	Step / Hook Details	Status	Duration
	User is registered an account on new Bank app and Firstname is appeared as expected		
	Dashboard page URL is verified		
7	And User clicks on transfer option on dashboard page of new Bank app	PASSED	0.222 s
	User has clicked on Transfer option link on dashboard		
8	Then User clicks on make a new payment button	PASSED	1.686 s
	Transfer Page has been appeared		
	User has clicked on make a new payment		
9	Given User provides the transfer details like "Automation User", "123123", "123123", "500", "positive" and click on continue	PASSED	8.894 s
	User has landed on Send Money page		
	User has provided PayeeName		
	User has provided AccountNumber		
	User has provided ConfirmAccountNumber		
	User has provided Transfer Amount		
	User has clicked on Confirm Payment		
10	Then User confirms the transaction risk	FAILED	45.510 s
	org.openqa.selenium.TimeoutException: Expected condition failed: waiting for visibility of element located by By.xpath: //*[text()='Transaction Risk Details']/following::button[1] (tried for 45 second(s) with 500 milliseconds interval) Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLAT', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os. version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 8ad1cb840dae336b2478a633ca5a9862 at org.openqa.selenium.support.ui.WebDriverWait.timeoutException(WebDriverWait.java:87) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:231) at Utilities.WaitUtil.elementToBeLocated(WaitUtil.java:29) at StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.userConfirmsTheTransactionRisk(NewBankProfileOptionsScreenSD.java:400) at ?.User confirms the transaction risk(file:///Users/navepilla/IdeaProjects/main-project/ciamsgo-cucumber-test-framework/src/test/java/Features/Banking/newU//NewBankTransfers.feature:18) * Not displayable characters are replaced by '?'.		
11	Then User gets the Success message for the transaction	SKIPPED	0.002 s
12	And User logs out from new Bank app "positive"	SKIPPED	0.000 s
13	Then User terminates all windows of the browser	SKIPPED	0.000 s
	AFTER - StepDefinitions.NewBank.NewBankRegistrationScreenSD.testScenarioCondition()	PASSED	0.856 s
	Above scenario has been failed. Ref: Attachment	$\neg$	

	Step / Hook Details	Status	Duration
	PageURL: https://bank.ciam.sandbox.ciamsgo.com/profile/transfers		
	Terminated the browser as a failure noticed in above scenario		
	Send Management Send Send Send Send Send Send Send Send		
T	AFTER - StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.testScenarioCondition()	FAILED	0.006 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.prepareFailureEvidence(NewBankProfileOptionsScreenSD.java:34)		
1	AFTER - StepDefinitions.NewBank.NewBankWelcomeScreenSD.testScenarioCondition()	FAILED	0.002 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)		
ш	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)	I	1

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.NewBank.NewBankWelcomeScreenSD.prepareFailureEvidence(NewBankWelcomeScreenSD.java:20) at StepDefinitions.NewBank.NewBankWelcomeScreenSD.testScenarioCondition(NewBankWelcomeScreenSD.java:31)		
	AFTER - StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.testScenarioCondition()	FAILED	0.004 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptinsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_rlym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.prepareFailureEvidence(DeloitteSecurityLayerSD.java:22) at StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.prepareFailureEvidence(DeloitteSecurityLayerSD.java:33)		
	AFTER - StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.testScenarioCondition()	FAILED	0.003 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		

DETAILED SECTION -- 10 --

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.prepareFailureEvidence(GoogleOktaLoginSD.java:16) at StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.testScenarioCondition(GoogleOktaLoginSD.java:27)		
	AFTER - StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.testScenarioCondition()	FAILED	0.003 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.9.0', revision: 'a4995e2c09* System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities (acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: (chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOnto: (debuggerAddress: localhost:50372), networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:669) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.prepareFailureEvidence(FeedTestDataToFilesSD.java:30)		
	AFTER - StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.testScenarioCondition()	FAILED	0.017 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		

DETAILED SECTION -- 11 --

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.prepareFailureEvidence(FacebookOktaLoginSD.java:17) at StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.testScenarioCondition(FacebookOktaLoginSD.java:28)		
	AFTER - StepDefinitions.CommonDefinitions.BrowserOperationsSD.testScenarioCondition()	FAILED	0.003 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.9.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.BrowserOperationsSD.prepareFailureEvidence(BrowserOperationsSD.java:15) at StepDefinitions.CommonDefinitions.BrowserOperationsSD.testScenarioCondition(BrowserOperationsSD.java:26)		
	AFTER - StepDefinitions.Banking.BankingTransferScreenSD.testScenarioCondition()	FAILED	0.002 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.9.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)	T AILLD	
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		

DETAILED SECTION -- 12 --

ŧ	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingTransferScreenSD.prepareFailureEvidence(BankingTransferScreenSD.java:16) at StepDefinitions.Banking.BankingTransferScreenSD.testScenarioCondition(BankingTransferScreenSD.java:27)		
	AFTER - StepDefinitions.Banking.BankingBrokerageAccountSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.9.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities (acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: (chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_rr/ym2k45yj129), goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingBrokerageAccountSD.prepareFailureEvidence(BankingBrokerageAccountSD.java:14) at StepDefinitions.Banking.BankingBrokerageAccountSD.testScenarioCondition(BankingBrokerageAccountSD.java:25)		
	AFTER - StepDefinitions.Banking.BankingPaymentsSD.testScenarioCondition()	FAILED	0.002 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		

DETAILED SECTION -- 13 --

Step / Hook Details	Status	Duration
at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingPaymentsSD.prepareFailureEvidence(BankingPaymentsSD.java:12) at StepDefinitions.Banking.BankingPaymentsSD.testScenarioCondition(BankingPaymentsSD.java:23)		
AFTER - StepDefinitions.Banking.BankingWelcomeScreenSD.testScenarioCondition()	FAILED	0.001 s
org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)		
at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:142)		
at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		
at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		
at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
at StepDefinitions.Banking.BankingWelcomeScreenSD.prepareFailureEvidence(BankingWelcomeScreenSD.java:15)		
at StepDefinitions.Banking.BankingWelcomeScreenSD.testScenarioCondition(BankingWelcomeScreenSD.java:26)		
AFTER - StepDefinitions.BankingLoggedInScreenSD.testScenarioCondition()	FAILED	0.004 s
org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)		
at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		
at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		
at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		
at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		

DETAILED SECTION -- 14 --

#	Step / Hook Details	Status	Duration
	at StepDefinitions.Banking.BankingLoggedInScreenSD.prepareFailureEvidence(BankingLoggedInScreenSD.java:16) at StepDefinitions.Banking.BankingLoggedInScreenSD.testScenarioCondition(BankingLoggedInScreenSD.java:27)		
	AFTER - StepDefinitions.Banking.BankTransfersSD.testScenarioCondition()	FAILED	0.003 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
	at StepDefinitions.Banking.BankTransfersSD.prepareFailureEvidence(BankTransfersSD.java:12) at StepDefinitions.Banking.BankTransfersSD.testScenarioCondition(BankTransfersSD.java:23)		
	AFTER - StepDefinitions.Banking.BankingProfileOptionsSD.testScenarioCondition()  org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142)	FAILED	0.002 s
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingProfileOptionsSD.prepareFailureEvidence(BankingProfileOptionsSD.java:17)		

DETAILED SECTION -- 15 --

#	Step / Hook Details	Status	Duration
	at StepDefinitions.Banking.BankingProfileOptionsSD.testScenarioCondition(BankingProfileOptionsSD.java:28)		
	AFTER - StepDefinitions.Banking.BankingSignUpEmailSD.testScenarioCondition()	FAILED	0.006 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
	at StepDefinitions.Banking.BankingSignUpEmailSD.prepareFailureEvidence(BankingSignUpEmailSD.java:16) at StepDefinitions.BankingSignUpEmailSD.testScenarioCondition(BankingSignUpEmailSD.java:27)  AFTER - StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition()	FAILED	0.003 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingLoginScreenSD.prepareFailureEvidence(BankingLoginScreenSD.java:15) at StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition(BankingLoginScreenSD.java:26)		

DETAILED SECTION -- 16 --

#	Step / Hook Details	Status	Duration
	AFTER - StepDefinitions.Retail.RetailOctaSignInSceenSD.testScenarioCondition()	FAILED	0.005 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
	at StepDefinitions.Retail.RetailOctaSignInSceenSD.prepareFailureEvidence(RetailOctaSignInSceenSD.java:26)		
	at StepDefinitions.Retail.RetailOctaSignInSceenSD.testScenarioCondition(RetailOctaSignInSceenSD.java:37)		
	AFTER - StepDefinitions.Retail.RetailWelcomeScreenSD.testScenarioCondition()	FAILED	0.002 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:largeBlob: true,		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
	at StepDefinitions.Retail.RetailWelcomeScreenSD.prepareFailureEvidence(RetailWelcomeScreenSD.java:21) at StepDefinitions.Retail.RetailWelcomeScreenSD.testScenarioCondition(RetailWelcomeScreenSD.java:32)		
	AFTER - StepDefinitions.Retail.RetailProfileOptionsScreenSD.testScenarioCondition()	FAILED	0.000 s

DETAILED SECTION -- 17 --

org.openga.selenium.NoSuchSessionException: Session Dis null. Using WebDriver after calling quiti()? Build info: version: '4.30, revision: '49395e2076' System info: host: 'UsBGONAVEPILLA'. ip: '42494070-4789 84 644-15787 87500 bit levelor. '05 can that GO S.Y. os arch: '486 64'. os version: '12.6', java ver		Step / Hook Details	Status	Duration
AFTER - StepDefinitions.Retail.RetailSignUpScreenSD.testScenarioCondition()  org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09" System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (deec40d3a576, userDataDir. /var/flotders/ r/ym2k45y129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {Implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.BettipCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:659) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenSbot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailSignUpScreenSD.prepareFailureEvidence(RetailSignUpScreenSD.java:18) at StepDefinitions.Retail.RetailSignUpScreenSD.testScenarioCondition(RetailSignUpScreenSD.java:29)		'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailProfileOptionsScreenSD.prepareFailureEvidence(RetailProfileOptionsScreenSD.java:22)	Status	
'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.01.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDatabir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:659) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailSignUpScreenSD.prepareFailureEvidence(RetailSignUpScreenSD.java:18) at StepDefinitions.Retail.RetailSignUpScreenSD.testScenarioCondition(RetailSignUpScreenSD.java:29)	$\forall$		FAILED	0.000 s
at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailSignUpScreenSD.prepareFailureEvidence(RetailSignUpScreenSD.java:18) at StepDefinitions.Retail.RetailSignUpScreenSD.testScenarioCondition(RetailSignUpScreenSD.java:29)		'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true,		
at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailSignUpScreenSD.prepareFailureEvidence(RetailSignUpScreenSD.java:18) at StepDefinitions.Retail.RetailSignUpScreenSD.testScenarioCondition(RetailSignUpScreenSD.java:29)				
AFTER - StepDefinitions.Retail.RetailLoginScreenSD.testScenarioCondition() FAILED 0.000 s		at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.RetailSignUpScreenSD.prepareFailureEvidence(RetailSignUpScreenSD.java:18)		
	1	AFTER - StepDefinitions.Retail.RetailLoginScreenSD.testScenarioCondition()	FAILED	0.000 s

DETAILED SECTION -- 18 --

#	Step / Hook Details	Status	Duration
	'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdp/Version: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailLoginScreenSD.prepareFailureEvidence(RetailLoginScreenSD.java:34)		
	AFTER - StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129), goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.Shot(CaptureScreen.java:9)		
	at StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.prepareFailureEvidence(RetailPrivacyWebFormScreenSD.java:18) at StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.testScenarioCondition(RetailPrivacyWebFormScreenSD.java:29)		
	AFTER - StepDefinitions.Health.HealthConfigureRegistrationSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch:		

DETAILED SECTION -- 19 --

#	Step / Hook Details	Status	Duration
	'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
	at StepDefinitions.Health.HealthConfigureRegistrationSD.prepareFailureEvidence(HealthConfigureRegistrationSD.java:14)		
	at StepDefinitions.Health.HealthConfigureRegistrationSD.testScenarioCondition(HealthConfigureRegistrationSD.java:25)		
	AFTER - StepDefinitions.Health.HealthWelcomeScreenSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
	at StepDefinitions.Health.HealthWelcomeScreenSD.prepareFailureEvidence(HealthWelcomeScreenSD.java:15)		
	at StepDefinitions.Health.HealthWelcomeScreenSD.testScenarioCondition(HealthWelcomeScreenSD.java:26)		
	AFTER - StepDefinitions.Health.HealthRegisterScreenSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}]		


DETAILED SECTION -- 20 --

#	Step / Hook Details	Status	Duration
	Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthRegisterScreenSD.prepareFailureEvidence(HealthRegisterScreenSD.java:30)		
	AFTER - StepDefinitions.Health.HealthLoginScreenSD.testScenarioCondition()	FAILED	0.002 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthLoginScreenSD.prepareFailureEvidence(HealthLoginScreenSD.java:20) at StepDefinitions.Health.HealthLoginScreenSD.prepareFailureEvidence(HealthLoginScreenSD.java:31)		
	AFTER - StepDefinitions.Health.HealthLoggedInHomeScreenSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62		

DETAILED SECTION -- 21 --

#	Step / Hook Details	Status	Duration
	(1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:50372}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:50372/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
	at StepDefinitions.Health.HealthLoggedInHomeScreenSD.prepareFailureEvidence(HealthLoggedInHomeScreenSD.java:24)		
	at StepDefinitions.Health.HealthLoggedInHomeScreenSD.testScenarioCondition(HealthLoggedInHomeScreenSD.java:38)		

### **US04-01** New\_Bank: User can able to make another payment again

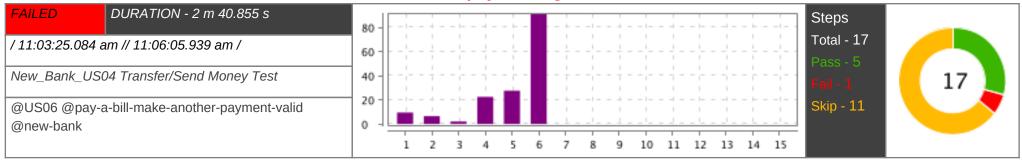

#	Step / Hook Details	Status	Duration
1	Given Setup the Test Environment as "CHROME" and User opens the given URL "NEW_BANK"	PASSED	9.465 s
	User has opened the link:https://bank.ciam.sandbox.ciamsgo.com/ on CHROME browser.		
2	Given User provides access token to Deloitte security page for New Banking App	PASSED	6.446 s
	User is clicked on AccessThroughEntryToken	]	
	User has provided Access Token		
	User has received the Access to Deloitte		
3	And User verifies the new bank site is accessible	PASSED	2.085 s
	New Bank Page has been appeared as expected		
	Page URI is appeared as expected, URL:https://bank.ciam.sandbox.ciamsgo.com/		
4	And User waits until the login section appears for new Bank app	PASSED	22.465 s

#	Step / Hook Details	Status	Duration
	Login Section has appeared		
5	Given User provides "newbankregistrationviaemail16" and password for new bank app - static	PASSED	27.586 s
	User has provided username	]	
	User has provided password		
	User has clicked on Sign-On button		
6	Then User should able to login with "automation" and land on dashboard of new Bank app "positive"	FAILED	1 m 30.860 s
	org.openqa.selenium.TimeoutException: Expected condition failed: waiting for visibility of element located by By.xpath: //*[text()='Automation'] (tried for 60 second(s) with 500 milliseconds interval) Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java. version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129), goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true) Session ID: e6ee1fbeb5bc141459fa5b16f6ba1e66 at org.openqa.selenium.support.ui.WebDriverWait.timeoutException(WebDriverWait.java:87) at Utilities.WaitUtil.elementToBeLocated(WaitUtil.java:29) at StepDefinitions.NewBankProfileOptionsScreenSD. userShouldAbleToLoginWithOnNewBankAppAndLandOnDashBoard(NewBankProfileOptionsScreenSD.java:67) at ?.User should able to login with "automation" and land on dashboard of new Bank app "positive"(file:///Users/navepilla/IdeaProjects/main-project/ciamsgo-cucumber-test-framework/src/test/java/Features/Banking/newUl/NewBankTransfers.feature:32) * Not displayable characters are replaced by '?'.		
7	And User clicks on transfer option on dashboard page of new Bank app	SKIPPED	0.000 s
8	Then User clicks on make a new payment button	SKIPPED	0.001 s
9	Given User provides the transfer details like "Automation User", "123123", "123123", "500", "positive" and click on continue	SKIPPED	0.000 s
10	Then User confirms the transaction risk	SKIPPED	0.000 s
11	Then User gets the Success message for the transaction	SKIPPED	0.001 s
12	And User clicks on make another payment	SKIPPED	0.000 s
13	Given User provides the transfer details like "Automation User", "123123", "123123", "500", "positive" and click on continue	SKIPPED	0.000 s
14	Then User confirms the transaction risk	SKIPPED	0.000 s
15	Then User gets the Success message for the transaction	SKIPPED	0.001 s
16	And User logs out from new Bank app "positive"	SKIPPED	0.001 s
17	Then User terminates all windows of the browser	SKIPPED	0.000 s
	AFTER - StepDefinitions.NewBank.NewBankRegistrationScreenSD.testScenarioCondition()  Above scenario has been failed. Ref: Attachment  PageURL: https://bank.ciam.sandbox.ciamsgo.com/	PASSED	1.843 s

#	Step / Hook Details	Status	Duration
	Terminated the browser as a failure noticed in above scenario		
	Safe & Secure Banking for you Printy or conserve with last  The bank have  Legest Cheas  Legest Chea		
	AFTER - StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.testScenarioCondition()	FAILED	0.006 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities (acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129), goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.prepareFailureEvidence(NewBankProfileOptionsScreenSD.java:23) at StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.prepareFailureEvidence(NewBankProfileOptionsScreenSD.java:23)		
	AFTER - StepDefinitions.NewBank.NewBankWelcomeScreenSD.testScenarioCondition()	FAILED	0.002 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.NewBank.NewBankWelcomeScreenSD.prepareFailureEvidence(NewBankWelcomeScreenSD.java:20) at StepDefinitions.NewBank.NewBankWelcomeScreenSD.testScenarioCondition(NewBankWelcomeScreenSD.java:31)		
	AFTER - StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.9.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:669) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.prepareFailureEvidence(DeloitteSecurityLayerSD.java:22) at StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.prepareFailureEvidence(DeloitteSecurityLayerSD.java:33)		
	AFTER - StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.testScenarioCondition()	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		

DETAILED SECTION -- 25 --

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.prepareFailureEvidence(GoogleOktaLoginSD.java:16) at StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.testScenarioCondition(GoogleOktaLoginSD.java:27)		
	AFTER - StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.9.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.prepareFailureEvidence(FeedTestDataToFilesSD.java:30)		
	AFTER - StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		

DETAILED SECTION -- 26 --

!	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.prepareFailureEvidence(FacebookOktaLoginSD.java:17) at StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.testScenarioCondition(FacebookOktaLoginSD.java:28)		
	AFTER - StepDefinitions.CommonDefinitions.BrowserOperationsSD.testScenarioCondition()	FAILED	0.003 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities (acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:669) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.BrowserOperationsSD.prepareFailureEvidence(BrowserOperationsSD.java:15) at StepDefinitions.CommonDefinitions.BrowserOperationsSD.testScenarioCondition(BrowserOperationsSD.java:26)		
	AFTER - StepDefinitions.Banking.BankingTransferScreenSD.testScenarioCondition()	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		

DETAILED SECTION -- 27 --

#	Step / Hook Details	Status	Duration
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.BankingTransferScreenSD.prepareFailureEvidence(BankingTransferScreenSD.java:16) at StepDefinitions.BankingTransferScreenSD.testScenarioCondition(BankingTransferScreenSD.java:27)		
	AFTER - StepDefinitions.BankingBrokerageAccountSD.testScenarioCondition()	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
	at StepDefinitions.Banking.BankingBrokerageAccountSD.prepareFailureEvidence(BankingBrokerageAccountSD.java:14) at StepDefinitions.Banking.BankingBrokerageAccountSD.testScenarioCondition(BankingBrokerageAccountSD.java:25)		
	AFTER - StepDefinitions.BankingPaymentsSD.testScenarioCondition()	FAILED	0.003 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
	at org.openga.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java.353)		
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		

DETAILED SECTION -- 28 --

!	Step / Hook Details	Status	Duration
	at StepDefinitions.Banking.BankingPaymentsSD.prepareFailureEvidence(BankingPaymentsSD.java:12) at StepDefinitions.Banking.BankingPaymentsSD.testScenarioCondition(BankingPaymentsSD.java:23)		
	AFTER - StepDefinitions.Banking.BankingWelcomeScreenSD.testScenarioCondition()	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.9.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenSbot(CaptureScreen.sbotAs(RemoteWebDriver.java:353) at StepDefinitions.Banking.BankingWelcomeScreenSD.testScenarioCondition(BankingWelcomeScreenSD.java:26)	FAILED	
+	AFTER - StepDefinitions.Banking.BankingLoggedInScreenSD.testScenarioCondition()	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: '44995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.StakeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingLoggedInScreenSD.prepareFailureEvidence(BankingLoggedInScreenSD.java:16)		

DETAILED SECTION -- 29 --

#	Step / Hook Details	Status	Duration
	at StepDefinitions.Banking.BankingLoggedInScreenSD.testScenarioCondition(BankingLoggedInScreenSD.java:27)		
	AFTER - StepDefinitions.Banking.BankTransfersSD.testScenarioCondition()	FAILED	0.006 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openga.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:107)		
	at org.openga.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
	at StepDefinitions.Banking.BankTransfersSD.prepareFailureEvidence(BankTransfersSD.java:12) at StepDefinitions.Banking.BankTransfersSD.testScenarioCondition(BankTransfersSD.java:23)		
_	, , ,	EALLED	0.000.0
	AFTER - StepDefinitions.BankingProfileOptionsSD.testScenarioCondition()	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java.624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java.628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java.353)		
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
	at StepDefinitions.Banking.BankingProfileOptionsSD.prepareFailureEvidence(BankingProfileOptionsSD.java:17)		
	at StepDefinitions.Banking.BankingProfileOptionsSD.testScenarioCondition(BankingProfileOptionsSD.java:28)		

DETAILED SECTION -- 30 --

#	Step / Hook Details	Status	Duration
	AFTER - StepDefinitions.Banking.BankingSignUpEmailSD.testScenarioCondition()	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}	TAILLE	
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
	at StepDefinitions.Banking.BankingSignUpEmailSD.prepareFailureEvidence(BankingSignUpEmailSD.java:16)		
	at StepDefinitions.Banking.BankingSignUpEmailSD.testScenarioCondition(BankingSignUpEmailSD.java:27)		
	AFTER - StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition()	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
	at StepDefinitions.Banking.BankingLoginScreenSD.prepareFailureEvidence(BankingLoginScreenSD.java:15)		
	at StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition(BankingLoginScreenSD.java:26)		
	AFTER - StepDefinitions.Retail.RetailOctaSignInSceenSD.testScenarioCondition()	FAILED	0.000 s

<u> </u>	Step / Hook Details	Status	Duration
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(CriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailOctaSignInSceenSD.prepareFailureEvidence(RetailOctaSignInSceenSD.java:26)	Status	
_	at StepDefinitions.Retail.RetailOctaSignInSceenSD.testScenarioCondition(RetailOctaSignInSceenSD.java:37)  AFTER - StepDefinitions.Retail.RetailWelcomeScreenSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailWelcomeScreenSD.prepareFailureEvidence(RetailWelcomeScreenSD.java:21)		
	at StepDefinitions.Retail.RetailWelcomeScreenSD.testScenarioCondition(RetailWelcomeScreenSD.java:32)	FAILED	0.019 s
_	AFTER - StepDefinitions.Retail.RetailProfileOptionsScreenSD.testScenarioCondition()		

#	Step / Hook Details	Status	Duration
	'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailProfileOptionsScreenSD.prepareFailureEvidence(RetailProfileOptionsScreenSD.java:33)		
	AFTER - StepDefinitions.Retail.RetailSignUpScreenSD.testScenarioCondition()	FAILED	0.002 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:147) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.shot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailSignUpScreenSD.prepareFailureEvidence(RetailSignUpScreenSD.java:29)		
	AFTER - StepDefinitions.Retail.RetailLoginScreenSD.testScenarioCondition()	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch:		

DETAILED SECTION -- 33 --

#	Step / Hook Details	Status	Duration
	'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.nrvokeExecute(DriverCommandExecutor.java:107)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailLoginScreenSD.prepareFailureEvidence(RetailLoginScreenSD.java:23)		
	at StepDefinitions.Retail.RetailLoginScreenSD.prepareFailureEvidence(RetailLoginScreenSD.java.23) at StepDefinitions.Retail.RetailLoginScreenSD.testScenarioCondition(RetailLoginScreenSD.java.34)		
	AFTER - StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
	at StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.prepareFailureEvidence(RetailPrivacyWebFormScreenSD.java:18)		
	$at\ Step Definitions. Retail. Retail Privacy WebForm Screen SD. test Scenario Condition (Retail Privacy WebForm Screen SD. java: 29)$		
	AFTER - StepDefinitions.Health.HealthConfigureRegistrationSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}]		

DETAILED SECTION -- 34 --


#	Step / Hook Details	Status	Duration
	Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthConfigureRegistrationSD.prepareFailureEvidence(HealthConfigureRegistrationSD.java:14) at StepDefinitions.Health.HealthConfigureRegistrationSD.testScenarioCondition(HealthConfigureRegistrationSD.java:25)		
	AFTER - StepDefinitions.Health.HealthWelcomeScreenSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthWelcomeScreenSD.prepareFailureEvidence(HealthWelcomeScreenSD.java:26)		
	AFTER - StepDefinitions.Health.HealthRegisterScreenSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62		

DETAILED SECTION -- 35 --

#	Step / Hook Details	Status	Duration
	(1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
	at StepDefinitions.Health.HealthRegisterScreenSD.prepareFailureEvidence(HealthRegisterScreenSD.java:19) at StepDefinitions.Health.HealthRegisterScreenSD.testScenarioCondition(HealthRegisterScreenSD.java:30)		
	AFTER - StepDefinitions.Health.HealthLoginScreenSD.testScenarioCondition()	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthLoginScreenSD.prepareFailureEvidence(HealthLoginScreenSD.java:20) at StepDefinitions.Health.HealthLoginScreenSD.testScenarioCondition(HealthLoginScreenSD.java:31)	FAILED	
	AFTER - StepDefinitions.Health.HealthLoggedInHomeScreenSD.testScenarioCondition()		0.000 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51070},		

#	Step / Hook Details	Status	Duration
	networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51070/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
	at StepDefinitions.Health.HealthLoggedInHomeScreenSD.prepareFailureEvidence(HealthLoggedInHomeScreenSD.java:24)		
	at StepDefinitions.Health.HealthLoggedInHomeScreenSD.testScenarioCondition(HealthLoggedInHomeScreenSD.java:38)		

# US04-02 New\_Bank: User cannot able to Transfer or send money if User doesn't provide the same PayeeAccount Number and ConfirmPayeeAccount Number

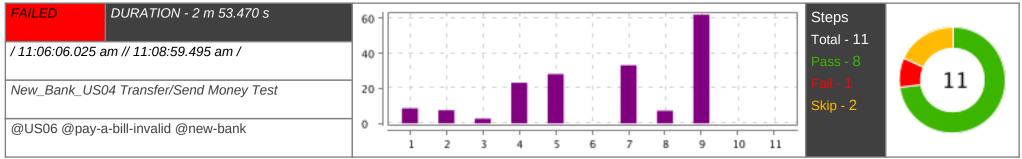

#	Step / Hook Details	Status	Duration
1	Given Setup the Test Environment as "CHROME" and User opens the given URL "NEW_BANK"	PASSED	8.564 s
	User has opened the link:https://bank.ciam.sandbox.ciamsgo.com/ on CHROME browser.		
2	Given User provides access token to Deloitte security page for New Banking App	PASSED	7.500 s
	User is clicked on AccessThroughEntryToken		
	User has provided Access Token		
	User has received the Access to Deloitte		
3	And User verifies the new bank site is accessible	PASSED	2.687 s
	New Bank Page has been appeared as expected		
	Page URI is appeared as expected, URL:https://bank.ciam.sandbox.ciamsgo.com/		
4	And User waits until the login section appears for new Bank app	PASSED	23.158 s

#	Step / Hook Details	Status	Duration
	Login Section has appeared		
5	Given User provides "newbankregistrationviaemail16" and password for new bank app - static	PASSED	28.106 s
	User has provided username	1	
	User has provided password		
	User has clicked on Sign-On button		
6	Then User should able to login with "automation" and land on dashboard of new Bank app "negative"	PASSED	0.001 s
	Skipping the Test as it falls under Negative testing		
7	And User clicks on transfer option on dashboard page of new Bank app	PASSED	33.151 s
	User has clicked on Transfer option link on dashboard	1	
8	Then User clicks on make a new payment button	PASSED	7.248 s
	Transfer Page has been appeared	1	
	User has clicked on make a new payment		
9	Given User provides the transfer details like "Automation User", "123123", "123125", "500", "negative" and click on continue	FAILED	1 m 2.051 s
	User has landed on Send Money page	1	
	User has provided PayeeName		
	User has provided AccountNumber		
	User has provided ConfirmAccountNumber		
	User has provided Transfer Amount		
	User has clicked on Confirm Payment		
	org.openqa.selenium.TimeoutException: Expected condition failed: waiting for visibility of element located by By.xpath: Account number and Confirm Account number do not match (tried for 45 second(s) with 500 milliseconds interval) Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os. version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: b68533c095f0224e0f884519bd99cf5f		
	at org.openqa.selenium.support.ui.WebDriverWait.timeoutException(WebDriverWait.java:87) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:231) at Utilities.WaitUtil.elementToBeLocated(WaitUtil.java:29) at StepDefinitions.NewBank.NewBankProfileOptionsScreenSD. userProvidesTheTransferDetailsLikeAndClickOnContinue(NewBankProfileOptionsScreenSD.java:448) at ?.User provides the transfer details like "Automation User", "123123", "123125", "500", "negative" and click on continue(file:///Users/navepilla/IdeaProjects/main-project/ciamsgo-cucumber-test-framework/src/test/java/Features/Banking/newUl/NewBankTransfers.feature:58) * Not displayable characters are replaced by '?'.		
10	And User logs out from new Bank app "negative"	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
11	Then User terminates all windows of the browser	SKIPPED	0.000 s
	AFTER - StepDefinitions.NewBank.NewBankRegistrationScreenSD.testScenarioCondition()  Above scenario has been failed. Ref: Attachment PageURL: https://bank.ciam.sandbox.ciamsgo.com/profile/transfers  Terminated the browser as a failure noticed in above scenario	PASSED	0.943 s
	AFTER - StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.testScenarioCondition()  org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: '44995e2c09" System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: (chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions.{debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.lakeScreenShot(CaptureScreen,java:9) at StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.prepareFailureEvidence(NewBankProfileOptionsScreenSD.java:34)	FAILED	0.003 s
	AFTER - StepDefinitions.NewBank.NewBankWelcomeScreenSD.testScenarioCondition()  org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true,	FAILED	0.001 s

DETAILED SECTION -- 39 --

#	Step / Hook Details	Status	Duration
	webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.NewBank.NewBankWelcomeScreenSD.prepareFailureEvidence(NewBankWelcomeScreenSD.java:20) at StepDefinitions.NewBank.NewBankWelcomeScreenSD.testScenarioCondition(NewBankWelcomeScreenSD.java:31)		
	AFTER - StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.testScenarioCondition()  org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4.995e2c.09" System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (leec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.perpareFailureEvidence(DeloitteSecurityLayerSD.java:32)	FAILED	0.000 s
	AFTER - StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.testScenarioCondition()  org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}	FAILED	0.001 s

DETAILED SECTION -- 40 --

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.prepareFailureEvidence(GoogleOktaLoginSD.java:16) at StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.testScenarioCondition(GoogleOktaLoginSD.java:27)		
	AFTER - StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.testScenarioCondition()  org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:629)  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353)  at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)  at StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.prepareFailureEvidence(FeedTestDataToFilesSD.java:30)	FAILED	0.000 s
	AFTER - StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.testScenarioCondition()  org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.prepareFailureEvidence(FacebookOktaLoginSD.java:17) at StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.testScenarioCondition(FacebookOktaLoginSD.java:28)		
	AFTER - StepDefinitions.CommonDefinitions.BrowserOperationsSD.testScenarioCondition()	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.9.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_rlym2k45yj129), goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdp?version: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.BrowserOperationsSD.prepareFailureEvidence(BrowserOperationsSD.java:15) at StepDefinitions.CommonDefinitions.BrowserOperationsSD.testScenarioCondition(BrowserOperationsSD.java:26)		
	AFTER - StepDefinitions.Banking.BankingTransferScreenSD.testScenarioCondition()	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingTransferScreenSD.prepareFailureEvidence(BankingTransferScreenSD.java:16) at StepDefinitions.Banking.BankingTransferScreenSD.testScenarioCondition(BankingTransferScreenSD.java:27)		
	AFTER - StepDefinitions.Banking.BankingBrokerageAccountSD.testScenarioCondition()	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingBrokerageAccountSD.prepareFailureEvidence(BankingBrokerageAccountSD.java:14) at StepDefinitions.Banking.BankingBrokerageAccountSD.testScenarioCondition(BankingBrokerageAccountSD.java:25)		
	AFTER - StepDefinitions.Banking.BankingPaymentsSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingPaymentsSD.prepareFailureEvidence(BankingPaymentsSD.java:12) at StepDefinitions.Banking.BankingPaymentsSD.testScenarioCondition(BankingPaymentsSD.java:23)		
	AFTER - StepDefinitions.Banking.BankingWelcomeScreenSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.9.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129), goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreenshotAs(RemoteWebDriver.java:353) at StepDefinitions.Banking.BankingWelcomeScreenSD.prepareFailureEvidence(BankingWelcomeScreenSD.java:15) at StepDefinitions.Banking.BankingWelcomeScreenSD.testScenarioCondition(BankingWelcomeScreenSD.java:26)		
	AFTER - StepDefinitions.Banking.BankingLoggedInScreenSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingLoggedInScreenSD.prepareFailureEvidence(BankingLoggedInScreenSD.java:16) at StepDefinitions.Banking.BankingLoggedInScreenSD.testScenarioCondition(BankingLoggedInScreenSD.java:27)		
	AFTER - StepDefinitions.Banking.BankTransfersSD.testScenarioCondition()	FAILED	0.004 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.9.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.82 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129), goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankTransfersSD.prepareFailureEvidence(BankTransfersSD.java:12) at StepDefinitions.Banking.BankTransfersSD.testScenarioCondition(BankTransfersSD.java:23)		
	AFTER - StepDefinitions.Banking.BankingProfileOptionsSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		

DETAILED SECTION -- 45 --

org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: '44995e2c09" System info: host: 'USBGONAVEPILLA1', ip: '2409:4070.4798.d5:d4e1:3578.7580.b1de%en0', os.name: 'Mac OS X', os.arch: '886.64', os.version: '12.6', java version: '13.0-1.1' Driver info: org.openqa.selenium.chromeChromeDriver Command: [null, screenshot f]] Capabilities (acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: (chromedriverVersion: 107.0.5304.62 (Leec40da576, userDataDir: Nar/folders/ r/ym2k45yj129), goog:chromeOptions: (debuggerAddress: localhost:51944), networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy; Proxy(), sec.dp: ws:/flocalhost:51944/devtoo, sec.dp/version: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: (implicit: 0, pageLoad: 300000), script: 30000), unhandledPromptSehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:virtualAuthenticators: true) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:624) at StepDefinitions.Banking.BankingSignUpEmailSD.testScenarioCondition(BankingSignUpEmailSD.java:27)  AFTER - StepDefinitions.Banking.BankingSignUpEmailSD.testScenarioCondition(BankingSignUpEmailSD.java:27)  AFTER - StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition(Command:Chrometioner.Gonmand:Chrometioner.scioner.java:10.0000), u	#	Step / Hook Details	Status	Duration
org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: '44995e2c09" System info: host: 'USBGONAVEPILLA1', ip: '2409:4070.4798.d5:d4e1:3578.7580.b1de%en0', os.name: 'Mac OS X', os.arch: '886.64', os.version: '12.6', java version: '13.0-1.1' Driver info: org.openqa.selenium.chromeChromeDriver Command: [null, screenshot f]] Capabilities (acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: (chromedriverVersion: 107.0.5304.62 (Leec40da576, userDataDir: Nar/folders/ r/ym2k45yj129), goog:chromeOptions: (debuggerAddress: localhost:51944), networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy; Proxy(), sec.dp: ws:/flocalhost:51944/devtoo, sec.dp/version: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: (implicit: 0, pageLoad: 300000), script: 30000), unhandledPromptSehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:virtualAuthenticators: true) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:624) at StepDefinitions.Banking.BankingSignUpEmailSD.testScenarioCondition(BankingSignUpEmailSD.java:27)  AFTER - StepDefinitions.Banking.BankingSignUpEmailSD.testScenarioCondition(BankingSignUpEmailSD.java:27)  AFTER - StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition(Command:Chrometioner.Gonmand:Chrometioner.scioner.java:10.0000), u		at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingProfileOptionsSD.prepareFailureEvidence(BankingProfileOptionsSD.java:17)		
'a4995e2c09" System info: host: 'USBGONAVEPILLA1', ip: '24094070'A798'd5'dde1:3578'7580'b1fe%en0', os.name: 'Mac OS X', os.arch: 'X86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptinsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /warfolders/_r/m2k45y129), goog:chromeOptions: {debuggerAddress: localhost:51944/} networkConnectionEnabled: false, pageLoadStrategy: normal_platformName: MAC, proxy Proxy(), secepto; ws://localhost51944/devtoo, sec.dpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension.credBlob: true, webauthn:witualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at Org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingSignUpEmailSD.repearFailureEvidence(BankingSignUpEmailSD.java:16) at StepDefinitions.Banking.BankingSignUpEmailSD.repearFailureEvidence(BankingSignUpEmailSD.java:27)  ### AFTER - StepDefinitions.Banking.BankingSignUpEmailSD.repearFailureEvidence(BankingSignUpEmailSD.java:27)  ### AFTER - StepDefinitions.Banking.BankingSignUpEmailSD.repearFailureEvidence(BankingSignUpEmailSD.java:27)  ### AFTER - StepDefinitions.Banking.BankingSignUpEmailSD.repearFailureEvidence(BankingSignUpEmailSD.goog.chrome: (chromeDriver CommandE.ful		AFTER - StepDefinitions.BankingSignUpEmailSD.testScenarioCondition()	FAILED	0.000 s
org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingSignUpEmailSD.prepareFailureEvidence(BankingSignUpEmailSD.java:16)		
'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		AFTER - StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition()	FAILED	0.003 s
at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		

DETAILED SECTION -- 46 --

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingLoginScreenSD.prepareFailureEvidence(BankingLoginScreenSD.java:15) at StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition(BankingLoginScreenSD.java:26)		
	AFTER - StepDefinitions.Retail.RetailOctaSignInSceenSD.testScenarioCondition()	FAILED	0.002 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09* System info: host: 'USBGONAVEPILLA1', ip: '2409:4070'.4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.shot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailOctaSignInSceenSD.jepagraFailureEvidence(RetailOctaSignInSceenSD.java:37)		
	AFTER - StepDefinitions.Retail.RetailWelcomeScreenSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		

#	Step / Hook Details	Status	Duration
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailWelcomeScreenSD.prepareFailureEvidence(RetailWelcomeScreenSD.java:21) at StepDefinitions.Retail.RetailWelcomeScreenSD.testScenarioCondition(RetailWelcomeScreenSD.java:32)		
	AFTER - StepDefinitions.Retail.RetailProfileOptionsScreenSD.testScenarioCondition()	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.RetailProfileOptionsScreenSD.prepareFailureEvidence(RetailProfileOptionsScreenSD.java:22)		
	at StepDefinitions.Retail.RetailProfileOptionsScreenSD.testScenarioCondition(RetailProfileOptionsScreenSD.java:33)  AFTER - StepDefinitions.Retail.RetailSignUpScreenSD.testScenarioCondition()	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142)	PAILLD	0.000 3
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		

DETAILED SECTION -- 48 --

	Step / Hook Details	Status	Duration
	at StepDefinitions.Retail.RetailSignUpScreenSD.prepareFailureEvidence(RetailSignUpScreenSD.java:18) at StepDefinitions.Retail.RetailSignUpScreenSD.testScenarioCondition(RetailSignUpScreenSD.java:29)		
	AFTER - StepDefinitions.Retail.RetailLoginScreenSD.testScenarioCondition()	FAILED	0.002 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.9.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129], goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.shot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailLoginScreenSD.prepareFailureEvidence(RetailLoginScreenSD.java:34)		
_	AFTER - StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.prepareFailureEvidence(RetailPrivacyWebFormScreenSD.java:18)		

Step / Hook Details	Status	Duration
at StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.testScenarioCondition(RetailPrivacyWebFormScreenSD.java:29)		
AFTER - StepDefinitions.Health.HealthConfigureRegistrationSD.testScenarioCondition()	FAILED	0.001 s
org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)		0.002 s
at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
at StepDefinitions.Health.HealthConfigureRegistrationSD.testScenarioCondition(HealthConfigureRegistrationSD.java:25)	EALLED	
org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}	IAILLU	0.002 S
at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
	at StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.testScenarioCondition(RetailPrivacyWebFormScreenSD.java:29)  AFTER - StepDefinitions.Health.HealthConfigureRegistrationSD.testScenarioCondition()  org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: '4.3995e203' System info: toost: 'USBGONAVEPILLA1', pr. '2409.4070'.4788.d5:442:1538'.75880.tbtfee9en0', os.name: 'Mac OS X', os.arch: '86.64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [hull, screenshot {}]}  Capabilities (acceptinsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: (chromedriveVersion: 107.0.5304.62)  Caecado36576, userDatafior. /ar/nofket5y, 259, joog:chromeOptions: (debuggerAddress: localhost:51944/devtoo, secrdyVersion: 107.0.5504.75, setMindowRedt: true, strictlelinlereatability: false, timeouts: (implicit: 0, pageLoad: 300000), script: 30000), unhandledPromptBehavior: dismiss and notify, webauthm:extension:credBlob: true, webauthm:extension:largeBlob: true, webauthm:extension:largeBlob: true, webauthm:extension:largeBlob: true, webauthm:extension:largeBlob: true, webauthm:extension:largeBlob: true, webauthm:extension:largeBlob: true, at org.openqa.selenium.remote.service. DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:639) at Org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:639) at StepDefinitions.Health.HealthConfigureRegistrationSD.prepareFailureEvidence(HealthConfigureRegistrationSD.java:14) at StepDefinitions.Health.HealthConfigureRegist	at StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.testScenarioCondition(RetailPrivacyWebFormScreenSD.java.29)  AFTER - StepDefinitions.Health.HealthConfigureRegistrationSD.testScenarioCondition()  org.openga.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: '4.895962:09' System info: host: 'USBGONAVEPILLA1', ip: '2409.4070-4798.d5.d4e1:3578.7590.b1fe/wen0', os.name: 'Mac OS X', os.arch: '846, 64', os.version: '12.6', java.version: '12.6', java.yersion: '12.6', java.yersion: '12.6', java.yersion: '12.6', java.yersion: '10.7.0.5304.62' (Jece40d3a576, userDataDir. /varifolders/_rym2k45y129), goog.chromeOptions: (debuggerAddress: localhost519444, networkConnectionEnableti.dale, paget.oad5strategy. normal.platformName: MAC, proxy; Proxy(), secctp. varifolaciblest.3944/devtoo, secctpVersion: 107.0.5304.87, setWindowFect: true, srict=lieInteractability: false, timeouts: (implicit: 0, paget.oad: 300000), script: 30000), unhandledPrompBehavior: dismiss and notify, webauthm.extension.crdeBiob: true, webauthm.virtualAuthenticators: true) at org.openga.selenium.remote. Province DriverCommandExecutor avecute(DriverCommandExecutor.java:145) at org.openga.selenium.remote. RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openga.selenium.remote. RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openga.selenium.remote. RemoteWebDriver.execute(RemoteWebDriver.java:629) at StepDefinitions. Health. HealthConfigureRegistrationSD.para=failureEvidence(HealthConfigureRegistrationSD.java:14) at StepDefinitions. Health. HealthConfigureRegistrationSD.para=failureEvidence(HealthConfigureRegistrationSD.java:14) at StepDefinitions. Health. HealthConfigureRegistrationSD.para=failureEvidence(Health

DETAILED SECTION -- 50 --

#	Step / Hook Details	Status	Duration
	AFTER - StepDefinitions.Health.HealthRegisterScreenSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}	, , , , , , , , , , , , , , , , , , ,	
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthRegisterScreenSD.prepareFailureEvidence(HealthRegisterScreenSD.java:19)		
	at StepDefinitions.Health.HealthRegisterScreenSD.testScenarioCondition(HealthRegisterScreenSD.java:19)  at StepDefinitions.Health.HealthRegisterScreenSD.testScenarioCondition(HealthRegisterScreenSD.java:30)		
	AFTER - StepDefinitions.HealthLoginScreenSD.testScenarioCondition()	FAILED	0.001 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
	at StepDefinitions.Health.HealthLoginScreenSD.prepareFailureEvidence(HealthLoginScreenSD.java:20) at StepDefinitions.Health.HealthLoginScreenSD.testScenarioCondition(HealthLoginScreenSD.java:31)		
	AFTER - StepDefinitions.HealthLoggedInHomeScreenSD.testScenarioCondition()	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision:		
	'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:d4e1:3578:7580:b1fe%en0', os.name: 'Mac OS X', os.arch:		
	'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}]		
	Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62		
	(1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:51944},		
	networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:51944/devtoo,		
	se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true,		
	webauthn:virtualAuthenticators: true}		
	at org.openga.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)		
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)		
	at StepDefinitions.Health.HealthLoggedInHomeScreenSD.prepareFailureEvidence(HealthLoggedInHomeScreenSD.java:24)		
	at StepDefinitions.Health.HealthLoggedInHomeScreenSD.testScenarioCondition(HealthLoggedInHomeScreenSD.java:38)		
	at Steppennitions.neatin.neatin.neatineotieensp.testscenanocondition(neatincoggedinnomescreensp.java.sa)		