


| Feature                          |              | Scenario |   |   |   | Step |    |   |   |
|----------------------------------|--------------|----------|---|---|---|------|----|---|---|
| Name                             | Duration     | <i>T</i> | P | F | S | T    | P  | F | S |
| New_Bank_US05 Profile Items Test | 1 m 46.693 s | 1        | 0 | 1 | 0 | 28   | 18 | 1 | 9 |

| Tag                     | Scenario |   |   | Feature |   |   |   |   |
|-------------------------|----------|---|---|---------|---|---|---|---|
| Name                    | <i>T</i> | P | F | S       | T | P | F | S |
| @US05                   | 1        | 0 | 1 | 0       | 1 | 0 | 1 | 0 |
| @update-address-details | 1        | 0 | 1 | 0       | 1 | 0 | 1 | 0 |
| @new-bank               | 1        | 0 | 1 | 0       | 1 | 0 | 1 | 0 |

FEATURES SUMMARY -- 4




| # | Feature Name                     | T | P | F | S | Duration     |
|---|----------------------------------|---|---|---|---|--------------|
| 1 | New_Bank_US05 Profile Items Test | 1 | 0 | 1 | 0 | 1 m 46.693 s |

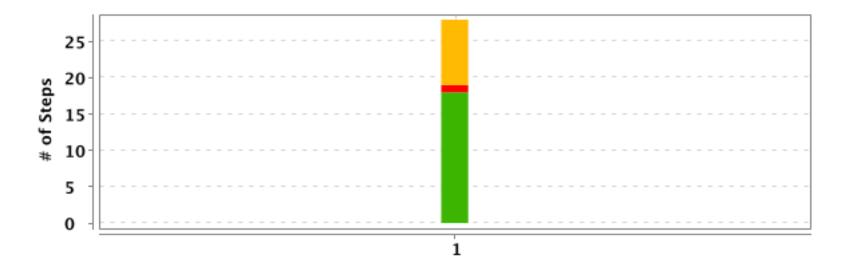


| # | Feature Name                     | Scenario Name   | <b>T</b> | P  | F | S | Duration     |
|---|----------------------------------|---|----------|----|---|---|--------------|
| 1 | New_Bank_US05 Profile Items Test | US05-01 New_Bank: User can able to update FirstName, Lastname, Email and Mobile details | 28       | 18 | 1 | 9 | 1 m 46.679 s |

DETAILED SECTION -- 6 --

## **New Bank US05 Profile Items Test**

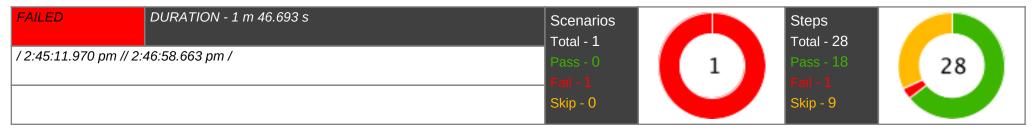

## US05-01 New\_Bank: User can able to update FirstName, Lastname, Email and Mobile details

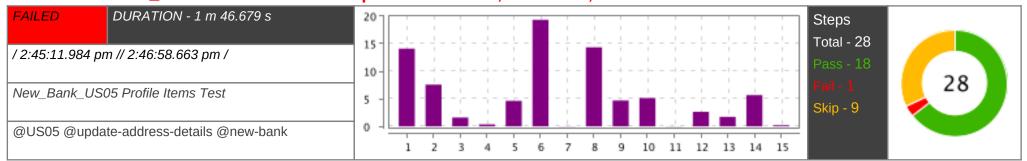

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
| 1 | Given Setup the Test Environment as "CHROME" and User opens the given URL "NEW_BANK"   | PASSED | 14.084 s |
|   | User has opened the link:https://bank.ciam.sandbox.ciamsgo.com/ on CHROME browser.   |        |          |
| 2 | Given User provides access token to Deloitte security page for New Banking App   | PASSED | 7.571 s  |
|   | User is clicked on AccessThroughEntryToken   |        |          |
|   | User has provided Access Token   |        |          |
|   | User has received the Access to Deloitte   |        |          |
| 3 | And User verifies the new bank site is accessible  | PASSED | 1.604 s  |
|   | New Bank Page has been appeared as expected  |        |          |
|   | Page URI is appeared as expected, URL:https://bank.ciam.sandbox.ciamsgo.com/   |        |          |
| 4 | And User clicks on OpenAnAccount on new Bank app   | PASSED | 0.360 s  |
|   | User has clicked on Open An New Account  |        |          |
| 5 | Given User provides the account creation using "EMAIL" and submit  | PASSED | 4.631 s  |
|   | User has clicked on Sign-Up through Email MFA  |        |          |
| 6 | Given User provides "newbankregistrationviaemail@mailinator.com", "automation", "automation", "newbankregistrationviaemail", | PASSED | 19.304 s |
|   | "positive" and password for Signup page of new Bank app  |        |          |
|   | Registration via Email Page has been appeared as expected  |        |          |

| #  | Step / Hook Details  | Status | Duration |
|----|--|--------|----------|
|    | Registration via Email Page URL is verified as expected  |        |          |
|    | User has provided the Email address  |        |          |
|    | User has provided the FirstName  |        |          |
|    | User has provided the LastName   |        |          |
|    | User has provided the Username   |        |          |
|    | User has provided the password   |        |          |
|    | User has provided the confirm password   |        |          |
|    | User has enabled the T&C   |        |          |
|    | User has clicked on Register button  |        |          |
|    | User has landed on Select MFA page and URL has been verified as expected   |        |          |
|    | User has skipped the MFA device registration   |        |          |
| 7  | Then User feeds the test data of new Bank "newbankregistrationviaemail@mailinator.com", "automation", "positive" to csv file                                     | PASSED | 0.027 s  |
|    | Test Data is loaded to CSV file in this path:/Users/navepilla/IdeaProjects/main-project/ciamsgo-cucumber-test-framework/TestData/NewBankRegisterEmailMFAData.csv |        |          |
| 8  | Then User should able to login with "automation" on new Bank app "positive"  | PASSED | 14.335 s |
|    | User is registered an account on new Bank app and Firstname is appeared as expected  |        |          |
|    | Profile Option page URL is verified  |        |          |
| 9  | Then Verify the "newbankregistrationviaemail@mailinator.com", "automation", "automation" and "positive" of logged-in user  | PASSED | 4.683 s  |
|    | details on new bank app  |        |          |
|    | User has landed on Profile Options page in personal details section  |        |          |
|    | Email is appeared as expected  |        |          |
|    | Firstname is appeared as expected  |        |          |
|    | Lastname is appeared as expected   |        |          |
| 10 | And User logs out from new Bank app "positive"   | PASSED | 5.121 s  |
|    | User has clicked on Logout arrow button  |        |          |
|    | User has clicked on Logout button  |        |          |
|    | User has successfully logged-out from the new bank app and landed on welcome page  |        |          |
| 11 | And User verifies the new bank site is accessible  | PASSED | 0.021 s  |
|    | New Bank Page has been appeared as expected  |        |          |
|    | Page URI is appeared as expected, URL:https://bank.ciam.sandbox.ciamsgo.com/   |        |          |
| 12 | And User waits until the login section appears for new Bank app  | PASSED | 2.651 s  |
|    | Login Section has appeared   |        |          |
| 13 | Given User provides "newbankregistrationviaemail" and password for new bank app - previous   | PASSED | 1.727 s  |
|    | User has provided username   |        |          |
|    | User has provided password   |        |          |

| #  | Step / Hook Details   | Status | Duration |
|----|---|--------|----------|
|    | User has clicked on Sign-On button  |        |          |
| 14 | Then User should able to login with "automation" and land on dashboard of new Bank app "positive"                                 | PASSED | 5.677 s  |
|    | User is registered an account on new Bank app and Firstname is appeared as expected   | 1      |          |
|    | Dashboard page URL is verified  |        |          |
| 15 | And User clicks on profile option on dashboard page of new Bank app   | PASSED | 0.197 s  |
|    | User has clicked on Profile option link on dashboard  | ]      |          |
| 16 | Then User updates "Mapple Street", "United States", "California", "San Jose" and "94088" address details in location section of   | PASSED | 14.956 s |
|    | new Bank app  |        |          |
|    | User has landed on Profile Options page in location details section   | ]      |          |
|    | Profile Details URL has been verified   |        |          |
|    | User has entered street address   |        |          |
|    | User has selected Country name from the list  |        |          |
|    | User has selected State name from the list  |        |          |
|    | User has entered city name  |        |          |
|    | User has entered zipcode detail   |        |          |
| 17 | And User clicks on update details and confirm as NO   | PASSED | 0.315 s  |
|    | User has landed on Profile Options page in personal details section   |        |          |
|    | Profile Details URL has been verified   |        |          |
|    | User has clicked on UpdateYourInformationButton   |        |          |
|    | Update Your Information Pop Up/Notification Box has been appeared   |        |          |
|    | User has declined the Update Information details  |        |          |
|    | User has landed again on Personal Details section as expected   |        |          |
| 18 | And User clicks on update details and confirm as YES and verifies the confirmation message  | PASSED | 5.604 s  |
|    | User has landed on Profile Options page in personal details section   |        |          |
|    | Profile Details URL has been verified   |        |          |
|    | User has clicked on UpdateYourInformationButton   |        |          |
|    | Update Your Information Pop Up/Notification Box has been appeared   |        |          |
|    | User has accepted the Update Information details  |        |          |
|    | Details have been updated confirmation message has been verified  |        |          |
|    | User has landed again on Personal Details section as expected   |        |          |
| 19 | Then Verify the "Mapple Street", "United States", "California", "San Jose", "94088" and "positive" of address details on new bank | FAILED | 3.080 s  |
|    | app   |        |          |
|    | User has landed on Profile Options page in personal details section   |        |          |
|    | Street Address is appeared as expected  |        |          |
|    | java.lang.AssertionError: expected [United States] but found [US]   |        |          |
|    | at org.testng.Assert.fail(Assert.java:110)  |        |          |

| #  | Step / Hook Details   | Status  | Duration |
|----|---|---------|----------|
|    | at org.testng.Assert.failNotEquals(Assert.java:1413) at org.testng.Assert.assertEqualsImpl(Assert.java:149) at org.testng.Assert.assertEquals(Assert.java:131) at org.testng.Assert.assertEquals(Assert.java:655) at org.testng.Assert.assertEquals(Assert.java:665) at StepDefinitions.NewBank.NewBankProfileOptionsScreenSD. verifyTheAndOfAddressDetailsOnNewBankApp(NewBankProfileOptionsScreenSD.java:149) at ?.Verify the "Mapple Street", "United States", "California", "San Jose", "94088" and "positive" of address details on new bank app(file:///Us ers/navepilla/IdeaProjects/main-project/ciamsgo-cucumber-test-framework/src/test/java/Features/Banking/newUl/NewBankProfileItems. feature:69) * Not displayable characters are replaced by '?'.  |         |          |
| 20 | And User logs out from new Bank app "positive"  | SKIPPED | 0.001 s  |
| 21 | And User verifies the new bank site is accessible   | SKIPPED | 0.000 s  |
| 22 | And User waits until the login section appears for new Bank app   | SKIPPED | 0.000 s  |
| 23 | Given User provides "newbankregistrationviaemail" and password for new bank app - previous  | SKIPPED | 0.000 s  |
| 24 | Then User should able to login with "automation" and land on dashboard of new Bank app "positive"   | SKIPPED | 0.000 s  |
| 25 | And User clicks on profile option on dashboard page of new Bank app   | SKIPPED | 0.001 s  |
| 26 | Then Verify the "Mapple Street", "United States", "California", "San Jose", "94088" and "positive" of address details on new bank app   | SKIPPED | 0.000 s  |
| 27 | And User logs out from new Bank app "positive"  | SKIPPED | 0.000 s  |
| 28 | Then User terminates all windows of the browser   | SKIPPED | 0.000 s  |
|    | AFTER - StepDefinitions.NewBank.NewBankRegistrationScreenSD.testScenarioCondition()  Above scenario has been failed. Ref: Attachment  PageURL: https://bank.ciam.sandbox.ciamsgo.com/profile/details  Terminated the browser as a failure noticed in above scenario   | PASSED  | 0.520 s  |
|    | AFTER - StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.testScenarioCondition()  org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, | FAILED  | 0.026 s  |

DETAILED SECTION -- 10 --

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}  |        |          |
|   | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)   |        |          |
|   | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)   |        |          |
|   | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)   |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)   |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)   |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)   |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)   |        |          |
|   | at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)   |        |          |
|   | at StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.prepareFailureEvidence(NewBankProfileOptionsScreenSD.java:23)  |        |          |
|   | at StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.testScenarioCondition(NewBankProfileOptionsScreenSD.java:34)   |        |          |
|   | AFTER - StepDefinitions.NewBank.NewBankWelcomeScreenSD.testScenarioCondition()  | FAILED | 0.002 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1ecc40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.NewBank.NewBankWelcomeScreenSD.jetestScenarioCondition(NewBankWelcomeScreenSD.java:31) | FAILED |          |
|   | AFTER - StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.testScenarioCondition()  org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000},  | FAILED | 0.004 s  |

DETAILED SECTION -- 11 --

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.prepareFailureEvidence(DeloitteSecurityLayerSD.java:32) at StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.testScenarioCondition(DeloitteSecurityLayerSD.java:33)  |        |          |
|   | AFTER - StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.testScenarioCondition()  org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:147) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at Org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.prepareFailureEvidence(GoogleOktaLoginSD.java:27) | FAILED | 0.002 s  |
|   | AFTER - StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.testScenarioCondition()  org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true,  | FAILED | 0.001 s  |

DETAILED SECTION -- 12 --

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.prepareFailureEvidence(FeedTestDataToFilesSD.java:19) at StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.testScenarioCondition(FeedTestDataToFilesSD.java:30)   |        |          |
|   | AFTER - StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.testScenarioCondition()  org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1ecc40d3a576, userDataDir: /var/folders/_r/ym2k45yj129), goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.prepareFailureEvidence(FacebookOktaLoginSD.java:17) at StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.prepareFailureEvidence(FacebookOktaLoginSD.java:28) | FAILED | 0.005 s  |
|   | AFTER - StepDefinitions.CommonDefinitions.BrowserOperationsSD.testScenarioCondition()  org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: '44995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}   | FAILED | 0.002 s  |

DETAILED SECTION -- 13 --

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.BrowserOperationsSD.prepareFailureEvidence(BrowserOperationsSD.java:15) at StepDefinitions.CommonDefinitions.BrowserOperationsSD.testScenarioCondition(BrowserOperationsSD.java:26)   |        |          |
|   | AFTER - StepDefinitions.BankingTransferScreenSD.testScenarioCondition()  | FAILED | 0.003 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptinsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1ecc40d3a576, userDataDir: \textit{Var/folders/_rlym2k45yj129}}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.Shot(CaptureScreen.Sb.prepareFailureEvidence(BankingTransferScreenSD.java:16) at StepDefinitions.Banking.BankingTransferScreenSD.testScenarioCondition(BankingTransferScreenSD.java:27) |        |          |
|   | AFTER - StepDefinitions.BankingBrokerageAccountSD.testScenarioCondition()  | FAILED | 0.002 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)  |        |          |

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingBrokerageAccountSD.prepareFailureEvidence(BankingBrokerageAccountSD.java:14) at StepDefinitions.BankingBrokerageAccountSD.testScenarioCondition(BankingBrokerageAccountSD.java:25)   |        |          |
|   | AFTER - StepDefinitions.Banking.BankingPaymentsSD.testScenarioCondition()  | FAILED | 0.000 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129), goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/qevtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingPaymentsSD.prepareFailureEvidence(BankingPaymentsSD.java:12) at StepDefinitions.Banking.BankingPaymentsSD.testScenarioCondition(BankingPaymentsSD.java:23) |        |          |
|   | AFTER - StepDefinitions.Banking.BankingWelcomeScreenSD.testScenarioCondition()   | FAILED | 0.000 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)  |        |          |

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingWelcomeScreenSD.prepareFailureEvidence(BankingWelcomeScreenSD.java:15) at StepDefinitions.Banking.BankingWelcomeScreenSD.testScenarioCondition(BankingWelcomeScreenSD.java:26)   |        |          |
|   | AFTER - StepDefinitions.Banking.BankingLoggedInScreenSD.testScenarioCondition()  | FAILED | 0.002 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09" System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptinsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1ecc40d3a576, userDataDir: /var/folders/_rlym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803/, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdp/version: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingLoggedInScreenSD.prepareFailureEvidence(BankingLoggedInScreenSD.java:27) |        |          |
|   | AFTER - StepDefinitions.Banking.BankTransfersSD.testScenarioCondition()  | FAILED | 0.002 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142)  |        |          |

DETAILED SECTION -- 16 --

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankTransfersSD.prepareFailureEvidence(BankTransfersSD.java:12) at StepDefinitions.Banking.BankTransfersSD.testScenarioCondition(BankTransfersSD.java:23)   |        |          |
|   | AFTER - StepDefinitions.Banking.BankingProfileOptionsSD.testScenarioCondition()  | FAILED | 0.001 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.9.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129), goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingProfileOptionsSD.prepareFailureEvidence(BankingProfileOptionsSD.java:17) at StepDefinitions.Banking.BankingProfileOptionsSD.testScenarioCondition(BankingProfileOptionsSD.java:28) |        |          |
|   | AFTER - StepDefinitions.Banking.BankingSignUpEmailSD.testScenarioCondition()   | FAILED | 0.001 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1ecc40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)  |        |          |

| <b>#</b> | Step / Hook Details  | Status | Duration |
|----------|--|--------|----------|
|          | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingSignUpEmailSD.prepareFailureEvidence(BankingSignUpEmailSD.java:16) at StepDefinitions.Banking.BankingSignUpEmailSD.testScenarioCondition(BankingSignUpEmailSD.java:27)   |        |          |
|          | AFTER - StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition()   | FAILED | 0.000 s  |
|          | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (leec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingLoginScreenSD.prepareFailureEvidence(BankingLoginScreenSD.java:15) at StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition(BankingLoginScreenSD.java:26) |        |          |
|          | AFTER - StepDefinitions.Retail.RetailOctaSignInSceenSD.testScenarioCondition()   | FAILED | 0.001 s  |
|          | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)  |        |          |

DETAILED SECTION -- 18 --

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailOctaSignInSceenSD.prepareFailureEvidence(RetailOctaSignInSceenSD.java:26) at StepDefinitions.Retail.RetailOctaSignInSceenSD.testScenarioCondition(RetailOctaSignInSceenSD.java:37)  |        |          |
|   | AFTER - StepDefinitions.Retail.RetailWelcomeScreenSD.testScenarioCondition()  | FAILED | 0.001 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1ecc40d3a576, userDataDir: /var/folders/_rlym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailWelcomeScreenSD.jerpareFailureEvidence(RetailWelcomeScreenSD.java:32) |        |          |
|   | AFTER - StepDefinitions.Retail.RetailProfileOptionsScreenSD.testScenarioCondition()   | FAILED | 0.004 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)   |        |          |

DETAILED SECTION -- 19 --

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailProfileOptionsScreenSD.prepareFailureEvidence(RetailProfileOptionsScreenSD.java:22) at StepDefinitions.Retail.RetailProfileOptionsScreenSD.testScenarioCondition(RetailProfileOptionsScreenSD.java:33)   |        |          |
|   | AFTER - StepDefinitions.Retail.RetailSignUpScreenSD.testScenarioCondition()  | FAILED | 0.001 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities (acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: (chromedriverVersion: 107.0.5304.86 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129), goog:chromeOptions: (debuggerAddress: localhost:55803), networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: (implicit: 0, pageLoad: 300000, script: 30000), unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailSignUpScreenSD.prepareFailureEvidence(RetailSignUpScreenSD.java:18) at StepDefinitions.Retail.RetailSignUpScreenSD.testScenarioCondition(RetailSignUpScreenSD.java:29) |        |          |
|   | AFTER - StepDefinitions.Retail.RetailLoginScreenSD.testScenarioCondition()   | FAILED | 0.001 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}  |        |          |
|   | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)  |        |          |
|   | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)  |        |          |
|   | at org.openqa.selenium.remote.service.bhverCommandExecutor.execute(DhverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:309) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)  |        |          |

DETAILED SECTION -- 20 --

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailLoginScreenSD.prepareFailureEvidence(RetailLoginScreenSD.java:23) at StepDefinitions.Retail.RetailLoginScreenSD.testScenarioCondition(RetailLoginScreenSD.java:34)   |        |          |
|   | AFTER - StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.testScenarioCondition()  | FAILED | 0.001 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.9.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.prepareFailureEvidence(RetailPrivacyWebFormScreenSD.java:29) |        |          |
|   | AFTER - StepDefinitions.HealthConfigureRegistrationSD.testScenarioCondition()  | FAILED | 0.001 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)  |        |          |

DETAILED SECTION -- 21 --

|   | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | at StepDefinitions.Health.HealthConfigureRegistrationSD.prepareFailureEvidence(HealthConfigureRegistrationSD.java:14) at StepDefinitions.Health.HealthConfigureRegistrationSD.testScenarioCondition(HealthConfigureRegistrationSD.java:25)   |        |          |
| П | AFTER - StepDefinitions.Health.HealthWelcomeScreenSD.testScenarioCondition()   | FAILED | 0.001 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4.995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthWelcomeScreenSD.prepareFailureEvidence(HealthWelcomeScreenSD.java:15) |        |          |
| + | at StepDefinitions.Health.HealthWelcomeScreenSD.testScenarioCondition(HealthWelcomeScreenSD.java:26)  AFTER - StepDefinitions.Health.HealthRegisterScreenSD.testScenarioCondition()  | FAILED | 0.001 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: '44995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: '86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenSot(CaptureScreen.java:9) at StepDefinitions.Health.HealthRegisterScreenSD.prepareFailureEvidence(HealthRegisterScreenSD.java:19)  |        |          |

DETAILED SECTION -- 22 --

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | at StepDefinitions.Health.HealthRegisterScreenSD.testScenarioCondition(HealthRegisterScreenSD.java:30)  |        |          |
|   | AFTER - StepDefinitions.Health.HealthLoginScreenSD.testScenarioCondition()  | FAILED | 0.001 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) |        |          |
|   | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)   |        |          |
|   | at StepDefinitions.Health.HealthLoginScreenSD.prepareFailureEvidence(HealthLoginScreenSD.java:20) at StepDefinitions.Health.HealthLoginScreenSD.testScenarioCondition(HealthLoginScreenSD.java:31)  AFTER - StepDefinitions.Health.HealthLoggedInHomeScreenSD.testScenarioCondition()   | FAILED | 0.003 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:229f:a19c:19cb:d4c:7b47:a50a%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:55803}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:55803/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}   | FAILED |          |
|   | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)   |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthLoggedInHomeScreenSD.prepareFailureEvidence(HealthLoggedInHomeScreenSD.java:24) at StepDefinitions.Health.HealthLoggedInHomeScreenSD.testScenarioCondition(HealthLoggedInHomeScreenSD.java:38)  |        |          |