


| Feature                         |              | Scenario |   |   |   | Step |    |   |   |
|---------------------------------|--------------|----------|---|---|---|------|----|---|---|
| Name                            | Duration     | T        | P | F | S | T    | P  | F | S |
| New_Bank_US09 09 MyDevices Test | 2 m 46.484 s | 1        | 0 | 1 | 0 | 17   | 12 | 1 | 4 |

| Tag                       | Scenario |   | Scenario |   |   | Feature |   |   |  |
|---------------------------|----------|---|----------|---|---|---------|---|---|--|
| Name                      | T        | P | F        | S | T | P       | F | S |  |
| @add-and-delete-email-mfa | 1        | 0 | 1        | 0 | 1 | 0       | 1 | 0 |  |
| @new-bank                 | 1        | 0 | 1        | 0 | 1 | 0       | 1 | 0 |  |
| @US09                     | 1        | 0 | 1        | 0 | 1 | 0       | 1 | 0 |  |

FEATURES SUMMARY -- 4



| # | Feature Name                    | T | P | F | S | Duration     |
|---|---------------------------------|---|---|---|---|--------------|
| 1 | New_Bank_US09 09 MyDevices Test | 1 | 0 | 1 | 0 | 2 m 46.484 s |

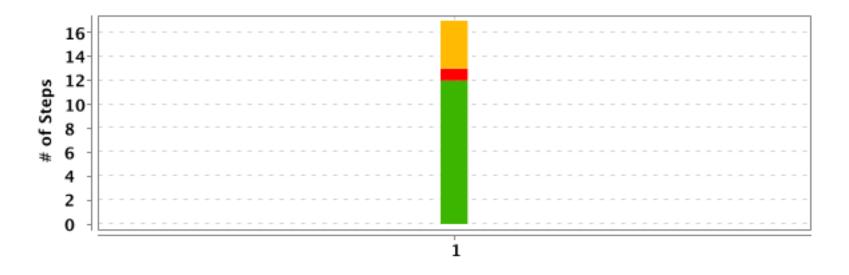


| # | Feature Name                    | Scenario Name   | T  | P  | F | S | Duration     |
|---|---------------------------------|---|----|----|---|---|--------------|
| 1 | New_Bank_US09 09 MyDevices Test | US09-01 New_Bank: Create an account then add email as | 17 | 12 | 1 | 4 | 2 m 46.473 s |
|   |                                 | MFA device and delete it                              |    |    |   |   |              |

DETAILED SECTION -- 6 --

## New\_Bank\_US09 09 MyDevices Test

| FAILED            | DURATION - 2 m 46.484 s | Scenarios |   | Steps      |    |
|-------------------|-------------------------|-----------|---|------------|----|
|                   |                         | Total - 1 |   | Total - 17 |    |
| / 11:32:41.444 pi | m // 11:35:27.928 pm /  | Pass - 0  | 1 | Pass - 12  | 17 |
|                   |                         | Fail - 1  |   | Fail - 1   |    |
|                   |                         | Skip - 0  |   | Skip - 4   |    |

## US09-01 New\_Bank: Create an account then add email as MFA device and delete it

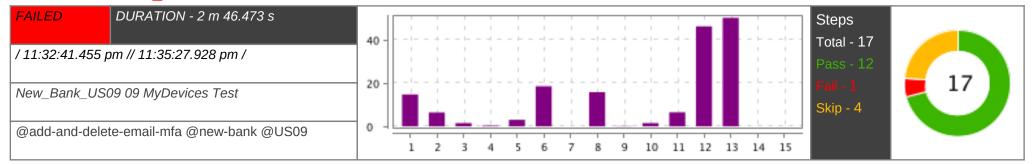

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
| 1 | Given Setup the Test Environment as "CHROME" and User opens the given URL "NEW_BANK"   | PASSED | 14.752 s |
|   | User has opened the link:https://bank.ciam.sandbox.ciamsgo.com/ on CHROME browser.   |        |          |
| 2 | Given User provides access token to Deloitte security page for New Banking App   | PASSED | 6.465 s  |
|   | User is clicked on AccessThroughEntryToken   |        |          |
|   | User has provided Access Token   |        |          |
|   | User has received the Access to Deloitte   |        |          |
| 3 | And User verifies the new bank site is accessible  | PASSED | 1.507 s  |
|   | New Bank Page has been appeared as expected  |        |          |
|   | Page URI is appeared as expected, URL:https://bank.ciam.sandbox.ciamsgo.com/   |        |          |
| 4 | And User clicks on OpenAnAccount on new Bank app   | PASSED | 0.363 s  |
|   | User has clicked on Open An New Account  |        |          |
| 5 | Given User provides the account creation using "EMAIL" and submit  | PASSED | 3.063 s  |
|   | User has clicked on Sign-Up through Email MFA  |        |          |
| 6 | Given User provides "newbankregistrationviaemail@mailinator.com", "automation", "automation", "newbankregistrationviaemail", | PASSED | 18.565 s |
|   | "positive" and password for Signup page of new Bank app  |        |          |
|   | Registration via Email Page has been appeared as expected  |        |          |

| #  | Step / Hook Details  | Status | Duration |
|----|--|--------|----------|
|    | Registration via Email Page URL is verified as expected  |        |          |
|    | User has provided the Email address  |        |          |
|    | User has provided the FirstName  |        |          |
|    | User has provided the LastName   |        |          |
|    | User has provided the Username   |        |          |
|    | User has provided the password   |        |          |
|    | User has provided the confirm password   |        |          |
|    | User has enabled the T&C   |        |          |
|    | User has clicked on Register button  |        |          |
|    | User has landed on Select MFA page and URL has been verified as expected   |        |          |
|    | User has skipped the MFA device registration   |        |          |
| 7  | Then User feeds the test data of new Bank "newbankregistrationviaemail@mailinator.com", "automation", "automation", "positive" to csv file                       | PASSED | 0.030 s  |
|    | Test Data is loaded to CSV file in this path:/Users/navepilla/IdeaProjects/main-project/ciamsgo-cucumber-test-framework/TestData/NewBankRegisterEmailMFAData.csv |        |          |
| 8  | Then User should able to login with "automation" on new Bank app "positive"  | PASSED | 15.846 s |
|    | User is registered an account on new Bank app and Firstname is appeared as expected  | 1      |          |
|    | Profile Option page URL is verified  |        |          |
| 9  | And User clicks on profile option on dashboard page of new Bank app  | PASSED | 0.191 s  |
|    | User has clicked on Profile option link on dashboard   |        |          |
| 10 | And User clicks on MyDevices tab in account details of new Bank app  | PASSED | 1.555 s  |
|    | MyDevices tab is appeared  | 1      |          |
|    | User has clicked on MyDevices Link   |        |          |
| 11 | Then User verifies the myDevices page and clicks on add new email as a MFA source  | PASSED | 6.502 s  |
|    | User has navigated to MyDevices screen   | 1      |          |
|    | No Devices has been registered text appeared as expected   |        |          |
|    | MyDevices Page URL has been verified   |        |          |
|    | User has clicked on add new MFA device   |        |          |
|    | Add Email Device Text has been verified  |        |          |
|    | Add Text Message Device Text has been verified   |        |          |
|    | Add Voice Device Text has been verified  |        |          |
|    | Add UnAuthenticator Device Text has been verified  |        |          |
|    | Add Biometric Device Text has been verified  |        |          |
|    | User has clicked on Add Email MFA device button  |        |          |
| 12 | And User should check inbox of "newbankregistrationviaemail@mailinator.com", get the OTP from Mailinator and provide the   | PASSED | 46.217 s |
|    | OTP to add MFA device and click on finish  |        |          |

| #  | Step / Hook Details   | Status  | Duration |
|----|---|---------|----------|
| 13 | User has switched from MFA Page -> Mailinator site  User has opened inbox for the registered email  User has received the Magic Link - JUST NOW  OTP has been received: To finish pairing your device, enter this code: 327026  User has switched from Mailinator site -> OTP Section of Add MFA device  User has clicked on finish button  Then User verifies the availability of email MFA device  User has clicked on finish button  Then User verifies the availability of email MFA device  org.openga.selenium.TimeoutException: Expected condition failed: waiting for visibility of element located by By.xpath:  //*[text()="Email"]/following::*[text()="Receive an email with a passcode to authenticate"] (tried for 50 second(s) with 500 milliseconds interval)  Build info: version: '4.3.0', revision: 'a4995e2c09'' System info: host: 'USBGONAVEPILLAT, ip: '2409:4070-4798::d5:2088:a013-73d6::5565%em(o', os.name: 'Mac OS X', os.arch: 'X86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openga.selenium.chrome.ChromeDriver Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45y]129), goog:chromeOptions: {debuggerAddress: localhost:52955/, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy; Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 300000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: ea67e2482ebe1b708f4eb0b100bb1530  at org.openga.selenium.support.ui.FluentWait.until(FluentWait.java:231)  at Utilities.WaitUtil.elementToBeLocated(WaitUtil.java:29)  at StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.  userVerifiesTheAvailability.OfEmailMFADeviceAndClic | FAILED  | 50.195 s |
| 14 | And User deletes the added MFA device   | SKIPPED | 0.001 s  |
| 15 | Then User verifies there should not be any MFA device listed  | SKIPPED | 0.000 s  |
| 16 | And User logs out from new Bank app "positive"  | SKIPPED | 0.000 s  |
| 17 | Then User terminates all windows of the browser   | SKIPPED | 0.000 s  |
|    | AFTER - StepDefinitions.NewBank.NewBankRegistrationScreenSD.testScenarioCondition()  Above scenario has been failed. Ref: Attachment  PageURL: https://bank.ciam.sandbox.ciamsgo.com/profile/details#myDevices  Terminated the browser as a failure noticed in above scenario   | PASSED  | 1.052 s  |

|   | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | State  Office and State A state |        |          |
|   | AFTER - StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.testScenarioCondition()   | FAILED | 0.008 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.prepareFailureEvidence(NewBankProfileOptionsScreenSD.java:37)   |        |          |
| † | AFTER - StepDefinitions.NewBank.NewBankWelcomeScreenSD.testScenarioCondition()  | FAILED | 0.005 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:147)  | FAILED |          |
|   | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)   |        |          |

DETAILED SECTION -- 10 --

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.NewBank.NewBankWelcomeScreenSD.prepareFailureEvidence(NewBankWelcomeScreenSD.java:20) at StepDefinitions.NewBank.NewBankWelcomeScreenSD.testScenarioCondition(NewBankWelcomeScreenSD.java:31)  |        |          |
|   | AFTER - StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.testScenarioCondition()   | FAILED | 0.002 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.prepareFailureEvidence(DeloitteSecurityLayerSD.java:24) at StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.prepareFailureEvidence(DeloitteSecurityLayerSD.java:35) |        |          |
|   | AFTER - StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.testScenarioCondition()   | FAILED | 0.004 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)  | I ALLE |          |
|   | at org.openga.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)   |        |          |

DETAILED SECTION -- 11 --

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.prepareFailureEvidence(GoogleOktaLoginSD.java:16) at StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.testScenarioCondition(GoogleOktaLoginSD.java:27)   |        |          |
|   | AFTER - StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.testScenarioCondition()  | FAILED | 0.002 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09* System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.prepareFailureEvidence(FeedTestDataToFilesSD.java:30) |        |          |
|   | AFTER - StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.testScenarioCondition()  | FAILED | 0.005 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)   |        |          |
|   | at org.openga.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)  |        |          |

DETAILED SECTION -- 12 --

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.prepareFailureEvidence(FacebookOktaLoginSD.java:17) at StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.testScenarioCondition(FacebookOktaLoginSD.java:28)   |        |          |
|   | AFTER - StepDefinitions.CommonDefinitions.BrowserOperationsSD.testScenarioCondition()  | FAILED | 0.003 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: '44995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at Org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.shotAs(RemoteWebDriver.java:353) at StepDefinitions.CommonDefinitions.BrowserOperationsSD.prepareFailureEvidence(BrowserOperationsSD.java:26) |        |          |
|   | AFTER - StepDefinitions.Banking.BankingTransferScreenSD.testScenarioCondition()  | FAILED | 0.001 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:147)   |        |          |
|   | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)  |        |          |

DETAILED SECTION -- 13 --

| !        | Step / Hook Details   | Status | Duration |
|----------|---|--------|----------|
|          | at StepDefinitions.Banking.BankingTransferScreenSD.prepareFailureEvidence(BankingTransferScreenSD.java:16) at StepDefinitions.Banking.BankingTransferScreenSD.testScenarioCondition(BankingTransferScreenSD.java:27)  |        |          |
|          | AFTER - StepDefinitions.Banking.BankingBrokerageAccountSD.testScenarioCondition()   | FAILED | 0.002 s  |
|          | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws:/localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at Org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at Org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) |        |          |
| $\dashv$ | at StepDefinitions.Banking.BankingBrokerageAccountSD.testScenarioCondition(BankingBrokerageAccountSD.java:25)  AFTER - StepDefinitions.Banking.BankingPaymentsSD.testScenarioCondition()  | FAILED | 0.001 s  |
|          | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.StakeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingPaymentsSD.jrepareFailureEvidence(BankingPaymentsSD.java:12)  |        | 0.0013   |

DETAILED SECTION -- 14 --

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | at StepDefinitions.Banking.BankingPaymentsSD.testScenarioCondition(BankingPaymentsSD.java:23)  |        |          |
|   | AFTER - StepDefinitions.Banking.BankingWelcomeScreenSD.testScenarioCondition()   | FAILED | 0.002 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) |        |          |
|   | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingWelcomeScreenSD.prepareFailureEvidence(BankingWelcomeScreenSD.java:15) at StepDefinitions.Banking.BankingWelcomeScreenSD.testScenarioCondition(BankingWelcomeScreenSD.java:26)   |        |          |
|   | AFTER - StepDefinitions.Banking.BankingLoggedInScreenSD.testScenarioCondition()  | FAILED | 0.001 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}   |        |          |
|   | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)  |        |          |
|   | at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingLoggedInScreenSD.prepareFailureEvidence(BankingLoggedInScreenSD.java:16)   |        |          |

DETAILED SECTION -- 15 --

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | AFTER - StepDefinitions.Banking.BankTransfersSD.testScenarioCondition()  | FAILED | 0.002 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} |        |          |
|   | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)  |        |          |
|   | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)  |        |          |
|   | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)  |        |          |
|   | at StepDefinitions.Banking.BankTransfersSD.prepareFailureEvidence(BankTransfersSD.java:12)   |        |          |
|   | at StepDefinitions.Banking.BankTransfersSD.testScenarioCondition(BankTransfersSD.java:12)  |        |          |
|   | AFTER - StepDefinitions.Banking.BankingProfileOptionsSD.testScenarioCondition()  | FAILED | 0.001 s  |
|   |  | FAILED | 0.001 S  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} |        |          |
|   | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)  |        |          |
|   | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)  |        |          |
|   | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)  |        |          |
|   | at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)  |        |          |
|   | at StepDefinitions.Banking.BankingProfileOptionsSD.prepareFailureEvidence(BankingProfileOptionsSD.java:19)   |        |          |
|   | at StepDefinitions.Banking.BankingProfileOptionsSD.testScenarioCondition(BankingProfileOptionsSD.java:30)  |        |          |
|   | AFTER - StepDefinitions.Banking.BankingSignUpEmailSD.testScenarioCondition()   | FAILED | 0.000 s  |

DETAILED SECTION -- 16 --

| org.operga.selenium.NoSuchSessionException. Session ID is null. Using WebDriver after calling quit(79 Build infor version: "A.307, revision: "A.995e2009" System into host: USBGONAVEPILLA1; pr. 2004-0070-4798-65.20d8.0013-076.55698-607. os.name: "Mac OS X. os.arch: "X86 64", os.version: "12.6", java version: "18.0.1.1" Driver info: org.openga.selenium.chrome.ChromeDriver.Command; full, screenshot (1) Capabilities (acceptinsecure.Certs: true, browserName: chrome, browserVersion: 107.0.5034-87, chrome: (chromebriverVersion: 107.0.5034-82 (Leec40d34576, userDatabir: Varifolders/ ry/m24459/129), goog.chromeOptions: (debuggerAddress: localhost: 52955), networkComnectionEnabled: false, pagle.coda87statepy. normal, platformName: McC, proxy. Proxy), secrety. sevilopatis. 52955(evitoc, secretyVersion: 107.0.5304-87, setWindowRect: true. strictFleinteractability: false, timeouts: (implicit: 0, pagle.cad: 300000), soript: 300000), unhandicelformgibBehavior dismiss and notify, webauthraverison.credilobit: true, webauthraverison:largeBlob: true, at org.openga.selenium.memote. ProvineCommandExecutor.evea.cute(ProvineCommandExecutor.java:142) at org.openga.selenium.memote.exericoneDiver.commandExecutor.java:142) at org.openga.selenium.memote.RemoteWebDriver.geva.628) at StepDefinitions.Banking BankingSignUpEmailSD proviners.geva.6291 at StepDefinitions.Banking BankingSignUpEmailSD revision: sades.geva.6291.3291.3291.3291.3291.3291.3291.3291.3                                     | # | Step / Hook Details  | Status | Duration |
|--|---|--|--------|----------|
| at StepDefinitions.Banking.BankingSignUpEmailSD.prepareFailureEvidence(BankingSignUpEmailSD.java:16) at StepDefinitions.Banking.BankingSignUpEmailSD.testScenarioCondition(BankingSignUpEmailSD.java:27)  AFTER - StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition() org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: '44995e2c09' System info: host: 'USBGONAVEPILLAT,' jp: '2409.4070.4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: '86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities (acceptinsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: (chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir. /var/folders/_r/ym2k45yj129), goog:chromeOptions: (debuggerAddress: localhost:52955), networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy/), se:cdp: ves://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: formition of true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.service.DriverCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.lakeScreenShot(CaptureScreen.java:9) at StepDefinitions.BankingLoginScreenSD.pepareFailureEvidence(BankingLoginScreenSD.java:15) at StepDefinitions.BankingLoginScreenSD.pepareFailureEvidence(BankingLoginScreenSD.java:15)  |   | 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) |        |          |
| org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: '44995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_rlym2k45y129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdp/version: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.service.DriverCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at Org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at Org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreenshot(CaptureScreen,Java:9) at StepDefinitions.Banking.BankingLoginScreenSD.prepareFailureEvidence(BankingLoginScreenSD.java:15) at StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition(BankingLoginScreenSD.java:26) |   | at StepDefinitions.Banking.BankingSignUpEmailSD.prepareFailureEvidence(BankingSignUpEmailSD.java:16)   |        |          |
| 'a4995e2c09" System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '13.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities (acceptinsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenSbot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingLoginScreenSD.pepareFailureEvidence(BankingLoginScreenSD.java:15) at StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition(BankingLoginScreenSD.java:26)  |   | AFTER - StepDefinitions.BankingLoginScreenSD.testScenarioCondition()   | FAILED | 0.001 s  |
| at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingLoginScreenSD.prepareFailureEvidence(BankingLoginScreenSD.java:15) at StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition(BankingLoginScreenSD.java:26)   |   | 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true,   |        |          |
| at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingLoginScreenSD.prepareFailureEvidence(BankingLoginScreenSD.java:15) at StepDefinitions.BankingLoginScreenSD.testScenarioCondition(BankingLoginScreenSD.java:26)   |   | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)  |        |          |
| at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingLoginScreenSD.prepareFailureEvidence(BankingLoginScreenSD.java:15) at StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition(BankingLoginScreenSD.java:26)   |   | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)  |        |          |
| at StepDefinitions.Banking.BankingLoginScreenSD.prepareFailureEvidence(BankingLoginScreenSD.java:15) at StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition(BankingLoginScreenSD.java:26)   |   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)  |        |          |
| AFTER - StepDefinitions.Retail.RetailOctaSignInSceenSD.testScenarioCondition() FAILED 0.001 s  |   | at StepDefinitions.Banking.BankingLoginScreenSD.prepareFailureEvidence(BankingLoginScreenSD.java:15)   |        |          |
|  |   | AFTER - StepDefinitions.Retail.RetailOctaSignInSceenSD.testScenarioCondition()   | FAILED | 0.001 s  |

DETAILED SECTION -- 17 --

|           | Step / Hook Details  | Status | Duration |
|-----------|--|--------|----------|
|           | 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (teec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129), goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailOctaSignInSceenSD.prepareFailureEvidence(RetailOctaSignInSceenSD.java:37)   |        |          |
| $\dagger$ | AFTER - StepDefinitions.Retail.RetailWelcomeScreenSD.testScenarioCondition()   | FAILED | 0.004 s  |
|           | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailWelcomeScreenSD.prepareFailureEvidence(RetailWelcomeScreenSD.java:32) |        |          |
|           | AFTER - StepDefinitions.Retail.RetailProfileOptionsScreenSD.testScenarioCondition()  | FAILED | 0.002 s  |
|           | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch:   |        |          |

DETAILED SECTION -- 18 --

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)  |        |          |
|   | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailProfileOptionsScreenSD.prepareFailureEvidence(RetailProfileOptionsScreenSD.java:22) at StepDefinitions.Retail.RetailProfileOptionsScreenSD.testScenarioCondition(RetailProfileOptionsScreenSD.java:33)   |        |          |
|   | AFTER - StepDefinitions.Retail.RetailSignUpScreenSD.testScenarioCondition()  | FAILED | 0.001 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} |        |          |
|   | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)  |        |          |
|   | at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.RetailSignUpScreenSD.prepareFailureEvidence(RetailSignUpScreenSD.java:18) at StepDefinitions.RetailSignUpScreenSD.testScenarioCondition(RetailSignUpScreenSD.java:29)   |        |          |
|   | AFTER - StepDefinitions.Retail.RetailLoginScreenSD.testScenarioCondition()   | FAILED | 0.001 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}]  |        |          |

DETAILED SECTION -- 19 --

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openga.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)   |        |          |
|   | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailLoginScreenSD.prepareFailureEvidence(RetailLoginScreenSD.java:23)  |        |          |
|   | at StepDefinitions.Retail.RetailLoginScreenSD.testScenarioCondition(RetailLoginScreenSD.java:34)  AFTER - StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.testScenarioCondition()  | FAILED | 0.002 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: '44995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.Shot(CaptureScreen.java:9) |        |          |
|   | at StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.prepareFailureEvidence(RetailPrivacyWebFormScreenSD.java:18) at StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.testScenarioCondition(RetailPrivacyWebFormScreenSD.java:29)   |        |          |
|   | AFTER - StepDefinitions.Health.HealthConfigureRegistrationSD.testScenarioCondition()  org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62}  | FAILED | 0.001 s  |

DETAILED SECTION -- 20 --

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}  |        |          |
|   | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353)  |        |          |
|   | at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthConfigureRegistrationSD.prepareFailureEvidence(HealthConfigureRegistrationSD.java:14) at StepDefinitions.Health.HealthConfigureRegistrationSD.testScenarioCondition(HealthConfigureRegistrationSD.java:25)   |        |          |
|   | AFTER - StepDefinitions.Health.HealthWelcomeScreenSD.testScenarioCondition()   | FAILED | 0.000 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} |        |          |
|   | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthWelcomeScreenSD.prepareFailureEvidence(HealthWelcomeScreenSD.java:15) at StepDefinitions.Health.HealthWelcomeScreenSD.testScenarioCondition(HealthWelcomeScreenSD.java:26)   |        |          |
| _ | AFTER - StepDefinitions.Health.HealthRegisterScreenSD.testScenarioCondition()  | FAILED | 0.001 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955},   |        |          |

DETAILED SECTION -- 21 --

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthRegisterScreenSD.prepareFailureEvidence(HealthRegisterScreenSD.java:19) at StepDefinitions.Health.HealthRegisterScreenSD.testScenarioCondition(HealthRegisterScreenSD.java:30)  |        |          |
|   | AFTER - StepDefinitions.Health.HealthLoginScreenSD.testScenarioCondition()  | FAILED | 0.001 s  |
|   | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities (acceptinsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo, se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthLoginScreenSD.prepareFailureEvidence(HealthLoginScreenSD.java:20) at StepDefinitions.Health.HealthLoginScreenSD.testScenarioCondition(HealthLoginScreenSD.java:31) |        |          |
|   | AFTER - StepDefinitions.Health.HealthLoggedInHomeScreenSD.testScenarioCondition()  org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20d8:a013:7dd5:5565%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: /var/folders/_r/ym2k45yj129}, goog:chromeOptions: {debuggerAddress: localhost:52955}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52955/devtoo,  | FAILED | 0.001 s  |

DETAILED SECTION -- 22 --

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} |        |          |
|   | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)  |        |          |
|   | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)  |        |          |
|   | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)  |        |          |
|   | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)  |        |          |
|   | at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)  |        |          |
|   | at StepDefinitions.Health.HealthLoggedInHomeScreenSD.prepareFailureEvidence(HealthLoggedInHomeScreenSD.java:26)  |        |          |
|   | at StepDefinitions.Health.HealthLoggedInHomeScreenSD.testScenarioCondition(HealthLoggedInHomeScreenSD.java:40)   |        |          |