

CIAM/SGO Automation PDF Report

01-Nov-2022, 1:16:37 pm

Start : Nov 01, 1:14:05.869 pm

End : Nov 01, 1:16:35.092 pm

Duration : 2 m 29.223 s

Features

Scenarios

Steps

PASSED - 0

FAILED - 1

SKIPPED - 0

PASSED - 0

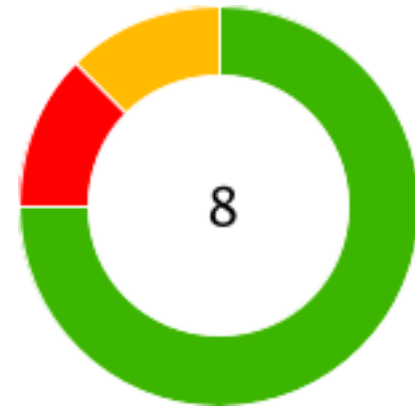
FAILED - 1

SKIPPED - 0

PASSED - 6

FAILED - 1

SKIPPED - 1

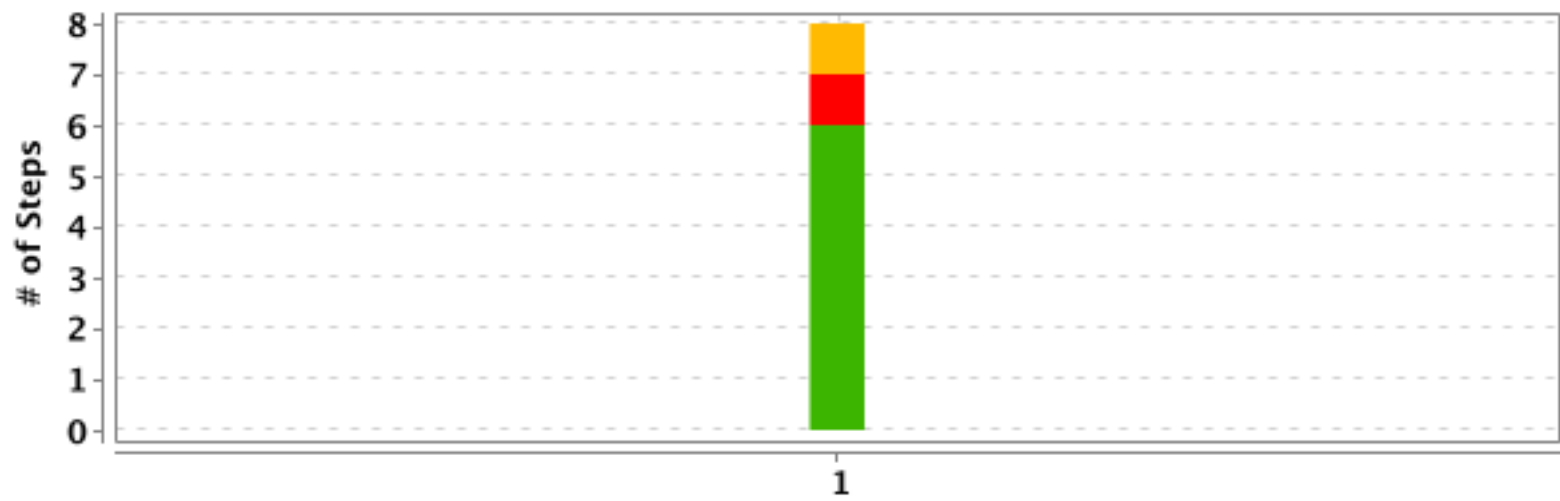


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>New_Bank_US01 Open An Account Test</u>	2 m 29.223 s	1	0	1	0	8	6	1	1

Tag	Scenario				Feature			
Name	<i>T</i>	<i>P</i>	<i>F</i>	<i>S</i>	<i>T</i>	<i>P</i>	<i>F</i>	<i>S</i>
@forgot-password	1	0	1	0	1	0	1	0
@US01	1	0	1	0	1	0	1	0
@new-bank	1	0	1	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>New_Bank_US01 Open An Account Test</u>	1	0	1	0	2 m 29.223 s

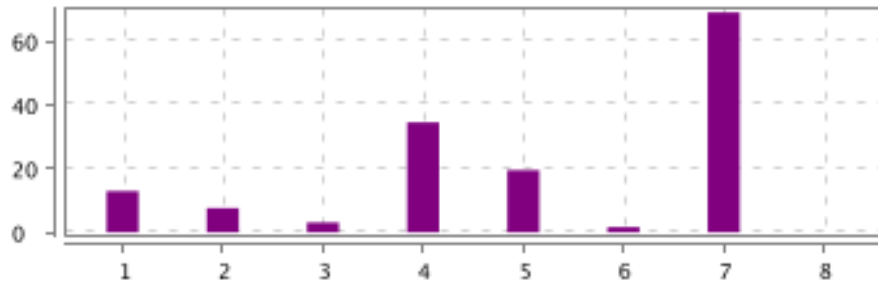



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>New_Bank_US01 Open An Account Test</u>	<u>US01-03 New_Bank: User can able to get a link to setup a new password in case user forgets password</u>	8	6	1	1	2 m 29.210 s

New_Bank_US01 Open An Account Test


FAILED	DURATION - 2 m 29.223 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 8 Pass - 6 Fail - 1 Skip - 1	
/ 1:14:05.869 pm // 1:16:35.092 pm /					

US01-03 New_Bank: User can able to get a link to setup a new password in case user forgets password

FAILED		DURATION - 2 m 29.210 s			<div>Steps</div> <div>Total - 8</div> <div>Pass - 6</div> <div>Fail - 1</div> <div>Skip - 1</div>	
/ 1:14:05.882 pm // 1:16:35.092 pm /						
New_Bank_US01 Open An Account Test						
@forgot-password @US01 @new-bank						

#	Step / Hook Details	Status	Duration
1	Given Setup the Test Environment as "CHROME" and User opens the given URL "NEW_BANK"	PASSED	12.956 s
	User has opened the link:https://bank.ciam.sandbox.ciamsgo.com/ on CHROME browser.		
2	Given User provides access token to Deloitte security page for New Banking App	PASSED	7.548 s
	User is clicked on AccessThroughEntryToken		
	User has provided Access Token		
	User has received the Access to Deloitte		
3	And User verifies the new bank site is accessible	PASSED	3.063 s
	New Bank Page has been appeared as expected		
	Page URI is appeared as expected, URL:https://bank.ciam.sandbox.ciamsgo.com/		
4	And User clicks on ForgetPassword link on new Bank app	PASSED	34.525 s
	User has clicked on Forget Password Link		
5	Given User provides "newbankregistrationviaemail5" to forget password page and verifies the UI text information	PASSED	19.517 s
	User has switched from Welcome On Board page > Forget Password page		
	User is clicked on AccessThroughEntryToken		
	User has provided Access Token		
	User has received the Access to Deloitte		

#	Step / Hook Details	Status	Duration
	User has landed on Forget Password Page Forget Password Page URL has been verified User has provided email to get the recovery code User has clicked on submit forget password to get the recovery code		
6	Then User lands on setup new password page User has landed on Setup New Password Page Setup Password Page URL has been verified	PASSED	1.650 s
7	Given User should check inbox of "newbankregistrationviaemail5", get the OTP from Mailinator and provide the OTP to Setup Password page User has switched from Setup New Password Page -> Mailinator site User has opened inbox for the registered email User has received the Magic Link - JUST NOW OTP has been received: n7lq2vvl org.openqa.selenium.TimeoutException: Expected condition failed: waiting for visibility of element located by By.xpath: //*[text()='Set New Password']/following::*[text()='If you have an active account with a valid email address,']/following::*[text()='you will receive an email with a recovery code which you may enter here,']/following::*[text()='along with a new password.']] (tried for 35 second(s) with 500 milliseconds interval) Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: cf90c4f373cb0f7c4978d9cedec08a42 at org.openqa.selenium.support.ui.WebDriverWait.timeoutException(WebDriverWait.java:87) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:231) at Utilities.WaitUtil.elementToBeLocated(WaitUtil.java:24) at StepDefinitions.Retail.RetailOctaSignInScreenSD. userShouldGetTheOTPFromMailinatorAndProvideltToSetupPassword(RetailOctaSignInScreenSD.java:596) at ?.User should check inbox of "newbankregistrationviaemail5", get the OTP from Mailinator and provide the OTP to Setup Password page(file:///Users/navepilla/IdeaProjects/main-project/ciamsgo-cucumber-test-framework/src/test/java/Features/Banking/newUI/NewBankOpenAnAccount.feature:44) * Not displayable characters are replaced by '?'.	FAILED	1 m 9.000 s
8	Then User provides new password, confirm password and submit the form	SKIPPED	0.002 s
	AFTER - StepDefinitions.NewBank.NewBankRegistrationScreenSD.testScenarioCondition() Above scenario has been failed. Ref: Attachment PageURL: https://www.mailinator.com/v4/public/inboxes.jsp?msgid=newbankregistrationviaemail5-1667288727-23227561 Terminated the browser as a failure noticed in above scenario	PASSED	0.709 s

#	Step / Hook Details	Status	Duration
			
	<p>AFTER - StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.prepareFailureEvidence(NewBankProfileOptionsScreenSD.java:23) at StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.testScenarioCondition(NewBankProfileOptionsScreenSD.java:34)</p>	FAILED	0.007 s
	<p>AFTER - StepDefinitions.NewBank.NewBankWelcomeScreenSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624)</p>	FAILED	0.006 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.NewBank.NewBankWelcomeScreenSD.prepareFailureEvidence(NewBankWelcomeScreenSD.java:16) at StepDefinitions.NewBank.NewBankWelcomeScreenSD.testScenarioCondition(NewBankWelcomeScreenSD.java:27)		
	AFTER - StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.testScenarioCondition() org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.prepareFailureEvidence(DeloitteSecurityLayerSD.java:22) at StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.testScenarioCondition(DeloitteSecurityLayerSD.java:33)	FAILED	0.004 s
	AFTER - StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.testScenarioCondition() org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628)	FAILED	0.004 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.prepareFailureEvidence(GoogleOktaLoginSD.java:16) at StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.testScenarioCondition(GoogleOktaLoginSD.java:27)		
	AFTER - StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.testScenarioCondition() org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.prepareFailureEvidence(FeedTestDataToFilesSD.java:19) at StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.testScenarioCondition(FeedTestDataToFilesSD.java:30)	FAILED	0.002 s
	AFTER - StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.testScenarioCondition() org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353)	FAILED	0.009 s

#	Step / Hook Details	Status	Duration
	at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.prepareFailureEvidence(FacebookOktaLoginSD.java:17) at StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.testScenarioCondition(FacebookOktaLoginSD.java:28)		
	AFTER - StepDefinitions.CommonDefinitions.BrowserOperationsSD.testScenarioCondition() org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.BrowserOperationsSD.prepareFailureEvidence(BrowserOperationsSD.java:15) at StepDefinitions.CommonDefinitions.BrowserOperationsSD.testScenarioCondition(BrowserOperationsSD.java:26)	FAILED	0.003 s
	AFTER - StepDefinitions.Banking.BankingTransferScreenSD.testScenarioCondition() org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	at StepDefinitions.Banking.BankingTransferScreenSD.prepareFailureEvidence(BankingTransferScreenSD.java:16) at StepDefinitions.Banking.BankingTransferScreenSD.testScenarioCondition(BankingTransferScreenSD.java:27)		
	AFTER - StepDefinitions.Banking.BankingBrokerageAccountSD.testScenarioCondition() org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingBrokerageAccountSD.prepareFailureEvidence(BankingBrokerageAccountSD.java:14) at StepDefinitions.Banking.BankingBrokerageAccountSD.testScenarioCondition(BankingBrokerageAccountSD.java:25)	FAILED	0.007 s
	AFTER - StepDefinitions.Banking.BankingPaymentsSD.testScenarioCondition() org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingPaymentsSD.prepareFailureEvidence(BankingPaymentsSD.java:12)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	at StepDefinitions.Banking.BankingPaymentsSD.testScenarioCondition(BankingPaymentsSD.java:23)		
	AFTER - StepDefinitions.Banking.BankingWelcomeScreenSD.testScenarioCondition() org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingWelcomeScreenSD.prepareFailureEvidence(BankingWelcomeScreenSD.java:15) at StepDefinitions.Banking.BankingWelcomeScreenSD.testScenarioCondition(BankingWelcomeScreenSD.java:26)	FAILED	0.001 s
	AFTER - StepDefinitions.Banking.BankingLoggedInScreenSD.testScenarioCondition() org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingLoggedInScreenSD.prepareFailureEvidence(BankingLoggedInScreenSD.java:16) at StepDefinitions.Banking.BankingLoggedInScreenSD.testScenarioCondition(BankingLoggedInScreenSD.java:27)	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	AFTER - StepDefinitions.Banking.BankTransfersSD.testScenarioCondition() <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankTransfersSD.prepareFailureEvidence(BankTransfersSD.java:12) at StepDefinitions.Banking.BankTransfersSD.testScenarioCondition(BankTransfersSD.java:23) </pre>	FAILED	0.004 s
	AFTER - StepDefinitions.Banking.BankingProfileOptionsSD.testScenarioCondition() <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingProfileOptionsSD.prepareFailureEvidence(BankingProfileOptionsSD.java:17) at StepDefinitions.Banking.BankingProfileOptionsSD.testScenarioCondition(BankingProfileOptionsSD.java:28) </pre>	FAILED	0.001 s
	AFTER - StepDefinitions.Banking.BankingSignUpEmailSD.testScenarioCondition()	FAILED	0.004 s

#	Step / Hook Details	Status	Duration
	<p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingSignUpEmailSD.prepareFailureEvidence(BankingSignUpEmailSD.java:16) at StepDefinitions.Banking.BankingSignUpEmailSD.testScenarioCondition(BankingSignUpEmailSD.java:27)</p>		
	<p>AFTER - StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingLoginScreenSD.prepareFailureEvidence(BankingLoginScreenSD.java:15) at StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition(BankingLoginScreenSD.java:26)</p>	FAILED	0.001 s
	<p>AFTER - StepDefinitions.Retail.RetailOctaSignInScreenSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision:</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<p>'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailOctaSignInScreenSD.prepareFailureEvidence(RetailOctaSignInScreenSD.java:26) at StepDefinitions.Retail.RetailOctaSignInScreenSD.testScenarioCondition(RetailOctaSignInScreenSD.java:37)</p>		
	<p>AFTER - StepDefinitions.Retail.RetailWelcomeScreenSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailWelcomeScreenSD.prepareFailureEvidence(RetailWelcomeScreenSD.java:21) at StepDefinitions.Retail.RetailWelcomeScreenSD.testScenarioCondition(RetailWelcomeScreenSD.java:32)</p>	FAILED	0.004 s
	<p>AFTER - StepDefinitions.Retail.RetailProfileOptionsScreenSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch:</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre>'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailProfileOptionsScreenSD.prepareFailureEvidence(RetailProfileOptionsScreenSD.java:22) at StepDefinitions.Retail.RetailProfileOptionsScreenSD.testScenarioCondition(RetailProfileOptionsScreenSD.java:33)</pre>		
	<p>AFTER - StepDefinitions.Retail.RetailSignUpScreenSD.testScenarioCondition()</p> <pre>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailSignUpScreenSD.prepareFailureEvidence(RetailSignUpScreenSD.java:18) at StepDefinitions.Retail.RetailSignUpScreenSD.testScenarioCondition(RetailSignUpScreenSD.java:29)</pre>	FAILED	0.001 s
	<p>AFTER - StepDefinitions.Retail.RetailLoginScreenSD.testScenarioCondition()</p> <pre>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}]</pre>	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	<p>Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailLoginScreenSD.prepareFailureEvidence(RetailLoginScreenSD.java:23) at StepDefinitions.Retail.RetailLoginScreenSD.testScenarioCondition(RetailLoginScreenSD.java:34)</p>		
	<p>AFTER - StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.prepareFailureEvidence(RetailPrivacyWebFormScreenSD.java:18) at StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.testScenarioCondition(RetailPrivacyWebFormScreenSD.java:29)</p>	FAILED	0.002 s
	<p>AFTER - StepDefinitions.Health.HealthConfigureRegistrationSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre>(1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthConfigureRegistrationSD.prepareFailureEvidence(HealthConfigureRegistrationSD.java:14) at StepDefinitions.Health.HealthConfigureRegistrationSD.testScenarioCondition(HealthConfigureRegistrationSD.java:25)</pre>		
	<p>AFTER - StepDefinitions.Health.HealthWelcomeScreenSD.testScenarioCondition()</p> <pre>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthWelcomeScreenSD.prepareFailureEvidence(HealthWelcomeScreenSD.java:15) at StepDefinitions.Health.HealthWelcomeScreenSD.testScenarioCondition(HealthWelcomeScreenSD.java:26)</pre>	FAILED	0.002 s
	<p>AFTER - StepDefinitions.Health.HealthRegisterScreenSD.testScenarioCondition()</p> <pre>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:49425},</pre>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<p>networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthRegisterScreenSD.prepareFailureEvidence(HealthRegisterScreenSD.java:19) at StepDefinitions.Health.HealthRegisterScreenSD.testScenarioCondition(HealthRegisterScreenSD.java:30)</p>		
	<p>AFTER - StepDefinitions.Health.HealthLoginScreenSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthLoginScreenSD.prepareFailureEvidence(HealthLoginScreenSD.java:20) at StepDefinitions.Health.HealthLoginScreenSD.testScenarioCondition(HealthLoginScreenSD.java:31)</p>	FAILED	0.002 s
	<p>AFTER - StepDefinitions.Health.HealthLoggedInHomeScreenSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:461d:f3eb:1df1:7842:cc12:64e4%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:49425}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:49425/devtoo...,</p>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<pre>se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthLoggedInInHomeScreenSD.prepareFailureEvidence(HealthLoggedInInHomeScreenSD.java:24) at StepDefinitions.Health.HealthLoggedInInHomeScreenSD.testScenarioCondition(HealthLoggedInInHomeScreenSD.java:38)</pre>		