

CIAM/SGO Automation PDF Report

01-Nov-2022, 12:39:29 am

Start : Nov 01, 12:38:41.033 am

End : Nov 01, 12:39:28.024 am

Duration : 46.991 s

Features

Scenarios

Steps

PASSED - 0

FAILED - 1

SKIPPED - 0

PASSED - 0

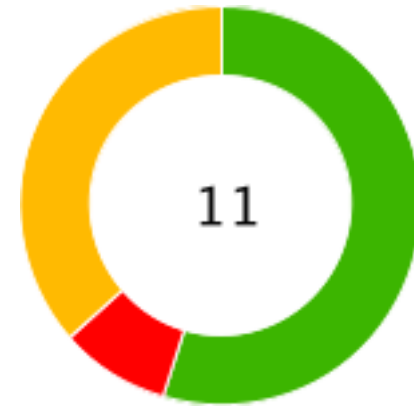
FAILED - 1

SKIPPED - 0

PASSED - 6

FAILED - 1

SKIPPED - 4

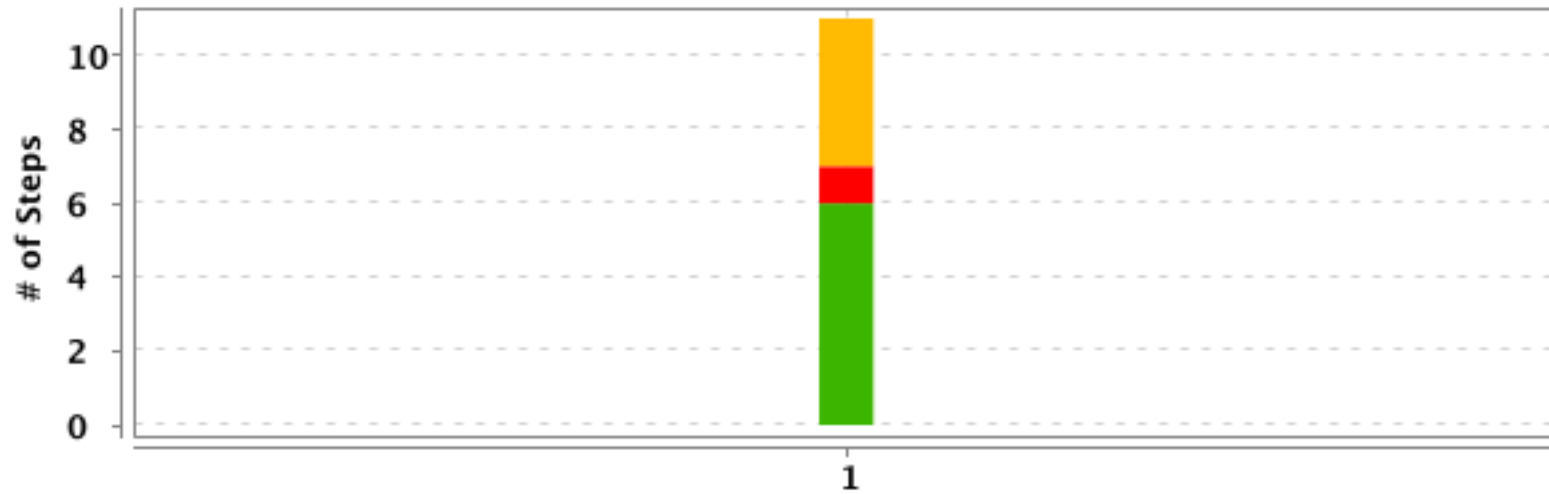


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>New_Bank_US01 Open An Account Test</u>	46.991 s	1	0	1	0	11	6	1	4

Tag	Scenario				Feature			
Name	<i>T</i>	<i>P</i>	<i>F</i>	<i>S</i>	<i>T</i>	<i>P</i>	<i>F</i>	<i>S</i>
@US01	1	0	1	0	1	0	1	0
@open-an-account-email-mfa	1	0	1	0	1	0	1	0
@new-bank	1	0	1	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>New_Bank_US01 Open An Account Test</u>	1	0	1	0	46.991 s



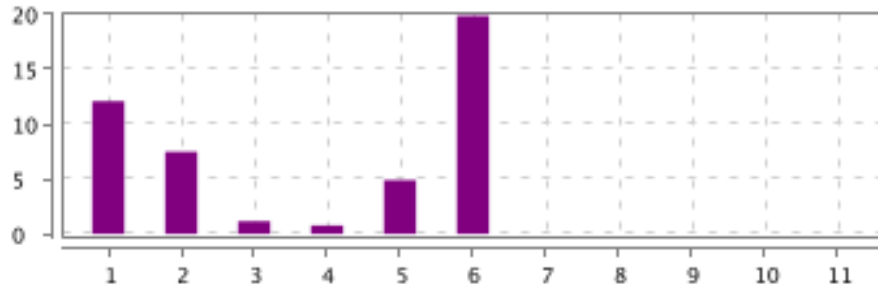

#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>New_Bank_US01 Open An Account Test</u>	<u>US01-02 New_Bank: Customer should open a new account by providing email for MFA verification and then verify the *</u>	11	6	1	4	46.974 s

* The feature name and/or scenario name has been cropped to fit in the available space.

New_Bank_US01 Open An Account Test


FAILED	DURATION - 46.991 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 11 Pass - 6 Fail - 1 Skip - 4	
/ 12:38:41.033 am // 12:39:28.024 am /					

US01-02 New_Bank: Customer should open a new account by providing email for MFA verification and then verify the user should be logged-in to the platform

FAILED		DURATION - 46.974 s			Steps Total - 11 Pass - 6 Fail - 1 Skip - 4	
/ 12:38:41.050 am // 12:39:28.024 am /						
New_Bank_US01 Open An Account Test						
@US01 @open-an-account-email-mfa @new-bank						

#	Step / Hook Details	Status	Duration
1	Given Setup the Test Environment as "CHROME" and User opens the given URL "NEW_BANK" User has opened the link: https://bank.ciam.sandbox.ciamsgo.com/ on CHROME browser.	PASSED	12.064 s
2	Given User provides access token to Deloitte security page for New Banking App User is clicked on AccessThroughEntryToken User has provided Access Token User has received the Access to Deloitte	PASSED	7.469 s
3	And User verifies the new bank site is accessible New Bank Page has been appeared as expected Page URI is appeared as expected, URL: https://bank.ciam.sandbox.ciamsgo.com/	PASSED	1.161 s
4	And User clicks on OpenAnAccount on new Bank app User has clicked on Open An New Account	PASSED	0.762 s
5	Given User provides the account creation using "EMAIL" and submit User has clicked on Sign-Up through Email MFA	PASSED	4.898 s
6	Given User provides "newbankregistrationviaemail@mailinator.com", "automation", "automation", "newbankregistrationviaemail",	PASSED	19.857 s

#	Step / Hook Details	Status	Duration
	<p>"positive" and password for Signup page of new Bank app</p> <p>Registration via Email Page has been appeared as expected</p> <p>Registration via Email Page URL is verified as expected</p> <p>User has provided the Email address</p> <p>User has provided the FirstName</p> <p>User has provided the LastName</p> <p>User has provided the Username</p> <p>User has provided the password</p> <p>User has provided the confirm password</p> <p>User has enabled the T&C</p> <p>User has clicked on Register button</p> <p>User has landed on Select MFA page and URL has been verified as expected</p> <p>User has skipped the MFA device registration</p>		
7	<p>Then User feeds the test data of new Bank "newbankregistrationviaemail@mailinator.com", "automation", "automation" to csv file</p> <p>io.cucumber.core.exception.CucumberException: Step [User feeds the test data of new Bank {string}, {string}, {string} to csv file] is defined with 5 parameters at 'StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.userFeedsTheNewBankTestDataToCsvFile(java.lang.String, java.lang.String,java.lang.String,java.lang.String,java.lang.String)'. However, the gherkin step has 3 arguments: * "newbankregistrationviaemail@mailinator.com" * "automation" * "automation" Step text: User feeds the test data of new Bank "newbankregistrationviaemail@mailinator.com", "automation", "automation" to csv file</p> <p>at io.cucumber.core.runner.PickleStepDefinitionMatch.arityMismatch(PickleStepDefinitionMatch.java:83)</p> <p>at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:42)</p> <p>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)</p> <p>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85)</p> <p>at io.cucumber.core.runner.TestStep.run(TestStep.java:57)</p> <p>at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)</p> <p>at io.cucumber.core.runner.TestCase.run(TestCase.java:84)</p> <p>at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129)</p> <p>at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</p> <p>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)</p> <p>at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)</p>	FAILED	0.011 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:235) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54) </pre>		
8	Then User should able to login with "automation" on new Bank app "positive"	SKIPPED	0.001 s
9	Then Verify the "newbankregistrationviaemail@mailinator.com", "automation", "automation" and "positive" of logged-in user details on new bank app	SKIPPED	0.000 s
10	And User logs out from new Bank app "positive"	SKIPPED	0.000 s
11	Then User terminates all windows of the browser	SKIPPED	0.000 s
	<p>AFTER - StepDefinitions.NewBank.NewBankRegistrationScreenSD.testScenarioCondition()</p> <p>Above scenario has been failed. Ref: Attachment</p> <p>PageURL: https://bank.ciam.sandbox.ciamsgo.com/signup</p> <p>Terminated the browser as a failure noticed in above scenario</p> 	PASSED	0.543 s
	AFTER - StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.testScenarioCondition()	FAILED	0.023 s

#	Step / Hook Details	Status	Duration
	<p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.prepareFailureEvidence(NewBankProfileOptionsScreenSD.java:23) at StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.testScenarioCondition(NewBankProfileOptionsScreenSD.java:34)</p>		
	<p>AFTER - StepDefinitions.NewBank.NewBankWelcomeScreenSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.NewBank.NewBankWelcomeScreenSD.prepareFailureEvidence(NewBankWelcomeScreenSD.java:16) at StepDefinitions.NewBank.NewBankWelcomeScreenSD.testScenarioCondition(NewBankWelcomeScreenSD.java:27)</p>	FAILED	0.002 s
	<p>AFTER - StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision:</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<p>'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.prepareFailureEvidence(DeloitteSecurityLayerSD.java:22) at StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.testScenarioCondition(DeloitteSecurityLayerSD.java:33)</p>		
	<p>AFTER - StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.prepareFailureEvidence(GoogleOktaLoginSD.java:16) at StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.testScenarioCondition(GoogleOktaLoginSD.java:27)</p>	FAILED	0.002 s
	<p>AFTER - StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.</p>	FAILED	0.005 s

#	Step / Hook Details	Status	Duration
	<pre> version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.prepareFailureEvidence(FeedTestDataToFilesSD.java:19) at StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.testScenarioCondition(FeedTestDataToFilesSD.java:30) </pre>		
	<p>AFTER - StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.testScenarioCondition()</p> <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os. version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.prepareFailureEvidence(FacebookOktaLoginSD.java:17) at StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.testScenarioCondition(FacebookOktaLoginSD.java:28) </pre>	FAILED	0.004 s
	<p>AFTER - StepDefinitions.CommonDefinitions.BrowserOperationsSD.testScenarioCondition()</p> <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os. version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities </pre>	FAILED	0.011 s

#	Step / Hook Details	Status	Duration
	<pre>{acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.BrowserOperationsSD.prepareFailureEvidence(BrowserOperationsSD.java:15) at StepDefinitions.CommonDefinitions.BrowserOperationsSD.testScenarioCondition(BrowserOperationsSD.java:26)</pre>		
	AFTER - StepDefinitions.Banking.BankingTransferScreenSD.testScenarioCondition() <pre>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingTransferScreenSD.prepareFailureEvidence(BankingTransferScreenSD.java:16) at StepDefinitions.Banking.BankingTransferScreenSD.testScenarioCondition(BankingTransferScreenSD.java:27)</pre>	FAILED	0.001 s
	AFTER - StepDefinitions.Banking.BankingBrokerageAccountSD.testScenarioCondition() <pre>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62</pre>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre>(1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingBrokerageAccountSD.prepareFailureEvidence(BankingBrokerageAccountSD.java:14) at StepDefinitions.Banking.BankingBrokerageAccountSD.testScenarioCondition(BankingBrokerageAccountSD.java:25)</pre>		
	<p>AFTER - StepDefinitions.Banking.BankingPaymentsSD.testScenarioCondition()</p> <pre>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os. version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingPaymentsSD.prepareFailureEvidence(BankingPaymentsSD.java:12) at StepDefinitions.Banking.BankingPaymentsSD.testScenarioCondition(BankingPaymentsSD.java:23)</pre>	FAILED	0.001 s
	<p>AFTER - StepDefinitions.Banking.BankingWelcomeScreenSD.testScenarioCondition()</p> <pre>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os. version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:54094},</pre>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<p>networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingWelcomeScreenSD.prepareFailureEvidence(BankingWelcomeScreenSD.java:15) at StepDefinitions.Banking.BankingWelcomeScreenSD.testScenarioCondition(BankingWelcomeScreenSD.java:26)</p>		
	<p>AFTER - StepDefinitions.Banking.BankingLoggedInScreenSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingLoggedInScreenSD.prepareFailureEvidence(BankingLoggedInScreenSD.java:16) at StepDefinitions.Banking.BankingLoggedInScreenSD.testScenarioCondition(BankingLoggedInScreenSD.java:27)</p>	FAILED	0.001 s
	<p>AFTER - StepDefinitions.Banking.BankTransfersSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo...,</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankTransfersSD.prepareFailureEvidence(BankTransfersSD.java:12) at StepDefinitions.Banking.BankTransfersSD.testScenarioCondition(BankTransfersSD.java:23) </pre>		
	AFTER - StepDefinitions.Banking.BankingProfileOptionsSD.testScenarioCondition() <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os. version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingProfileOptionsSD.prepareFailureEvidence(BankingProfileOptionsSD.java:17) at StepDefinitions.Banking.BankingProfileOptionsSD.testScenarioCondition(BankingProfileOptionsSD.java:28) </pre>	FAILED	0.000 s
	AFTER - StepDefinitions.Banking.BankingSignUpEmailSD.testScenarioCondition() <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os. version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, </pre>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<p>unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingSignUpEmailSD.prepareFailureEvidence(BankingSignUpEmailSD.java:16) at StepDefinitions.Banking.BankingSignUpEmailSD.testScenarioCondition(BankingSignUpEmailSD.java:27)</p>		
	<p>AFTER - StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingLoginScreenSD.prepareFailureEvidence(BankingLoginScreenSD.java:15) at StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition(BankingLoginScreenSD.java:26)</p>	FAILED	0.001 s
	<p>AFTER - StepDefinitions.Retail.RetailOctaSignInScreenSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true,</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre>webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailOctaSignInScreenSD.prepareFailureEvidence(RetailOctaSignInScreenSD.java:26) at StepDefinitions.Retail.RetailOctaSignInScreenSD.testScenarioCondition(RetailOctaSignInScreenSD.java:37)</pre>		
	<p>AFTER - StepDefinitions.Retail.RetailWelcomeScreenSD.testScenarioCondition()</p> <pre>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailWelcomeScreenSD.prepareFailureEvidence(RetailWelcomeScreenSD.java:21) at StepDefinitions.Retail.RetailWelcomeScreenSD.testScenarioCondition(RetailWelcomeScreenSD.java:32)</pre>	FAILED	0.004 s
	<p>AFTER - StepDefinitions.Retail.RetailProfileOptionsScreenSD.testScenarioCondition()</p> <pre>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</pre>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailProfileOptionsScreenSD.prepareFailureEvidence(RetailProfileOptionsScreenSD.java:22) at StepDefinitions.Retail.RetailProfileOptionsScreenSD.testScenarioCondition(RetailProfileOptionsScreenSD.java:33) </pre>		
	<p>AFTER - StepDefinitions.Retail.RetailSignUpScreenSD.testScenarioCondition()</p> <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailSignUpScreenSD.prepareFailureEvidence(RetailSignUpScreenSD.java:18) at StepDefinitions.Retail.RetailSignUpScreenSD.testScenarioCondition(RetailSignUpScreenSD.java:29) </pre>	FAILED	0.002 s
	<p>AFTER - StepDefinitions.Retail.RetailLoginScreenSD.testScenarioCondition()</p> <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) </pre>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailLoginScreenSD.prepareFailureEvidence(RetailLoginScreenSD.java:23) at StepDefinitions.Retail.RetailLoginScreenSD.testScenarioCondition(RetailLoginScreenSD.java:34)		
	AFTER - StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.testScenarioCondition() org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.prepareFailureEvidence(RetailPrivacyWebFormScreenSD.java:18) at StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.testScenarioCondition(RetailPrivacyWebFormScreenSD.java:29)	FAILED	0.003 s
	AFTER - StepDefinitions.Health.HealthConfigureRegistrationSD.testScenarioCondition() org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthConfigureRegistrationSD.prepareFailureEvidence(HealthConfigureRegistrationSD.java:14) at StepDefinitions.Health.HealthConfigureRegistrationSD.testScenarioCondition(HealthConfigureRegistrationSD.java:25) </pre>		
	<p>AFTER - StepDefinitions.Health.HealthWelcomeScreenSD.testScenarioCondition()</p> <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthWelcomeScreenSD.prepareFailureEvidence(HealthWelcomeScreenSD.java:15) at StepDefinitions.Health.HealthWelcomeScreenSD.testScenarioCondition(HealthWelcomeScreenSD.java:26) </pre>	FAILED	0.002 s
	<p>AFTER - StepDefinitions.Health.HealthRegisterScreenSD.testScenarioCondition()</p> <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) </pre>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthRegisterScreenSD.prepareFailureEvidence(HealthRegisterScreenSD.java:19) at StepDefinitions.Health.HealthRegisterScreenSD.testScenarioCondition(HealthRegisterScreenSD.java:30)		
	AFTER - StepDefinitions.Health.HealthLoginScreenSD.testScenarioCondition() org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthLoginScreenSD.prepareFailureEvidence(HealthLoginScreenSD.java:20) at StepDefinitions.Health.HealthLoginScreenSD.testScenarioCondition(HealthLoginScreenSD.java:31)	FAILED	0.002 s
	AFTER - StepDefinitions.Health.HealthLoggedInHomeScreenSD.testScenarioCondition() org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: 'fe80:0:0:0:87c:28d9:fb12:349d%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:54094}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:54094/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthLoggedInHomeScreenSD.prepareFailureEvidence(HealthLoggedInHomeScreenSD.java:24) at StepDefinitions.Health.HealthLoggedInHomeScreenSD.testScenarioCondition(HealthLoggedInHomeScreenSD.java:38)		