

CIAM/SGO Automation PDF Report

03-Nov-2022, 4:52:06 pm

Start : Nov 03, 4:49:44.208 pm

End : Nov 03, 4:52:04.592 pm

Duration : 2 m 20.384 s

Features

Scenarios

Steps

PASSED - 0

FAILED - 1

SKIPPED - 0

PASSED - 0

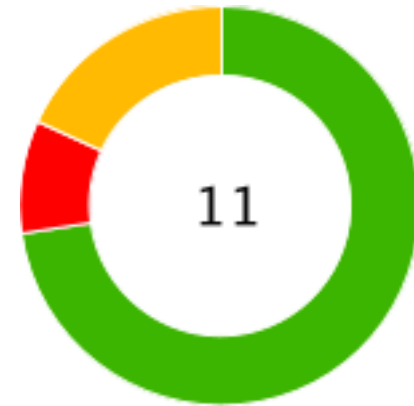
FAILED - 1

SKIPPED - 0

PASSED - 8

FAILED - 1

SKIPPED - 2

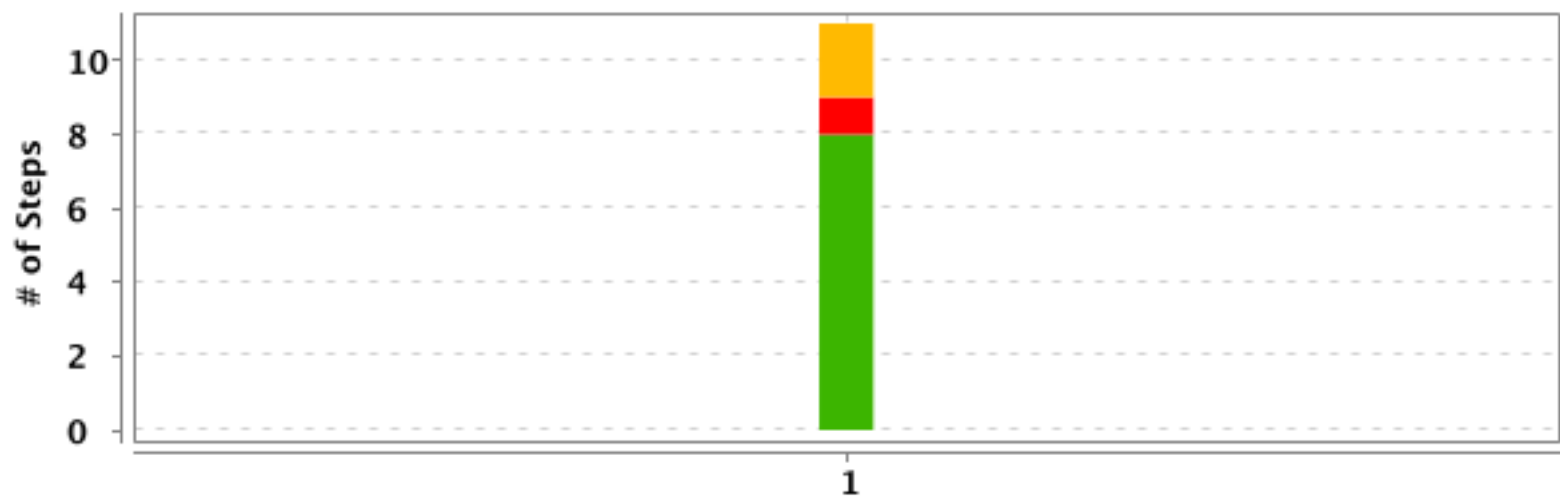


| Feature | | Scenario | | | | Step | | | |
|---|--------------|----------|---|---|---|------|---|---|---|
| Name | Duration | T | P | F | S | T | P | F | S |
| <u>New_Bank_US08 Privacy And Consent Test</u> | 2 m 20.384 s | 1 | 0 | 1 | 0 | 11 | 8 | 1 | 2 |

| Tag | Scenario | | | | Feature | | | |
|----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Name | <i>T</i> | <i>P</i> | <i>F</i> | <i>S</i> | <i>T</i> | <i>P</i> | <i>F</i> | <i>S</i> |
| @privacy-and-consent | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @US08 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @new-bank | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |





| # | Feature Name | T | P | F | S | Duration |
|---|---|---|---|---|---|--------------|
| 1 | <u>New_Bank_US08 Privacy And Consent Test</u> | 1 | 0 | 1 | 0 | 2 m 20.384 s |

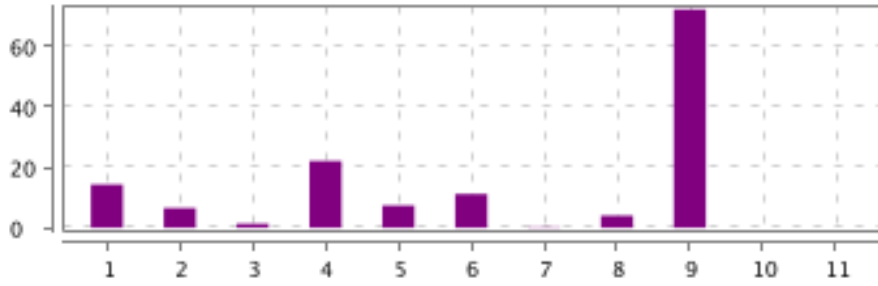



| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|---|---|----|---|---|---|--------------|
| 1 | <u>New_Bank_US08 Privacy And Consent Test</u> | <u>US08-01 New_Bank: User completes the Privacy and Consent Check</u> | 11 | 8 | 1 | 2 | 2 m 20.370 s |

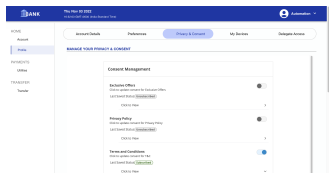
New_Bank_US08 Privacy And Consent Test

| | | | | | |
|--------------------------------------|-------------------------|--|---|---|---|
| FAILED | DURATION - 2 m 20.384 s | Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0 |  | Steps Total - 11 Pass - 8 Fail - 1 Skip - 2 |  |
| / 4:49:44.208 pm // 4:52:04.592 pm / | | | | | |

US08-01 New_Bank: User completes the Privacy and Consent Check

| | | | | |
|--|-------------------------|--|---|---|
| FAILED | DURATION - 2 m 20.370 s |  | Steps Total - 11 Pass - 8 Fail - 1 Skip - 2 |  |
| / 4:49:44.222 pm // 4:52:04.592 pm / | | | | |
| New_Bank_US08 Privacy And Consent Test | | | | |
| @privacy-and-consent @US08 @new-bank | | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Setup the Test Environment as "CHROME" and User opens the given URL "NEW_BANK" with CORS Unblock Plugin "BANK_PREF" | PASSED | 14.289 s |
| | User has opened the link:https://bank.ciam.sandbox.ciamsgo.com/ on CHROME browser. | | |
| 2 | Given User provides access token to Deloitte security page for New Banking App | PASSED | 6.538 s |
| | User is clicked on AccessThroughEntryToken | | |
| | User has provided Access Token | | |
| | User has received the Access to Deloitte | | |
| 3 | And User verifies the new bank site is accessible | PASSED | 1.291 s |
| | New Bank Page has been appeared as expected | | |
| | Page URI is appeared as expected, URL:https://bank.ciam.sandbox.ciamsgo.com/ | | |
| 4 | And User waits until the login section appears for new Bank app | PASSED | 22.117 s |
| | Login Section has appeared | | |
| 5 | Given User provides "newbankregistrationviaemail17" and password for new bank app - static | PASSED | 7.384 s |
| | User has provided username | | |
| | User has provided password | | |
| | User has clicked on Sign-On button | | |

| # | Step / Hook Details | Status | Duration |
|----|--|---------|--------------|
| 6 | <p>Then User should able to login with "automation" and land on dashboard of new Bank app "positive"</p> <p>User is registered an account on new Bank app and Firstname is appeared as expected</p> <p>Dashboard page URL is verified</p> | PASSED | 11.137 s |
| 7 | <p>Then User clicks on profile option on dashboard page of new Bank app</p> <p>User has clicked on Profile option link on dashboard</p> | PASSED | 0.277 s |
| 8 | <p>Then User clicks on Privacy and Consent tab in account details of new Bank app</p> <p>Privacy And Consent tab is appeared</p> <p>User has clicked on PrivacyAndConsent Link</p> | PASSED | 3.976 s |
| 9 | <p>And User waits until the Privacy and Consent i-frame appears and validate the details for new Bank app</p> <p>User has navigated to Privacy And Consent screen</p> <p>org.openqa.selenium.TimeoutException: Expected condition failed: waiting for visibility of element located by By.xpath: //*[text()=' Consent Management ']' (tried for 60 second(s) with 500 milliseconds interval) Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc6%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...)}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: dbca0f3408abd178b03ac4b7cc532060</p> <p>at org.openqa.selenium.support.ui.WebDriverWait.timeoutException(WebDriverWait.java:87)</p> <p>at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:231)</p> <p>at Utilities.WaitUtil.elementToBeLocated(WaitUtil.java:29)</p> <p>at StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.</p> <p>userWaitsUntilThePrivacyAndConsentIFrameAppearsAndValidateTheDetailsForNewBankApp(NewBankProfileOptionsScreenSD.java:533)</p> <p>at ?.User waits until the Privacy and Consent i-frame appears and validate the details for new Bank app(file:///Users/navepilla/IdeaProjects/main-project/ciamsgo-cucumber-test-framework/src/test/java/Features/Banking/newUI/NewBankPrivacyAndConsent.feature:16)</p> <p>* Not displayable characters are replaced by '?'.</p> | FAILED | 1 m 12.203 s |
| 10 | And User logs out from new Bank app "positive" | SKIPPED | 0.002 s |
| 11 | Then User terminates all windows of the browser | SKIPPED | 0.000 s |
| | <p>AFTER - StepDefinitions.NewBank.NewBankRegistrationScreenSD.testScenarioCondition()</p> <p>Above scenario has been failed. Ref: Attachment</p> <p>PageURL: https://bank.ciam.sandbox.ciamsgo.com/profile/details#privacy</p> <p>Terminated the browser as a failure noticed in above scenario</p>  | PASSED | 0.943 s |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | AFTER - StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.testScenarioCondition() <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc0000000000', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.prepareFailureEvidence(NewBankProfileOptionsScreenSD.java:26) at StepDefinitions.NewBank.NewBankProfileOptionsScreenSD.testScenarioCondition(NewBankProfileOptionsScreenSD.java:37) </pre> | FAILED | 0.007 s |
| | AFTER - StepDefinitions.NewBank.NewBankWelcomeScreenSD.testScenarioCondition() <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc0000000000', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.NewBank.NewBankWelcomeScreenSD.prepareFailureEvidence(NewBankWelcomeScreenSD.java:20) at StepDefinitions.NewBank.NewBankWelcomeScreenSD.testScenarioCondition(NewBankWelcomeScreenSD.java:31) </pre> | FAILED | 0.002 s |
| | AFTER - StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.testScenarioCondition() | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc0000000000', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.prepareFailureEvidence(DeloitteSecurityLayerSD.java:24) at StepDefinitions.CommonDefinitions.DeloitteSecurityLayerSD.testScenarioCondition(DeloitteSecurityLayerSD.java:35)</p> | | |
| | <p>AFTER - StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc0000000000', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.prepareFailureEvidence(GoogleOktaLoginSD.java:16) at StepDefinitions.CommonDefinitions.GoogleOktaLoginSD.testScenarioCondition(GoogleOktaLoginSD.java:27)</p> | FAILED | 0.019 s |
| | <p>AFTER - StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision:</p> | FAILED | 0.002 s |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | <p>'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc0000000000', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.prepareFailureEvidence(FeedTestDataToFilesSD.java:19) at StepDefinitions.CommonDefinitions.FeedTestDataToFilesSD.testScenarioCondition(FeedTestDataToFilesSD.java:30)</p> | | |
| | <p>AFTER - StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc0000000000', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.prepareFailureEvidence(FacebookOktaLoginSD.java:17) at StepDefinitions.CommonDefinitions.FacebookOktaLoginSD.testScenarioCondition(FacebookOktaLoginSD.java:28)</p> | FAILED | 0.001 s |
| | <p>AFTER - StepDefinitions.CommonDefinitions.BrowserOperationsSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc0000000000', os.name: 'Mac OS X', os.arch:</p> | FAILED | 0.007 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | <pre>'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.CommonDefinitions.BrowserOperationsSD.prepareFailureEvidence(BrowserOperationsSD.java:15) at StepDefinitions.CommonDefinitions.BrowserOperationsSD.testScenarioCondition(BrowserOperationsSD.java:26)</pre> | | |
| | <p>AFTER - StepDefinitions.Banking.BankingTransferScreenSD.testScenarioCondition()</p> <pre>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc00:0000', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingTransferScreenSD.prepareFailureEvidence(BankingTransferScreenSD.java:16) at StepDefinitions.Banking.BankingTransferScreenSD.testScenarioCondition(BankingTransferScreenSD.java:27)</pre> | FAILED | 0.001 s |
| | <p>AFTER - StepDefinitions.Banking.BankingBrokerageAccountSD.testScenarioCondition()</p> <pre>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc00:0000', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}]</pre> | FAILED | 0.002 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | <p>Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingBrokerageAccountSD.prepareFailureEvidence(BankingBrokerageAccountSD.java:14) at StepDefinitions.Banking.BankingBrokerageAccountSD.testScenarioCondition(BankingBrokerageAccountSD.java:25)</p> | | |
| | <p>AFTER - StepDefinitions.Banking.BankingPaymentsSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc6%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingPaymentsSD.prepareFailureEvidence(BankingPaymentsSD.java:12) at StepDefinitions.Banking.BankingPaymentsSD.testScenarioCondition(BankingPaymentsSD.java:23)</p> | FAILED | 0.005 s |
| | <p>AFTER - StepDefinitions.Banking.BankingWelcomeScreenSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc6%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62</p> | FAILED | 0.004 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | <pre>(1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingWelcomeScreenSD.prepareFailureEvidence(BankingWelcomeScreenSD.java:15) at StepDefinitions.Banking.BankingWelcomeScreenSD.testScenarioCondition(BankingWelcomeScreenSD.java:26)</pre> | | |
| | AFTER - StepDefinitions.Banking.BankingLoggedInScreenSD.testScenarioCondition() <pre>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc0000', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingLoggedInScreenSD.prepareFailureEvidence(BankingLoggedInScreenSD.java:16) at StepDefinitions.Banking.BankingLoggedInScreenSD.testScenarioCondition(BankingLoggedInScreenSD.java:27)</pre> | FAILED | 0.005 s |
| | AFTER - StepDefinitions.Banking.BankTransfersSD.testScenarioCondition() <pre>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc0000', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:52894},</pre> | FAILED | 0.002 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | <p>networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankTransfersSD.prepareFailureEvidence(BankTransfersSD.java:12) at StepDefinitions.Banking.BankTransfersSD.testScenarioCondition(BankTransfersSD.java:23)</p> | | |
| | <p>AFTER - StepDefinitions.Banking.BankingProfileOptionsSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc00:0000', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingProfileOptionsSD.prepareFailureEvidence(BankingProfileOptionsSD.java:19) at StepDefinitions.Banking.BankingProfileOptionsSD.testScenarioCondition(BankingProfileOptionsSD.java:30)</p> | FAILED | 0.002 s |
| | <p>AFTER - StepDefinitions.Banking.BankingSignUpEmailSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc00:0000', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo...,</p> | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | <pre> se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingSignUpEmailSD.prepareFailureEvidence(BankingSignUpEmailSD.java:16) at StepDefinitions.Banking.BankingSignUpEmailSD.testScenarioCondition(BankingSignUpEmailSD.java:27) </pre> | | |
| | <p>AFTER - StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition()</p> <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc00::1', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Banking.BankingLoginScreenSD.prepareFailureEvidence(BankingLoginScreenSD.java:15) at StepDefinitions.Banking.BankingLoginScreenSD.testScenarioCondition(BankingLoginScreenSD.java:26) </pre> | FAILED | 0.001 s |
| | <p>AFTER - StepDefinitions.Retail.RetailOctaSignInScreenSD.testScenarioCondition()</p> <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc00::1', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, </pre> | FAILED | 0.002 s |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | <p>unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailOctaSignInScreenSD.prepareFailureEvidence(RetailOctaSignInScreenSD.java:26) at StepDefinitions.Retail.RetailOctaSignInScreenSD.testScenarioCondition(RetailOctaSignInScreenSD.java:37)</p> | | |
| | <p>AFTER - StepDefinitions.Retail.RetailWelcomeScreenSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc0%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailWelcomeScreenSD.prepareFailureEvidence(RetailWelcomeScreenSD.java:21) at StepDefinitions.Retail.RetailWelcomeScreenSD.testScenarioCondition(RetailWelcomeScreenSD.java:32)</p> | FAILED | 0.003 s |
| | <p>AFTER - StepDefinitions.Retail.RetailProfileOptionsScreenSD.testScenarioCondition()</p> <p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc0%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true,</p> | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | <pre>webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailProfileOptionsScreenSD.prepareFailureEvidence(RetailProfileOptionsScreenSD.java:22) at StepDefinitions.Retail.RetailProfileOptionsScreenSD.testScenarioCondition(RetailProfileOptionsScreenSD.java:33)</pre> | | |
| | <p>AFTER - StepDefinitions.Retail.RetailSignUpScreenSD.testScenarioCondition()</p> <pre>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc0000', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailSignUpScreenSD.prepareFailureEvidence(RetailSignUpScreenSD.java:18) at StepDefinitions.Retail.RetailSignUpScreenSD.testScenarioCondition(RetailSignUpScreenSD.java:29)</pre> | FAILED | 0.001 s |
| | <p>AFTER - StepDefinitions.Retail.RetailLoginScreenSD.testScenarioCondition()</p> <pre>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc0000', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}</pre> | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | <pre> at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailLoginScreenSD.prepareFailureEvidence(RetailLoginScreenSD.java:23) at StepDefinitions.Retail.RetailLoginScreenSD.testScenarioCondition(RetailLoginScreenSD.java:34) </pre> | | |
| | <p>AFTER - StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.testScenarioCondition()</p> <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc0000', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.prepareFailureEvidence(RetailPrivacyWebFormScreenSD.java:18) at StepDefinitions.Retail.RetailPrivacyWebFormScreenSD.testScenarioCondition(RetailPrivacyWebFormScreenSD.java:29) </pre> | FAILED | 0.002 s |
| | <p>AFTER - StepDefinitions.Health.HealthConfigureRegistrationSD.testScenarioCondition()</p> <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc0000', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) </pre> | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | <pre> at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthConfigureRegistrationSD.prepareFailureEvidence(HealthConfigureRegistrationSD.java:14) at StepDefinitions.Health.HealthConfigureRegistrationSD.testScenarioCondition(HealthConfigureRegistrationSD.java:25) </pre> | | |
| | <p>AFTER - StepDefinitions.Health.HealthWelcomeScreenSD.testScenarioCondition()</p> <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc00:0000', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthWelcomeScreenSD.prepareFailureEvidence(HealthWelcomeScreenSD.java:15) at StepDefinitions.Health.HealthWelcomeScreenSD.testScenarioCondition(HealthWelcomeScreenSD.java:26) </pre> | FAILED | 0.001 s |
| | <p>AFTER - StepDefinitions.Health.HealthRegisterScreenSD.testScenarioCondition()</p> <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc00:0000', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129..., goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) </pre> | FAILED | 0.004 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthRegisterScreenSD.prepareFailureEvidence(HealthRegisterScreenSD.java:19) at StepDefinitions.Health.HealthRegisterScreenSD.testScenarioCondition(HealthRegisterScreenSD.java:30) | | |
| | AFTER - StepDefinitions.Health.HealthLoginScreenSD.testScenarioCondition() org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc0%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthLoginScreenSD.prepareFailureEvidence(HealthLoginScreenSD.java:20) at StepDefinitions.Health.HealthLoginScreenSD.testScenarioCondition(HealthLoginScreenSD.java:31) | FAILED | 0.003 s |
| | AFTER - StepDefinitions.Health.HealthLoggedInHomeScreenSD.testScenarioCondition() org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'USBGONAVEPILLA1', ip: '2409:4070:4798:d5:20f9:16a2:9484:fc0%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.6', java.version: '18.0.1.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 107.0.5304.87, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576..., userDataDir: /var/folders/_r/ym2k45yj129...}, goog:chromeOptions: {debuggerAddress: localhost:52894}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52894/devtoo..., se:cdpVersion: 107.0.5304.87, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) | FAILED | 0.002 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at Utilities.CaptureScreen.takeScreenShot(CaptureScreen.java:9) at StepDefinitions.Health.HealthLoggedInHomeScreenSD.prepareFailureEvidence(HealthLoggedInHomeScreenSD.java:26) at StepDefinitions.Health.HealthLoggedInHomeScreenSD.testScenarioCondition(HealthLoggedInHomeScreenSD.java:40) | | |