

# Cucumber Report

23-Jan-2023, 12:11:38 pm

Start : Jan 23, 12:11:35.313 pm

End : Jan 23, 12:11:38.104 pm

Duration : 2.791 s

Features


Scenarios

Steps

PASSED - 0  
FAILED - 1  
SKIPPED - 0


PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 1  
SKIPPED - 0

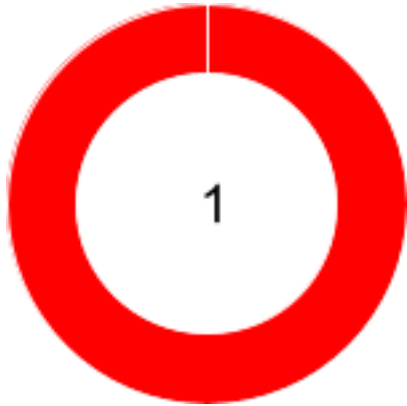



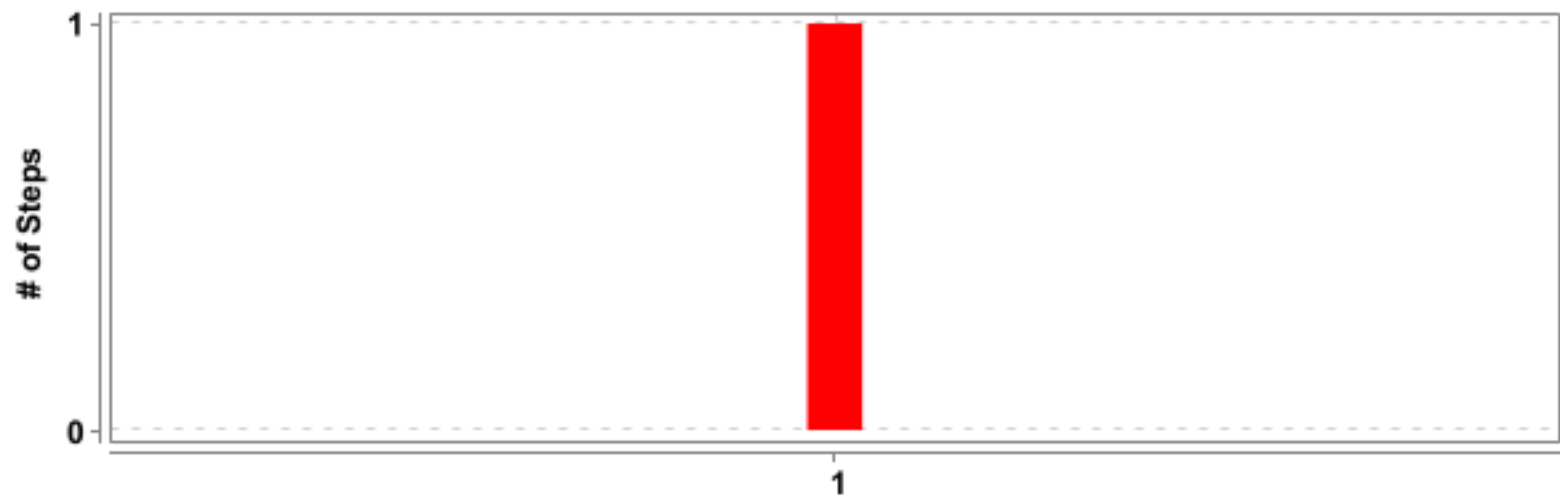

#	Feature Name	T	P	F	S	Duration
1	<u>Calculator Basic Scripting</u>	1	0	1	0	2.791 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Calculator Basic Scripting</u>	<u>My app</u>	1	0	1	0	2.785 s

**(F)- Calculator Basic Scripting**

<b>FAILED</b>	<b>DURATION - 2.791 s</b>	Scenarios		Steps	
/ 12:11:35.313 pm // 12:11:38.104 pm /		Total - 1		Total - 1	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 0	

**(S)- My app**
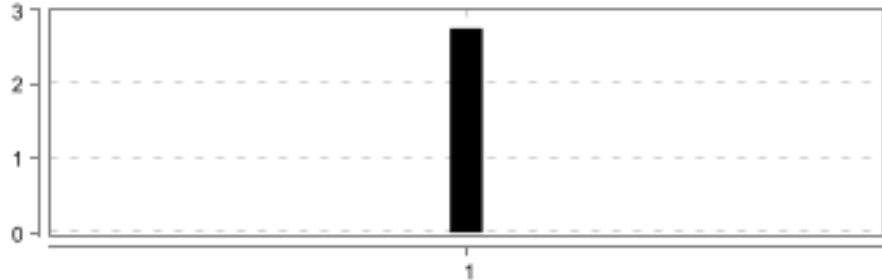
<div>FAILED</div> <div>DURATION - 2.785 s</div>		<div></div>	<div>Steps</div> <div>Total - 1</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 0</div>	<div></div>
<div>/ 12:11:35.319 pm // 12:11:38.104 pm /</div>				
<div>Calculator Basic Scripting</div>				
<div>@Appium @CalculatorAutomation</div>				

#	Step / Hook Details	Status	Duration
1	<p>Given launch App</p> <p>org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'LIN65004405', ip: '10.109.129.42'</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553)</p> <p>at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:156)</p> <p>at io.appium.java_client.AppiumDriver.&lt;init&gt;(AppiumDriver.java:80)</p> <p>at io.appium.java_client.AppiumDriver.&lt;init&gt;(AppiumDriver.java:92)</p> <p>at com.functions.factory.MobileDriverFactory.mobileDriverLaunch(MobileDriverFactory.java:37)</p> <p>at stepDef.pages.google_Page.launchApp(google_Page.java:34)</p> <p>at ?.launch App(file:///C:/Users/NAVEBAND/IdeaProjects/Appium-BDD-Automation/features/MobileAutomation.feature:6)</p> <p>Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '15' Driver info: driver.version: AppiumDriver</p> <p>at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274)</p> <p>at java.base/java.util.Optional.orElseGet(Optional.java:362)</p> <p>at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535)</p> <p>at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229)</p>	FAILED	2.753 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at com.functions.factory.MobileDriverFactory.mobileDriverLaunch(MobileDriverFactory.java:37) at stepDef.pages.google_Page.launchApp(google_Page.java:34) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:64) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:564) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) at io.cucumber.core.runner.TestStep.run(TestStep.java:64) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:104) at io.cucumber.core.runner.Runner.runPickle(Runner.java:71) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:199) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:234) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137)		

#	Step / Hook Details	Status	Duration
	<pre> at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:33) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:221) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54) Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:660) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:875) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:832) * Not displayable characters are replaced by '?'. </pre>		
	AFTER - stepDef.utilities.ApplicationHooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.004 s
	scenario status : FAILED		