

# REST - Country Web Service

## CountryController.java

```
package com.cognizant.spring_learn.controller;

import com.cognizant.spring_learn.Country;
import org.springframework.context.ApplicationContext;
import org.springframework.context.support.ClassPathXmlApplicationContext;
import org.springframework.web.bind.annotation.RequestMapping;
import org.springframework.web.bind.annotation.RestController;

@RestController
public class CountryController {

    @RequestMapping("/country")
    public Country getCountryIndia() {

        ApplicationContext context =
            new ClassPathXmlApplicationContext("country.xml");

        Country country = context.getBean("country", Country.class);

        ((ClassPathXmlApplicationContext) context).close();

        return country;
    }
}
```

## Country.xml

```
<?xml version="1.0" encoding="UTF-8"?>

<beans xmlns="http://www.springframework.org/schema/beans"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xsi:schemaLocation="
        http://www.springframework.org/schema/beans
        https://www.springframework.org/schema/beans/spring-beans.xsd">

    <bean id="country"
        class="com.cognizant.spring_learn.Country">
```

```
<property name="code" value="IN"/>
<property name="name" value="India"/>
```

```
</bean>
```

```
</beans>
```

### **SpringLearnApplication.java**

```
package com.cognizant.spring_learn;
```

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;
import org.springframework.context.ApplicationContext;
import org.springframework.context.support.ClassPathXmlApplicationContext;
```

```
@SpringBootApplication
```

```
public class SpringLearnApplication {
```

```
    private static final Logger LOGGER =
        LoggerFactory.getLogger(SpringLearnApplication.class);
```

```
    public static void main(String[] args) {
```

```
        LOGGER.info("START");
```

```
        SpringApplication.run(SpringLearnApplication.class, args);
```

```
        //displayCountry();
```

```
        LOGGER.info("END");
    }
```

```
    public static void displayCountry() {
```

```
        ApplicationContext context =
            new ClassPathXmlApplicationContext("country.xml");
```

```
        Country country =
```


```
context.getBean("country", Country.class);
```

```
LOGGER.debug("Country : {}", country);
```

```
((ClassPathXmlApplicationContext) context).close();
```

```
}
```

```
}
```

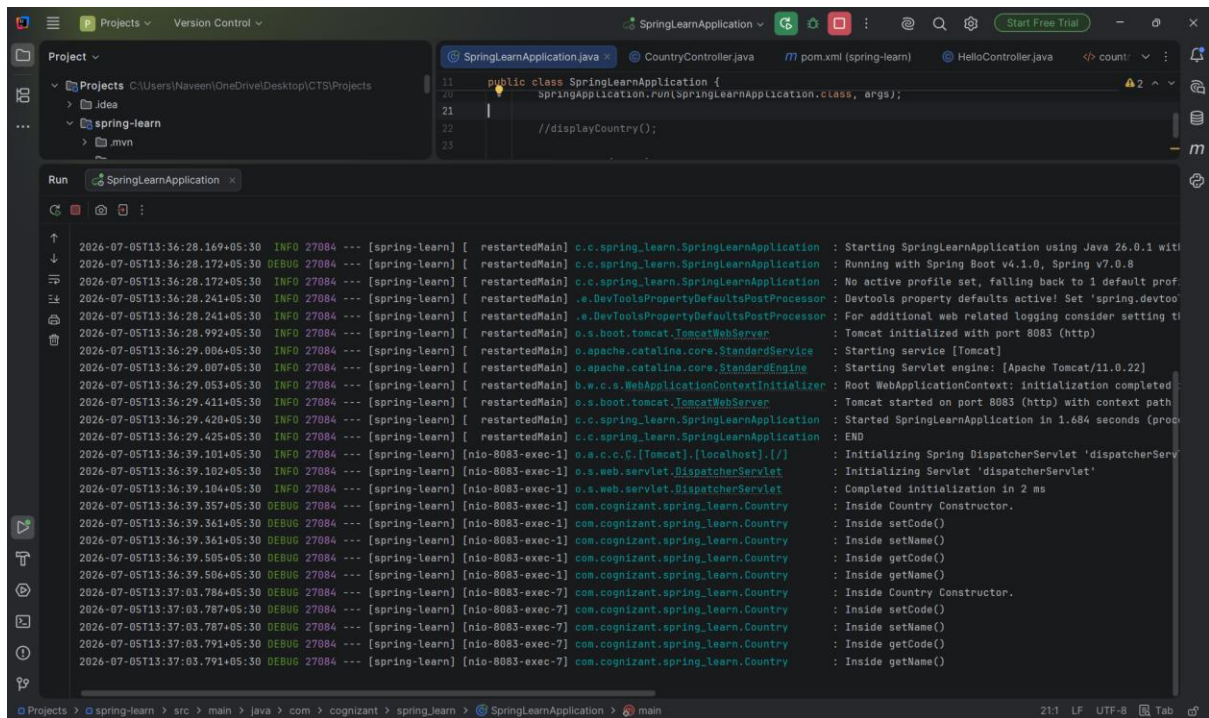

The screenshot shows an IDE with a project named 'spring-learn'. The main editor displays the `SpringLearnApplication.java` file, which contains the following code:

```
11 public class SpringLearnApplication {
20     SpringApplication.run(SpringLearnApplication.class, args);
21
22     //displayCountry();
23 }
```

The Run console shows the following logs:

```
2026-07-05T13:36:28.169+05:30 INFO 27084 --- [spring-learn] [ restartedMain] c.c.spring_learn.SpringLearnApplication : Starting SpringLearnApplication using Java 26.0.1 with
2026-07-05T13:36:28.172+05:30 DEBUG 27084 --- [spring-learn] [ restartedMain] c.c.spring_learn.SpringLearnApplication : Running with Spring Boot v4.1.0, Spring v7.0.8
2026-07-05T13:36:28.172+05:30 INFO 27084 --- [spring-learn] [ restartedMain] c.c.spring_learn.SpringLearnApplication : No active profile set, falling back to 1 default prof
2026-07-05T13:36:28.241+05:30 INFO 27084 --- [spring-learn] [ restartedMain] e.DevToolsPropertyDefaultsPostProcessor : Devtools property defaults active! Set 'spring.devtool
2026-07-05T13:36:28.241+05:30 INFO 27084 --- [spring-learn] [ restartedMain] e.DevToolsPropertyDefaultsPostProcessor : For additional web related logging consider setting ti
2026-07-05T13:36:28.992+05:30 INFO 27084 --- [spring-learn] [ restartedMain] o.s.boot.tomcat.TomcatWebServer : Tomcat initialized with port 8083 (http)
2026-07-05T13:36:29.006+05:30 INFO 27084 --- [spring-learn] [ restartedMain] o.s.boot.tomcat.TomcatWebServer : Starting service [Tomcat]
2026-07-05T13:36:29.007+05:30 INFO 27084 --- [spring-learn] [ restartedMain] o.apache.catalina.core.StandardService : Starting Servlet engine: [Apache Tomcat/11.0.22]
2026-07-05T13:36:29.053+05:30 INFO 27084 --- [spring-learn] [ restartedMain] o.w.c.s.WebApplicationContextInitializer : Root WebApplicationContext: initialization completed
2026-07-05T13:36:29.411+05:30 INFO 27084 --- [spring-learn] [ restartedMain] o.s.boot.tomcat.TomcatWebServer : Tomcat started on port 8083 (http) with context path
2026-07-05T13:36:29.420+05:30 INFO 27084 --- [spring-learn] [ restartedMain] c.c.spring_learn.SpringLearnApplication : Started SpringLearnApplication in 1.684 seconds (proc
2026-07-05T13:36:29.425+05:30 INFO 27084 --- [spring-learn] [ restartedMain] c.c.spring_learn.SpringLearnApplication : END
2026-07-05T13:36:39.101+05:30 INFO 27084 --- [spring-learn] [nio-8083-exec-1] o.a.c.c.C.[Tomcat].[localhost].[/] : Initializing Spring DispatcherServlet 'dispatcherServ
2026-07-05T13:36:39.102+05:30 INFO 27084 --- [spring-learn] [nio-8083-exec-1] o.s.web.servlet.DispatcherServlet : Initializing Servlet 'dispatcherServlet'
2026-07-05T13:36:39.104+05:30 INFO 27084 --- [spring-learn] [nio-8083-exec-1] o.s.web.servlet.DispatcherServlet : Completed initialization in 2 ms
2026-07-05T13:36:39.357+05:30 DEBUG 27084 --- [spring-learn] [nio-8083-exec-1] com.cognizant.spring_learn.Country : Inside Country Constructor.
2026-07-05T13:36:39.361+05:30 DEBUG 27084 --- [spring-learn] [nio-8083-exec-1] com.cognizant.spring_learn.Country : Inside setCode()
2026-07-05T13:36:39.361+05:30 DEBUG 27084 --- [spring-learn] [nio-8083-exec-1] com.cognizant.spring_learn.Country : Inside setName()
2026-07-05T13:36:39.505+05:30 DEBUG 27084 --- [spring-learn] [nio-8083-exec-1] com.cognizant.spring_learn.Country : Inside getCode()
2026-07-05T13:36:39.506+05:30 DEBUG 27084 --- [spring-learn] [nio-8083-exec-1] com.cognizant.spring_learn.Country : Inside getName()
2026-07-05T13:37:03.786+05:30 DEBUG 27084 --- [spring-learn] [nio-8083-exec-7] com.cognizant.spring_learn.Country : Inside Country Constructor.
2026-07-05T13:37:03.787+05:30 DEBUG 27084 --- [spring-learn] [nio-8083-exec-7] com.cognizant.spring_learn.Country : Inside setCode()
2026-07-05T13:37:03.787+05:30 DEBUG 27084 --- [spring-learn] [nio-8083-exec-7] com.cognizant.spring_learn.Country : Inside setName()
2026-07-05T13:37:03.791+05:30 DEBUG 27084 --- [spring-learn] [nio-8083-exec-7] com.cognizant.spring_learn.Country : Inside getCode()
2026-07-05T13:37:03.791+05:30 DEBUG 27084 --- [spring-learn] [nio-8083-exec-7] com.cognizant.spring_learn.Country : Inside getName()
```

