

REST - Get country based on country code

CountryController.java

```
package com.cognizant.spring_learn.controller;

import com.cognizant.spring_learn.Country;
import com.cognizant.spring_learn.service.CountryService;
import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.web.bind.annotation.*;

@RestController
public class CountryController {

    @Autowired
    private CountryService countryService;

    @GetMapping("/countries/{code}")
    public Country getCountry(@PathVariable String code) {

        return countryService.getCountry(code);

    }
}
```

CountryService.java

```
package com.cognizant.spring_learn.service;

import com.cognizant.spring_learn.Country;
import org.springframework.context.ApplicationContext;
import org.springframework.context.support.ClassPathXmlApplicationContext;
import org.springframework.stereotype.Service;

import java.util.List;

@Service
public class CountryService {

    public Country getCountry(String code) {

        ApplicationContext context =
```

```

        new ClassPathXmlApplicationContext("country.xml");

List<Country> countries =
    (List<Country>) context.getBean("countryList");

for (Country country : countries) {
    if (country.getCode().equalsIgnoreCase(code)) {
        ((ClassPathXmlApplicationContext) context).close();
        return country;
    }
}

((ClassPathXmlApplicationContext) context).close();

return null;
}
}

```

Country.xml

```

<?xml version="1.0" encoding="UTF-8"?>

<beans xmlns="http://www.springframework.org/schema/beans"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xsi:schemaLocation="
        http://www.springframework.org/schema/beans
        https://www.springframework.org/schema/beans/spring-beans.xsd">

    <bean id="countryList" class="java.util.ArrayList">
        <constructor-arg>
            <list>

                <bean class="com.cognizant.spring_learn.Country">
                    <property name="code" value="IN"/>
                    <property name="name" value="India"/>
                </bean>

                <bean class="com.cognizant.spring_learn.Country">
                    <property name="code" value="US"/>
                    <property name="name" value="United States"/>
                </bean>
            </list>
        </constructor-arg>
    </bean>

```

```

        <bean class="com.cognizant.spring_learn.Country">
            <property name="code" value="JP"/>
            <property name="name" value="Japan"/>
        </bean>

        <bean class="com.cognizant.spring_learn.Country">
            <property name="code" value="DE"/>
            <property name="name" value="Germany"/>
        </bean>

    </list>
</constructor-arg>
</bean>

</beans>

```

SpringLearnApplication.java

```

package com.cognizant.spring_learn;

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;
import org.springframework.context.ApplicationContext;
import org.springframework.context.support.ClassPathXmlApplicationContext;

@SpringBootApplication
public class SpringLearnApplication {

    private static final Logger LOGGER =
        LoggerFactory.getLogger(SpringLearnApplication.class);

    public static void main(String[] args) {

        LOGGER.info("START");

        SpringApplication.run(SpringLearnApplication.class, args);

        //displayCountry();
    }
}

```

```

    LOGGER.info("END");
}

```

```

public static void displayCountry() {

```

```

    ApplicationContext context =
        new ClassPathXmlApplicationContext("country.xml");

```

```

    Country country =
        context.getBean("country", Country.class);

```

```

    LOGGER.debug("Country : {}", country);

```

```

    ((ClassPathXmlApplicationContext) context).close();

```

```


}

```

```

}

```

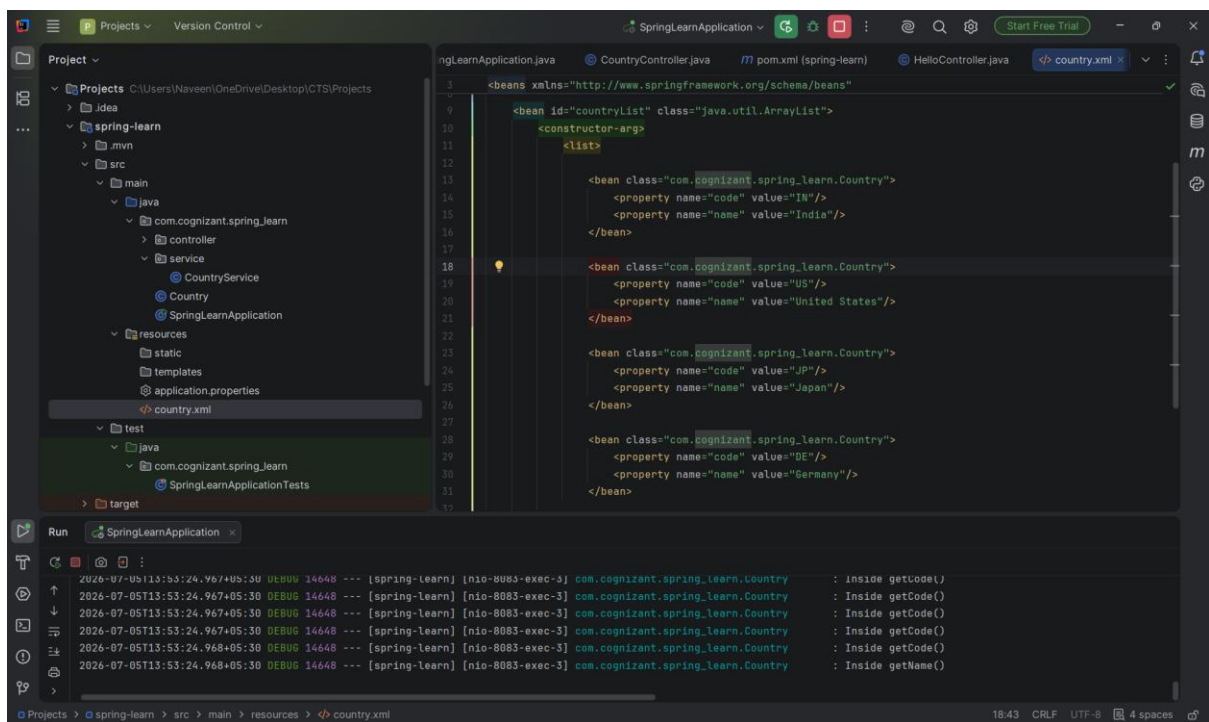

localhost:8083/countries/in

Ask Gemini

localhost:8083/countries/in

☆

Pretty print

```
{
  "code": "IN",
  "name": "India"
}
```

GET Get data

My Collection > Get data

GET localhost:8083/countries/jp

Send

Docs Params Authorization Headers 6 Body Scripts Tests Settings

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 5 Test Results 1/1

JSON Preview Visualize

```
1 {
2   "code": "JP",
3   "name": "Japan"
4 }
```

200 OK · 37 ms · 184 B · Save Response

Globals Vault Tools

COLLECTIONS

My Collection

GET Get data

POST Post data

ENVIRONMENTS

SPECS

FLAWS

Connect Git Console Terminal 0 0 0

GET Get data

My Collection > Get data

GET localhost:8083/countries/de

Send

Docs Params Authorization Headers 6 Body Scripts Tests Settings

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 5 Test Results 1/1

JSON Preview Visualize

```
1 {
2   "code": "DE",
3   "name": "Germany"
4 }
```

200 OK · 32 ms · 186 B · Save Response

Globals Vault Tools

COLLECTIONS

My Collection

GET Get data

POST Post data

ENVIRONMENTS

SPECS

FLAWS

Connect Git Console Terminal 0 0 0