
Revisions			
Rev.	Date	Author	Description
A	18/01/2021	P.L.P	

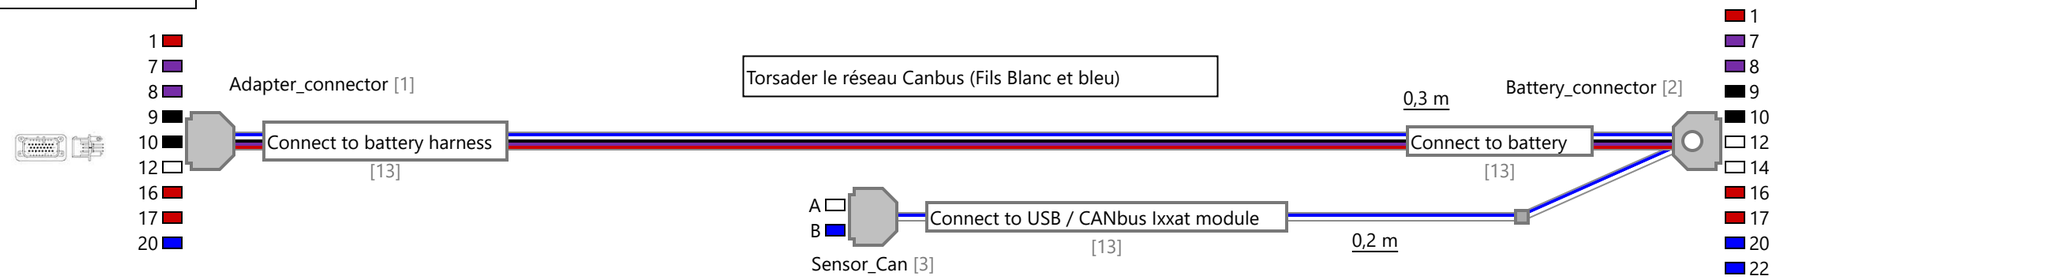

- Ce connecteur mâle [32879] n'est pas un connecteur à sertir, mais à souder (connecteur de circuit imprimé). Les fils doivent y être soudés puis protégés individuellement par une petite gaine thermorétractable.
- Les broches à souder inutilisées doivent être manchonnées individuellement dans une petite gaine thermo, ou coupées à raz.

- Obturer le connecteur mâle SensorCan avec un Delphi femelle 150 bouchonné.

- Bouchonner les cavités inutilisées.
- Utiliser 2 demi-capots [34688] pour protéger les fils

Adapter_connector


From	To	Conductor	Color	Gauge	Twisted With
Adapter_connector.1	Battery_connector.1	W1.Red		1 mm²	
Adapter_connector.7	Battery_connector.7	W4.Violet		1 mm²	
Adapter_connector.8	Battery_connector.8	W5.Violet		1 mm²	
Adapter_connector.9	Battery_connector.9	W8.Black		1 mm²	
Adapter_connector.10	Battery_connector.10	W9.Black		1 mm²	
Adapter_connector.12	Battery_connector.12	W10.White		1 mm²	W11
Adapter_connector.16	Battery_connector.16	W2.Red		1 mm²	
Adapter_connector.17	Battery_connector.17	W3.Red		1 mm²	
Adapter_connector.20	Battery_connector.20	W11.Blue		1 mm²	W10

Sensor_Can

From	To	Conductor	Color	Gauge	Twisted With
Sensor_Can.A	Battery_connector.14	W13.White		1 mm²	W12
Sensor_Can.B	Battery_connector.22	W12.Blue		1 mm²	W13

Battery_connector

From	To	Conductor	Color	Gauge	Twisted With
Battery_connector.1	Adapter_connector.1	W1.Red		1 mm²	
Battery_connector.7	Adapter_connector.7	W4.Violet		1 mm²	
Battery_connector.8	Adapter_connector.8	W5.Violet		1 mm²	
Battery_connector.9	Adapter_connector.9	W8.Black		1 mm²	
Battery_connector.10	Adapter_connector.10	W9.Black		1 mm²	
Battery_connector.12	Adapter_connector.12	W10.White		1 mm²	W11
Battery_connector.14	Sensor_Can.A	W13.White		1 mm²	W12
Battery_connector.16	Adapter_connector.16	W2.Red		1 mm²	
Battery_connector.17	Adapter_connector.17	W3.Red		1 mm²	
Battery_connector.20	Adapter_connector.20	W11.Blue		1 mm²	W10
Battery_connector.22	Sensor_Can.B	W12.Blue		1 mm²	W13

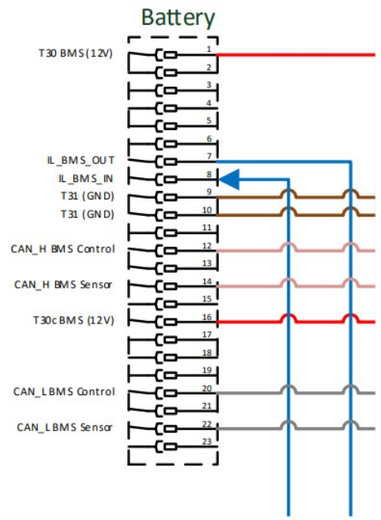

Bill of Materials

Id	Type	Manufacturer	Part Number	Quantity
1	Connector	MOUSER	[32879] Connecteur TE Ampseal mâle 23 ways PCB droit	1
2	Connector	TE	#27308 - Plug TE 23 way F/H BLK	1
3	Connector	Delphi	#15215 - Delphi_150_2_way_male	1
4	Wire		1mm² Red	≥ 0,9 m
5	Wire		1 mm² Purple	≥ 0,6 m
6	Wire		1mm² Black	≥ 0,6 m
7	Wire		1mm² - White	≥ 0,5 m
8	Wire		1mm² - Blue	≥ 0,5 m
13	Label		Generic White Label	3

Title	Diagnostic Kreisel
Part Number	#36647-Diagnostic_Kreisel
Description	
Revision	----

	Name	Date
Drawn By	----	----
Eng Approved	----	----
Mfg Approved	----	----
QA	----	----

rapidHARNESS

This document contains confidential and proprietary information that cannot be reproduced or divulged, in whole or in part, without written authorization.