Revisions			
Rev.	Date	Author	Description
A	21/01/2018	Florent de Labarre	Creation
B	03/02/2020	Pierre Le Prieur	Modifs
C	16/09/2021	P.E	MaJ Faisceau complet
D	18/01/2022	P.E	Ajout indication CAN-Bus + Mise en commun de Vref et Vref Distributor
E	21-Feb-23	P.E	Modifs IDTAG 0 pour passage en MD4-5
F	14-Mar-23	P.E	Ajout controle cavité 65 (+12V) et 66 (0V)
G	03-Apr-23	P.E	Ajout joysticks sur faisceau xMCe
H	11/07/2024	P.E	Modifs Splice 46 et Splice 47
I	04/03/2025	R.F	Inversion joysticks left et right et refonte

Main_MC42

Cavity	To	Conductor	Color	Size	Length
1	CanBus_Main_to_MC4_10.B	W38.Black		0,75 mm²	≥ 0,8 m
2	J1939.B	W40.Black		0,75 mm²	≥ 0,8 m
3	Can_Drive.B	W39.Black		0,75 mm²	≥ 0,8 m
4	IDTag_F.B	W50.White		0,75 mm²	
7	Vref_Plus_Distributor	W59.White		0,75 mm²	
8	R8.POS	W16.White		0,75 mm²	
9	Pressure_block.2	W17.White		0,75 mm²	
10	Pressure_tracks.2	W19.White		0,75 mm²	
17	CanBus_Main_to_MC4_10.A	W21.White		0,75 mm²	≥ 0,8 m
18	J1939.A	W24.White		0,75 mm²	≥ 0,8 m
19	Can_Drive.A	W56.White		0,75 mm²	≥ 0,8 m
20	IDTag_F.A	W49.White		0,75 mm²	
23	Vref_Minus_Distributor	W60.White		0,75 mm²	
24	Joystick_Left.3	W11.White		0,75 mm²	≥ 0,8 m
35	Splice_VREF_Minus	W8.White		0,75 mm²	
36	Joystick_Right.3	W9.White		0,75 mm²	≥ 0,8 m
41	ByPass.2	W62.Black		1 mm²	
42	Landing_DOWN.2	W61.Black		1 mm²	
43	Landing_Unblock.2	W82.Black		1 mm²	
44	Electric_Drive_FuseBox_B1.C	W47.White		0,75 mm²	≥ 0,8 m
46	Splice_C1_46	W14.White		0,75 mm²	
47	Splice_C1_47	W15.White		0,75 mm²	
51	Splice_VREF_Plus	W7.White		0,75 mm²	
57	Landing_UP.2	W81.Black		1 mm²	
58	Track_Tension.2	W80.Black		1 mm²	
59	Landing_Block.2	W78.Black		1 mm²	
60	Electric_Drive_FuseBox_B1.A	W45.White		0,75 mm²	≥ 0,8 m
62	Splice_C1_46	W18.White		0,75 mm²	
63	Splice_C1_47	W20.White		0,75 mm²	
65	12V	W43.Red		2,5 mm²	
66	Supply.B	W44.Black		2,5 mm²	≥ 0,8 m

Couper les Cables non utilisés à 30 cm de la prise.
Isoler avec gaines thermo chaque cable non utilisés.
Faire une chaussette avec gaine thermo de l'ensemble des cables non utilisés.

IDTAG_0

Cavity	To	Conductor	Color	Size
1	IDTag_M.A	W30.Blue		1 mm²
2	IDTag_M.B	W31.Blue		1 mm²

IDTag_M

Cavity	To	Conductor	Color	Size
A	IDTAG_0.1	W30.Blue		1 mm²
B	IDTAG_0.2	W31.Blue		1 mm²

IDTag_F

Cavity	To	Conductor	Color	Size
A	Main_MC42.20	W49.White		0,75 mm²
B	Main_MC42.4	W50.White		0,75 mm²

IDTAG_0 [8]
IDTag_M [3, 12, 19, 35]
IDTag_F [10, 15, 19, 37]
[16] IDTAG 0 (MC21)

Main_MC42 [2] — MC42 — 1 — Splice_C1_47 [23]

[16]

12V [23] — 1

12V

From	To	Conductor	Color	Size
12V	Main_MC42.65	W43.Red		2,5 mm²
12V	Supply.A	W58.Red		2,5 mm²

Splice_C1_47

From	To	Conductor	Color	Size
Splice_C1_47	Electric_Drive_FuseBox_B1.B	W42.Red		1 mm²
Splice_C1_47	Electric_Drive_FuseBox_B1.D	W41.Red		1 mm²
Splice_C1_47	Main_MC42.47	W15.White		0,75 mm²
Splice_C1_47	Main_MC42.63	W20.White		0,75 mm²
Splice_C1_47	Splice_C1_47_Distributeur	W46.Red		1 mm²

Splice_C1_46

From	To	Conductor	Color	Size
Splice_C1_46	ByPass.1	W52.Red		1 mm²
Splice_C1_46	Landing_DOWN.1	W53.Red		1 mm²
Splice_C1_46	Landing_UP.1	W54.Red		1 mm²
Splice_C1_46	Main_MC42.46	W14.White		0,75 mm²
Splice_C1_46	Main_MC42.62	W18.White		0,75 mm²
Splice_C1_46	Track_Tension.1	W55.Red		1 mm²

Splice_C1_46 [23] — 1

[16] By Pass (MC01) — ByPass [1]
[16] UP (MC02) — Landing_UP [1]
[16] DOWN (MC03) — Landing_DOWN [1]
[16] Track (MC04) — Track_Tension [1]

ByPass

Cavity	To	Conductor	Color	Size
1	Splice_C1_46	W52.Red		1 mm²
2	Main_MC42.41	W62.Black		1 mm²

Landing_UP

Cavity	To	Conductor	Color	Size
1	Splice_C1_46	W54.Red		1 mm²
2	Main_MC42.57	W81.Black		1 mm²

Landing_DOWN

Cavity	To	Conductor	Color	Size
1	Splice_C1_46	W53.Red		1 mm²
2	Main_MC42.42	W61.Black		1 mm²

Track_Tension

Cavity	To	Conductor	Color	Size
1	Splice_C1_46	W55.Red		1 mm²
2	Main_MC42.58	W80.Black		1 mm²

Vref_Plus_Distributor [23]
Vref_Minus_Distributor [23]

Vref_Plus_Distributor, Vref_Minus_Distributor

From	To	Conductor	Color	Size
Vref_Minus_Distributor	Main_MC42.23	W60.White		0,75 mm²
Vref_Minus_Distributor	Oil_Level.B	W28.Black		1 mm²
Vref_Minus_Distributor	Pressure_block.1	W26.Black		1 mm²
Vref_Minus_Distributor	Pressure_tracks.1	W27.Black		1 mm²
Vref_Plus_Distributor	Main_MC42.7	W59.White		0,75 mm²
Vref_Plus_Distributor	Pressure_block.3	W32.Red		1 mm²
Vref_Plus_Distributor	Pressure_tracks.3	W33.Red		1 mm²
Vref_Plus_Distributor	R7.NEG	W34.Red		1 mm²

Splice_C1_47_Distributeur [23] — 1

[16] Block (MC05) — Landing_Block [1]
[16] Unblock (MC06) — Landing_Unblock [1]

Landing_Block

Cavity	To	Conductor	Color	Size
1	Splice_C1_47_Distributeur	W48.Red		1 mm²
2	Main_MC42.59	W78.Black		1 mm²

Landing_Unblock

Cavity	To	Conductor	Color	Size
1	Splice_C1_47_Distributeur	W51.Red		1 mm²
2	Main_MC42.43	W82.Black		1 mm²

Splice_C1_47_Distributeur

From	To	Conductor	Color	Size
Splice_C1_47_Distributeur	Landing_Block.1	W48.Red		1 mm²
Splice_C1_47_Distributeur	Landing_Unblock.1	W51.Red		1 mm²
Splice_C1_47_Distributeur	Splice_C1_47	W46.Red		1 mm²

[16] P Block (MC08) — Pressure_block [7, 14, 35]
[16] P Track (MC09) — Pressure_tracks [7, 14, 35]

Pressure_block

Cavity	To	Conductor	Color	Size
1	Vref_Minus_Distributor	W26.Black		1 mm²
2	Main_MC42.9	W17.White		0,75 mm²
3	Vref_Plus_Distributor	W32.Red		1 mm²

Pressure_tracks

Cavity	To	Conductor	Color	Size
1	Vref_Minus_Distributor	W27.Black		1 mm²
2	Main_MC42.10	W19.White		0,75 mm²
3	Vref_Plus_Distributor	W33.Red		1 mm²

R7

From	To	Conductor	Color	Size
R7.NEG	Vref_Plus_Distributor	W34.Red		1 mm²
R7.POS	Splice_Oil_level	W35.Red		1 mm²

R8

From	To	Conductor	Color	Size
R8.NEG	Splice_Oil_level	W37.Red		1 mm²
R8.POS	Main_MC42.8	W16.White		0,75 mm²

1 — R7 [22]
1 — R8 [22]
Splice_Oil_level [23] — 1
[16] Oil (MC17)(GW01) — Oil_Level [5, 13, 20, 36]

Oil_Level

Cavity	To	Conductor	Color	Size
A	Splice_Oil_level	W36.Red		1 mm²
B	Vref_Minus_Distributor	W28.Black		1 mm²

Splice_Oil_level

From	To	Conductor	Color	Size
Splice_Oil_level	Oil_Level.A	W36.Red		1 mm²
Splice_Oil_level	R7.POS	W35.Red		1 mm²
Splice_Oil_level	R8.NEG	W37.Red		1 mm²

Console

[16] Supply (MC16)(IM05) — 0,8 m — Supply [4, 11, 18, 34]

Supply

Cavity	To	Conductor	Color	Size
A	12V	W58.Red		2,5 mm²
B	Main_MC42.66	W44.Black		2,5 mm²

Splice_VREF_Plus

From	To	Conductor	Color	Size
Splice_VREF_Plus	Joystick_Left.2	W25.Violet		1 mm²
Splice_VREF_Plus	Joystick_Right.2	W29.Violet		1 mm²
Splice_VREF_Plus	Main_MC42.51	W7.White		0,75 mm²

Left (xMC23) — 0,8 m [17] — Joystick_Left [9, 14, 37, 38]

Joystick_Left

Cavity	To	Conductor	Color	Size
1	Splice_VREF_Minus	W13.Black		1 mm²
2	Splice_VREF_Plus	W25.Violet		1 mm²
3	Main_MC42.24	W11.White		0,75 mm²

Splice_VREF_Minus

From	To	Conductor	Color	Size
Splice_VREF_Minus	Joystick_Left.1	W13.Black		1 mm²
Splice_VREF_Minus	Joystick_Right.1	W12.Black		1 mm²
Splice_VREF_Minus	Main_MC42.35	W8.White		0,75 mm²

2 — Splice_VREF_Plus [23]
Splice_VREF_Minus [23]

Right (xMC22) — 0,8 m [17] — Joystick_Right [9, 14, 37, 38]

Joystick_Right

Cavity	To	Conductor	Color	Size
1	Splice_VREF_Minus	W12.Black		1 mm²
2	Splice_VREF_Plus	W29.Violet		1 mm²
3	Main_MC42.36	W9.White		0,75 mm²

MC42 (MC_13)(FBA_01) — 0,8 m [16] — Electric_Drive_FuseBox_B1 [6, 15, 21, 35]

Electric_Drive_FuseBox_B1

Cavity	To	Conductor	Color	Size	Notes
A	Main_MC42.60	W45.White		0,75 mm²	Battery Reset
B	Splice_C1_47	W42.Red		1 mm²	
C	Main_MC42.44	W47.White		0,75 mm²	
D	Splice_C1_47	W41.Red		1 mm²	

Main (MC_18)(MD_09) — 0,8 m [16] — CanBus_Main_to_MC4_10 [3, 12, 19, 35]

CanBus_Main_to_MC4_10

Cavity	To	Conductor	Color	Size	Twisted With
A	Main_MC42.17	W21.White		0,75 mm²	
B	Main_MC42.1	W38.Black		0,75 mm²	

J1939 (MC_19)(FBA_03) — 0,8 m [16] — J1939 [3, 12, 19, 35]

J1939


Cavity	To	Conductor	Color	Size	Twisted With
A	Main_MC42.18	W24.White		0,75 mm²	
B	Main_MC42.2	W40.Black		0,75 mm²	

Can_Drive (MC20)(FBA) — 0,8 m [16] — Can_Drive [3, 12, 19, 35]

Can_Drive

Cavity	To	Conductor	Color	Size	Twisted With
A	Main_MC42.19	W56.White		0,75 mm²	
B	Main_MC42.3	W39.Black		0,75 mm²	

Couper les paires Can-Bus à 15cm de la prise MC42 et utilisé du câble blindé pour atteindre la longeur totale.

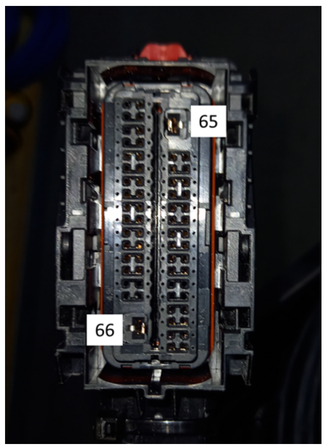

Vérifier que la cavité 65 correspond bien au fil rouge
Vérifier que la cavité 66 correspond bien au fil bleu

Voir Fiche méthode pour branchement bloc hydraulique

Title	#28580 - MC42_X100 Electric (xMCe) - IND H	
Description		Revision

	Name	Date
Drawn By	----	----
Eng Approved	----	----
Mfg Approved	----	----
QA	----	----

This document contains confidential and proprietary information that cannot be reproduced or divulged, in whole or in part, without written authorization.

Title:	#28580 - MC42_X100 Electric (xMCe) - IND H
Description:	

Id	Type	Part Number	Quantity	Description	Manufacturer
1	Connector	#20694 - Phoenix_valve_2_way	6	651-1410723	
2	Connector	#24679 - Parker_C1_66_way	1		
3	Connector	#15215 - Delphi_150_2_way_male	4	Delphi 12162000	Delphi
4	Connector	#17183 - Delphi_480_2_way_male	1	Delphi 12065863	Delphi
5	Connector	#17351 - Delphi_280_2_way_female	1	Delphi 15300027	Delphi
6	Connector	#28050 - Delphi_150_4_way_female	1	Delphi 12160482-B	Delphi
7	Connector	#12189 - Te_Timer_3_way_female	2	571-2821911	TE
8	Connector	#20095- Adress Id-Tags #0	1	5030160	Parker
9	Connector	# 19975 - Automotive Connectors 4P J-P-TIM GEH KPL	2	571-1-963207-1	
10	Connector	#14869 - Delphi_150_2_way_female	1	Delphi 12052641	Delphi
11	Contact	#17237 Delphi_480_contact_male 5mm² 3.49-5.24mm	2	Delphi 12052172	Delphi
12	Contact	#10019 Delphi_150_contact_male 0.5-1.0mm² 1.69-2.78mm	8	Delphi 12045773	Delphi
13	Contact	#14173 Delphi_280_contact_female 2.0-3.0mm² 2.45-3.80mm	2	Delphi 12129493	Delphi
14	Contact	#15166 - Junior TIMER RECPT Contact - JPT	12		TE Connectivity
15	Contact	#13657 Delphi_150_contact_female 0.5-1.0mm² 2.03-2.80mm	6	Delphi 12048074	Delphi
16	Label	Generic White Label	16	Generic Label	
17	Label		2		
18	Lock	#10273 - Delphi_480_2_way_lock	1	Delphi 12059897	Delphi
19	Lock	#19468 - Delphi_150_2_way_lock	5	Delphi 12052634	Delphi
20	Lock	#18797 - Delphi_280_2_way_lock	1	Delphi 15300014-B	Delphi
21	Lock	#22024 - Delphi_150_4_way_female_lock	1	Delphi 12160480	Delphi
22	Resistor	#21463 - 240 Ohm resistor	2		
23	Splice	Generic Splice	9	Generic Splice	
26	Wire	1mm² Black	≥ 1,6 m		
27	Wire	1mm² Red	≥ 1,6 m		
28	Wire	2.5mm² - Black	≥ 0,8 m		
29	Wire	2.5mm² - Red	≥ 0,8 m		
30	Wire	C1_Wire	≥ 4 m		
31	Wire	0,75² White	≥ 1,6 m		
32	Wire	1 mm² Purple	≥ 1,6 m		
33	Wire	1mm² - Blue			
34	Wire Seal	#15414 - Delphi 480 Cable seal – Red – 2.81-3.76	2	Delphi 12052452	Delphi
35	Wire Seal	#17898 - Delphi 150 Cable seal – White – 1.60-2.15	18	Delphi 12089442	Delphi
36	Wire Seal	#13381 - Delphi 280 Cable seal – Green– 2.03-2.85	2	Delphi 12015284	Delphi
37	Wire Seal	#14820 - Delphi 150 Cable seal – Blue – 1.29-1.70	8	Delphi 12052925	Delphi
38	Wire Seal	#19593 - Delphi 150 Cavity plug	2	Delphi 12059168	Delphi
39	Wire	0.75² Black	≥ 2,4 m		