

Student ID Login: Guide for Backend, Frontend, QA and DevOps

Branch: feature/student-id-login · Date: 9 October 2026 · Audience: backend and frontend developers, testers, DevOps

Many students (classes 5–10) don't have an email address, so they can't use "Sign in with Google". This feature lets them **create an account with just their name and a password**. The system then gives them a **Student ID** (for example `ZV7K3M9Q`), which they use with their password to log in.

After logging in, these students can do **everything a Google-login student can do**: open courses, watch videos, take quizzes and coding problems, see progress and the leaderboard. Nothing changes for users who log in with Google.

Item	Value
Backend code	Branch <code>feature/student-id-login</code> (commit <code>5bf4e650</code>), to be merged into <code>chore/development_server_new</code>
Dev API	<code>https://dev.api.zuvy.org</code>
Dev Swagger	<code>https://dev.api.zuvy.org/apis</code>
Dev frontend	<code>https://dev.app.zuvy.org</code>
New APIs	5, all under <code>/auth/student</code>

Who should read what

You are	Read these parts
Everyone	Part A (the big picture, in simple words)
Frontend developer	Part A, Part D (what to build and how to use the Cloudflare token), Part F1–F2 (API details)
Backend developer	Part A, Part B (what changed), Part E (testing in Swagger), Part F (API reference)
Tester (QA)	Part A, Part G (test plan), Part H (database checks), Part J (troubleshooting)
DevOps / server owner	Part A, Part C (server setup)

Contents

- [Part A: The big picture in simple words](#)
- [Part B: What was built in the backend](#)
- [Part C: Server setup for DevOps](#)
- [Part D: Frontend guide](#)
- [Part E: Backend developer guide: testing in Swagger](#)
- [Part F: API reference](#)
- [Part G: Tester guide](#)
- [Part H: Checking the database](#)

- [Part I: Known limitations](#)
 - [Part J: Troubleshooting](#)
-

Part A: The big picture in simple words

A1. The problem

- Today every user signs in with Google, which needs an email address.
- Many young students don't have an email, so they couldn't use Zuvy at all.

A2. The solution

- A student opens the sign-up page and types **their name and a password**.
- The system creates their account and shows them a **Student ID** such as `ZV7K3M9Q`.
- From then on they log in with **Student ID + password**.
- Behind the scenes they are normal students, so **all courses and features work for them exactly like for Google users**.
- **There is no "forgot password" button**. If a student forgets their password, they ask the team. A **super admin** (a developer) sets a new password with an admin API and gives it to the student.

A3. What Cloudflare does (and why we need it)

Because sign-up needs no email and no phone number, a bad actor could write a small program that creates **thousands of fake accounts** in minutes. We need a way to tell **real people** apart from **programs (bots)**.

Cloudflare Turnstile is a free "Are you human?" check, a modern replacement for the old picture puzzles. Think of it as a **security guard at the door**:

1. **The guard checks the visitor**. When the sign-up page opens, a small Cloudflare box appears. Cloudflare checks the browser quietly in the background. Most students see **nothing, or just one checkbox**. No picture puzzles, which suits young children.
2. **The guard gives a one-time pass**. If the visitor looks human, Cloudflare gives the page a **token**: a long random text that works as a one-time pass.
3. **The pass is shown at the counter**. When the student clicks "Create account", the frontend sends the token to our backend together with the name and password.
4. **The counter calls the guard to confirm**. Our backend asks Cloudflare, "Is this pass real?" using a **secret key** that only the server knows. Only if Cloudflare says "yes" is the account created.

Important facts about the token:


- It works **only once** and **expires after 5 minutes**.
- It only proves "a human is here". It is **not a login token**, and it is never stored.
- A bot that calls our API directly has no valid token, so it is refused.

Why not just block by IP address? In a school, 40 students share **one Wi-Fi**, so they all have the **same public IP address**. A strict per-IP limit would block real students. Cloudflare judges **each browser separately**, so every student in the lab passes on their own. We still keep a **high per-IP limit**, but only as a safety ceiling against floods (Part B1).

There are **two keys** from Cloudflare:

Key	Who uses it	Secret?	Where it goes
Site key	Frontend	No, it's public	Frontend config, used to show the box
Secret key	Backend only	Yes, never share or commit	Server <code>.env</code> as <code>TURNSTILE_SECRET_KEY</code>

A4. What happens, step by step

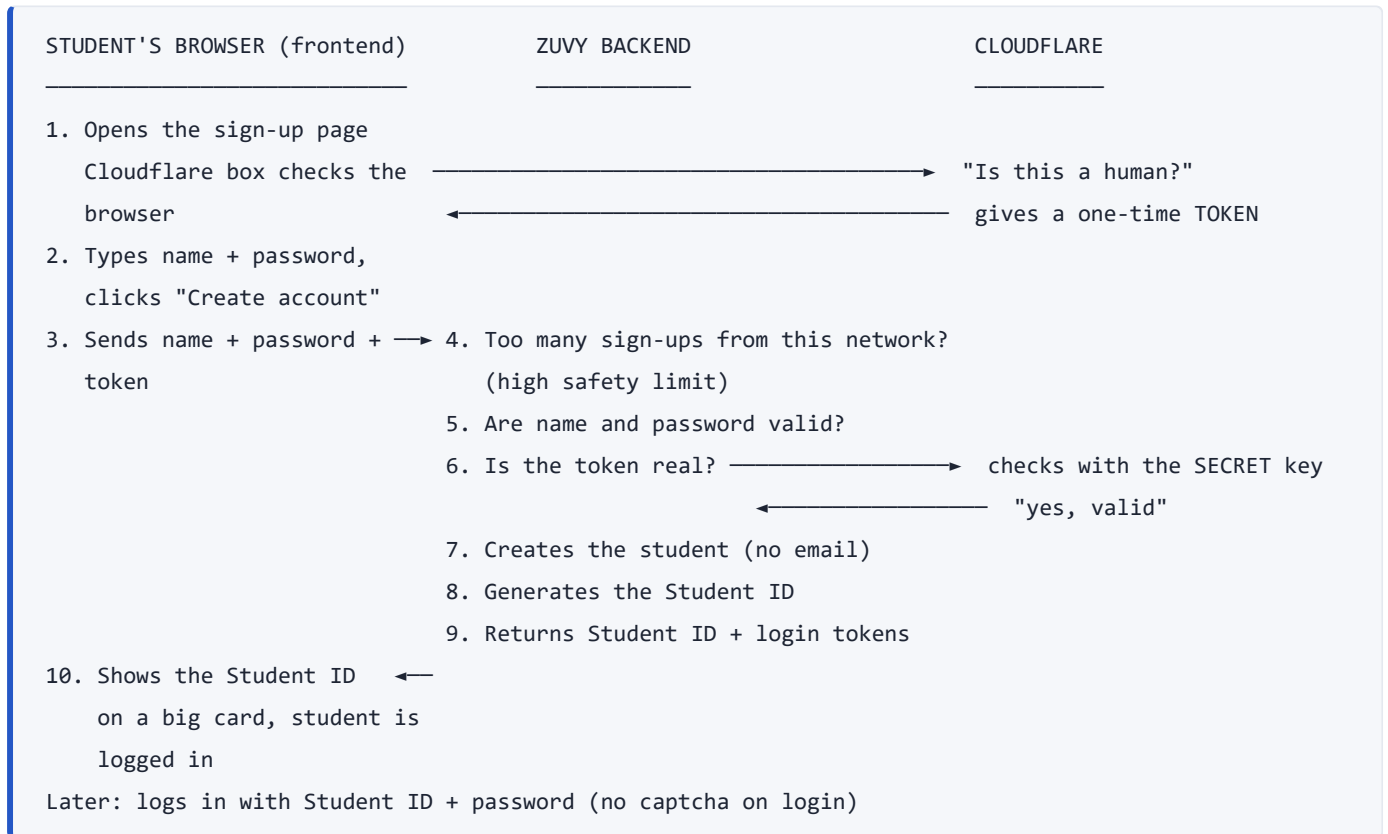

A5. Status: what is done and what is left

Area	Work	Status	Owner
Backend	Sign-up, login, Student ID, password hashing, logout	Done	Backend
Backend	Super admin tools: reset password, find student	Done	Backend
Backend	Enrol a student by Student ID into a course and batch: super admins (any course), org admins and ops (their own organisation's courses), recorded in the activity log	Done (not yet committed)	Backend
Backend	Cloudflare token check, per-IP safety limits, real client IP behind nginx	Done	Backend
Backend	Fixes so email-less students don't break classes, attendance or login checks	Done	Backend
Backend	Unit tests (25 tests)	Done	Backend
Server (dev)	nginx forwards the real client IP	Done	DevOps
Server (dev)	New <code>.env</code> values added	Done	DevOps
Server	Run database migration <code>0043</code> , bind the container port to localhost, check outbound access to Cloudflare (Part C)	To do / confirm	DevOps

Area	Work	Status	Owner
Cloudflare	Create the Turnstile widget and get the site key and secret key (Part C2)	To do / confirm	DevOps / lead
Frontend	Sign-up page with the Cloudflare box, Student ID login, Student ID card, error messages (Part D)	To do	Frontend
Frontend	Admin screen: "Add student by Student ID" in a course's students page (Part D12)	To do	Frontend
QA	Test plan (Part G)	To do after deploy	QA

Part B: What was built in the backend

B1. The rules in simple words

- **Same user table:** the student is a normal row in `users`, with `email` and `google_user_id` both empty (NULL) and `mode = 'student'`.
- **Separate login table:** the Student ID and the password hash live in a new table, `zuvy_student_credentials`, linked to `users.id`.
- **Student ID format:** `ZV` + 6 characters, for example `ZV7K3M9Q`. Look-alike characters (0/O, 1/I/L) are never used, so it's easy to read and type. Login is **case-insensitive** (`zv7k3m9q` works too).
- **Passwords:** 6–64 characters. Never stored as plain text, only as a salted `bcrypt` hash.
- **Lockout:** after **5 wrong passwords**, that one account is locked for **15 minutes**. Classmates on the same Wi-Fi are not affected.
- **Captcha:** sign-up needs a valid Cloudflare token (Part A3). Login has no captcha.
- **Per-IP safety limits**, only on the two Student ID routes (all other APIs have no limit):

Route	Default limit per IP	Can be changed in <code>.env</code> with
Sign-up	60 per minute and 300 per hour	<code>SIGNUP_LIMIT_PER_MINUTE</code> , <code>SIGNUP_LIMIT_PER_HOUR</code>
Login	600 per 15 minutes	<code>LOGIN_LIMIT_PER_15_MINUTES</code>

These are high on purpose: a whole school lab can sign up at the same time without hitting them.

- **Courses:** Public courses enrol the student automatically when they open one, exactly as for Google students. For **private** courses, a **super admin**, or an **admin / ops** of the course's organisation, enrolls them into a batch by Student ID (Part F5). The usual "add students" API can't be used, because it works by email. Moving a student between batches (`PATCH /batch/reassign/...`) and the "unassigned students" list work unchanged, because they use the user id.
- **Same session as Google:** login returns the same `access_token` and `refresh_token`, made by the same code as Google login. `/auth/refresh` and `/auth/logout` work unchanged.

B2. New files

File	What it is
<code>drizzle/migrations/0043_create_zuvy_student_credentials.sql</code>	Creates the <code>zuvy_student_credentials</code> table
<code>src/student-auth/student-auth.module.ts</code>	New Nest module
<code>src/student-auth/student-auth.controller.ts</code>	The 5 new endpoints under <code>/auth/student</code>
<code>src/student-auth/student-auth.service.ts</code>	Sign-up, login, logout, password reset, search and enrol logic
<code>src/student-auth/dto/student-auth.dto.ts</code>	Request body and query validation
<code>src/student-auth/captcha.service.ts</code>	Checks the Cloudflare token with Cloudflare
<code>src/student-auth/student-auth.throttle.ts</code>	Per-IP limits for sign-up and login (read from <code>.env</code>)
<code>src/config/trust-proxy.ts</code>	Which proxies (nginx via Docker) are trusted for the real client IP
<code>src/student-auth/student-auth.service.spec.ts</code>	Unit tests: password hashing and Student ID generation
<code>src/student-auth/captcha.service.spec.ts</code>	Unit tests: the Cloudflare token check
<code>src/student-auth/student-auth.throttle.spec.ts</code>	Tests: per-IP limits behind a proxy, including faked headers

B3. New table: `zuvy_student_credentials`

Column	Type	Meaning
<code>id</code>	serial	Primary key
<code>user_id</code>	bigint, unique, FK → <code>users.id</code> (cascade delete)	The student
<code>student_id</code>	varchar(16), unique	Login ID, e.g. <code>ZV7K3M9Q</code>
<code>password_hash</code>	varchar(255)	<code>bcrypt\$16384\$8\$1\$<salt>\$<hash></code>
<code>failed_attempts</code>	integer, default 0	Wrong passwords in a row
<code>locked_until</code>	timestampz, nullable	Login blocked until this time
<code>password_updated_at</code>	timestampz	Last password change
<code>last_reset_by</code>	bigint, FK → <code>users.id</code>	Super admin who last reset the password
<code>last_reset_at</code>	timestampz	When it was last reset
<code>created_at</code>	timestampz	When the account was created

B4. Changes to existing files

Every change below is a **no-op** for users who have an email: they run exactly the same logic as before. Each change only matters when a user's email is empty.

File	Change	Why it was needed
<code>src/auth/auth.service.ts</code>	The token-issuing half of Google <code>login()</code> moved into a new method, <code>issueLoginSession(user)</code> . Google login calls it unchanged.	Student ID login reuses exactly the same code, so both produce identical tokens.
<code>src/auth/auth.service.ts</code>	<code>isPoc</code> now also requires the user to have an email (login, refresh, org switch).	For email-less users, <code>null === null</code> would wrongly mark them as an organisation's point of contact.
<code>src/middleware/jwt.middleware.ts</code>	(a) <code>/auth/student/signup</code> and <code>/auth/student/login</code> added to the public routes. (b) A token with no email now matches the user on <code>email IS NULL</code> .	(a) Students can sign up and log in without a token. (b) The old check <code>email = <token email></code> can never match an empty email in SQL, so every request from these students would have returned 401. Tokens with an email run the exact same SQL as before.
<code>src/controller/classes/classes.service.ts</code>	Students without an email are left out of Google Calendar and Zoom invite lists (class creation and session merge).	One empty attendee makes Google reject the whole event, which would break class creation for the entire batch.
<code>src/services/attendance-worker/attendance-worker.service.ts</code>	Zoom attendance matching ignores empty emails.	Zoom reports guests with an empty email; without this, a guest could be credited to a student who has no email.
<code>src/services/attendance/attendance-calculation.service.ts</code>	Google Meet attendance matching ignores empty emails.	Same reason as above.
<code>src/controller/student/student.service.ts</code>	<code>email.toLowerCase()</code> → <code>email?.toLowerCase() ?? null</code> in "completed classes with attendance".	It would have crashed for a student without an email.
<code>src/main.ts</code>	<code>app.set('trust proxy', ...)</code> , trusting only nginx's addresses (loopback and Docker's private ranges).	Without it, every request looks like it comes from nginx, so a per-IP limit would be one limit for everyone. No existing code reads the client IP, so other routes behave exactly as before.
<code>drizzle/schema.ts</code>	Added the <code>zuvyStudentCredentials</code> table. Also a type-only fix: the <code>bytea</code> custom type now declares <code>driverData: Buffer</code> .	Drizzle definition of the new table. The type fix removes an editor error; it changes nothing at runtime.
<code>src/app.module.ts</code>	Registered <code>StudentAuthModule</code> .	Turns on the new endpoints.
<code>sample.env</code>	Added the new settings (Part C3).	Documentation for deployments.

Part C: Server setup for DevOps

Do these once per environment (dev first, then stage and production).

C1. Run the database migration

1. Connect to the environment's database with `psql`, DBeaver or pgAdmin.
2. Select the right schema. It is `main` unless the server runs with `ENV_NOTE=stage_template`:

```
SET search_path TO main;          -- or: SET search_path TO stage_template;
```

3. Run the whole file `drizzle/migrations/0043_create_zuvy_student_credentials.sql`.
4. Check that the table exists (you should see 10 columns):

```
SELECT column_name, data_type
FROM information_schema.columns
WHERE table_name = 'zuvy_student_credentials'
ORDER BY ordinal_position;
```

Deploying the code **before** the migration is safe for existing users, because nothing else reads this table. Only the new `/auth/student/*` endpoints fail, with a 500 error, until the table exists.

C2. Create the Cloudflare Turnstile widget (get the keys)

1. Log in at dash.cloudflare.com and open Turnstile in the left menu (on newer dashboards it's under *Application security*).
2. Click **Add widget**:
 - **Name**: Zuvy Student Sign-up
 - **Hostnames**: the **frontend** domains where students sign up, e.g. `dev.app.zuvy.org` and the production frontend domain. Not the API domains.
 - **Widget mode**: **Managed** (most students see one checkbox or nothing)
 - **Pre-clearance**: No
3. Click **Create**. Cloudflare shows two keys:
 - **Site key** → give it to the frontend team (it's public).
 - **Secret key** → put it **only** in the server `.env` (Part C3). Never in frontend code, chat or git.

Your domain does **not** need to use Cloudflare DNS or hosting. Turnstile works on any website and is free.

Use an organisation-owned Cloudflare account, not a personal one. If the person who owns a personal account leaves, nobody can rotate the secret or change the hostnames. If you must start with a personal account, invite a teammate as an admin (*Manage Account* → *Members*). The keys can be swapped later without any code change.

C3. Environment variables (server `.env`)

Variable	Required	Example / default	Meaning
<code>TURNSTILE_SECRET_KEY</code>	Yes (unless the captcha is disabled on dev)	From Cloudflare (C2)	Secret key used to check tokens. Without it (and without <code>CAPTCHA_DISABLED</code>), sign-up returns 503.

Variable	Required	Example / default	Meaning
<code>TURNSTILE_ALLOWED_HOSTNAMES</code>	No	<code>dev.app.zuvy.org</code>	If set, the captcha must have been solved on one of these frontend sites (comma-separated, exact names). Leave empty when using Cloudflare test keys.
<code>CAPTCHA_DISABLED</code>	No	<code>true</code> on dev only	Skips the captcha check so testers can use Swagger. Must be lowercase <code>true</code> . Ignored on production (when <code>BASE_URL</code> contains <code>main-api</code>).
<code>SIGNUP_LIMIT_PER_MINUTE</code>	No	<code>60</code>	Sign-ups allowed per IP per minute
<code>SIGNUP_LIMIT_PER_HOUR</code>	No	<code>300</code>	Sign-ups allowed per IP per hour
<code>LOGIN_LIMIT_PER_15_MINUTES</code>	No	<code>600</code>	Student ID logins allowed per IP per 15 minutes
<code>TRUST_PROXY</code>	No	<code>loopback,uniquelocal</code>	Proxies trusted for the client IP. The default fits nginx on the same EC2 host in front of Docker.

How to write them:

```
TURNSTILE_SECRET_KEY="0x4AAAAAA...your-secret..."
TURNSTILE_ALLOWED_HOSTNAMES="dev.app.zuvy.org"
```

- Double quotes are fine (they match the rest of the file). Use **no spaces** around `=` and no trailing spaces.
- Docker Compose reads `.env` **only when the container starts**. After editing, recreate the container:

```
docker compose -f compose.yaml up -d --force-recreate      # dev
docker compose -f compose_production.yaml up -d --force-recreate  # production
```

- Check the container sees the key without printing it (prints only its length; `0` means missing):

```
docker exec zuvy_container sh -c 'echo ${#TURNSTILE_SECRET_KEY}'
```

Cloudflare test keys (for dev and testing; they never show a real puzzle):

Purpose	Value
Backend test secret: always passes	<code>1x000000000000000000000000000000AA</code>
Backend test secret: always fails	<code>2x000000000000000000000000000000AA</code>
Frontend test site key: always passes	<code>1x000000000000000000000000AA</code>
Token produced by test site keys	<code>XXXX.DUMMY.TOKEN.XXXX</code>

C4. nginx: pass the student's real IP to the API

The API runs in Docker behind nginx. For the per-IP limits to see each student's own IP (and not nginx's), nginx must forward it. On Ubuntu, `include proxy_params;` already sets the needed headers (`Host`, `X-Real-IP`, `X-Forwarded-For`, `X-Forwarded-Proto`), so don't add them a second time.

Recommended API server block for dev:

```
server {
    server_name dev.api.zuvy.org;

    location / {
        proxy_pass http://127.0.0.1:5001/;
        include proxy_params;      # sets Host, X-Real-IP, X-Forwarded-For, X-Forwarded-Proto
    }

    listen 443 ssl; # managed by Certbot
    ssl_certificate /etc/letsencrypt/live/dev.api.zuvy.org/fullchain.pem; # managed by Certbot
    ssl_certificate_key /etc/letsencrypt/live/dev.api.zuvy.org/privkey.pem; # managed by Certbot
    include /etc/letsencrypt/options-ssl-nginx.conf; # managed by Certbot
    ssl_dhparam /etc/letsencrypt/ssl-dhparams.pem; # managed by Certbot
}
```

- Use `127.0.0.1` rather than `localhost` in `proxy_pass` (`localhost` can resolve to IPv6 first).
- Apply with `sudo nginx -t && sudo systemctl reload nginx`.
- If `nginx -t` warns `conflicting server name`, another file also declares the same domain. Find it with `sudo grep -rn "dev.api.zuvy.org" /etc/nginx/sites-enabled/ /etc/nginx/conf.d/` and remove the duplicate (often a backup copy left in `sites-enabled`).
- If **Cloudflare's proxy** sits in front of nginx (`curl -sI https://dev.api.zuvy.org | grep -i cf-ray` prints something), nginx also needs its `real_ip` module with Cloudflare's IP ranges and `real_ip_header CF-Connecting-IP`; . Otherwise every request carries Cloudflare's IP.

C5. Docker: only nginx should reach the container

The compose files publish the API port on **all** network interfaces (`5001` dev, `4778` stage, `4777` production), so someone could skip nginx and send a fake IP header. Because nginx uses `127.0.0.1`, bind the port to localhost in the compose file:

```
ports:
  - '127.0.0.1:5001:5000'
```

Then recreate the container. If you prefer not to change the compose files, block these ports from the internet in the **EC2 security group** instead. (Change the compose files in git, not only on the server, because the deploy runs `git pull`.)

C6. Outbound access to Cloudflare

The backend calls `https://challenges.cloudflare.com` to check tokens. EC2 allows outbound traffic by default; confirm from inside the container:

```
docker exec zuvy_container wget -qO- --spider https://challenges.cloudflare.com && echo OK
```

C7. Server checklist

- ☐ Migration `0043` run on this environment's database (C1)
- ☐ Turnstile widget created; site key given to frontend; secret key in `.env` (C2, C3)
- ☐ `.env` values added and container recreated; key length check is not `0` (C3)

- ☐ nginx uses `include proxy_params;` and `127.0.0.1;` `nginx -t` shows no conflict warning (C4)
- ☐ Container port bound to `127.0.0.1` or blocked in the security group (C5)
- ☐ Container can reach `challenges.cloudflare.com` (C6)
- ☐ QA test TC-42 passes: one network blocked by the limit, another network still works (Part G)

Part D: Frontend guide

D1. What the frontend needs to build

Screen	What it does
Student sign-up page	Name, password, confirm password, the Cloudflare box , and a "Create account" button
Student ID card	Shown right after sign-up: the Student ID in big letters, with Download / Print buttons
"Login with Student ID"	Next to "Sign in with Google": Student ID + password fields

Everything after login (dashboard, courses, refresh, logout) is the **same as for Google users**.

D2. How the Cloudflare token works in the frontend

```

Sign-up page loads
└─ Cloudflare box appears (uses the SITE KEY) and checks the browser
    └─ Cloudflare gives the page a TOKEN (via the onSuccess callback)
        └─ Enable the "Create account" button
            └─ POST /auth/student/signup { name, password, captchaToken: TOKEN }
                └─ success (201): save session, show the Student ID card
                └─ error: show the message AND reset the box (to get a new token)
  
```

Rules:

1. **One token = one sign-up attempt.** After any attempt (success or error), reset the box to get a fresh token.
2. **Tokens expire after 5 minutes.** If the student waits too long, Cloudflare calls `onExpire`; clear the token and keep the button disabled until a new one arrives.
3. **Only send the token to `/auth/student/signup`.** Login doesn't use a captcha.
4. **Don't store the token** (no `localStorage`, no cookies). It's only for that one request.
5. **Never put the secret key in the frontend**, and never call Cloudflare's `siteverify` URL from the browser. The backend does that.

D3. Site key per environment

Environment	Site key to use	Backend secret it must pair with
Local development	<code>1x00000000000000000000AA</code> (Cloudflare test key, always passes)	Test secret <code>1x000000000000000000000000000000AA</code> , or <code>CAPTCHA_DISABLED=true</code>
Dev (<code>dev.app.zuvy.org</code>)	Real site key from Cloudflare (or the test key while testing)	Matching real secret (or the test secret)
Production	Real site key	Real secret

Keep it in the frontend's env config, for example `NEXT_PUBLIC_TURNSTILE_SITE_KEY` (Next.js) or `VITE_TURNSTILE_SITE_KEY` (Vite). It's public, so this is safe.

A token made with a **test** site key is rejected by a **real** secret key. Keep the frontend and backend keys from the same pair.

D4. Code example: React / Next.js

Install the small wrapper library:

```
npm install @marsidev/react-turnstile
```

Sign-up form:

```

'use client';
import { useRef, useState } from 'react';
import { Turnstile, type TurnstileInstance } from '@marsidev/react-turnstile';

const API_URL = process.env.NEXT_PUBLIC_API_URL; // e.g. https://dev.api.zuvy.org
const SITE_KEY = process.env.NEXT_PUBLIC_TURNSTILE_SITE_KEY!;

export function StudentSignupForm() {
  const turnstileRef = useRef<TurnstileInstance>(null);
  const [captchaToken, setCaptchaToken] = useState('');
  const [submitting, setSubmitting] = useState(false);
  const [error, setError] = useState('');

  async function handleSubmit(e: React.FormEvent<HTMLFormElement>) {
    e.preventDefault();
    const form = new FormData(e.currentTarget);
    setSubmitting(true);
    setError('');
    try {
      const res = await fetch(`${API_URL}/auth/student/signup`, {
        method: 'POST',
        headers: { 'Content-Type': 'application/json' },
        body: JSON.stringify({
          name: form.get('name'),
          password: form.get('password'),
          captchaToken,
        }),
      });
      const data = await res.json();
      if (!res.ok) {
        setError(signupErrorMessage(res.status, data.message));
        return;
      }
      saveSession(data); // the same function used after Google login
      showStudentIdCard(data.studentId); // big card with Download / Print
    } catch {
      setError('Network problem. Please check your internet and try again.');
```

} finally {
 // A token works only once: always get a fresh one for the next attempt.
 turnstileRef.current?.reset();
 setCaptchaToken('');
 setSubmitting(false);
 }
 }

 return (
 <form onSubmit={handleSubmit}>

```

    <input name="name" placeholder="Your full name" minLength={2} maxLength={100} required />
    <input name="password" type="password" placeholder="Password" minLength={6} maxLength={64}
required />
    <Turnstile
      ref={turnstileRef}
      siteKey={SITE_KEY}
      onSuccess={setCaptchaToken}
      onExpire={() => setCaptchaToken('')}
      onError={() => setCaptchaToken('')}
    />
    {error && <p role="alert">{error}</p>}
    <button type="submit" disabled={!captchaToken || submitting}>
      {submitting ? 'Creating account...' : 'Create account'}
    </button>
  </form>
);
}

function signUpErrorMessage(status: number, message: string | string[]) {
  if (status === 400) return Array.isArray(message) ? message[0] : message; // validation or captcha
  if (status === 429) return message; // says how long to wait
  if (status === 503) return 'Sign-up is temporarily unavailable. Please try again later.';
  return 'Something went wrong. Please try again.';
}

```

Disabling the button while `submitting` also stops a double-click from creating two accounts.

D5. Code example: plain HTML / JavaScript

```
<script src="https://challenges.cloudflare.com/turnstile/v0/api.js?onload=initCaptcha&render=explicit"
async defer></script>
<div id="captcha"></div>

<script>
  let captchaToken = '';
  let widgetId;

  function initCaptcha() {
    widgetId = turnstile.render('#captcha', {
      sitekey: 'YOUR_SITE_KEY',
      callback: (token) => { captchaToken = token; },      // enable the button here
      'expired-callback': () => { captchaToken = ''; },
      'error-callback': () => { captchaToken = ''; },
    });
  }

  // After every sign-up attempt (success or error):
  //   turnstile.reset(widgetId); captchaToken = '';
</script>
```

D6. Login with Student ID

```
const res = await fetch(`${API_URL}/auth/student/login`, {
  method: 'POST',
  headers: { 'Content-Type': 'application/json' },
  body: JSON.stringify({ studentId, password }),    // no captcha on login
});
```

- Accept the Student ID in any case; the backend ignores case and spaces around it.
- On success, handle the response **exactly like Google login**: store `access_token` and `refresh_token` the same way, then use the same refresh and logout calls.

D7. Error messages to show

API	Status	Meaning	What the UI should do
Sign-up	400	Invalid name/password, missing or failed captcha	Show the message; reset the Cloudflare box
Sign-up	429	Too many sign-ups from this network	Show the server message (it says to wait a few minutes)
Sign-up	503	Captcha not configured on the server, or Cloudflare down	"Sign-up is temporarily unavailable. Please try again later."
Sign-up	500	Server or database problem	"Something went wrong. Please try again."

API	Status	Meaning	What the UI should do
Login	401	Wrong Student ID or password	"Wrong Student ID or password."
Login	429	Account locked (5 wrong passwords), or too many logins	Show the server message (it says how many minutes to wait)

D8. After sign-up and login

- **Student ID card (very important):** there is no "forgot password" and no email, so the Student ID is the student's only way back in. Show it in big letters, ask them to write it down (for example a "I have written it down" checkbox), and offer **Download** and **Print**.
- **Remember the last Student ID on the device** (localStorage) and pre-fill it on the login page. Never store the password.
- `user.email` is `null` for these students. Anywhere the UI shows the user's email (header, profile, leaderboard), show the name or the Student ID instead of "null".
- **Forgot password:** show a short note on the login page, e.g. "Forgot your password? Ask your teacher or the Zuvy team."

D9. Content-Security-Policy

If the frontend sets a CSP header, allow Cloudflare, or the box won't load:

```
script-src ... https://challenges.cloudflare.com;
frame-src ... https://challenges.cloudflare.com;
```

D10. Testing the frontend with Cloudflare test site keys

Test site key	Behaviour	Use it to test
1x00000000000000000000AA	Always passes (box visible)	The normal sign-up flow
2x00000000000000000000AB	Always fails (box visible)	No token arrives; button stays disabled; error shown
3x00000000000000000000FF	Always shows an interactive challenge	How the page looks when Cloudflare asks the student to click

D11. Frontend checklist

- ☐ Sign-up page with name, password and the Cloudflare box
- ☐ "Create account" disabled until a token arrives, and while the request is running
- ☐ Token sent as `captchaToken` in `POST /auth/student/signup`
- ☐ Box reset after every attempt; expired token clears the button
- ☐ Student ID card with Download / Print after sign-up
- ☐ "Login with Student ID" option next to Google, using `POST /auth/student/login`
- ☐ Session handled exactly like Google login (tokens, refresh, logout)
- ☐ No "null" shown where an email would appear
- ☐ Error messages from D7
- ☐ Site key from env config; secret key never in frontend code
- ☐ CSP allows `challenges.cloudflare.com` (if a CSP is used)
- ☐ Admin screen: "Add student by Student ID" (D12)

D12. Admin screen: add a student by Student ID

Org admins, ops and super admins need a way to put a Student ID student into a **private** course's batch. The existing "Add students" dialog (email list / CSV) can't do it, because it works by email.

What to build on the course's students page, next to the existing "Add students" button: an **"Add by Student ID"** dialog with:

1. A **Student ID** text field (accept any case; the backend uppercases it).
2. A **batch** dropdown (the course's batches; always send one).
3. An **Add** button that calls:

```
const res = await fetch(`${API_URL}/auth/student/admin/enroll`, {
  method: 'POST',
  headers: { 'Content-Type': 'application/json', Authorization: `Bearer ${accessToken}` },
  body: JSON.stringify({ studentId, bootcampId: course.id, batchId }),
});
```

Show the result clearly:

Status	Show
200	"Riya Sharma (ZV7K3M9Q) added to Batch 2", using <code>data.name</code> from the response, so the admin can confirm it's the right student. Refresh the students list.
404	"No student with this Student ID" (or "Batch not found")
409	"This student is already in this course"
400	"This batch is full"
403	"You can only add students to your own organisation's courses. Switch to the right organisation."

Show the button only to **admin**, **ops** and **super admin** users. Hide it for instructors (they would get 403).

In the students list these students show **no email**. Show their name, and the Student ID if available.

Part E: Backend developer guide: testing in Swagger

E1. Run the unit tests locally

The project's `package.json` Jest config points to a `libs/` folder that doesn't exist, so `npm test` fails before running anything. Use this small local config instead (create it in the project root; **don't commit it**):

```
// jest.student-auth.config.js
module.exports = {
  rootDir: __dirname,
  roots: ['<rootDir>/src'],
  moduleFileExtensions: ['js', 'json', 'ts'],
  moduleDirectories: ['node_modules', '<rootDir>'],
  testEnvironment: 'node',
  transform: { '^.+\\.ts$': ['ts-jest', { isolatedModules: true }] },
};
```

```
npx jest -c jest.student-auth.config.js --runInBand --forceExit src/student-auth
```

Expected: Test Suites: 3 passed, Tests: 25 passed. (Error logs such as Turnstile request failed: timeout are expected: the tests exercise failure paths.)

E2. Swagger basics

1. Open <https://dev.api.zuvy.org/apis> (locally: <http://localhost:<PORT>/apis>). Swagger is turned off on production.
2. Find the section "Student ID Authentication". All 5 new endpoints are there.
3. To call an endpoint: expand it, click Try it out, edit the body, click Execute.
4. To call a protected endpoint: copy the `access_token` from a sign-up or login response → click Authorize (padlock, top right) → paste only the token (Swagger adds Bearer) → Authorize → Close.
5. To switch user: Authorize → Logout, then authorize with the other token.

E3. The captcha in Swagger

Swagger can't show the Cloudflare box, so on the dev server use one of these:

Dev .env setting	What to send as <code>captchaToken</code> in sign-up
<code>CAPTCHA_DISABLED="true"</code>	Leave <code>captchaToken</code> out (or send anything)
<code>TURNSTILE_SECRET_KEY="1x000000000000000000000000000000AA"</code>	<code>"XXXX.DUMMY.TOKEN.XXXX"</code> (runs the real check against Cloudflare)

On production neither works: a real token from the frontend is always required.

E4. Getting a super admin token (for the admin APIs)

1. Log in to the dev web app (<https://dev.app.zuvy.org>) with a Google account that is a super admin on dev.
2. Open DevTools (F12) → Network tab.
3. Click any request to the API and copy the value after `Authorization: Bearer`.
4. Paste it in Swagger's Authorize dialog.

No super admin account on dev? Ask an existing super admin to add your email with `POST /super-admin`.

E5. Swagger walkthrough (about 20 minutes)

Use `CAPTCHA_DISABLED="true"` on dev for steps 1–13. The `TC-xx` numbers point to the full test cases in Part G3.

1. **Sign up** a student (TC-01). Check: status 201, `studentId` like `ZV7K3M9Q`, `user.email` is `null`, `user.rolesList` is `["student"]`. Note the `studentId`, `access_token` and `refresh_token`.
2. **Check validation** (TC-03 to TC-05): short name, short password and an extra `email` field each return 400.
3. **Log in** with the Student ID (TC-06) and with it in lowercase (TC-07). Both 200; `showTooltip` is `false`.
4. **Wrong password and unknown ID** (TC-08, TC-09): both 401 with the **same** message.
5. **Use the student token** (TC-13 to TC-15): authorize with the `access_token`; `GET /student/` returns 200 (not 401), and opening a public course enrolls the student.
6. **Refresh and logout** (TC-17 to TC-19).
7. **Lockout** (TC-10, TC-11): 5 wrong passwords, then the correct one returns 429.
8. **Super admin tools** (TC-20 to TC-32): authorize as a super admin; reset a password (generated and chosen), search by name, enrol in a private course with a `batchId`, try the edge cases.
9. **Non-admin access** (TC-31, TC-32): the admin APIs return 403 for a normal user and 401 with no token.
10. **Enrolment by org admin and ops** (TC-47 to TC-52): log in to the dev web app as an **org admin** and as an **ops** user, copy their tokens, and enrol into their own organisation's course (200) and another organisation's course (403). Check `GET /trackinglog` shows the "enroll_student" entry.
11. **Database check** (Part H): the new rows exist, `email` is `NULL`, `password_hash` starts with `script$`.
12. **Response headers**: in a sign-up or login response, check the `x-ratelimit-remaining-...` headers are present (they show the per-IP limits are active).
13. **Logs**: run `docker logs zuvy_container --tail 100`. A password reset logs `Password reset for Student ID . ..`; a rejected captcha logs `Captcha rejected: ...`.
14. **Captcha and limits** (TC-37 to TC-46): needs `.env` changes on dev; coordinate with DevOps and restore the values afterwards.

E6. Before merging

- ☐ Unit tests pass (E1)
- ☐ Type check shows no new errors: `npx tsc --noEmit -p tsconfig.json`
- ☐ Swagger walkthrough E5 steps 1–13 pass on dev
- ☐ Regression tests RG-01 to RG-12 (Part G4) pass on dev

Part F: API reference

All examples use `ZV7K3M9Q` as the Student ID. Use the ID you actually receive.

F1. Sign up: `POST /auth/student/signup`

Creates the account and logs the student in straight away.

- **Login needed**: no (public)
- **Request body**:

```
{
  "name": "Riya Sharma",
  "password": "riya@2026",
  "captchaToken": "XXXX.DUMMY.TOKEN.XXXX"
}
```

- **Rules:**
 - `name`: 2–100 characters. Spaces at the start and end are removed, and repeated spaces become one.
 - `password`: 6–64 characters.
 - `captchaToken`: the token from the Cloudflare box. Required unless `CAPTCHA_DISABLED=true` on dev.
 - No other fields are allowed. For example, sending `email` returns 400.
- **Order of checks:** per-IP limit → input validation → captcha → account creation. A failed captcha never creates anything in the database.
- **Success:** `201 Created`

```
{
  "studentId": "ZV7K3M9Q",
  "access_token": "eyJhbGciOi...",
  "refresh_token": "eyJhbGciOi...",
  "showTooltip": true,
  "user": {
    "id": "48213",
    "email": null,
    "name": "Riya Sharma",
    "profilePicture": null,
    "role": "student",
    "center": null,
    "rolesList": ["student"],
    "orgId": null,
    "orgName": null,
    "isPoc": false,
    "permissions": {}
  }
}
```

Everything except `studentId` has exactly the same shape as the Google login response (`POST /auth/login`).

- **Errors:**

Status	When	Example message
400	Name too short or long, password too short or long, or an extra field	<code>["password must be longer than or equal to 6 characters"]</code>
400	No captcha token	<code>Captcha is required</code>
400	Cloudflare rejected the token (invalid, expired, already used, or solved on another site)	<code>Captcha verification failed. Please try again.</code>
429	Too many sign-ups from this IP	<code>Too many requests from this network. Please wait a few minutes and try again.</code>
503	<code>TURNSTILE_SECRET_KEY</code> not set on the server	<code>Sign-up is temporarily unavailable. Please try again later.</code>
503	Cloudflare couldn't be reached	<code>Could not verify the captcha. Please try again.</code>

Status	When	Example message
500	Table missing (migration not run) or a database error	Could not create the account

F2. Log in: `POST /auth/student/login`

- **Login needed:** no (public)
- **Request body:**

```
{
  "studentId": "ZV7K3M9Q",
  "password": "riya@2026"
}
```

`studentId` is case-insensitive and spaces around it are ignored. There is no captcha on login.

- **Success:** `200 OK`: same shape as sign-up (`studentId` , `access_token` , `refresh_token` , `showTooltip` , `user`). `showTooltip` is `false` after the first login.
- **Errors:**

Status	When	Message
400	Field missing or empty	validation message
401	Wrong Student ID or wrong password (deliberately the same message)	Invalid Student ID or password
429	5 wrong passwords in a row; this account is locked for 15 minutes	Too many wrong attempts. Try again after 15 minute(s).
429	Too many login attempts from this IP (default 600 per 15 minutes)	Too many requests from this network. Please wait a few minutes and try again.

F3. Reset a password (super admin): `POST /auth/student/admin/reset-password`

Use this when a student forgets their password.

- **Login needed:** yes, as a super admin
- **Request body:** set a specific password

```
{
  "studentId": "ZV7K3M9Q",
  "newPassword": "newpass123"
}
```

- **Request body:** let the server generate one (8 easy-to-read characters)

```
{
  "studentId": "ZV7K3M9Q"
}
```

- **Success:** `200 OK`

```
{
  "status": "success",
  "message": "Password updated. Share it with the student; it is not shown again.",
  "data": {
    "studentId": "ZV7K3M9Q",
    "userId": "48213",
    "name": "Riya Sharma",
    "password": "k7mq4x2d"
  }
}
```

The reset also **removes any logout**. Who reset it and when is saved in `last_reset_by` and `last_reset_at`.

- **Errors:**

Status	When	Message
400	<code>newPassword</code> shorter than 6 or longer than 64 characters	validation message
401	No token, or an invalid token	<code>Token not found</code> / <code>Invalid token</code>
403	Caller is not a super admin	<code>Only super admins can manage Student IDs</code>
404	Student ID does not exist	<code>Student ID not found</code>

F4. Find students (super admin): `GET /auth/student/admin/students`

Use this to look up a student's Student ID by name, or to check an account.

- **Login needed:** yes, as a **super admin**
- **Query parameters** (pass `studentId` or `name`, or both):

Param	Example	Meaning
<code>studentId</code>	<code>ZV7K3M9Q</code>	Exact Student ID
<code>name</code>	<code>riya</code>	Part of the name (case-insensitive)
<code>limit</code>	<code>20</code>	1–100, default 20

- **Example:** `GET /auth/student/admin/students?name=riya`
- **Success:** `200 OK`

```
{
  "status": "success",
  "data": [
    {
      "userId": "48213",
      "studentId": "ZV7K3M9Q",
      "name": "Riya Sharma",
      "createdAt": "2026-10-08 10:15:22.481+00",
      "lastLoginAt": "2026-10-08 10:20:03.112+00",
      "lockedUntil": null,
      "lastResetAt": null
    }
  ]
}
```

- **Errors:** 400 (neither `studentId` nor `name` given: `Pass a studentId or a name to search`), 401, 403.

F5. Enrol in a course (super admin, or org admin / ops): `POST /auth/student/admin/enroll`

The existing admin "add students" API (`POST /bootcamp/students/:bootcamp_id`) finds students **by email**, so it can't add these students. Use this endpoint for **private** courses. Public courses don't need it.

- **Who can call it:**

Caller	Can enrol into
Super admin	Any course
Admin or ops of an organisation	Only courses of the organisation they are currently logged into (their active org)
Instructor, student, anyone else	Nothing (403)

An admin or ops user who belongs to several organisations must first switch to the course's organisation (`POST /org/switch-org`), then call this API with the new token.

- **Request body:**

```
{
  "studentId": "ZV7K3M9Q",
  "bootcampId": 12,
  "batchId": 34
}
```

`batchId` is optional, but **always send it**. `GET /student/` (the student's "My courses") only lists enrolments that have a batch.

- **Order of checks:** course looked up → permission checked (403) → course exists (404) → Student ID exists (404) → batch belongs to the course and has space → enrol. The permission is checked first, so a caller without permission can't learn whether a course or Student ID exists.
- **Success:** `200 OK`. The response includes the student's **name**, so the admin can confirm they typed the right Student ID:

```
{
  "status": "success",
  "message": "Student ZV7K3M9Q enrolled in Full Stack Web Development",
  "data": {
    "studentId": "ZV7K3M9Q",
    "userId": "48213",
    "name": "Riya Sharma",
    "bootcampId": 12,
    "bootcampName": "Full Stack Web Development",
    "batchId": 34
  }
}
```

If the student is already in the course and you pass a **different** `batchId`, the student is moved: `"message": "Student moved to the selected batch"`, with the same `data`.

- **Activity log:** every call is recorded in the organisation's activity log (`zuvy_tracking_logs` , shown by `GET /trackinglog`) as **"enroll_student"**, exactly like the normal "add students" API, including failed attempts.
- **Errors:**

Status	When	Message
400	Batch is full	The maximum capacity for the batch has been reached
403	Not a super admin, and not admin/ops of the course's organisation	Only super admins, or admins and ops of this course's organisation, can enrol students by Student ID
404	Wrong Student ID, course or batch	Student ID not found / Course not found / Batch not found in this course
409	Already enrolled (same batch, or no batch given)	Student is already enrolled in this course

F6. Existing endpoints that work unchanged for these students

Endpoint	Body or note
<code>POST /auth/refresh</code>	<code>{ "refresh_token": "<refresh_token>" }</code> ; returns a new pair, and the old refresh token stops working
<code>POST /auth/logout</code>	Authorize with the student's access token; afterwards that token returns 401
<code>GET /student/</code>	Courses the student is enrolled in (<code>inProgressBootcamps</code> , <code>completedBootcamps</code>)
<code>GET /student/bootcamp/public</code>	Public courses
<code>GET /tracking/allModulesForStudents/{bootcampId}</code>	Modules of a course (also auto-enrols in a public course)
<code>GET /tracking/bootcampProgress/{bootcampId}</code>	Course progress
<code>GET /student/leaderboard/{bootcampId}</code>	Leaderboard (the student appears with <code>email: null</code>)

Part G: Tester guide

G1. What you need

- Access to the **dev web app** (<https://dev.app.zuvy.org>) and **dev Swagger** (<https://dev.api.zuvy.org/apis>).
- A **super admin** Google account on dev (for password resets and enrolment).
- An **org admin** and an **ops** Google account on dev, and the id of one course in **their** organisation and one course in **another** organisation (for TC-47 to TC-52).
- **Two different internet connections** for the rate-limit tests, for example office Wi-Fi and a phone hotspot.
- Someone who can change the dev server's `.env` (only for section G3.6).
- Optional: read access to the dev database (Part H).

Test in this order: **G2** (in the browser, once the frontend is ready), **G3** (APIs in Swagger), **G4** (regression for email users).

G2. Browser tests (after the frontend is ready)

ID	Steps	Expected result
UI-01	Open the student sign-up page	The Cloudflare box appears. "Create account" stays disabled until the box shows success.
UI-02	Enter a name and password, click "Create account"	Account created. A big Student ID card appears with Download / Print. The student is logged in.
UI-03	Download or print the Student ID card	The file or printout shows the correct Student ID.
UI-04	Log out, then "Login with Student ID" with the ID and password	Logged in; dashboard loads.
UI-05	Log in with the Student ID typed in lowercase	Works.
UI-06	Log in with a wrong password	"Wrong Student ID or password." No hint about which one was wrong.
UI-07	Enter a wrong password 5 times, then the correct one	A message says the account is locked and how many minutes to wait.
UI-08	While UI-07's account is locked, log in to another Student ID account from the same Wi-Fi	Works: the lock only affects one account.
UI-09	Open the sign-up page, complete the box, wait more than 5 minutes , then click "Create account"	The button is disabled or an error appears; the box resets; trying again works.
UI-10	Double-click "Create account" quickly	Only one account is created (check with Part H).
UI-11	School lab: 10 or more devices on the same Wi-Fi sign up within a few minutes	All succeed. Nobody gets "Too many requests".
UI-12	As a Student ID student, open a public course, finish a chapter, a quiz and a coding problem	Works like a Google student. Progress and leaderboard update.
UI-13	Check every place that normally shows an email (header, profile, leaderboard)	No "null" or broken layout; the name or Student ID is shown instead.

ID	Steps	Expected result
UI-14	Close the browser and come back the next day	Still logged in (session refresh works like Google users).
UI-15	"Forgot password": a super admin resets it (TC-20), then log in with the new password	Works.
UI-16	On the same login page, sign in with Google as an email user	Works exactly as before.
UI-17	As an org admin , and again as ops , open a private course's students page and use "Add by Student ID" with a batch	The student's name is shown to confirm; the student appears in that batch and now sees the course.

G3. API tests in Swagger

Write down the `studentId`, `access_token` and `refresh_token` from TC-01; later tests use them. Sections G3.1–G3.5 assume the dev server has `CAPTCHA_DISABLED="true"`, so sign-up bodies can leave out `captchaToken`. If dev uses the Cloudflare test secret instead, add `"captchaToken": "XXXX.DUMMY.TOKEN.XXXX"` to every sign-up body.

G3.1 Sign-up and login

ID	Steps	Expected result
TC-01	POST <code>/auth/student/signup</code> with <code>{"name": "Test Student One", "password": "test@123"}</code>	201. The response has a <code>studentId</code> starting with <code>ZV</code> and 8 characters long, plus <code>access_token</code> , <code>refresh_token</code> , <code>user</code> . <code>email = null</code> and <code>user.rolesList = ["student"]</code> .
TC-02	Sign up again with the same name and password	201 with a different <code>studentId</code> . Names don't have to be unique.
TC-03	Sign up with <code>{"name": "A", "password": "test@123"}</code>	400: the name is too short.
TC-04	Sign up with <code>{"name": "Test", "password": "123"}</code>	400: the password is too short.
TC-05	Sign up with <code>{"name": "Test", "password": "test@123", "email": "a@b.com"}</code>	400: <code>property email should not exist</code> .
TC-06	POST <code>/auth/student/login</code> with the Student ID from TC-01 and <code>test@123</code>	200. Same shape as TC-01, and <code>showTooltip</code> is <code>false</code> .
TC-07	Log in with the Student ID in lowercase	200.
TC-08	Log in with the right ID and a wrong password	401 <code>Invalid Student ID or password</code> .
TC-09	Log in with an ID that doesn't exist (e.g. <code>ZVAAAAAA</code>)	401 with the same message as TC-08.

G3.2 Lockout

ID	Steps	Expected result
TC-10	Use the TC-02 account. Log in with a wrong password 5 times.	Attempts 1–5 return 401.
TC-11	Right after that, log in with the correct password	429 Too many wrong attempts. Try again after 15 minute(s).
TC-12	Reset the password as a super admin (TC-20), then log in with the new password	200: the reset removed the lock.

G3.3 Using the token on normal student APIs

Authorize in Swagger with the student's `access_token` first.

ID	Steps	Expected result
TC-13	<code>GET /student/</code>	200, with <code>inProgressBootcamps</code> and <code>completedBootcamps</code> both empty for a new student. There must be no 401: this proves the middleware fix works.
TC-14	<code>GET /student/bootcamp/public</code> and pick a public course id, then call <code>GET /tracking/allModulesForStudents/{id}</code>	200 with the modules.
TC-15	<code>GET /student/</code> again	The public course from TC-14 now appears in <code>inProgressBootcamps</code> (automatic enrolment).
TC-16	Open a chapter, mark it complete and submit a quiz or coding problem through the normal student APIs or the web app	Works the same as for a Google student. Progress and leaderboard update.
TC-17	<code>POST /auth/refresh</code> with <code>{"refresh_token": "<refresh_token>"}</code>	200 with a new <code>access_token</code> and <code>refresh_token</code> .
TC-18	Call <code>POST /auth/refresh</code> again with the old refresh token	401.
TC-19	<code>POST /auth/logout</code> (authorized as the student), then <code>GET /student/</code> with the same token	Logout returns 201; the next call returns 401.

G3.4 Super admin tools

Authorize in Swagger with a **super admin** token first.

ID	Steps	Expected result
TC-20	<code>POST /auth/student/admin/reset-password</code> with <code>{"studentId": "<id from TC-02>"}</code>	200 with a generated 8-character <code>password</code> .
TC-21	Log in as that student with the old password	401.
TC-22	Log in with the password from TC-20	200.
TC-23	Reset with <code>{"studentId": "<id>", "newPassword": "mychoice1"}</code> , then log in with <code>mychoice1</code>	Both 200.
TC-24	Reset with <code>{"studentId": "ZVAAAAAA"}</code>	404 Student ID not found.

ID	Steps	Expected result
TC-25	GET /auth/student/admin/students?name=test student	200; both test accounts are listed.
TC-26	GET /auth/student/admin/students with no parameters	400.
TC-27	POST /auth/student/admin/enroll with a private course: {"studentId": "<id>", "bootcampId": <id>, "batchId": <id>}	200 "enrolled in ...", with data.name = the student's name. As the student, GET /student/ now lists the course.
TC-28	Repeat TC-27 exactly	409 Student is already enrolled in this course.
TC-29	Repeat TC-27 with another batch of the same course	200 Student moved to the selected batch.
TC-30	Enrol with a batchId from a different course	404 Batch not found in this course.
TC-31	Authorize as a normal student, admin, ops or instructor (not a super admin) and call reset-password or GET .../admin/students	403 Only super admins can manage Student IDs. (Enrolment rules for admins and ops are tested in G3.7.)
TC-32	Log out of Swagger (no token) and call any /auth/student/admin/* endpoint	401.

G3.5 Classes and attendance (needs a batch with a Student ID student in it)

ID	Steps	Expected result
TC-33	As an admin or instructor, create a Google Meet class for a batch that contains a Student ID student and email students	Class is created. Email students get the calendar invite.
TC-34	Create a Zoom class for the same batch	Class is created. Email students are invited.
TC-35	After the Zoom class ends and attendance is processed	Email students' attendance is recorded as before. The Student ID student is not matched automatically (see Part I).
TC-36	As an admin, mark the Student ID student present with POST /bootcamp/attendance/mark, body [{"sessionId": <id>, "userId": <student user id>, "status": "present"}]. Send this flat list, not the {"attendance": [...]} wrapper that Swagger suggests: the server reads sessionId from each item directly.	Attendance is saved for that student.

G3.6 Captcha and rate limits (needs changes to the dev server's .env)

Change .env, recreate the container (Part C3), and run the test. Put the original values back afterwards.

ID	.env on dev	Steps	Expected result
TC-37	TURNSTILE_SECRET_KEY=1x000000000000000000000000000000AA, no CAPTCHA_DISABLED	Sign up without captchaToken	400 Captcha is required

ID	.env on dev	Steps	Expected result
TC-38	Same as TC-37	Sign up with "captchaToken": "XXXX.DUMMY.TOKEN. XXXX"	201: the real Cloudflare check ran and passed
TC-39	TURNSTILE_SECRET_KEY=2x000000000000000000000000000000AA (always fails)	Sign up with the dummy token	400 Captcha verification failed. Please try again. No new row in zuvy_student_credentials (Part H).
TC-40	No TURNSTILE_SECRET_KEY and no CAPTCHA_DISABLED	Sign up	503 Sign-up is temporarily unavailable. Please try again later.
TC-41	CAPTCHA_DISABLED=true, SIGNUP_LIMIT_PER_MINUTE=3	Sign up 4 times within one minute from the same network (e.g. office Wi-Fi)	Calls 1–3 return 201; call 4 returns 429 Too many requests from this network... The response has a retry-after-signupPerMinute header (seconds to wait). Allowed calls carry x-ratelimit-remaining-signupPerMinute.
TC-42	Same as TC-41	While the office network is still blocked, sign up from a different network (e.g. a phone hotspot)	201. This proves nginx passes the real client IP. If it's also 429, every user is sharing nginx's IP: fix Part C4.
TC-43	Same as TC-41	From the blocked network, try to fake a new IP with curl (example below)	Still 429: a client's own X-Forwarded-For value is ignored.
TC-44	LOGIN_LIMIT_PER_15_MINUTES=3	Log in 4 times from the same network	Calls 1–3 return 200 (or 401 for a wrong password); call 4 returns 429. A different network can still log in.
TC-45	Any of the low limits above	Call normal APIs (e.g. GET /student/, Google login, admin pages) many times	Never 429 : only the two Student ID routes are rate limited.
TC-46	Original values restored	Sign up and log in normally	Works as in G3.1–G3.5.

Curl for TC-43:

```
curl -i -X POST "https://dev.api.zuvy.org/auth/student/signup" \
-H "Content-Type: application/json" \
-H "X-Forwarded-For: 1.2.3.4" \
-d '{"name":"Spoof Test","password":"test@123}"'
```

G3.7 Enrolment by org admins and ops

Use the org admin and ops tokens: log in to the dev web app as each user and copy the token, as in Part E4. "Own course" means a private course of the organisation the user is **currently** logged into.

ID	Caller	Steps	Expected result
TC-47	Org admin	Enrol a Student ID student into an own course with a <code>batchId</code>	200 ; <code>data.name</code> shows the student; as the student, <code>GET /student/</code> lists the course.
TC-48	Org ops	Same as TC-47, with another Student ID student	200 .
TC-49	Org admin or ops	Enrol into a course of another organisation	403 Only super admins, or admins and ops of this course's organisation, can enrol students by Student ID. Nothing is created.
TC-50	Instructor	Enrol into a course they teach	403 , same message as TC-49.
TC-51	Org admin in 2 organisations	Switch org (<code>POST /org/switch-org</code>) to org B, enrol into an org A course; then switch back to org A and retry with the new token	First 403 , then 200 : only the current organisation counts.
TC-52	Org admin	After TC-47 and TC-49, open the organisation's activity log (<code>GET /trackinglog</code>)	An <code>enroll_student</code> entry with the admin as actor, the Student ID and the course name. TC-49 appears as a failed entry.

G4. Regression tests for users with email

These confirm that nothing changed for existing users. **Run them before every release to production.**

ID	Steps	Expected result
RG-01	Log in to the web app with Google as a student	Works. Courses, progress and leaderboard look normal.
RG-02	Log in with Google as an instructor	Works. Instructor dashboard and classes load.
RG-03	Log in with Google as an admin	Works. Courses, batches and students load.
RG-04	Log in with Google as a super admin	Works.
RG-05	Check the login response (Network tab) for an org POC user	<code>isPoc</code> is <code>true</code> for the POC and <code>false</code> for everyone else, the same as before.
RG-06	As an admin in 2 organisations, switch org (<code>POST /org/switch-org</code>)	Works and returns new tokens.
RG-07	Stay idle until the token refreshes, or call <code>POST /auth/refresh</code>	Works.
RG-08	Log out, then try the old token	401 , as before.
RG-09	Create a Google Meet class and a Zoom class for a normal batch	Both are created, and invites are sent to all students.
RG-10	After a Zoom class, check attendance	Recorded for students who attended, as before.

ID	Steps	Expected result
RG-11	Merge two sessions (<code>POST /classes/merge</code>)	Works; child-batch students are added to the parent session.
RG-12	Add students by email to a course (<code>POST /bootcamp/students/{id}</code>)	Works as before.

Part H: Checking the database

Run `SET search_path TO main;` (or `stage_template`) first.

Latest Student ID accounts:

```
SELECT c.student_id, u.id AS user_id, u.name, u.email, u.google_user_id, u.mode,
       c.failed_attempts, c.locked_until, c.last_reset_by, c.last_reset_at, c.created_at
FROM zuvy_student_credentials c
JOIN users u ON u.id = c.user_id
ORDER BY c.created_at DESC
LIMIT 10;
```

Expected: `email` and `google_user_id` are NULL, and `mode` is `student`.

Passwords are never stored in plain text:

```
SELECT student_id, LEFT(password_hash, 20) AS hash_start
FROM zuvy_student_credentials
ORDER BY created_at DESC
LIMIT 5;
```

Expected: every value starts with `scrypt$16384$8$1$`.

Enrolments of a Student ID account:

```
SELECT e.bootcamp_id, e.batch_id, e.status, e.enrolled_date
FROM zuvy_batch_enrollments e
JOIN zuvy_student_credentials c ON c.user_id = e.user_id
WHERE c.student_id = 'ZV7K3M9Q';
```

Unlock an account by hand (the reset API does the same):

```
UPDATE zuvy_student_credentials
SET failed_attempts = 0, locked_until = NULL
WHERE student_id = 'ZV7K3M9Q';
```

Delete test accounts (deleting the user also deletes the credential row):

```
DELETE FROM users
WHERE id IN (
  SELECT user_id FROM zuvy_student_credentials
  WHERE student_id IN ('ZV7K3M9Q')
);
```

If the delete fails because of rows in other tables (enrolments, submissions and so on), remove those test rows first, or just leave the test accounts on dev.

Part I: Known limitations

Limitation	Workaround or plan
Live-class attendance is not recorded automatically for Student ID students. Zoom and Google Meet identify people by email, and these students join as guests.	An admin marks them with <code>POST /bootcamp/attendance/mark</code> (TC-36).
Students without an email get no calendar or Zoom invites .	They join from the class link in the Zuvy app.
Old sessions stay valid after a password reset, until the tokens expire (up to 7 days through refresh). Student tokens are not stored on the server, so they can't be cancelled.	Acceptable for forgotten passwords.
A student who forgets their Student ID may sign up again and get a second account, splitting their progress.	Frontend: Student ID card + remembered ID on the device (D8). Later: match on date of birth and school.
Rate-limit counters are kept in the container's memory . They reset when the container restarts, and if the API is scaled to several containers, each one counts separately.	Fine for one container. For several, switch the throttler to Redis storage.
A very large school (more than about 300 sign-ups an hour from one public IP) could reach the sign-up ceiling.	Raise <code>SIGNUP_LIMIT_PER_HOUR</code> / <code>SIGNUP_LIMIT_PER_MINUTE</code> in <code>.env</code> . No code change is needed.
Sign-up depends on Cloudflare. If Cloudflare is unreachable, sign-up returns 503. Login is not affected.	Rare. Students can retry a few minutes later.
A determined person can still solve captchas by hand and create accounts slowly.	Watch for spikes. Class join codes with seat limits would stop this completely (future work).
These accounts must stay students . Giving them an admin or instructor role breaks their login, because staff sessions are stored with an email column that can't be empty.	Don't assign roles to Student ID accounts.
Only super admins can reset passwords and search Student ID accounts. (Enrolment is also open to org admins and ops.) Searching is not org-limited, because these students belong to no organisation until enrolled.	Org admins ask a super admin for resets and lookups; for enrolment they ask the student or teacher for the Student ID (from the ID card).
The existing "add students" API and CSV upload still work only by email.	Use "Add by Student ID" (Part D12 / F5) for these students.
There is no parental consent step, which the DPDP Act requires for under-18 learners.	Product or legal to decide (for example a consent checkbox on sign-up).

Part J: Troubleshooting

You see	Likely cause	Fix
Sign-up returns 500 <code>Could not create the account</code>	The migration hasn't been run on this database	Run Part C1
Every student API returns 401 with a Student ID token	The server is running old code without the middleware change	Deploy the latest build
<code>/auth/student/signup</code> returns 401 <code>Token not found</code>	Old middleware without the public routes	Deploy the latest build
Reset / search APIs return 403	The token isn't a super admin's	Use a super admin token (Part E4)
Enrol API returns 403 for an org admin or ops user	The course belongs to another organisation than the one they're currently logged into, or the user is an instructor	Switch to the course's organisation (<code>POST /org/switch-org</code>) and use the new token, or ask a super admin
429 on login <code>Too many wrong attempts...</code>	The account is locked after 5 wrong passwords	Wait 15 minutes, or reset the password
429 <code>Too many requests from this network...</code>	The per-IP limit was reached	Wait the number of seconds in the <code>retry-after-<limit_name></code> header, or raise the limit in <code>.env</code>
Everyone gets 429 at the same time, from different places	nginx isn't forwarding the client IP, so all users share nginx's IP	Fix nginx (Part C4) and check <code>TRUST_PROXY</code>
Sign-up 400 <code>Captcha is required</code>	<code>captchaToken</code> is missing	Send the token, or set <code>CAPTCHA_DISABLED="true"</code> on dev
Sign-up 400 <code>Captcha verification failed</code>	The token is invalid, expired (older than 5 minutes), already used, or from another site	Reset the box and get a fresh token. With test keys, leave <code>TURNSTILE_ALLOWED_HOSTNAMES</code> empty. Check the site key and secret key are from the same pair.
Sign-up 503 <code>Sign-up is temporarily unavailable</code>	<code>TURNSTILE_SECRET_KEY</code> isn't set in the running container	Add it to <code>.env</code> and recreate the container; check its length (Part C3)
The Cloudflare box doesn't appear on the page	Wrong site key, the page's domain isn't in the widget's hostnames, or CSP blocks it	Check the site key, the widget hostnames (Part C2) and the CSP (Part D9)
400 <code>property X should not exist</code>	The body has an extra field	Send only the fields shown in Part F
Endpoints missing in Swagger	Old build, or you're on production (Swagger is off there)	Use the dev Swagger page after deploying

You see	Likely cause	Fix
<code>npm test</code> fails with "Directory ... libs ... was not found"	The project's Jest config points to a missing folder	Use the local config in Part E1
<code>git commit</code> hangs at <code>prettier --write</code> (Windows)	The pre-commit hook's Prettier step can hang on some Windows machines with many files	Stop it (Ctrl+C), run <code>npx prettier --write <files></code> , <code>git add</code> them, and ask the team lead how to commit