

SIF APIs

Simple Integration Framework
Overview and documentation of usage.



Table of Contents

1 About.....	12
1.1 Installing the API.....	12
1.2 Updating the API	13
1.3 Versioning and continuous development	13
1.4 Overview model	14
2 Usage.....	16
2.1 Endpoint method types.....	16
2.2 SOAP Endpoints (on prem).....	16
2.2.1 SOAP C# Example Client.....	17
2.3 REST Endpoints (on prem).....	17
2.4 RPC Endpoints for 360° Online (cloud).....	18
2.4.1 Endpoint configuration	19
2.4.2 Swagger.....	21
2.4.3 RPC Postman examples.....	21
2.4.4 RPC C# sample client.....	21
2.4.5 Common error messages in SIF RPC	22
2.5 SOAP Bridge (360° 5.9 – 5.13).....	22
2.5.1 Endpoint configuration	23
2.5.2 Things to remember.....	23
2.6 Client responsibility.....	23
2.7 PDF Converting.....	24
2.8 Authentication and ADContextUser	24
2.8.1 ADContextUser (not recommended)	24
2.8.2 Endpoint Authentication.....	25
2.8.2.1 Authkey - Anonymous	25
2.8.2.2 Bearer - (JWT)	25
2.8.2.3 Combined User	25
2.8.2.4 Combined Daemon	25
2.9 Contact identifiers	26
2.9.1 Creating contact person and private person by same external id	26
2.10 Validation of personal id number and enterprise number	27
2.11 Code values	27
2.12 Property tags	27
2.12.1 (*).....	27
2.12.2 (**).....	27
2.12.3 (\)	28
2.13 Remark Validation.	28
3 Delta support.....	28
3.1 Scenario Overview.....	28
3.2 How It Works.....	28
3.3 How the Client Should Use It.....	29
3.4 Important Considerations	29
3.5 Benefits of Delta Support	29
4 Contact service	29
4.1 SynchronizeContactPerson.....	29

4.1.1 Input.....	30
4.1.2 Output.....	31
4.2 SynchronizePrivatePerson	32
4.2.1 Input.....	32
4.2.2 Output.....	34
4.3 SynchronizeEnterprise.....	34
4.3.1 Input.....	34
4.3.2 Output.....	36
4.4 UpdateContactPerson	37
4.4.1 Input.....	37
4.4.2 Output.....	38
4.5 UpdatePrivatePerson	39
4.5.1 Input.....	39
4.5.2 Output.....	41
4.6 UpdateEnterprise	41
4.6.1 Input.....	41
4.6.2 Output.....	42
4.7 GetContactPersons.....	43
4.7.1 Input.....	43
4.7.2 Output.....	44
4.8 GetPrivatePersons	45
4.8.1 Input.....	45
4.8.2 Output.....	46
4.9 GetEnterprises.....	47
4.9.1 Input.....	47
4.9.2 Output.....	48
4.10 Sub Contracts	49
4.10.1 Data Contract: Address	49
4.10.2 Data Contract: ContactPersonResult	49
4.10.3 Data Contract: PrivatePersonResult.....	50
4.10.4 Data Contract: EnterpriseResult	51
4.10.5 Data Contract: DateRange	52
4.10.6 Data Contract: ContactContactParameter	52
4.10.7 Data Contract: EnterpriseEntity	52
4.11 Get Contact Custom Data.....	53
5 User service	54
5.1 SynchronizeUser	54
5.1.1 Input.....	54
5.1.2 Output.....	55
5.2 GetUsers.....	56
5.2.1 Input.....	56
5.2.2 Output.....	56
5.3 Sub Contracts	58
5.3.1 Data Contract: UserBase	58
5.3.2 Data Contract: UserProfile	58
5.3.3 Data Contract: AccessGroupMembership.....	58
5.4 UpdateUser (v5.15)	59
5.4.1 Input.....	59
5.4.2 Output.....	60

6 Estate service	60
6.1 SynchronizeEstate	60
6.1.1 Input.....	60
6.1.2 Output.....	61
6.2 GetEstates	63
6.2.1 Input.....	63
6.2.2 Output.....	64
6.3 Sub Contracts	64
6.3.1 Data Contract: Address	64
6.3.2 Data Contract: EstateResult	65
6.3.3 Data Contract: EstateRelation.....	65
7 Case service	66
7.1 CreateCase	66
7.1.1 Input.....	66
7.1.2 Output.....	70
7.2 UpdateCase	70
7.2.1 Input.....	70
7.2.2 Output.....	74
7.3 GetCases.....	75
7.3.1 Input.....	75
7.3.2 Output.....	80
7.3.3 Get Case Custom Data	80
7.3.4 Configure maximum documents to be return while getting case	81
7.4 Sub Contracts	81
7.4.1 Data Contract: CaseContactParameter	81
7.4.2 Data Contract: UnregisteredCaseContactParameter	82
7.4.3 Data Contract: ClassCodeParameter.....	83
7.4.4 Data Contract: CaseEstateParameter	84
7.4.5 Data Contract: CaseResult	85
7.4.6 Data Contract: CaseContactResult	87
7.4.7 Data Contract: AdditionalFieldParameter.....	88
7.4.8 Data Contract: AdditionalFieldListParameter	88
7.4.9 Data Contract: CaseEstateResult	89
7.4.10 Data Contract: DateCriteriaType.....	89
7.4.11 Data Contract: Permission	90
7.4.12 Data Contract: AdditionalRelations	90
7.4.13 Data Contract: CaseDocumentResult.....	91
7.4.14 Data Contract: CaseDocumentFileResult	91
7.4.15 Data Contract: DocumentCategoryResult.....	91
7.4.16 Data Contract: RemarkInfo	92
7.4.17 Data Contract: Keyword	92
7.4.18 Data Contract: Milestone.....	92
7.4.19 Data Contract: ProgressPlanResult.....	92
7.4.20 Data Contract: CaseProgressPlanActivityResult.....	93
7.4.21 Data Contract: MyCaseConfig	93
7.4.22 Data Contract: Stage	93
8 Document service.....	93
8.1 CreateDocument	94
8.1.1 Input.....	94

8.1.2 Output.....	99
8.1.3 Errors.....	99
8.1.3.1 The document type must have an external recipient.....	99
8.1.3.2 The document type must have an external sender	99
8.2 UpdateDocument	100
8.2.1 Input.....	100
8.2.2 Output.....	104
8.3 SignOffDocument	105
8.3.1 Input.....	105
8.3.2 Output.....	106
8.4 DispatchDocuments	107
8.4.1 Input.....	107
8.4.2 Output.....	107
8.5 GetDocuments	108
8.5.1 Input.....	108
8.5.2 Output.....	113
8.5.3 Get Document Custom Data	113
8.5.4 Configure the maximum files to return while getting document	114
8.5.5 Configure SQL query hints	114
8.6 Sub Contracts	114
8.6.1 Data Contract: DocumentContactParameter.....	114
8.6.2 Data Contract: UnregisteredContactParameter	116
8.6.3 Data Contract: ResponsibleEnterprise	117
8.6.4 Data Contract: ResponsiblePerson.....	117
8.6.5 Data Contract: DocumentResult	117
8.6.6 Data Contract: DocumentContactResult.....	121
8.6.7 Data contract: CreateFileFromTemplateParameter	121
8.6.8 Data Contract: File	122
8.6.9 Data Contract: ClassCodeParameter.....	124
8.6.10 Data Contract: SignOffContactParameter.....	124
9 Project service	124
9.1 CreateProject.....	125
9.1.1 Input.....	125
9.1.2 Output.....	127
9.2 UpdateProject	128
9.2.1 Input.....	128
9.2.2 Output.....	130
9.3 GetProjects.....	130
9.3.1 Input.....	130
9.3.2 Output.....	132
9.3.3 Get Project custom data	132
9.4 Sub Contracts	134
9.4.1 Data Contract: ProjectResult.....	134
9.4.2 Data Contract: ProjectContactParameter	134
9.4.3 Data Contract: ProjectContactResult	135
10 File service.....	137
10.1 Upload	137
10.1.1 Input.....	137
10.1.2 Output.....	137

10.2 Upload large file	138
10.2.1 Create Endpoint	138
10.3 CheckOutAndGetFileForExternalControl.....	140
10.3.1 Input.....	140
10.3.2 Output.....	141
10.4 UploadAndCheckInFileFromExternalControl.....	142
10.4.1 Input.....	142
10.4.2 Output.....	142
10.5 CreateFile	143
10.5.1 Input.....	143
10.5.2 Output.....	144
10.6 UpdateFile	145
10.6.1 Input.....	146
10.6.2 Output.....	147
10.7 DeleteFile	148
10.7.1 Input.....	148
10.7.2 Output.....	148
10.8 GetFilesWithMetadata	148
10.8.1 Input.....	148
10.8.2 Output.....	149
10.9 GetFileWithMetadata.....	150
10.9.1 Input.....	150
10.9.2 Output.....	150
10.10 GetFile	151
10.10.1 Input.....	151
10.10.2 Output.....	151
10.11 CreateFileVariant (v5.13 onwards).....	151
10.11.1 Input.....	151
10.11.2 Output.....	152
10.12 UploadStream (v5.17)	153
10.12.1 Input.....	153
10.12.2 Output.....	153
10.13 Sub Contracts	154
10.13.1 Data Contract: FileResult	154
10.14 Get Files Custom Data	155
11 AccessGroup Service	157
11.1 GetAccessGroups	157
11.1.1 Input.....	157
11.1.2 Output.....	158
11.2 Sub Contracts	159
11.2.1 Data Contract: AccessGroupResult	159
11.2.2 Data Contract: AccessGroupUserResult.....	159
12 MyCases Service	160
12.1 GetMyCases.....	160
12.1.1 Input.....	160
12.1.2 Output.....	162
12.1.3 MyCases Config.....	162
12.2 Sub Contracts	162
12.2.1 Data Contract: MyCaseResult	162

12.2.2 Data Contract: MyCasesDocumentResult	163
12.2.3 Data Contract: MyCasesDocumentFileResult	164
12.2.4 Data Contract: MyCasesContactResult	164
13 Support Service	165
13.1 GetCodeTableRows	165
13.1.1 Input.....	165
13.1.2 Output.....	165
13.2 GetSIFVersion	166
13.2.1 Input.....	166
13.2.2 Output.....	166
13.3 GetLogs.....	166
13.3.1 Input.....	166
13.3.2 Output.....	167
13.4 GetEvents	167
13.4.1 Input.....	167
13.4.2 Output.....	168
13.4.3 GetEvent Setting	169
13.5 CreateLog	169
13.5.1 Input.....	169
13.5.2 Output.....	170
13.6 GenerateJSONClient	170
13.6.1 Input.....	170
13.6.2 Output.....	170
13.7 Sub Contracts	171
13.7.1 Data Contract: LogResult	171
13.7.2 Data Contract: EventResult	171
13.7.3 Data Contract: DataResult	172
13.8 GetClassifications	172
13.8.1 Input.....	172
13.8.2 Output.....	173
13.8.3 Data Contract: ClassificationResult	173
13.8.4 Get Classification Custom Data	174
13.9 AddCodeTableRow (v5.14)	175
13.9.1 Input.....	175
13.9.2 Output.....	175
13.9.3 Sub contract.....	175
13.9.3.1 Data Contract: CodeTableResult.....	175
13.10 UpdateCodeTableRow (v5.14)	175
13.10.1 Input.....	175
13.10.2 Output.....	176
13.11 AutomaticArchivingEnabler SIF support (Under development)	176
13.11.1 BulkImportSync (under development).....	176
13.11.2 BulkImportAsync (under development).....	176
13.11.3 Input.....	177
13.11.4 Output.....	177
13.11.5 Subcontracts	177
13.11.5.1 Data Contract: ImportResult.....	177
13.12 GetEntitiesExternalIds (v5.17 onwards)	177
13.12.1 Input.....	177
13.12.2 Output.....	178

13.12.3 Subcontracts	178
13.12.3.1 Data contract: ExternalIdSearchParameter	178
13.13 AddExternalId (v6.2 onwards)	179
13.13.1 Input	179
13.13.2 Output	179
13.14 DeleteExternalId (v6.4 onwards)	180
13.14.1 Input	180
13.14.2 Output	180
13.15 GetSwaggerOpenAPIServiceDefinition (v5.17 onwards)	181
13.15.1 Input	181
13.15.2 Output	181
13.16 TempEntityStorage Text Support (v5.18 onwards)	181
13.16.1 GetTempEntityStorageText	181
13.16.1.1 Input	181
13.16.1.2 Output	182
13.16.2 AddTempEntityStorageText	182
13.16.2.1 Input	182
13.16.2.2 Output	183
13.16.3 DeleteTempEntityStorageText	183
13.16.3.1 Input	183
13.16.3.1 Output	184
13.17 CreateHistoricLog (6.5)	184
13.17.1 Input	184
13.17.2 Output	184
13.18 GetDocumentTemplateMetadata	185
13.18.1 Input	185
13.18.2 Output	185
13.18.3 Subcontracts	186
13.18.3.1 Data contract: TemplateMetadataResult	186
13.18.3.2 Data contract: TemplateScript	187
13.19 DownloadDocumentTemplate	187
13.19.1 Input	187
13.19.2 Output	187
14 Revision Service	188
14.1 CreateRevision	188
14.1.1 Input	188
14.1.2 Output	188
14.2 UpdateRevision	189
14.2.1 Input	189
14.2.2 Output	189
14.3 GetRevision	190
14.3.1 Input	190
14.3.2 Output	191
14.4 GetRevisions	191
14.4.1 Input	191
14.4.2 Output	192
15 Activity Service	194
15.1 CreateWorkflowActivity	194
15.1.1 Input	194

15.1.2 Output.....	195
15.2 UpdateWorkflowActivity.....	195
15.2.1 Input.....	195
15.2.2 Output.....	196
15.3 GetWorkflowActivities.....	196
15.3.1 Input.....	196
15.3.2 Output.....	198
15.3.3 Get Activity Custom Data.....	198
15.4 GetProgressPlanDetails.....	199
15.4.1 Input.....	199
15.4.2 Output.....	200
15.5 GetHandlingActivities.....	200
15.5.1 Input.....	200
15.5.2 Output.....	202
15.6 AddHandlingActivity.....	202
15.6.1 Input.....	202
15.6.2 Output.....	204
15.7 UpdateHandlingActivity.....	204
15.7.1 Input.....	204
15.7.2 Output.....	206
15.8 Subcontracts.....	206
15.8.1 Data contract: WorkflowActivityResult.....	206
15.8.2 Data contract: ProgressPlanDetailsResult.....	207
15.8.3 Data contract: ProgressPlanActivityBase.....	207
15.8.4 Data contract: HandlingActivityResult.....	208
15.8.5 Data contract: Board.....	208
15.8.6 Data contract: BoardMeeting.....	208
15.8.7 Data contract: ActivityDocument.....	209
15.8.8 Data contract: RelatedDocument.....	209
15.8.9 Data contract: ActivityContactParameter.....	209
15.8.10 Data contract: ActivityType.....	210
15.8.11 Data contract: ActivityStatus.....	210
15.8.12 Data contract: ActivityPriority.....	210
15.8.13 Data contract: ActivityAccessGroupResult.....	211
15.8.14 Data contract: Recipients.....	211
15.8.15 Data contract: ResponsibleContact.....	211
15.8.16 Data contract: ResponsibleCompany.....	211
15.8.17 Data contract: ActivityDocument.....	211
16 Ping methods.....	212
17 Code Table - common values.....	213
17.1 Case Status.....	213
17.2 Document Status.....	214
17.3 Document Category.....	215
17.4 Document Contact Role (Activity - Contact role).....	216
17.5 Version Status.....	216
18 Support for Default Values.....	216
18.1 Brief about Default values and its related tables in 360:.....	217
18.1.1 What is Default value?.....	217

18.1.2 Why it is required?	217
18.1.3 Code table structure:	217
18.2 Usage of Default values:	218
18.3 Creating new Default Value sets	218
18.4 Example:	218
18.4.1 Configure Default Value Context:	218
18.4.2 Configure Default Value Template:	218
18.4.3 Configure Default Values:	219
18.4.4 CreateCaseParameter with Default Value Set:	222
18.5 Limitations:	225
19 Generic SIF Settings	226
19.1 Web config settings	226
19.1.1 SI.Data.SkipValidateResponsible	228
19.1.2 SI.Data.WS.ValidateContactId	228
19.1.3 SI.Data.WS.MaxExceptionLength	229
19.1.4 SI.Data.BL.UserName	229
19.2 360 Web admin settings	229
19.2.1 SIF BL Lan Code	230
19.2.2 SIF Claim Prefix	231
19.2.3 SIF Show Stack Trace	232
19.2.4 SIF Case Custom Fields Query	233
19.2.5 SIF MaxReturnedDocuments while searching case	233
19.2.6 SIF Contact Custom Fields Query	233
19.2.7 SIF Document Custom Fields Query	233
19.2.8 SIF MaxReturnedFiles while searching document	233
19.2.9 SIF MyCases Config	233
19.2.10 SIF Sync User By Contact Recno Or Contact External Id	234
19.2.11 SIF Enable ADContextUser	235
19.2.12 SIF Log Frequency	235
19.2.13 SIF Inherit Responsible From Case (Available from 5.9 version)	236
19.2.14 SIF GetClassification Custom Fields Query	236
19.2.15 SIF Project Custom Fields Query	236
19.2.16 SIF LastDate look-up in entitylog (v5.16)	237
19.2.17 SIF GetEntitiesExternalIds Config (v5.17)	237
19.2.18 SIF Enable Transactions (v5.17)	237
19.2.19 SIF File Inserts in DocumentBatch (v5.17)	238
19.2.20 SIF Activity Custom Fields Query	239
19.2.21 SIF TempEntityStorage Config (v5.18)	239
19.2.22 SIF AccessGroup Custom Fields Query (v6.5)	239
20 SIF API Calling Examples	240
20.1 SOAP Service	240
20.1.1 Create Case	242
20.1.1.1 Clone Request	242
20.1.2 Get Case	244
20.1.3 Update Case	244
20.2 REST API	245
20.2.1 Create Case	248
20.2.2 Get Case	249
20.2.2.1 How to create new request?	249

20.2.3 Update Case	251
20.3 SIF RPC.....	253
20.3.1 Create Case	255
20.3.2 Get Case	258
20.3.3 Update Case	260
20.4 SIF SOAP Bridge (Deprecated v5.14)	263
20.4.1 Existing client modifications	264
20.4.2 SOAP bridge sample requests/response	264
21 eArchive support	265
21.1 Overview model	266
21.2 Update Noark-5 XML Job.....	266
21.3 JSON sample requests	267
21.3.1 Archiving case	267
21.3.2 Get archived case	268
21.3.3 Update archived case.....	268
21.3.4 Archiving document	268
21.3.5 Get archived document	269
21.3.6 Update archived document	270
21.3.7 Upload file reference	270
21.4 Swagger samples	270
21.4.1 Case	270
21.4.2 Document	272
21.4.3 File.....	273
22 Advance endpoint configuration (v5.11 onwards.)	274
22.1 Filter sets	274
22.2 Add endpoint.....	276
22.2.1 Common properties	276
22.2.2 Add filter set.....	277
22.3 Edit endpoint	278
22.4 Delete endpoint.....	279
22.5 Endpoint information	279
22.6 Important points to remember	279
22.7 Update method filter sets. (v5.14 onwards)	280
22.8 Configure result properties to endpoint. (Pilot functionality in SIF in 5.17: Security and performance) .	281
22.8.1 FileService/GetFilesWithMetadata support (5.18 or 6.0 and above)	284


1 About

This document describes the SIF APIs, which can be used by external systems to create, update and read data to/from 360°. The SIF APIs consist of SOAP, REST and RPC services. The SOAP and REST endpoints are for 360° on-premises installations, and the RPC endpoints are for 360° Online (cloud solutions) and on-prem installations above version 5.0.

«SIF RPC was released in 2018 and is the preferred SIF interface to use when developing integrations for communicating with 360. SIF SOAP and SIF REST are based on old, outdated technology and will reach end of life Q1 2022. When end of life is reached, customers using SIF SOAP or SIF REST must migrate their client code to use SIF RPC before they can upgrade to the next version released of 360°.

From 360° version 5.9, we have provided the support for old SIF SOAP based services with RPC way of calling called SOAP bridge by introducing a new endpoint “SIF SOAP” under web admin -> Endpoint configuration just like “SIF RPC”. This bridge component is implemented as a Asp.net REST service but will translate the SOAP message and call the existing implementation. This new SOAP bridge will be available only on limited 360° versions, going further we will discontinue the SOAP and REST services.

See the [Overview model](#) for what is available in the different services.

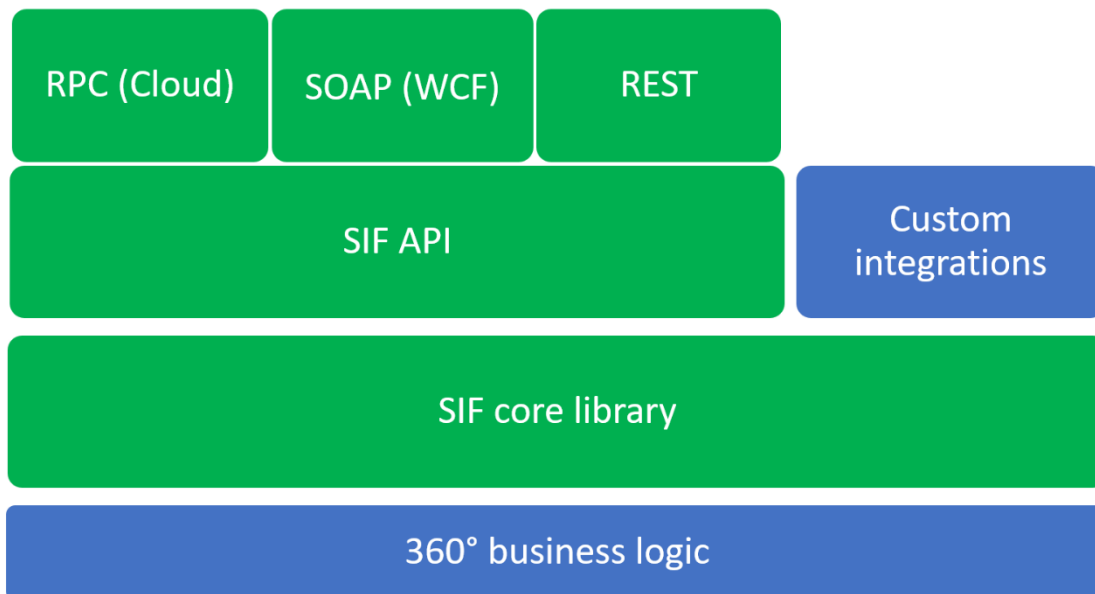

A simple figure describing the different APIs and how SIF integrates with 360°. The SIF core library is also used for custom integrations.

1.1 Installing the API

Installation is done by Tieto and is usually done on the same server that 360° is installed on.

Mandatory pre-requisite for installing SIF from 1.3.0 release and onwards:

Important: As SIF has upgraded to .Net framework 4.8, it is mandatory to have **4.8 framework** and **.Net Core 3.1**

With 360° version 5.9, SIF APIs (SIF RPC and SIF SOAP bridge) are part of standard 360° installation.

1.2 Updating the API

Updating is done by Tieto and is done by re-installing the service for 360° version 5.8 or below.

We recommend that any client consuming the SOAP webservice is rebuilt and tested with the updated WSDL, if this is necessary or not depends on the consumer of the webservice, which we have no control over. The reason rebuilding may be needed is a rare scenario which can result in input DataMembers (properties) being nulled out. The scenario is that DataMembers can have been added to an input contract that change the DataMembers alphabetical order. If a webservice client does not generate and send the xml in the correct order, the wrongly ordered properties will be null. Read more about this on [SO](#), [MSDN-1](#) and [MSDN-2](#).


As an extra precaution, we have since January 2017 started ordering new input DataMembers so changes will be fully backwards compatible. However, previously added input DataMembers have not and cannot be ordered as the correct order cannot be determined without considering every consumer of the web services, which is impossible.

For 360° version 5.9 or above, to get latest changes in API, installation of 360° standard setup or hotfix is required. (This should be done by TietoEvry)

1.3 Versioning and continuous development

If you have SIF SOAP or RPC newer than November 2018, you can check which version you have by using the [GetSIFVersion](#) operation in SupportService.

On premise, you can check what version of the service you have by checking the file version of a dll. These are typically found under C:\360\360 Program Files\instances\[instance name]\webservices\SI.WS.Core\SIF\bin, right click on the SI.Data.Core.dll > Properties > Details > File version. This number is the build version of the web service installation and corresponds to our internal changeset ID.

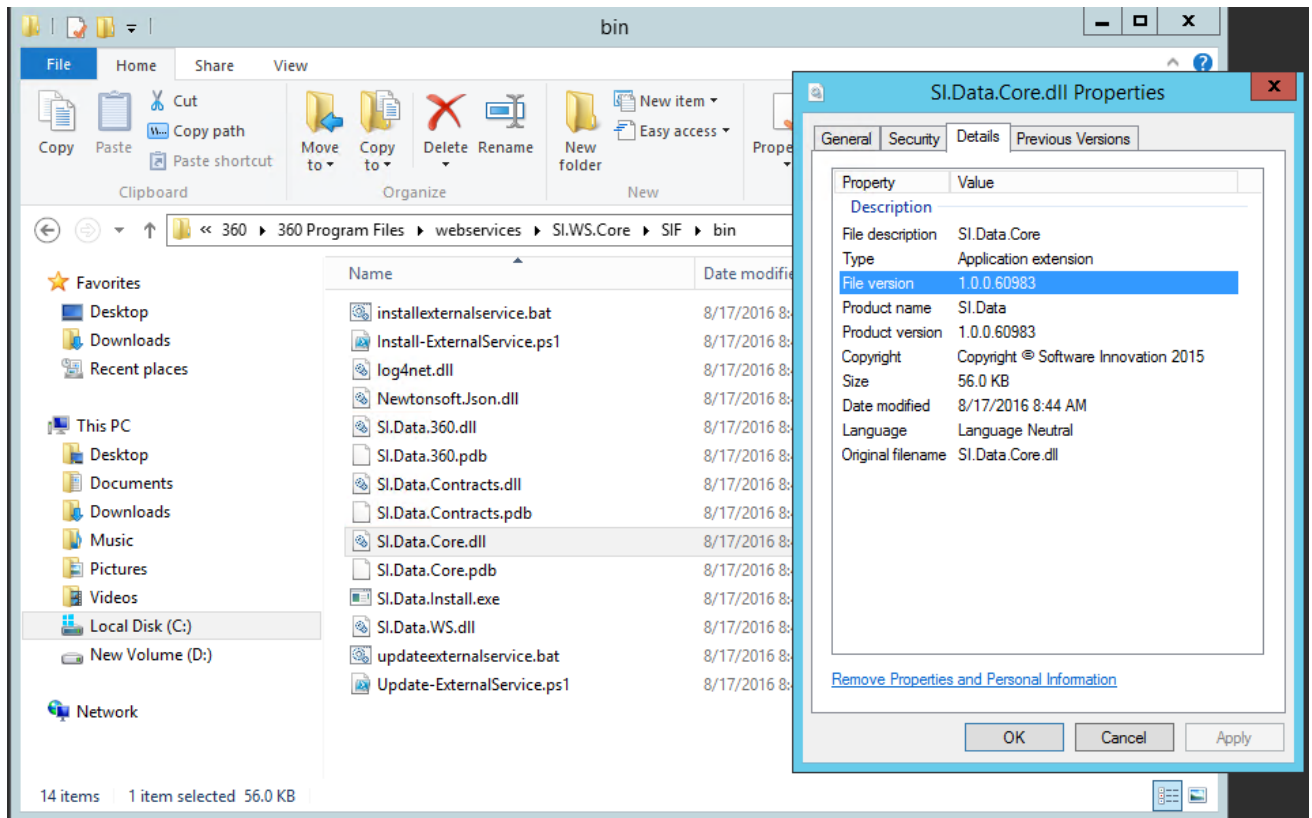

If your file version is 1.0.0.0 it means it was built before mid-2015 when versioning was implemented.

The API is continuously improved with changes that in almost all cases is **backwards-compatible**. Meaning an existing integration should **not** break on contract or behavior level if you chose to update the API. There are two exceptions:


- SOAP: Your integration do not support that the WSDL has a method extended with new properties; normally this should be fine as long as you rebuild your integrations according to the new WSDL.
- Some minor backwards-incompatible changes, but these are documented with the "From/Before DLL version X" notes under the affected service method properties.

1.4 Overview model

This model is a quick overview over the different services and methods that are available in the SIF API. All services are available in SOAP (on prem)/SOAP bridge and RPC (cloud/on prem), and the blue ones are available as REST (on prem) as well.

SIF API Services

Methods are also currently available as REST is marked with blue color
Method(s) marked with red only available in SIF RPC API, v3.10 onwards



Case service	Contact service
+ CreateCase + UpdateCase + GetCases	+ SynchronizeContactPerson + SynchronizePrivatePerson + SynchronizeEnterprise + GetContactPersons + GetPrivatePersons + GetEnterprises + UpdatePrivatePerson + UpdateContactPerson + UpdateEnterprise

Document service	Estate service
+ CreateDocument + UpdateDocument + SignOffDocument + DispatchDocuments + GetDocuments	+ SynchronizeEstate + GetEstates

File service	Project service
+ Upload + CheckOutAndGetFileForExternalControl + UploadAndCheckInFileFromExternalControl + GetFileWithMetadata + GetFilesWithMetadata + GetFile + CreateFile + UpdateFile + DeleteFile + CreateFileVariant + UploadStream	+ CreateProject + UpdateProject + GetProjects

User service	AccessGroup service
+ SynchronizeUser + GetUsers + UpdateUser	+ GetAccessGroups

MyCases service	Support service
+ GetMyCases	+ GetCodeTableRows + GetSIFVersion + GetLogs + GetEvents + CreateLog + CreateHistoricLog + GetClassifications + GenerateJsonClient + AddCodeTableRow + UpdateCodeTableRow + GetEntitiesExternalIds + GetSwaggerOpenAPIServiceDefinition + GetTempEntityStorageText + AddTempEntityStorageText + DeleteTempEntityStorageText + AddExternalId + DeleteExternalId + SetupMQ + ManageQueue + WaitForEvents + GetDocumentTemplateMetadata + DownloadDocumentTemplate

Revision service	Support methods
+ CreateRevision + UpdateRevision + GetRevision + GetRevisions	+ Ping

Activity service
+ CreateWorkflowActivity + UpdateWorkflowActivity + GetWorkflowActivities + GetHandlingActivities + GetProgressPlanDetails + AddHandlingActivity + UpdateHandlingActivity



External part

2 Usage

2.1 Endpoint method types

Four main types of methods are provided:

- Synchronize methods - Updates or creates depending on whether they exist or not.
- Create methods
- Update methods
- Get methods - Gets entities based on search criteria.

2.2 SOAP Endpoints (on prem)

Note: SIF SOAP API's support has been deprecated from 360 v5.9. SOAP Bridge (wrapper for WCF) with RPC support has been added with v5.9 and this wrapper only available from v5.9 – v5.13.

Every service documented in this document is implemented as SOAP web service endpoints, which are available for 360° on premise.

There are multiple web service URL's. The exact URL depends on the server configuration and load balancing, but in most cases they will be something like

[http://\[servername\]:4000/Sl.WS.Core/SIF/ContactService.svc](http://[servername]:4000/Sl.WS.Core/SIF/ContactService.svc)

.. or CaseService.svc, DocumentService.svc, UserService.svc, FileService.svc

WSDL's for these services can be provided along with this document. WSDL specifies the functionality of a web service and can be used to build the client code.

The default service endpoints use Soap 1.1, conform to WS-I Basic Profile 1.2, and use Basic authentication. Each service (apart from FileService) also has alternative endpoints with different configurations. These are accessed by adding a postfix to the URL.

Endpoint	Soap	Authentication	Other
.svc	1.1	Basic ApiVersion	
.svc/Basic	1.1	Basic	
.svc/Ntlm	1.1	Ntlm	
.svc/BasicMtom	1.1	Basic	Mtom
.svc/NtlmMtom	1.1	Ntlm	Mtom
.svc/BasicS			for SSL
.svc/NtlmS			for SSL
.svc/BasicMtomS			for SSL
svc.NtlmMtomS			for SSL

Other authentication methods and Soap 1.2 can be configured if required.

2.2.1 SOAP C# Example Client

Feel free to download and clone the example client to get started. It requires that you have access to a 360° server with the webservice installed: <https://github.com/Public360/SIF.GWSL.CSharpExampleClient>

2.3 REST Endpoints (on prem)

Note: SIF REST APIs support has been deprecated from 360 v5.9.

The services can also be installed as a REST web service for 360° on premise. This service exposes plain HTTP GET/POST/PUT methods in a RESTful way. The table below describes services that also have been implemented as a REST endpoint.

Examples:

- Get all cases: HTTP GET [http://\[servername\]:4000/SI.WS.Core/SIFREST/api/cases/](http://[servername]:4000/SI.WS.Core/SIFREST/api/cases/), filter with URL parameters named as the related service method properties.
- Get case by recno: HTTP GET [http://\[servername\]:4000/SI.WS.Core/SIFREST/api/cases/123132/](http://[servername]:4000/SI.WS.Core/SIFREST/api/cases/123132/). Also allows ADContextUser.
- Create Case: HTTP POST [http://\[servername\]:4000/SI.WS.Core/SIFREST/api/cases/](http://[servername]:4000/SI.WS.Core/SIFREST/api/cases/) with body data parameters names as the related service method properties.
- Update Case: HTTP PUT [http://\[servername\]:4000/SI.WS.Core/SIFREST/api/cases/123112](http://[servername]:4000/SI.WS.Core/SIFREST/api/cases/123112) with body data parameters names as the related service method properties.

BaseURL = [http://\[servername\]:4000/SI.WS.Core/SIFREST/](http://[servername]:4000/SI.WS.Core/SIFREST/)

Implemented 14/27	Service Methods	HTTP Method	BaseURL + Following URL
6/6	Contact	-	-
X	SynchronizeContactPerson	POST	api/contactpersons/actions/synchronize
X	SynchronizePrivatePerson	POST	api/privatepersons/actions/synchronize
X	SynchronizeEnterprise	POST	api/enterprises/actions/synchronize
X	GetContactPersons	GET	api/contactpersons/
		GET	api/contactpersons/{recno}
X	GetPrivatePersons	GET	api/privatepersons/
		GET	api/privatepersons/{recno}
X	GetEnterprises	GET	api/enterprises/
		GET	api/enterprises/{recno}
0/2	User	-	-
	SynchronizeUser		
	GetUsers		
0/2	Estate	-	-
	SynchronizeEstate		
	GetEstates		
3/3	Case	-	-
X	CreateCase	POST	api/cases/

X	UpdateCase	PUT	api/cases/
X	GetCases	GET	api/cases/
		GET	api/cases/{recno}
3/5	Document	-	-
X	CreateDocument	POST	api/documents/
X	UpdateDocument	PUT	api/documents/{recno}
	SignOffDocument	POST	api/documents/actions/signoff
	DispatchDocuments		
X	GetDocuments	GET	api/documents/
		GET	api/documents/{recno}
0/3	Project	-	-
	CreateProject		
	UpdateProject		
	GetProjects		
0/3	File	-	-
	Upload		
	CheckOutAndGetFile..		
	UploadAndCheckInFile..		
1/1	MyCasesService	-	-
X	GetMyCases	GET	api/mycases/
1/1	AccessGroupService	-	-
X	GetAccessGroups	GET	api/accessgroups/
0/1	SupportService	-	-
	GetCodeTableRows		

2.4 RPC Endpoints for 360° Online (cloud)

Note: It is always good practice to send authkey in request headers or authorization headers. We appreciate if external third parties send authkey into headers due to security reason.

1. Request header

POST

https://mas-man-publicnorlrg.dev.360online.com/Biz/v2/api/call/SI.Data.RPC/SI.Data.RPC/CaseService/CreateCase ...

Params

Authorization

Headers (10)

Body

Pre-request Script


Tests

Settings

☒	Host ⓘ	<calculated when request is sent>	
☒	User-Agent ⓘ	PostmanRuntime/7.31.0	
☒	Accept ⓘ	*/*	
☒	Accept-Encoding ⓘ	gzip, deflate, br	
☒	Connection ⓘ	keep-alive	
☒	authkey	b1f49b64-6f34-4d3a-84ba-f3e9d0b53617	
	Key	Value	Description

Responses

2. Authorization

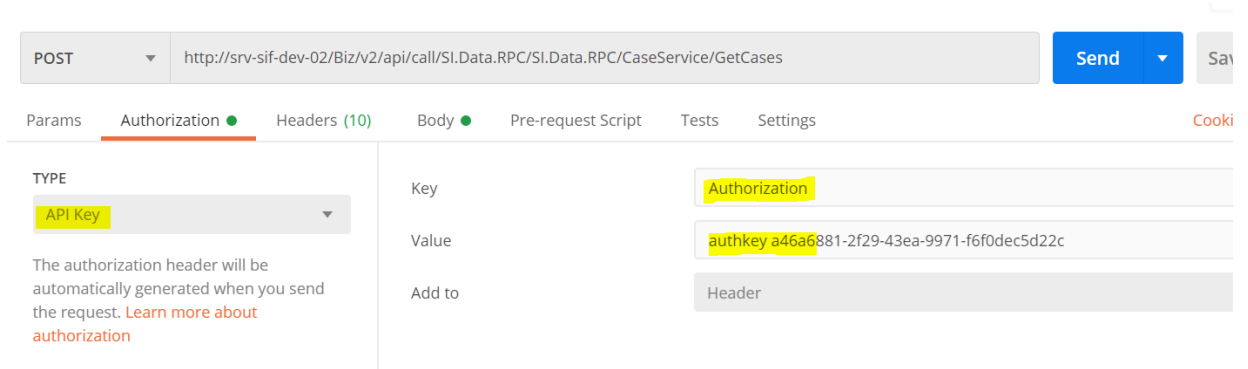

POST http://srv-sif-dev-02/Biz/v2/api/call/SI.Data.RPC/SI.Data.RPC/CaseService/GetCases Send Save

Params Authorization Headers (10) Body Pre-request Script Tests Settings Cookies

TYPE
API Key

The authorization header will be automatically generated when you send the request. [Learn more about authorization](#)

Key: Authorization
Value: authkey a46a6881-2f29-43ea-9971-f6f0dec5d22c
Add to: Header

All SOAP endpoints and operations have been rewritten as RPC endpoints to be able to use SIF on 360° Online. Note that the RPC endpoints can also be available in 360° on-prem installations, from 360° version 5.0.

You will get a URL and a secret authorization key that you need to use to call the service. The DNS name and auth key will differ from customer to customer.

The URL is:

`https://[customer specific url]/Biz/v2/api/call/SI.Data.RPC/SI.Data.RPC/[service]/[operation]?authkey=[auth key]`

If you are moving from the SOAP to the RPC endpoints, please refer to the document “SIF API in 360° Online.pdf”.

With version 5.12, we have added support for advance endpoint configuration for SIF RPC endpoint. For more detail information, please refer chapter: [Advance endpoint configuration](#). This support also been backported to v5.11. (v5.11 - Hotfix 168)

With version 5.14, we have added support for advance endpoint configuration to update methods (CaseService/Update and DocumentService/UpdateDocument) same as Get methods. For more details, please refer chapter: [Advance endpoint configuration \(v5.11 onwards.\)](#)

2.4.1 Endpoint configuration

Two ways to configure SIF RPC endpoint:


1. Below 5.3 version

You can configure endpoint while SIF RPC installation through data wizard.


2. 5.3 onwards

You can configure through web admin, follow below steps:


- a. Go to “Open 360 admin”

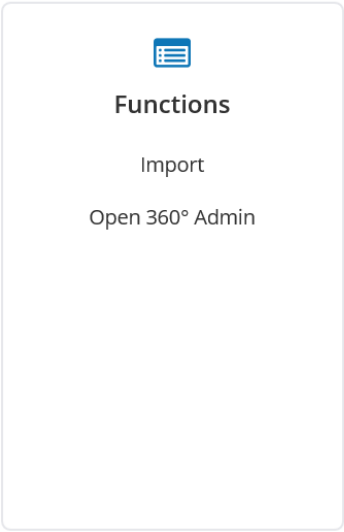


b. Go to “Configuration” tab.

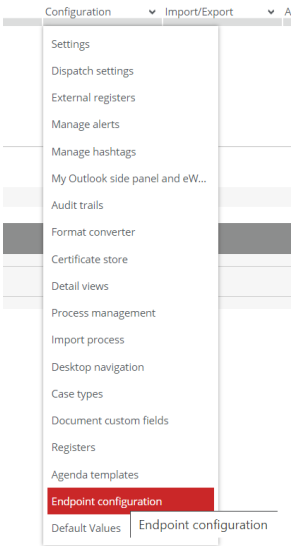

c. Click on “Add endpoint”

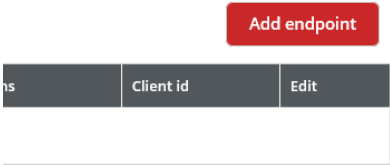

d. Fill out mandatory details.

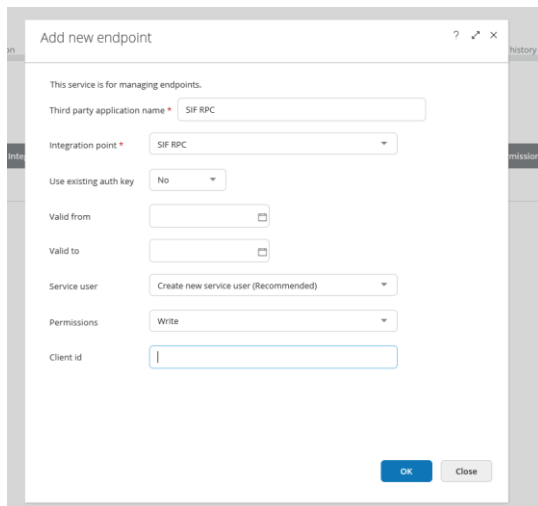

e. You will get row like this,

Legg til endpoint							
Tredjepartsprogram	Integreringspunkt	Gyldig fra	Gyldig til	Kopier service-URL	Rettigheter	Klient-ID	Rediger
SIF RPC	SIF RPC				Write		

Click on copy URL icon, there you will get the RPC authkey.

Note: It is always good practice to send the authentication key (authkey) in request headers.

For advance endpoint configuration for SIF RPC, please refer the section [Advance endpoint configuration \(v5.11 onwards.\)](#)

2.4.2 Swagger

We have generated Swagger-documentation for all the RPC endpoints. From 360° 5.0 you can test SIF RPC directly using Swagger UI. Add the auth key in the Authorize-box at the upper right side in the page of the service.

Swagger can be found here:

[https://\[customer-specific-domain\]/Biz/v2/api/swagger/SI.Data.RPC](https://[customer-specific-domain]/Biz/v2/api/swagger/SI.Data.RPC)

2.4.3 RPC Postman examples

A Postman collection with examples of SIF RPC-calls can be found at GitHub: <https://github.com/Public360/sif-rpc-postman-examples>

2.4.4 RPC C# sample client

Sample SIF RPC API client along with test projects. (This client will point to most recent SIF API build.) This solution includes 4 projects.

- CSV Import sample project: To import case from csv file using SIF RPC API.
- Console application to test out SIF services.
- Class library with connected servers.

- Test project with test methods.

[Public360API/SIFRPC_API: Public 360 - Sample SIF RPC API client along with test projects. \(github.com\)](#)

To get access to above link, please contact SIF team. This project has been published in private mode, only members can access it.

2.4.5 Common error messages in SIF RPC

Index was outside the bounds of the array

Response:

```
{"Type":"Error","CorrelationId":"a70a91e7-79e1-42fd-9f06-381a61e64e9c","ExceptionType":"IndexOutOfRangeException","Message":"Index was outside the bounds of the array.","Details":null}
```

Cause: Wrong name of the operation in the call. This is case sensitive, e.g. you will get this error if you try to call Createcase instead of CreateCase

Missing argument ‘...’

Response:

```
{"Type":"Error","CorrelationId":"0fb835f9-9661-43f4-9328-ca63e4c5c274","ExceptionType":"InvalidOperationException","Message":"Missing argument '...',"Details":null}
```

Cause: You are missing a field in the body. This is also case sensitive.

401 Unauthorized: Unable to authorize request

Cause: There's an error in the SIF configuration, and the problem is the user the service is running as. Contact Tieto.

200 OK: Can not inititate ADContextUser because the context user is empty or invalid

Cause: There is something wrong with the user in the ADContextUser field in the parameter – either the user is not a valid 360° user, or the format of the user's ID is wrong.

2.5 SOAP Bridge (360° 5.9 – 5.13)

With version v5.14, we have deprecated the support for SOAP Bridge. Customers need to convert their integrations to SIF RPC before upgrading to v5.14. Please contact TietoEvry Public360 support for more information.

From 360° version 5.9, we have provided the support for old SIF SOAP based services with RPC way of calling called SOAP bridge by introducing a new endpoint “SIF SOAP” under web admin -> Endpoint configuration just like “SIF RPC”. This bridge component is implemented as a Asp.net REST service but will translate the SOAP message and call the existing implementation. This new SOAP bridge will be available only on limited 360° versions, going further we will discontinue the SOAP services.


You will get a URL and a secret authorization key that you need to use to call the service. The DNS name and auth key will differ from customer to customer.

The URL is:

[https://\[customer specific url\]/Biz/v2-pbr/soapbridge/sif/\[service\]?authkey=\[auth key\]](https://[customer specific url]/Biz/v2-pbr/soapbridge/sif/[service]?authkey=[auth key])

2.5.1 Endpoint configuration

You can configure through web admin (Please note that to add new endpoint, you should have “TechnicalAdministrator” role)

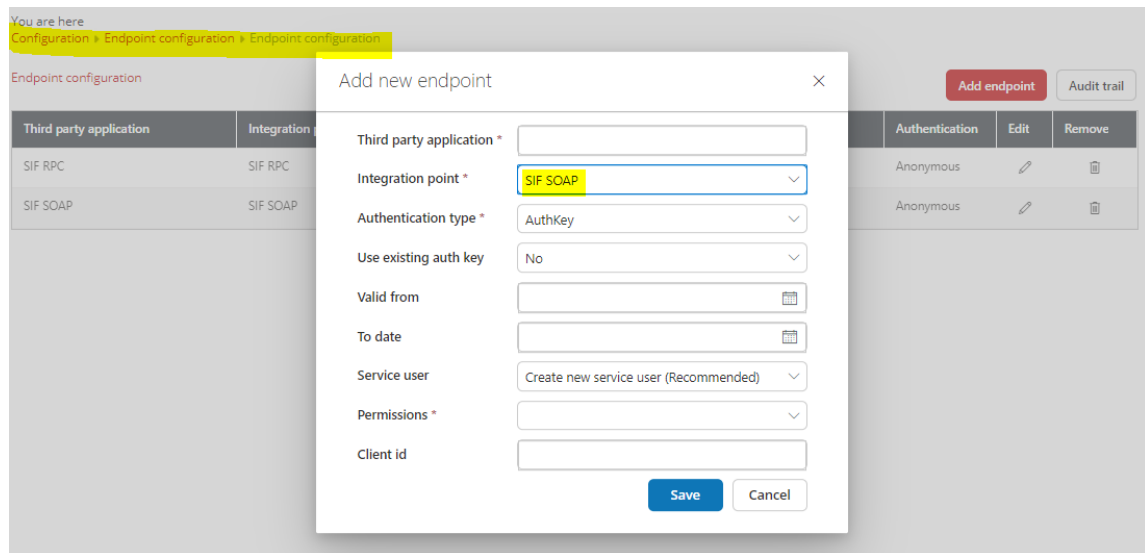

2.5.2 Things to remember

As this wrapper is very light weight and simple. There might be chances that for some scenarios it won't work, especially for stream objects, where we deal with file operations (GetFile, CheckIn and CheckOut, Upload). For those operations (File related operations), it is highly recommended to use SIF RPC instead.

2.6 Client responsibility

A client/consumer, for example external systems, is responsible for the following:

- Creating cases, documents and contacts in the correct order. This means that the service methods that are available must be called in the correct logical order. For example; you cannot create a document without first creating the case that it belongs to.
- Files must be in the correct format. PDF files is not verified to be PDF/A. No file format validation is done by the service.

- As a general rule, it is the client's responsibility to validate and clean input to its own needs. Some validation is still done by the 360° business logic, but errors will be in the stack trace format thrown by the business logic.
 - o Take note that customer specific validation can be implemented as a customer specific validation component.

2.7 PDF Converting

Converting of files to PDF (PDF/A) is not done by the service. This should be done using the 360° Format Converter module which uses a third-party application for the conversion. How the conversion is done is best explained with an example:

1. A client calls the service CreateDocument() or UpdateDocument() with files.
2. The service creates/updates a document and adds files to it in 360.
3. The 360° Format Converter module has a timer job that copies files to a third-party programs TODO folder. Only files that fit preconfigured requirements are copied to this folder, a typical requirement is that the file's document status is Closed.
4. The third-party application converts the files in the TODO folder. The files are then uploaded to 360° to the correct document.
5. The result is a 360° document with the original file(s) and PDF file(s).

The service has, in other words, no responsibility of converting files to PDF. The third-party application module is PixEdit which supports a wide range of file formats for conversion.

2.8 Authentication and ADContextUser

Note: Usage of ADContextUser is not recommended at least with SIF RPC API. Good practice is to have dedicated integration/service user for authentication. Each SIF RPC endpoint will have dedicated service user, therefore no need to send a user explicitly in request. If any need to run the request on behalf of then please contact Public360 support.

2.8.1 ADContextUser (not recommended)

The ADContextUser property is supported by all the service methods and contains the login name of a valid 360° user. If provided, the operation will execute as (impersonate) this user. If not provided, the operation will execute as the user that has authenticated against the web service, or for RPC, the user that has been configured to run the service in the installation.

Only some users can impersonate other users. For instance, if the client authenticates against the service with the user "domain\administrator", and specifies "domain\user1" as ADContextUser, "domain\administrator" must have impersonation rights in 360°. This is specified in the configuration file of the service.

Typical scenario 1: The client of the service is Application X. An integration user is created for this application, "domain\appx_int", which is configured with impersonation rights. The client authenticates with "domain\appx_int", but provides the login of the end user, "domain\user1", as ADContextUser. The operation is then executed as user1. For instance, if a case is created, user1 will be logged as the user who created it.

Typical scenario 2: Same as 1, except no ADContextUser is provided. In this case, the operation will be executed as appx_int. If a case is created, appx_int will be logged as the user who created it.

It is recommended that a dedicated user is created either for all clients to use in common ("domain\360sif_int"), or for each of them to use separately ("appx_int", "appy_int", ..). If ADContextUser is provided, it's enough with one common user. If ADContextUser is not provided, it is recommended to have a user for each client, so that the 360° log shows where the data came from. For instance, if both Application X and Application Y create contacts in 360, it is useful to know which of them created a specific contact. The integration user should have the Registrar role or the All Access role. If it is going to synchronize users, it also needs the User Administrator role.

2.8.2 Endpoint Authentication

Type of authentication provided by endpoint config:

Securing endpoints with bearer tokens adds an important extra layer of security by offloading the ownership of the secrets from the application (us) to the customer. **Also note that the AuthProxy only validates tokens and keys - it does not play any part in the flow to acquire the token!**

2.8.2.1 Authkey - Anonymous

Endpoints configured with "Authkey" will get dedicated service user with all access to 360. There is an option to select existing service user while configuration. All the actions will be performed by this service user. This user will not follow the same access control system as any other 360 users.

You will get all necessary loggings for create and edit but not read.

2.8.2.2 Bearer - (JWT)

Authorization Code Grant (ACG)

Securing an endpoint with this authentication type when client application running the requests with user context. Same users are also in 360. Using this type, you don't have to worry about the access controls. What the user get access to in 360 is then controlled only by the internal 360 access control system. (360 access matrix). You will also get all necessary loggings including read objects.

Note: If a user's have access to endpoint A secured with only bearer, they will also have access to endpoint B secured with bearer. The reason for this is that there is no way to separate access to different endpoints. To distinguish between two bearer type endpoints. Use ClientId property while configuring the endpoints.

2.8.2.3 Combined User

Bearer (JWT) + Authkey (Authorization Code Grant in combination with Authkey ACGK)

This adds an extra dimension to the authentication by requiring a secret that is managed by the 360 product (responsible). The resources are required to have a "technical administrator role" in 360 and is typically different from the resources managing the token configuration. The authkey is also adding "high level" authorization by restricting access to specific functionality in 360 using endpoint paths.

You will also get all necessary loggings including read objects.

2.8.2.4 Combined Daemon

Client Credential Grant in combination with Authkey (CCGA)

Client credential grant cannot be used by its own without introducing additional information to identify the different clients:

<https://docs.microsoft.com/en-us/azure/active-directory/develop/v2-oauth2-client-creds-grant-flow>

This is the option to use when the client is acting on behalf of the user or as a separate application (daemon). The main "problem" here is that there is no user connected to the token. This means that you must use some "property" on the token as identification, or as we do, connect the token explicitly to a 360 user. The coupling of the token and user is done on a given endpoint with a given authkey.

Best practices.

- Always try to create endpoint with "Bearer authentication" if you want to apply same access rule as 360 UI, User based authentication.
- With bearer authentication, you will get all necessary logging in 360 for example, File read by "this user".
- If you want to have dedicated user for integration, it is possible to have that user in AD and 360 with necessary/limited access rights.
- If you are using "Authkey" for authentication, it is recommended to have it in headers instead of URL.
- If you using "ClientId" property while configuring the endpoint, it is must that you send this information in headers along with required tokens.

2.9 Contact identifiers

There are three types of registered contacts in 360: Enterprises (/companies/departments), private persons and contact persons. A contact person is associated with an enterprise, a private person is not. A user always has a contact person, which contains the contact metadata of that user.

In the SIF API, contacts are identified by their PersonalIdNumber (social security number or "fødselsnummer" in Norwegian) if they're private persons, EnterpriseNumber (organization number or "organisasjonsnummer" in Norwegian) if they're enterprises, or ExternalId if they're contact persons. For instance, if you're synchronizing a private person with PersonalIdNumber 1234567890, the service will look for a contact with that id and update it if it exists.

When multiple external systems work with 360° contacts, or when there are existing contacts that should be referred to / updated by the service, care must be taken to prevent duplicates and other problems. This should be analyzed before the system is put into production.

2.9.1 Creating contact person and private person by same external id

Suppose If I am creating the private person with external id: "Test External Id 001" after that creating contact person with same external id i.e. "Test External Id 001" so, it will update the existing external id with [duplicate] and append GUID at last for that external id. The existing updated external id look likes "[duplicate] Test External Id 001 e1a72269-e501-4a45-9da2-9586d1d6f78c" and previously created private person is deactivated.

After that if you want to update anything against that external id it will update the newly created contact person's entries not the older private person because that private person is deactivated now, and the external id is also updated

And vice versa (same things are applicable when we are doing the same process for contact person to private person)

Why this happens:

External id is a unique field. So, we can't use same external id for both private person and contact person. To handle this constraint, we are updating the existing external id with [duplicate] and append GUID at last, if we used the already exist external id while creating new contact person or a private person.

2.10 Validation of personal id number and enterprise number

When synchronizing private persons and enterprises, the service can optionally validate that the values comply with Norwegian fødselsnummer and organisasjonsnummer formats (11 and 9 digits and satisfying a modulus 11 validation).

This functionality is toggled by the "SI.Data.WS.ValidateContactId" appSetting in the SIF web.config file. By default, it is set to false.

2.11 Code values

Some methods accept input in the form of code table values. For instance, when creating a case, you can set its Status property to a value from the Case status code table, such as "B".

All properties that accept code values can alternatively accept the recno of the code, on the format "recno:123". It is less risky to specify the code by recno, since it's possible (but rare) for code values to change.

Read more about this in the [Common Code Table: values chapter](#).

2.12 Property tags

2.12.1 (*)

This tag behind a property name means that the property is mandatory.

2.12.2 (**)

This tag behind a property name appears in pair with another property and means that one of the two properties are mandatory. You can choose the one that best fits your needs.

2.12.3 (\)

This tag behind property name means that at least one of properties with this symbol needs to be supplied.

2.13 Remark Validation.

In 360° version SP8 and below, remark *title* is mandatory. In version SP9 and above, remark *content* is mandatory. To support both scenarios, only one of the fields are now mandatory. Either remark title or remark content is mandatory, so that the remark validation is version independent. The value of remark title is assigned to remark content when content is null (not provided), and vice versa – the value of remark content is assigned to title, if title is not provided.

3 Delta support

Delta Support in an API (Using LastDate as Modified Date)

Delta support in an API is a mechanism that allows clients to fetch only the data that has **changed** (created, updated, or deleted) **since a specific point in time**. This is efficient for syncing data without retrieving everything repeatedly.

3.1 Scenario Overview

- **Input:** A LastDate (datetime) is provided in the request. This represents the last time the client fetched data.
- **Response:**
 - A list of records modified after LastDate.
 - A NextDeltaLastDate value – the new timestamp clients should use in the next delta request.

3.2 How It Works

Request:

```
{
  "LastDate": "2025-05-08T13:53:30.877",
  "MaxReturnedCases": 10,
  "ArchiveCode": "00"
}
```

API Behaviour:

- Query the database for records where ModifiedDate > LastDate.
- Return those records in the response.
- Calculate and return the highest ModifiedDate among the returned records as NextDeltaLastDate.

Response Example:

```
{
  "Cases": [
    {}, {}, {}
  ],
}
```

```

"TotalPageCount": 1,
"TotalCount": 3,
"NextDeltaLastDate": "2025-05-20T08:18:05.193",
"Successful": true,
"ErrorMessage": null,
"ErrorDetails": null
}

```

3.3 How the Client Should Use It

- On the next request, the client should use NextDeltaLastDate as the new LastDate.
- This ensures no duplicate or missed data.

3.4 Important Considerations

- ModifiedDate Field: Must be reliably updated on every insert/update.
- Time Precision: Timestamps should include milliseconds to avoid collisions.
- No Changes Case: If no data has changed, return an empty array and set NextDeltaLastDate = LastDate.

3.5 Benefits of Delta Support

- Reduces bandwidth usage.
- Speed up the sync/retrieval operations.
- Makes API usage scalable for mobile and distributed clients.

4 Contact service

Typical SOAP URL	http://[servername]:4000/SI.WS.Core/SIF/ContactService.svc
Typical REST URL	http://[servername]:4000/SI.WS.Core/SIFREST/api/contactpersons/ http://[servername]:4000/SI.WS.Core/SIFREST/api/privatepersons/ http://[servername]:4000/SI.WS.Core/SIFREST/api/enterprises/
Typical RPC URL	https://[customer specific domain]/Biz/v2/api/call/SI.Data.RPC/SI.Data.RPC/ContactService
Typical SOAP bridge URL – (deprecated with v5.14)	https://[customer specific domain]/Biz/v2-pbr/soapbridge/sif /ContactService

4.1 SynchronizeContactPerson

Creates or updates a contact person contact in 360° based on ExternalId. If the supplied ExternalId does not exist in 360° the contact is created. If the supplied ExternalId exists in 360° the contact is updated to mirror the supplied information.

In the scenario where there exist several contacts with the same ExternalId the oldest (lowest recno) will be updated, while an error message is logged to TraceView and the Windows Event Viewer. It is not possible that this web service method itself creates a duplicate of a contact, given that the ExternalId is correct.

OBS: If a property is not set, meaning it is blank or null; the corresponding value in 360° will be set to an empty value. This behavior is unique to the contact related synchronization methods.

4.1.1 Input

Data Contract: SynchronizeContactPersonParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
FirstName(*)	Contact – Name2	Mandatory when creating the contact
MiddleName	Contact – Name2	Middle name of the contact, concatenated to FirstName.
LastName(*)	Contact – Name3	Mandatory when creating the contact
ExternalId(*)	Contact – ExternalID	The external id number of the contact used as a unique identifier for the contact in 360. If unique, a new contact is created, otherwise the contact is updated. If more than one external system use the web service, external id's must be unique also between external systems.
Enterprise(*)	Contact – ToEmployer	The OrgNo or the ExternalID of the enterprise the contact is connected to, most likely as an employee.
Categories	Contact – Categories	List of categories, identified by their code name in the configured language, or by recno on the format "recno:123". If this property is not specified (null), no changes will be made to the user's existing categories.
Email	Contact – TeleObject 6	Email of this contact
AlternativeEmail	Contact – TeleObject 28	Alternative email of this contact
PhoneNumber	Contact – TeleObject 1	Whole phone number, including country and area code. Any formatting is ok but if you need the edit wizard in 360° to properly split country code and phone number, add a space between. E.g. "+47 22444444"
MobilePhone	Contact – TeleObject 27	See PhoneNumber.
DirectLine	Contact – TeleObject 4	See PhoneNumber
PrivateAddress	Contact - Addresses	PrivateAddress is an address object, see fields needed for input under " Data Contract: Address ".
PostAddress	Contact - Addresses	PostAddress is an address object, see fields needed for input under " Data Contract: Address ".
DataSource		DataSource is presented as a log entry under the Log-tab on the contact. The point is to track which systems have made updates to the contact. No logging is done if this property is empty or not set.
Gender	Contact - Gender	Enum Gender.Female or Gender.Male
Initials	Contact - Initials	(max 20 chars)
From DLL version 1.0.0.58408 :		

		Added. Null values will clear stored data.
		Before DLL version 1.0.0.58408 : Not available and would not clear stored data.
Title	Contact – Title	Title of contact (max 40 chars)
CustomNo1 CustomNo2 CustomNo3	Contact – No1 Contact – No2 Contact – No3	Standard fields that can be used to store custom data in. Usage vary from customer to customer. Contrary to other properties on this contract, null values will NOT clear stored data. To clear stored data you have to input an empty “ ” string. Because of backwards compatibility considerations.
Active	Contact – Active	Sets the active status of the contact. If left blank, it will default to true. If a deactivated contact is updated through the web service with this field blank the contact will be reactivated.
AccessGroup	Contact – ToAccessGroup	Name (code value) of the access group, or recno on the format “recno:123”. If none is provided, default access group (“Public”) is set.
AdditionalFields	-	Additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
Web	Contact – TeleObject 3	Web of this contact
PrivateTelephone	Contact-Teleobject 7	Private telephone of contact
DirectFax	Contact- Teleobject 5	Direct fax of contact

4.1.2 Output

Data Contract: SynchronizeContactPersonResult

Output Property	360° field	Comment
Recno	Contact – Recno	Unique ID in 360° for the contact
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

4.2 SynchronizePrivatePerson

This creates or updates a private person contact in 360° based on PersonalIdNumber. If the supplied PersonalIdNumber does not exist in 360° the contact is created. If the supplied PersonalIdNumber exists in 360° the contact is updated to mirror the supplied information.

In the scenario where there exists several contacts with the same PersonalIdNumber the oldest (lowest recno) will be updated, while an error message is logged to TraceView and the Windows Event Viewer. It is not possible that this web service method itself creates a duplicate of a contact, given that the PersonalIdNumber is correct.

OBS: If a property is not set, meaning it is blank or null; the corresponding value in 360° will be set to an empty value. This behavior is unique to the contact related synchronization methods.

4.2.1 Input

Data Contract: SynchronizePrivatePersonParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
FirstName(*)	Contact – Name2	Mandatory when creating the contact
MiddleName	Contact – Name2	Middle name of the contact, concatenated to FirstName.
LastName(*)	Contact – Name3	Mandatory when creating the contact
PersonalIdNumber(**)	Contact – Referencenumber	The personal identity number of the contact used as a unique identifier for the contact in 360°. If unique, a new contact is created, otherwise the contact is updated. Can optionally validate that the values comply with Norwegian fødselsnummer and organisasjonsnummer formats (11 and 9 digits, and satisfying a modulus 11 validation).
ExternalID(**)	Contact – ExternalID	The external id number of the contact can be used as a unique identifier for the contact in 360° instead of the personal identity number. If unique, a new contact is created, otherwise the contact is updated. If more than one external system use the web service, external id's must be unique also between external systems. If both ExternalID and PersonalIdNumber are used on a Contact in 360° which already exists with only PersonalIdNumber, a duplicate contact will be created.
Email	Contact – TeleObject 6	Email of this contact
AlternativeEmail	Contact – TeleObject 28	Alternative email of this contact
PhoneNumber	Contact – TeleObject 1	Whole phone number, including country and area code. Any formatting is ok but if you need the edit

		wizard in 360° to properly split country code and phone number, add a space between. E.g. "+47 22444444"
MobilePhone	Contact – TeleObject 27	See PhoneNumber
PrivateAddress	Contact – Addresses	PrivateAddress is an address object, see fields needed for input under " Data Contract: Address ".
PostAddress	Contact – Addresses	PostAddress is an address object, see fields needed for input under " Data Contract: Address ". Keep in mind standard 360° configuration does not present this address type in the GUI.
WorkAddress	Contact – Addresses	WorkAddress is an address object, see fields needed for input under " Data Contract: Address ".
DataSource		DataSource is presented as a log entry under the Log-tab on the contact. The point is to track which systems have made updates to the contact. No logging is done if this property is empty or not set.
Categories	Contact – Categories	List of categories, identified by their code name in the configured language, or by recno on the format "recno:123". If this property is not specified (null), no changes will be made to the contact's existing categories.
Gender	Contact – Gender	Enum Gender.Female or Gender.Male
CustomNo1 CustomNo2 CustomNo3	Contact – No1 Contact – No2 Contact – No3	Standard fields that can be used to store custom data in. Usage vary from customer to customer. Contrary to other properties on this contract, null values will NOT clear stored data. To clear stored data you have to input an empty " " string. Because of backwards compatibility considerations.
Active	Contact – Active	Sets the active status of the contact. If left blank, it will default to true. If a deactivated contact is updated through the web service with this field blank the contact will be reactivated.
AccessGroup	Contact – ToAccessGroup	Name (code value) of the access group, or recno on the format "recno:123". If none is provided, default access group ("Public") is set.
AdditionalFields	-	Additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
ContactRelations	Contact – RelationsToOtherContacts	List of contact – contact relations. Valid relation role (Contact – Contact role) can be passed but default role is "Cooperate with". Note: Recno or ReferenceNumber or ExternalId is mandatory to make contact contact relation, required at least one id set.

See the chapter "[ContactContactParameter](#)" for details, what kind of fields and how to use this parameter.

4.2.2 Output

Data Contract: SynchronizePrivatePersonResult

Output Property	360° field	Comment
Recno	Contact – Recno	Unique ID in 360° for the contact
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

4.3 SynchronizeEnterprise

This creates or updates an enterprise contact in 360° based on EnterpriseNumber. If the supplied EnterpriseNumber does not exist in 360° the contact is created. If the supplied EnterpriseNumber exists in 360° the contact is updated to mirror the supplied data.

In the scenario where there exists several contacts with the same EnterpriseNumber the oldest (lowest recno) will be updated, while an error message is logged to TraceView and the Windows Event Viewer. It is not possible that this web service method itself creates a duplicate of a contact, given that the EnterpriseNumber is correct.

OBS: If a property is not set, meaning it is blank or null; the corresponding value in 360° will be set to an empty value. This behavior is unique to the contact related synchronization methods.

4.3.1 Input

Data Contract: SynchronizeEnterpriseParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
Name(*)	Contact – Name	Mandatory when creating the contact
EnterpriseNumber(**)	Contact – Referencenumber	Enterprise number of the company. Represents a unique identifier for the enterprise in 360. Can optionally validate that the values comply with Norwegian fødselsnummer and organisasjonsnummer formats (11 and 9 digits, and satisfying a modulus 11 validation).
ExternalID(**)	Contact – ExternalID	The external id number of the contact can be used as a unique identifier for the contact in 360° instead of the enterprise number. If unique, a new

		contact is created, otherwise the contact is updated. If more than one external system use the web service, external id's must be unique also between external systems. If both ExternalID and EnterpriseNumber are used on a Contact in 360° which already exists with only EnterpriseNumber, a duplicate contact will be created.
ParentEnterpriseNumber	Contact – ToEmployer	Enterprise number of the parent company. This field will also accept ExternalID of the parent company as input.
PhoneNumber	Contact – Teleobject 1	Whole phone number, including country and area code. Any formatting is ok but if you need the edit wizard in 360° to properly split country code and phone number, add a space between. E.g. "+47 22444444"
Email	Contact – Teleobject 6	Email of this contact
AlternativeEmail	Contact – TeleObject 28	Alternative email of this contact
Web	Contact – Teleobject 3	Website of the company.
PostAddress	Contact – Addresses	Postal address of the company. PostAddress is an address object, see fields needed for input under chapter: " Data Contract: Address ".
OfficeAddress	Contact – Addresses	Office address of the company. OfficeAddress is an address object, see fields needed for input under chapter: " Data Contract: Address ".
DataSource		DataSource is presented as a log entry under the Log-tab on the contact. The point is to track which systems have made updates to the contact. No logging is done if this property is empty or not set.
Categories	Contact – Categories	List of categories, identified by their code name in the configured language, or by recno on the format "recno:123". If this property is not specified (null), no changes will be made to the contact's existing categories.
ContactRelations	Contact – FromMeToOthers	List of contact – contact relations. All relations are hardcoded to relation role "Cooperate with". Note: Only a private person or an enterprise may be added as a relation to a Contact. See the chapter "ContactContactParameter" for details, what kind of fields and how to use this parameter.
ReferenceNumber	Contact – FromMeToOthers – Referencenumber	EnterpriseNumber or PersonalIdNumber of the connected contact.
Initials	Contact – Initials	The Initials or ShortCode of the enterprise. (max 20 chars)

		From DLL version 1.0.0.58408: Added. Null values will clear this field. Before DLL version 1.0.0.58408: Not available and was never cleared.
CustomNo1 CustomNo2 CustomNo3	Contact – No1 Contact – No2 Contact – No3	Standard fields that can be used to store custom data in. Usage vary from customer to customer. Contrary to other properties on this contract, null values will NOT clear stored data. To clear stored data you have to input an empty “ ” string. Because of backwards compatibility considerations.
Active	Contact – Active	Sets the active status of the contact. If left blank, it will default to true. If a deactivated contact is updated through the web service with this field blank the contact will be reactivated.
AccessGroup	Contact – ToAccessGroup	Name (code value) of the access group, or recno on the format “recno:123”. If none is provided, default access group (“Public”) is set.
AdditionalFields	-	Additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.

4.3.2 Output

Data Contract: SynchronizeEnterpriseResult

Output Property	360° field	Comment
Recno	Contact – Recno	Unique ID in 360° for the contact
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

4.4 UpdateContactPerson

This is a pure update operation for contact person contacts in 360° to provide Recno and ExternalID as a unique identifier.

Primarily, only *one* of these IDs must be used.

If the supplied ID does not exist in 360°, an error message is returned. If the supplied ID exist in 360°, the contact is updated only with the supplied information.

OBS: If a property is not set, meaning it is blank or null; the corresponding value in 360° will not be set to an empty value (like in the Synchronize operations). It will keep its original value (set before the Update method is executed).

4.4.1 Input

Data Contract: UpdateContactPersonParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
FirstName	Contact – Name2	
MiddleName	Contact – Name2	Middle name of the contact, concatenated to FirstName.
LastName	Contact – Name3	
Recno (**)	Contact – Recno	The recno of the contact used as a unique identifier for the contact in 360°, instead of external id number. If it exists, the contact is updated.
Enterprise (**)	Contact – ToEmployer	The OrgNo or the ExternalID of the enterprise the contact is connected to, most likely as an employee.
Externalid (**)	Contact – ExternalID	The external id number of the contact used as a unique identifier for the contact in 360°, instead of recno. If it exists, the contact is updated.
Email	Contact – TeleObject 6	Email of this contact
AlternativeEmail	Contact – TeleObject 28	Alternative email of this contact
PhoneNumber	Contact – TeleObject 1	Whole phone number, including country and area code. Any formatting is ok but if you need the edit wizard in 360° to properly split country code and phone number, add a space between. E.g. "+47 22444444"
MobilePhone	Contact – TeleObject 27	See PhoneNumber
PrivateAddress	Contact – Addresses	PrivateAddress is an address object, see fields needed for input under " Data Contract: Address ".
PostAddress	Contact – Addresses	PostAddress is an address object, see fields needed for input under " Data Contract: Address ".

		Keep in mind standard 360° configuration does not present this address type in the GUI.
Categories	Contact – Categories	List of categories, identified by their code name in the configured language, or by recno on the format “recno:123”.
Gender	Contact – Gender	Enum Gender.Female or Gender.Male
CustomNo1	Contact – No1	Standard fields that can be used to store custom data in. Usage vary from customer to customer.
CustomNo2	Contact – No2	
CustomNo3	Contact – No3	
AccessGroup	Contact – ToAccessGroup	Name (code value) of the access group, or recno on the format “recno:123”. If none is provided, default access group (“Public”) is set.
ActiveContact	Contact – ActiveContact	Specifies whether or not a contact is active or inactive.
Title	Contact – Title	Title of contact
Initials	Contact – Initials	The Initials or ShortCode of the contact person.
AdditionalFields	-	Additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
Web	Contact – TeleObject 3	Web of this contact
PrivateTelephone	Contact-Teleobject 7	Private telephone of contact
DirectFax	Contact- Teleobject 5	Direct fax of contact

4.4.2 Output

Data Contract: UpdateContactPersonResult

Output Property	360° field	Comment
Recno	Contact – Recno	Unique ID in 360° for the contact
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

4.5 UpdatePrivatePerson

This is a pure update operation for private person contacts in 360° to provide Recno as a unique identifier (in addition to PersonalIdNumber and ExternalID).

Primarily, only *one* of these IDs must be used. However, it is possible to use Recno in combination with PersonalIdNumber and/or ExternalID. Whenever a value on either PersonalIdNumber or ExternalID, or both, are sent in together with a value for Recno, then Recno is used as the identifier, and the provided values in PersonalIdNumber and/or ExternalID are added/updated in their respective fields in 360°. Therefore, this operation can be used to add and update the IDs of contacts in 360°.

If the supplied ID does not exist in 360°, an error message is returned. If the supplied ID exist in 360°, the contact is updated only with the supplied information.

In the scenario where there exists several contacts with the same PersonalIdNumber or ExternalID, an error message is returned telling that duplicate contacts exist. It is not possible that this web service method itself creates a duplicate of a contact, given that the PersonalIdNumber and ExternalID are correct.

OBS: If a property is not set, meaning it is blank or null; the corresponding value in 360° will not be set to an empty value (like in the Synchronize operations). It will keep its original value (set before the Update method is executed).

4.5.1 Input

Data Contract: UpdatePrivatePersonParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
FirstName	Contact – Name2	
MiddleName	Contact – Name2	Middle name of the contact, concatenated to FirstName.
LastName	Contact – Name3	
Recno(**)	Contact – Recno	The recno of the contact used as a unique identifier for the contact in 360°, instead of personal identity number or external id number. If it exists, the contact is updated.
PersonalIdNumber(**)	Contact – Referencenumber	The personal identity number of the contact used as a unique identifier for the contact in 360°, instead of recno and external id number. If it exists, the contact is updated. Can optionally validate that the values comply with Norwegian fødselsnummer and organisasjonsnummer formats (11 and 9 digits, and satisfying a modulus 11 validation).
ExternalID(**)	Contact - ExternalID	The external id number of the contact used as a unique identifier for the contact in 360°, instead of recno and personal identity number.

		If it exists, the contact is updated.
Email	Contact – TeleObject 6	Email of this contact.
AlternativeEmail	Contact – TeleObject 28	Alternative email of this contact.
PhoneNumber	Contact – TeleObject 1	Whole phone number, including country and area code. Any formatting is ok but if you need the edit wizard in 360° to properly split country code and phone number, add a space between. E.g. "+47 22444444"
MobilePhone	Contact – TeleObject 27	See PhoneNumber
PrivateAddress	Contact - Addresses	PrivateAddress is an address object, see fields needed for input under " Data Contract: Address ".
PostAddress	Contact - Addresses	PostAddress is an address object, see fields needed for input under " Data Contract: Address ". Keep in mind standard 360° configuration does not present this address type in the GUI.
WorkAddress	Contact - Addresses	WorkAddress is an address object, see fields needed for input under " Data Contract: Address ".
Categories	Contact – Categories	List of categories, identified by their code name in the configured language, or by recno on the format "recno:123".
Gender	Contact - Gender	Enum Gender.Female or Gender.Male
CustomNo1 CustomNo2 CustomNo3	Contact – No1 Contact – No2 Contact – No3	Standard fields that can be used to store custom data in. Usage vary from customer to customer.
Active	Contact – Active	Sets the active status of the contact. If left blank, it will default to true. So, if a deactivated contact is updated through this method with this field left blank, the contact will be reactivated.
AccessGroup	Contact – ToAccessGroup	Name (code value) of the access group, or recno on the format "recno:123". If none is provided, default access group ("Public") is set.
Title	Contact – Title	Title of the private person

4.5.2 Output

Data Contract: UpdatePrivatePersonResult

Output Property	360° field	Comment
Recno	Contact – Recno	Unique ID in 360° for the contact
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

4.6 UpdateEnterprise

This is a pure update operation for enterprise contacts in 360° to provide Recno as a unique identifier (in addition to EnterpriseNumber and ExternalID).

Primarily, only *one* of these IDs must be used.

If the supplied ID does not exist in 360°, an error message is returned. If the supplied ID exist in 360°, the contact is updated only with the supplied information.

OBS: If a property is not set, meaning it is blank or null; the corresponding value in 360° will not be set to an empty value (like in the Synchronize operations). It will keep its original value (set before the Update method is executed).

4.6.1 Input

Data Contract: UpdateEnterpriseParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
Name	Contact – Name	
Recno (**)	Contact – Recno	The recno of the contact used as a unique identifier for the contact in 360°, instead of enterprise number or external id number. If it exists, the contact is updated.
EnterpriseNumber (**)	Contact – Referencenumber	The enterprise number of the contact used as a unique identifier for the contact in 360°, instead of recno and external id number. If it exists, the contact is updated.
ExternalID (**)	Contact - ExternalID	The external id number of the contact used as a unique identifier for the contact in 360°, instead of recno and enterprise number. If it exists, the contact is updated.
ParentEnterpriseNumber	Contact – ToEmployer	Enterprise number of the parent company.
Email	Contact – TeleObject 6	Email of this contact

AlternativeEmail	Contact – TeleObject 28	Alternative email of this contact
PhoneNumber	Contact – TeleObject 1	Whole phone number, including country and area code. Any formatting is ok but if you need the edit wizard in 360° to properly split country code and phone number, add a space between. E.g. "+47 22444444"
MobilePhone	Contact – TeleObject 27	See PhoneNumber
OfficeAddress	Contact - Addresses	OfficeAddress is an address object, see fields needed for input under " Data Contract: Address ".
PostAddress	Contact - Addresses	PostAddress is an address object, see fields needed for input under " Data Contract: Address ". Keep in mind standard 360° configuration does not present this address type in the GUI.
Categories	Contact – Categories	List of categories, identified by their code name in the configured language, or by recno on the format "recno:123".
Gender	Contact - Gender	Enum Gender.Female or Gender.Male
CustomNo1 CustomNo2 CustomNo3	Contact – No1 Contact – No2 Contact – No3	Standard fields that can be used to store custom data in. Usage vary from customer to customer.
ActiveContact	Contact – ActiveContact	Specifies whether or not a contact is active or inactive.
AccessGroup	Contact – ToAccessGroup	Name (code value) of the access group, or recno on the format "recno:123". If none is provided, default access group ("Public") is set.
Initials	Contact – Initials	The Initials or ShortCode of the enterprise.
AdditionalFields	-	Additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.

4.6.2 Output

Data Contract: UpdateEnterpriseResult

Output Property	360° field	Comment
Recno	Contact – Recno	Unique ID in 360° for the contact
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

4.7 GetContactPersons

Retrieves contact persons from 360° based on criteria defined in the input parameter. At least one criteria (Name, Recno, Categories or ExternalId) must be given. Returns a list of matching contact persons.

4.7.1 Input

Data Contract: GetContactPersonParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
Recno	Contact – Recno	Recno (unique identifier in 360) of the contact. Must be an exact match to return a contact.
Name	Contact – SearchName	Name of the contact. Returns all contacts with a name that contains the search name. Example: “Inge” will return “Knut Inge N.” and “Inge Larsen”
ExternalId	Contact – ExternalID	External identity number (unique identifier) of the contact. Must be an exact match to return a contact.
Active	Contact – ActiveContact	Active/inactive contacts. Boolean.
Categories	Contact – Categories	List of categories, identified by their code name in the configured language, or by recno on the format “recno:123”.
CreatedDateRange	Contact - CreatedDate	See Data Contract: DateRange for details.
From	-	Greater than or equal to. Precise to seconds.
To	-	Less than or equal to. Precise to seconds.
ModifiedDateRange	Contact - ModifiedDate	See Data Contract: DateRange for details.
From	-	Greater than or equal to. Precise to seconds.
To	-	Less than or equal to. Precise to seconds.
DateCriteria		Searches using DateCriteria, for more details refere chapter Data Contract: DateCriteriaType , what kind of fields and how to use this parameter.
Email	Contact – TeleObject 6	Email of this contact
AlternativeEmail	Contact – TeleObject 28	Alternative email of this contact
Page	-	Results are always returned paginated, meaning if your search results in 3000 objects, and MaxRows is 1000, then: Page 0 will have object 1-1000 Page 1 will have object 1001-2000, etc. First page is 0, meaning 0-indexed. Defaults to 0. Note: Always use SortCriterion along with page, to get more accurate result.
MaxRows	-	Read Page property for details. Defaults to all.
SortCriterion	-	Sort the search, is applied before Page and MaxRows limitations. Defaults to no sorting criterion, the database then controls the order. Enum values: - RecnoDescending

		- RecnoAscending Note: Always use SortCriterion along with page, to get more accurate result.
IncludeCustomFields	-	Boolean value, set true if you want additional 360° fields which are not currently included in the webservice output objects. Default value is false. Refer chapter Get Contact Custom Data for more details.
AdditionalFields	-	Searches using additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
AdditionalListFields		Searches using additional fields list parameter – see chapter for Data Contract: AdditionalFieldListParameter for details, what kind of fields and how to use this parameter.
Web	Contact – TeleObject 3	Web of contact

4.7.2 Output

Data Contract: GetContactPersonResult

Output Property	360° field	Comment
ContactPersons	Contact	List of ContactPersonResult objects. See chapter “ Data Contract: ContactPersonResult ” for details. From DLL version 1.0.0.63725 : Returns list of objects of class named ContactPersonResult. Before DLL version 1.0.0.63725 : Returns list of objects of class named ContactPersonBase.
TotalCount	-	Total number of hits.
TotalPageCount	-	Total number of pages.
Successful	-	Will be true as long as no exception occurred during the execution. This means that successful will be true even if no contact persons matching the criteria was found.
ErrorMessage	-	If successful is false, this contains a short error message
ErrorDetails	-	If successful is false, this contains a full stack trace

4.8 GetPrivatePersons

Retrieves private persons from 360° based on criteria defined in the input parameter. At least one criteria (Name, Recno or PersonalIdNumber) must be given. Returns a list of matching private persons.

4.8.1 Input

Data Contract: GetPrivatePersonParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
Recno	Contact – Recno	Recno (unique identifier in 360) of the contact. Must be an exact match to return a contact.
Name	Contact – SearchName	Name of the contact. Returns all contacts with a name that contains the search name. Example: “Inge” will return “Knut Inge N.” and “Inge Larsen”
ExternalID	Contact - ExternalID	ExternalID (possible unique identifier) of the contact. Must be an exact match to return a contact.
PersonalIdNumber	Contact – ReferenceNumber	Personal identity number (unique identifier) of the contact. Must be an exact match to return a contact.
Active	Contact – ActiveContact	Active/inactive contacts. Boolean.
Categories	Contact – Categories	List of categories, identified by their code name in the configured language, or by recno on the format “recno:123”.
CreatedDateRange	Contact - CreatedDate	See Data Contract: DateRange for details.
From	-	Greater than or equal to. Precise to seconds.
To	-	Less than or equal to. Precise to seconds.
ModifiedDateRange	Contact - ModifiedDate	See Data Contract: DateRange for details.
From	-	Greater than or equal to. Precise to seconds.
To	-	Less than or equal to. Precise to seconds.
Page	-	Results are always returned paginated, meaning if your search results in 3000 objects, and MaxRows is 1000, then: Page 0 will have object 1-1000 Page 1 will have object 1001-2000, etc. First page is 0, meaning 0-indexed. Defaults to 0. Note: Always use SortCriterion along with page, to get more accurate result.
MaxRows	-	Read Page property for details. Defaults to all.
SortCriterion	-	Sort the search, is applied before Page and MaxRows limitations. Defaults to no sorting criterion, the database then controls the order. Enum values: - RecnoDescending - RecnoAscending Note: Always use SortCriterion along with page, to get more accurate result.

AdditionalFields		Searches using additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
IncludeCustomFields	-	Boolean value, set true if you want additional 360° fields which are not currently included in the webservice output objects. Default value is false. Refer chapter Get Contact Custom Data for more details.
DateCriteria		Searches using DateCriteria, for more details refere chapter Data Contract: DateCriteriaType , what kind of fields and how to use this parameter.
Email	Contact – TeleObject 6	Email of this contact
AlternativeEmail	Contact – TeleObject 28	Alternative email of this contact
AdditionalListFields		Searches using additional fields list parameter – see chapter for Data Contract: AdditionalFieldListParameter for details, what kind of fields and how to use this parameter.

4.8.2 Output

Data Contract: GetPrivatePersonResult

Output Property	360° field	Comment
PrivatePersons	Contact	List of PrivatePersonResult objects. See chapter “Data Contract: PrivatePersonResult” for details. From DLL version 1.0.0.63725: Returns list of objects of class named PrivatePersonResult. Before DLL version 1.0.0.63725: Returns list of objects of class named PrivatePersonBase.
TotalCount	-	Total number of hits.
TotalPageCount	-	Total number of pages.
Successful	-	Will be true as long as no exception occurred during the execution. This means that successful will be true even if no private persons matching the criteria was found.
ErrorMessage	-	If successful is false, this contains a short error message
ErrorDetails	-	If successful is false, this contains a full stack trace

4.9 GetEnterprises

Retrieves enterprises from 360° based on criteria defined in the input parameter. At least one criteria (Name, Recno, Categories or EnterpriseNumber) must be given. Returns a list of matching enterprises.

4.9.1 Input

Data Contract: GetEnterpriseParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
Name	Contact – SearchName	Name of the company. Returns all contacts with a name that contains the search name. Example: “Innovation” will give a hit on “Software Innovation”.
Recno	Contact – Recno	Recno (unique identifier in 360) of the company. Must be an exact match to return an enterprise
ExternalID	Contact - ExternalID	ExternalID (possible unique identifier) of the contact. Must be an exact match to return a contact.
EnterpriseNumber	Contact – ReferenceNumber	Enterprise identity number (unique identifier) of the company. Must be an exact match to return a contact
Active	Contact – ActiveContact	Boolean. Is the contact active or not
Categories	Contact – Categories	List of categories, identified by their code name in the configured language, or by recno on the format “recno:123”.
Initials	Contact - Initials	The Initials or ShortCode of the enterprise.
CreatedDateRange	Contact - CreatedDate	See Data Contract: DateRange for details.
From	-	Greater than or equal to. Precise to seconds.
To	-	Less than or equal to. Precise to seconds.
ModifiedDateRange	Contact - ModifiedDate	See Data Contract: DateRange for details.
From	-	Greater than or equal to. Precise to seconds.
To	-	Less than or equal to. Precise to seconds.
Page	-	Results are always returned paginated, meaning if your search results in 3000 objects, and MaxRows is 1000, then: Page 0 will have object 1-1000 Page 1 will have object 1001-2000, etc. First page is 0, meaning 0-indexed. Defaults to 0. Note: Always use SortCriterion along with page, to get more accurate result.
MaxRows	-	Read Page property for details. Defaults to all.
SortCriterion	-	Sort the search, is applied before Page and MaxRows limitations. Defaults to no sorting criterion, the database then controls the order. Enum values: - RecnoDescending - RecnoAscending

Note: Always use SortCriterion along with page, to get more accurate result.		
AdditionalFields		Searches using additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
IncludeCustomFields	-	Boolean value, set true if you want additional 360° fields which are not currently included in the webservice output objects. Default value is false. Refer chapter Get Contact Custom Data for more details.
DateCriteria		Searches using DateCriteria, for more details refere chapter Data Contract: DateCriteriaType , what kind of fields and how to use this parameter.
Email	Contact – TeleObject 6	Email of this contact
AlternativeEmail	Contact – TeleObject 28	Alternative email of this contact
AdditionalListFields		Searches using additional fields list parameter – see chapter for Data Contract: AdditionalFieldListParameter for details, what kind of fields and how to use this parameter.

4.9.2 Output

Data Contract: GetEnterpriseResult

Output Property	360° field	Comment
Enterprises	Contact	List of PrivatePersonBase objects. See the chapter “ Data Contract: EnterpriseResult ” for details.
TotalCount	-	Total number of hits.
TotalPageCount	-	Total number of pages.
Successful	-	Will be true as long as no exception occurred during the execution. This means that successful will be true even if no enterprises matching the criteria was found.
ErrorMessage	-	If successful is false, this contains a short error message
ErrorDetails	-	If successful is false, this contains a full stack trace

4.10 Sub Contracts

This chapter defines data contracts in use by the main data contracts of the Contact methods.

4.10.1 Data Contract: Address

Property	360° field	Comment
StreetAddress	Address - Address	Example: "Drammensveien 1"
ZipCode	Address - ZipCode	Zip code of address.
ZipPlace	Address - ZipPlace	Zip place (City) of address.
Country(*)	Address - Country	Country of address. To create an address the user has to include "Country" together with another field. E.g. just sending in "Country" will not create an address, but sending in Country and StreetAddress will create an address. Example of input formats: "Norway" or "NOR". From version 5.10.164 , added support for ISO 3166-1 alpha-2 country codes.
County	Address - County	Municipality of address. Norwegian: "Kommune". Examples of input formats: "BODØ" or "1804", it is recommended that the number format is used, i.e. "1804".
Area	Address - Area	County of address. Norwegian: "Fylke". Examples of input formats: "NORDLAND" or "18", it is recommended that the number format is used, i.e. "18".
State	Address – State	Very optional, only used for some foreign countries.

4.10.2 Data Contract: ContactPersonResult

Output Property	360° field	Comment
Recno	Contact – Recno	Unique identified in 360.
FirstName	Contact – Name2	
LastName	Contact – Name3	Mandatory when creating the contact
ExternalId	Contact – ExternalId	The external identity number of the contact, used as the unique identifier for the contact in 360.
Enterprise	Contact – ToEmployer	The OrgNo of the Enterprise the contact is connected to.
Email	Contact – TeleObject 6	
PhoneNumber	Contact – TeleObject 1	
MobilePhone	Contact – TeleObject 27	
DirectLine	Contact – TeleObject 4	
PrivateAddress	Contact - Addresses	PrivateAddress is an address object, see details under the chapter: "Data Contract: Address" .

PostAddress	Contact - Addresses	PostAddress is an address object, see details under the chapter: “Data Contract: Address” .
Initials	Contact - Initials	
Title	Contact – Title	
Gender	Contact – Gender	
Categories	Contact – Categories	
CustomNo1	Contact – No1	
CustomNo2	Contact – No2	
CustomNo3	Contact – No3	
Active	Contact – ActiveContact	
CreatedDate	Contact – CreatedDate	
ModifiedDate	Contact – ModifiedDate	
AccessGroup	Contact – ToAccessGroup-Code	The Access Group Code which is connected to contact.
EnterpriseEntity	Contact – ToEmployer	EnterpriseEntity is an object, see details under the chapter: Data Contract: EnterpriseEntity
Web	Contact – TeleObject 3	Web of the contact
AccessGroupRecno	Contact- ToAccessGroup-Recno	The Access Group Recno which is connected to contact

4.10.3 Data Contract: PrivatePersonResult

Output Property	360° field	Comment
Recno	Contact – Recno	Unique identified in 360.
FirstName	Contact – Name2	
LastName	Contact – Name3	Mandatory when creating the contact
PersonalIdNumber	Contact – Referencenumber	The personal identity number of the contact, used as the unique identifier for the contact in 360.
ExternalID	Contact - ExternalID	The ExternalID of the contact, can be used as the unique identifier for the contact in 360.
Email	Contact – TeleObject 6	
PhoneNumber	Contact – TeleObject 1	
MobilePhone	Contact – TeleObject 27	
PrivateAddress	Contact - Addresses	PrivateAddress is an address object, see details under the chapter: “Data Contract: Address” .
PostAddress	Contact - Addresses	PostAddress is an address object, see details under the chapter: “Data Contract: Address” .
WorkAddress	Contact - Addresses	WorkAddress is an address object, see details under the chapter: “Data Contract: Address” .
Gender	Contact – Gender	

Categories	Contact – Categories	
CustomNo1	Contact – No1	
CustomNo2	Contact – No2	
CustomNo3	Contact – No3	
Active	Contact – ActiveContact	
CreatedDate	Contact – CreatedDate	
ModifiedDate	Contact – ModifiedDate	
AccessGroup	Contact – ToAccessGroup	The Access Group Code which is connected to contact.
AccessGroupRecno	Contact- ToAccessGroup-Recno	The Access Group Recno which is connected to contact

4.10.4 Data Contract: EnterpriseResult

Output Property	360° field	Comment
Recno	Contact – Recno	Unique identified in 360.
EnterpriseNumber	Contact – Referencenumber	The enterprise number of the contact, used as the unique identifier for the contact in 360.
ExternalID	Contact - ExternalID	The ExternalID of the contact, can be used as the unique identifier for the contact in 360.
Name	Contact – Name	
PhoneNumber	Contact – Teleobject 1	
MobilePhone	Contact – Teleobject 27	
Web	Contact – Teleobject 3	
Telefax	Contact – Teleobject 2	
Email	Contact – Teleobject 6	
OfficeAddress	Contact – Addresses	OfficeAddress is an address object, see details under the chapter: “Data Contract: Address”
PostAddress	Contact - Addresses	PostAddress is an address object, see details under the chapter: “Data Contract: Address”
ContactRelations	Contact – ToContacts	A list of contacts associated with the enterprise. The list contains EnterpriseContactResult objects.
Name	Contact – ToContacts - Name	Name of a contact person
Initials	Contact – Initials	
ParentEnterpriseNumber	Contact – ToEmployer	Enterprise number of the parent company.
Categories	Contact – Categories	
CustomNo1	Contact – No1	
CustomNo2	Contact – No2	
CustomNo3	Contact – No3	
Active	Contact – ActiveContact	
CreatedDate	Contact – CreatedDate	
ModifiedDate	Contact – ModifiedDate	

AccessGroup	Contact – ToAccessGroup	The Access Group Code which is connected to contact.
AccessGroupRecno	Contact- ToAccessGroup- Recno	The Access Group Recno which is connected to contact

4.10.5 Data Contract: DateRange

Property	360° field	Comment
From		Greater than or equal to, can be precise down to seconds, not milliseconds.
To		Less than or equal to, can be precise down to seconds, not milliseconds.

If either From or To is null, the search will not be limited by the lower (From) or upper (To) date. If both is null and exception is thrown, as this is not correct use. Then the DateRange object itself should be null.

Take note that both From and To **cannot** be used to limit the search down to milliseconds difference, due to internal limitations. This means if you have two entities:

Entity Object 1 – Date 2017.01.20 19:03:20:500

Entity Object 2 – Date 2017.01.20 19:03:20:502

Then you **cannot** limit the search by specifying that you want all documents created after the 501th ms to only get Entity Object 2, instead all search results will include both objects.

4.10.6 Data Contract: ContactContactParameter

Property	360° field	Comment
Recno	Contact – Recno	Unique identified in 360.
ReferenceNumber	Contact – ReferenceNumber	Personal identity number (unique identifier) of the contact. Must be an exact match to return a contact.
ExternalId	Contact - ExternalID	ExternalID (possible unique identifier) of the contact. Must be an exact match to return a contact.
Role	UserProfile - ToSysrole	A relation to the System Role this profile is using.

4.10.7 Data Contract: EnterpriseEntity

Property	360° field	Comment
Recno	Contact -ToEmployer - ToEmployerRecno	Unique identifier in 360.
ExternalId	Contact - ToEmployer - ToEmployerExternalID	The external identity number of the employer contact, used as the unique identifier for the contact in 360.
Referencenumber	Contact – ToEmployer - ToEmployerReferencenumber	The OrgNo of the Enterprise the contact is connected to

4.11 Get Contact Custom Data

To get additional 360° fields, which are not currently, included in the webservice output objects.

Follow the below steps:

1. Open 360 admin and go to CONFIGURATION => SETTINGS and edit value for “SIF Contact Custom Fields Query” which will include metaquery for getting the custom field, for e.g.

```
<QUERYDESC ENTITY="Contact" NAMESPACE="SIRIUS" DATASETFORMAT="XML">
  <RESULTFIELDS>
    <METAITEM TAG="CF_testfield">CF_testfield</METAITEM>
  </RESULTFIELDS>
  <CRITERIA>
    <METAITEM NAME="Recno" OPERATOR="IN">
      <VALUE>{0}</VALUE>
    </METAITEM>
  </CRITERIA>
</QUERYDESC>
```

CF_testfield is the custom meta field in Contact Entity.

Note: Entity name should start with capital letter. It returns Single value field only.

2. The result will be displayed in <AdditionalFields> .. <AdditionalFields> section in the as follows:

```
<AdditionalFields>
  <AdditionalFieldParameter>
    <Name>CF_testfield</Name>
    <Value>TestCustomField</Value>
  </AdditionalFieldParameter>
</AdditionalFields>
```

5 User service

Typical SOAP URL	http://[servername]:4000/SI.WS.Core/SIF/UserService.svc
Typical REST URL	<i>Not Implemented Yet</i>
Typical RPC URL	https://[customer specific domain]/Biz/v2/api/call/SI.Data.RPC/SI.Data.RPC/UserService
Typical SOAP Bridge URL (deprecated with v5.14)	https://[customer specific domain]/Biz/v2-pbr/soapbridge/sif/UserService

5.1 SynchronizeUser

Creates or updates a user in 360, identified by its login name. If the user does not exist, it is created. If it exists, it is updated to match the input.

A user must be connected to an existing 360° contact person, so always call SynchronizeContactPerson in the contact service first.

With version 5.14, new feature toggle (Feature name: SIFImprovedUserAuditTrail) has been introduced to limit the unnecessary logging for UserProfile when there is no change in UserProfile object since last update.

To enable this feature toggle, contact TietoEvry P360 team.

Note: This feature has been removed from version 6.0

Points to consider:

- Manually added profiles will get deactivated with SynchronizeUser unless those profiles are set with flag "ad lock" or mentioned in settings "SI.Data.User.Profiles.Ignore"
- SynchronizeUser will respect the source user base.

5.1.1 Input

Data Contract: SynchronizeUserParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
Login(*)	User – UserID	Login name
ContactExternalId(**)	User – ToContact	Reference to the user's contact person
ContactRecno(**)	User – ToContact	User's contact person recno on the format "recno:123"
IsActive	User – Active	True/false. Default: True
Profiles	User profile	If the parameter is not specified (null), profiles are not synchronized, and no existing profiles will be overwritten. If it is specified, even with an empty list, existing profiles will be overwritten.
Role(*)	UP – ToSysrole	Code from the Sysroles code table, (using the configured language), or recno on the format "recno:123"
EnterpriseId(*)	UP – ToOrgUnit	The role's organization unit. Set to either it's external id or enterprise number, or recno on the format "recno:123"

FromDate	UP – FromDate	A date the profile is valid from
ToDate	UP – ToDate	A date the profile is valid to
IsDefault (v6.3)	UP- Default	True/false. To Set the default value profile explicitly.
AccessGroups	Access Group Members	If the parameter is not specified (null), access groups are not synchronized, and no existing group memberships will be overwritten. If it is specified, even with an empty list, existing group memberships will be overwritten.
AccessGroup(*)	AGM – ToAccessGroup	Name of the access group, or recno on the format "recno:123"
FromDate	AGM – FromDate	A date the membership is valid from
ToDate	AGM – ToDate	A date the membership is valid to
IsServiceUser	User – IsServiceUser	True/false. Default: False
Language	User- Language	User language. If not provided, default - NOR

The Profiles and AccessGroups properties are optional. If not specified at all (null), no changes will be made to existing profiles and group memberships, allowing these to be maintained manually.

For ContactExternalId or ContactRecno properties, atleast one should have value.

5.1.2 Output

Data Contract: SynchronizeUserResult

Output Property	360° field	Comment
Recno	User – Recno	Internal 360° id for the user
Successful		If true, everything is ok. If false, the operation failed.
ErrorMessage		If unsuccessful, this contains a short error message
ErrorDetails		If unsuccessful, this contains a full stack trace

5.2 GetUsers

Retrieves users from 360° based on criteria defined in the input parameter, input parameter can be empty. Possible criterias (UserId,ContactExternalId,ContactRecno or none). Returns a list of matching users.

5.2.1 Input

Data Contract: GetUsersParameters

Input Property	360° field	Comment
ADContextUser		Read Authentication and ADContextUser
UserId	User - UserId	The ID that identifies the User (typically "domain\user").
ContactExternalId		Search users associated with the given contact external id
ContactRecno		Search users associated with the given contact recno
Page	-	Results are always returned paginated, meaning if your search results in 3000 objects, and MaxRows is 1000, then: Page 0 will have object 1-1000 Page 1 will have object 1001-2000, etc. First page is 0, meaning 0-indexed. Defaults to 0. Only applies when UserId, ContactExternalId or ContactRecno are not provided. Note: Always use SortCriterion along with page, to get more accurate result.
MaxRows	-	Read Page property for details. Defaults to all. Only applies when UserId, ContactExternalId or ContactRecno are not provided.
SortCriterion (v5.14 onwards)	-	Sort the search, is applied before Page and MaxRows limitations. Defaults to no sorting criterion, the database then controls the order. Enum values: - RecnoDescending - RecnoAscending Note: Always use SortCriterion along with page, to get more accurate result.

5.2.2 Output

Data Contract: GetUsersResult

Output Property	360° field	Comment
Users	User	List of UserBase objects. See chapter " Data Contract - UserBase " for details.
TotalCount	-	Total number of hits.
TotalPageCount	-	Total number of pages.

Successful	-	Will be true as long as no exception occurred during the execution. This means that successful will be true even if no enterprises matching the criteria was found.
ErrorMessage	-	If successful is false, this contains a short error message
ErrorDetails	-	If successful is false, this contains a full stack trace

5.3 Sub Contracts

This chapter defines data contracts in use by the main data contracts of the User methods.

5.3.1 Data Contract: UserBase

Property	360° field	Comment
Login		
ContactExternalId	Contact - ExternalID	Contact ID in the external system. If this user don't have an external id, the format will be "recno:xxxx"
IsActive		Boolean : Indicates if the user is active or not
Profiles	UserProfile	Array of connected user profiles. See chapter "Data Contract - UserProfile" for details.
AccessGroups	AccessGroup	Array of connected access groups. See chapter "Data Contract – AccessGroupMembership" for details.
IsServiceUser	User – IsServiceUser	Boolean: Indicates if the user is service user or not.
ContactRecno	Contact - Recno	Contact recno, the format will be "recno:xxxx"
Language	User - Language	User Language

5.3.2 Data Contract: UserProfile

Property	360° field	Comment
Role	UserProfile - ToSysrole	A relation to the System Role this profile is using.
Enterpriseld		External ID for user profile's organization unit.
FromDate	UserProfile - FromDate	The Start date that this profile is valid from.
Todate	UserProfile - ToDate	The profile is valid to this date.
EnterpriseRecno		Recno for user profile's organization unit Note: Only work in GetUsers(). Do not use while SynchronizeUser()
EnterpriseNumber		Referencenumber for user's organization unit. Note: Only work in GetUsers(). Do not use while SynchronizeUser()
IsDefault (v6.3)	UserProfile - Default	Flag value to show default profile.
RoleDescription (6.4)	UserProfile- ToSysrole.Description	Description of the user profile role.

5.3.3 Data Contract: AccessGroupMembership

Property	360° field	Comment
AccessGroup	AccessGroup - Code	Ident of this AccessGroup
AccessGroupRecno	AccessGroup - Recno	Recno of the access group

FromDate	AccessGroup - FromDate	The Start date this accessgroup is valid from.
ToDate	AccessGroup - ToDate	The accessgroup is valid to this date.

5.4 UpdateUser (v5.15)

This method supports updating user properties along with user profiles and access groups. Using this method, one can update UserId (Login). ContactExternalId or ContactRecno is mandatory to be able to successfully update the properties.

5.4.1 Input

Data Contract: UpdateUserParameter

Input Property	360° field	Comment
Login	User – UserID	Login name
ContactExternalId (**)	User – ToContact	Reference to the user's contact person
ContactRecno (**)	User – ToContact	User's contact person recno on the format "recno:123"
IsActive	User – Active	True/false. Default: True
Profiles	User profile	If the parameter is not specified (null), profiles are not synchronized, and no existing profiles will be overwritten. If it is specified, even with an empty list, existing profiles will be overwritten.
Role (*)	UP – ToSysrole	Code from the Sysroles code table, (using the configured language), or recno on the format "recno:123"
Enterpriseld (*)	UP – ToOrgUnit	The role's organization unit. Set to either it's external id or enterprise number, or recno on the format "recno:123"
FromDate	UP – FromDate	A date the profile is valid from
ToDate	UP – ToDate	A date the profile is valid to
AccessGroups	Access Group Members	If the parameter is not specified (null), access groups are not synchronized, and no existing group memberships will be overwritten. If it is specified, even with an empty list, existing group memberships will be overwritten.
AccessGroup (*)	AGM – ToAccessGroup	Name of the access group, or recno on the format "recno:123"
FromDate	AGM – FromDate	A date the membership is valid from
ToDate	AGM – ToDate	A date the membership is valid to
IsServiceUser	User – IsServiceUser	True/false. Default: False
Language	User- Language	User language. If not provided, default - NOR
SyncUserProfiles		If provided it synchronizes (Add, update or delete) user profiles. Default is set to false.

SyncAccessGroups	If provided it synchronizes (Add, update or delete) user access groups. Default is set to false.
-------------------------	---

5.4.2 Output

Data Contract: UpdateUserResult

Output Property	360° field	Comment
Recno	User – Recno	Internal 360° id for the user
Successful		If true, everything is ok. If false, the operation failed.
ErrorMessage		If unsuccessful, this contains a short error message
ErrorDetails		If unsuccessful, this contains a full stack trace

6 Estate service

Typical SOAP URL	http://[servername]:4000/Sl.WS.Core/SIF/EstateService.svc
Typical REST URL	<i>Not Implemented Yet</i>
Typical RPC URL	https://[customer specific domain]/Biz/v2/api/call/Sl.Data.RPC/Sl.Data.RPC/EstateService
Typical SOAP Bridge URL	https://[customer specific domain]/Biz/v2-pbr/soapbridge/sif/EstateService
(Deprecated with v5.14)	

6.1 SynchronizeEstate

Creates or updates an estate in 360, identified by its External ID. If the estate does not exist, it is created. If it exists, it is updated to match the input.

Estate type defaults to *Estate/Eiendom* (recno:1) if nothing else is provided.

6.1.1 Input

Data Contract: SynchronizeEstateParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
ExternalID(*)	Estate – ExternalId	The external id number of the estate must be used as a unique identifier for the estate in 360. If

		unique, a new estate is created, otherwise the estate is updated. If more than one external system use the web service, external id's must be unique also between external systems.
Type	Estate – ToEstateType	Points to the Estate type, identified by the code name in the configured language, or by recno on the format "recno:123". Default: Estate (recno: 1)
DataSource	-	DataSource is presented as a log entry under the Log-tab on the estate. The point is to track which systems have made updates to the estate.
Address	Estate – ToAddress	The address of the estate. See fields needed for input under chapter: " Data Contract: Address ".
Description	Estate – Description	Description of the estate.
Category	Estate - ToEstateCategory	The estate category, identified by the code name in the configured language, or by recno on the format "recno:123".
Status	Estate – ToEstateStatus	The status of the estate, identified by the code name in the configured language, or by recno on the format "recno:123".
AccessGroup	Estate – ToAccessGroup	Name (code value) of the access group, or recno on the format "recno:123". If none is provided, default access group ("Public") is set.
EstateNumber	Estate – EstateNumber	Gnr (Gårdsnummer).
WorkNumber	Estate – WorkNumber	Bnr (Bruksnummer).
SectionNumber	Estate – SectionNumber	Snr (Seksjonsnummer).
LeaseHoldNumber	Estate – LeaseHoldNumber	Fnr (Festenummer).
BuildingNumber	Estate – BuildingNumber	(Bygningsnummer).
AdditionalFields	-	Additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
SyncEstateRelations (v6.4)		Boolean flag to control the updating/deleting existing estate relation. If provided it synchronizes (Add, update or delete) relations to the estate. Default is set to false.
EstateRelations (v6.4)	connection: Estate - Estate	Add/update relations to estate. Relation will add from current estate to estates mentioned in this list object. Estate which we are synchronizing will be the source. See Data Contract: EstateRelation

6.1.2 Output

Data Contract: SynchronizeEstateResult

Output Property	360° field	Comment
Recno	Estate – Recno	Unique ID in 360° for the estate.
UID	Estate - UID	Globally unique identifier.
UIDOrigin	Estate - UIDOrigin	The origin of the UID: 360 or eArchive or Plan&Build.
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

6.2 GetEstates

Retrieves estates from 360° based on criteria defined in the input parameter. At least one criteria (ExternalId, Recno or Address) must be given. Returns a list of matching estates.

6.2.1 Input

Data Contract: GetEstatesParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
Recno	Estate – Recno	Recno (unique identifier in 360) of the estate. Must be an exact match to return an estate
ExternalID	Estate - ExternalId	ExternalID (possible unique identifier) of the estate. Must be an exact match to return an estate.
Address	Estate – ToAddress	The address of the estate. See fields needed for input under chapter: “ Data Contract: Address ”. Multiple estates can be returned here.
Page	-	Results are always returned paginated, meaning if your search results in 3000 objects, and MaxRows is 1000, then: Page 0 will have object 1-1000 Page 1 will have object 1001-2000, etc. First page is 0, meaning 0-indexed. Defaults to 0. Note: Always use SortCriterion along with page, to get more accurate result.
MaxRows	-	Read Page property for details. Defaults to all.
SortCriterion	-	Sort the search, is applied before Page and MaxRows limitations. Defaults to no sorting criterion, the database then controls the order. Enum values: - RecnoDescending - RecnoAscending Note: Always use SortCriterion along with page, to get more accurate result.
EstateNumber	Estate – EstateNumber	Gnr (Gårdsnummer).
WorkNumber	Estate – WorkNumber	Bnr (Bruksnummer).
SectionNumber	Estate – SectionNumber	Snr (Seksjonsnummer).
LeaseHoldNumber	Estate – LeaseHoldNumber	Fnr (Festenummer).
BuildingNumber	Estate – BuildingNumber	(Bygningsnummer).
IncludeEstateRelations (v6.4)		Boolean value. True or False. To include estate relations in result.

6.2.2 Output

Data Contract: GetEstatesResult

Output Property	360° field	Comment
Estates	Estate	List of Estate objects. See the chapter " Data Contract: EstateResult " for details.
TotalCount	-	Total number of hits.
TotalPageCount	-	Total number of pages.
ErrorMessage	-	If successful is false, this contains a short error message
ErrorDetails	-	If successful is false, this contains a full stack trace

6.3 Sub Contracts

This chapter defines data contracts in use by the main data contracts of the Estate methods.

6.3.1 Data Contract: Address

Property	360° field	Comment
StreetAddress	Address - Address	Example: "Drammensveien 1"
ZipCode	Address - ZipCode	Zip code of address.
ZipPlace	Address - ZipPlace	Zip place (City) of address.
Country	Address - Country	Country of address. To create an address the user has to include "Country" together with another field. E.g. just sending in "Country" will not create an address, but sending in Country and StreetAddress will create an address. Example of input formats: "Norway" or "NOR". With version 5.10, also added support for ISO 3166-1 alpha-2 country codes
County	Address - County	Municipality of address. Norwegian: "Kommune". Examples of input formats: "BODØ" or "1804", it is recommended that the number format is used, i.e. "1804".
Area	Address - Area	County of address. Norwegian: "Fylke". Examples of input formats: "NORDLAND" or "18", it is recommended that the number format is used, i.e. "18".
State	Address – State	Very optional, only used for some foreign countries.

6.3.2 Data Contract: EstateResult

Output Property	360° field	Comment
Recno	Estate – Recno	Unique identified in 360.
ExternalId	Estate – ExternalId	The external identity number of the estate, used as the unique identifier for the estate in 360.
Description	Estate – Description	The description of the estate.
Type	Estate – ToEstateType	The estate type.
Category	Estate - ToEstateCategory	The estate category.
Status	Estate – ToEstateStatus	The status of the estate.
Address	Estate – ToAddress	The estate address is an Address object, see details under the chapter: “Data Contract: Address” .
AccessGroup	Estate – ToAccessGroup	The access group.
EstateNumber	Estate – EstateNumber	Gnr (Gårdsnummer).
WorkNumber	Estate – WorkNumber	Bnr (Bruksnummer).
SectionNumber	Estate – SectionNumber	Snr (Seksjonsnummer).
LeaseHoldNumber	Estate – LeaseHoldNumber	Fnr (Festenummer).
BuildingNumber	Estate – BuildingNumber	(Bygningsnummer).
UID	Estate - UID	Globally unique identifier.
UIDOrigin	Estate - UIDOrigin	The origin of the UID: 360 or eArchive or Plan&Build.
EstateRelations (v6.4)	connection: Estate - Estate	Estate relations. See Data Contract: EstateRelation

6.3.3 Data Contract: EstateRelation

Property	360° field	Comment
Recno	Estate - Recno	Example: “Drammensveien 1”
ExternalId	Estate - ExternalId	Zip code of address.
Role	connection: Estate – Estate. ToRole	Estate – estate connection role. Refer code table: Estate - Estate role. To connect building type estates to plot. Use recno 99001.

7 Case service

Typical SOAP URL	http://[servername]:4000/Sl.WS.Core/SIF/CaseService.svc
Typical REST URL	http://[servername]:4000/Sl.WS.Core/SIFREST/api/cases/
Typical RPC URL	https://[customer specific domain]/Biz/v2/api/call/Sl.Data.RPC/Sl.Data.RPC/CaseService
Typical SOAP bridge URL	https://[customer specific domain]/Biz/v2-pbr/soapbridge/sif/CaseService
(Deprecated with v5.14)	

7.1 CreateCase

Creates a case in 360° with the case type Case ("Sak/Noark Sak" in Norwegian). The parameters in the data contracts accept either code value of the respective code or recno if nothing else is specified.

7.1.1 Input

Data Contract: CreateCaseParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
Title(*)	Case – Description	
UnofficialTitle	Case – UnofficialTitle	If not set, Title will be used.
ExternalId		External ID for the case.
Id	External Integration keys – ExternalId	External id. String value.
Type	External Integration Keys - ExternalSystem	External id type. Not mandatory. If not provided, default type "SI WS Case" will be used. External id is unique within each type, so type can be used if cases are imported from more than one external system which use ExternalId. Should have a name to reflect system and entity, e.g. "Visma Case".
ExternalName	External Integration Keys - ExternalName	Name of the external key (optional)
StartDate	Case – StartDate	Start date of the case progress. Defaults to the creation date of the case.

Status	Case – ToCaseStatus	Code value or recno. View common values. Example of use: Status="B"; sets the status to "Under handling" ArchiveCode and ArchiveType needs to be supplied to set the status that closes the case. E.g. "A" – "Avsluttet" Defaults according to the ADUserContext user's role: - Archivist = Closed - Case Manager = Reserved
ClosedDate	Case – ClosedDate	The date the case is closed. Should be used together with a closing status and is ignored otherwise. The following happens if the Status property is set to a closing status: - If this property is set, the case will gain this date as ClosedDate. - If this property is not set 360° automatically sets the ClosedDate to the current date.
JournalUnit	Case – ToJournalUnit	Can be code value or recno. E.g. JournalUnit="Sentralarkiv"
SubArchive	Case – ToSubArchive	Can be code value or recno. E.g. SubArchive="Sakarkiv", "60001" or "recno:60001"
ArchiveCodes	Case – ToClassCodes	At least one ArchiveCode needs to be set to close the case. This is a list of ClassCodeParameter objects. See the chapter " Data Contract ClassCodeParameter " for details.
FiledOnPaper	Case – Paper	Indicating (true/false) if the case is stored on paper.
Keywords	Case – Keywords	List of keywords connected to the case. E.g. ["Keyword 1", "Keyword 2"] If a keyword that does not exist in 360° is used, this is added to the keywords code table (the user needs Admin rights to create keywords).
AccessCode	Case – ToAccessCode	Code value or recno. E.g. AccessCode = "U" or "recno:0" Some access codes require Paragraph to be specified as well.
Paragraph	Case - Paragraph	Only code value is permitted. E.g. Paragraph = "OFL § 11"

		Mandatory for some access codes.
AccessGroup	Case – ToAccessGroup	Can be code value or recno. E.g. AccessGroup = “Public”
Notes	Case – Notes	Notes on the case
CaseType	Case - CaseType	Code or recno value, for instance “Sak” or “recno:2”. Default: 2 (Noark case) Refers to the <i>Case type</i> code table.
ResponsiblePersonIdNumber	Case – OurRef	The external ID of the responsible person. Looks for a contact with ExternalId equal to the property input. It is only possible to set a contactperson in the same enterprise hierarchy as the ADUserContext user as responsible, and the responsible needs to be a 360° user. Provide only ONE of the four possible fields to ID responsible person.
ResponsiblePersonRecno	Case – OurRef	Looks for a contact with Recno equal to the property input.
ResponsiblePersonEmail	Case – OurRef	Looks for a contact with Email equal to the property input.
ResponsiblePersonUserId	Case – OurRef	Looks for a contact with UserId (username, E.g. “no\name.name”)
ResponsibleEnterpriseNumber	Case – ToOrgUnit	The enterprise number of the responsible enterprise. Looks for a contact with ExternalID first, then for one with reference number equal to the property input. If neither this nor the ResponsibleEnterpriseRecno property is set, the responsible enterprise will be set to the responsible person’s enterprise. If the responsible person is not set, the responsible enterprise will be set to the main enterprise of all the users. It is only possible to set the responsible enterprise to an enterprise in the same enterprise hierarchy as the ADUserContext user. Provide only ONE of the two possible fields to ID responsible enterprise.

ResponsibleEnterpriseRecno	Case – ToOrgUnit	Looks up enterprise based on recno. Must be recno of a valid enterprise. See also ResponsibleEnterpriseNumber.
Contacts	Case - ToCaseContact	List of contacts with associated roles. See sub contract CaseContactParameter
UnregisteredContacts	Case – ToCaseContact	List of unregistered CaseContacts with associated roles. See sub contract UnregisteredCaseContactParameter .
ReferringCases	Case – ReferringCases	List of case numbers of referring cases. E.g. ("14/0001", "14/0002") Ignored if empty
Project	Case – Project	Project number of the project this case should be connected to.
Remarks	Case – ToNotes	List of remarks to be added to case
Title(\)	Note – Title	Remark title. See chapter Remark Validation for more details.
Content(\)	Note - Notes	Remark content. See chapter Remark Validation for more details.
RemarkType(*)	Note - ToNoteType	Uses code table: Note type Can be code value or recno. Mandatory
ScrapCode	Case – ToScrapCode	Can be code value or recno. E.g. ScrapCode = "B"
Category	Case – ToCaseCategory	Can be code value or recno. E.g. Category = "Leveranse" or "recno:1"
Estates	Case – ToEstates	List of estates to connect to case. See sub contract CaseEstateParameter The Estates to be connected to case must already exist in 360°. NB: This field requires "Estate" functionality to be activated in 360°, for example through the estate module, building case module or eByggesak 360°.
AdditionalFields	-	Additional single value fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
AdditionalListFields	-	Additional multi-value fields – see AdditionalFieldListParameter for details
DefaultValueSet	-	Default value set – see chapter Support for Default Values for more details.
ProgressPlanId	-	Used to connect the case to a progress plan. The ProgressPlanId can be a recno, workunit id or description.
Permissions	RowPermission – Entity/Key	List of Permission objects. See Data Contract: Permission

eArchiveXMLFragment (available from 5.11)		Virtual data through XML fragment on eArchive installation. Note: This property internally checks if current running installation is eArchive or not. If yes then only it will set XML fragment to case.
ImportedCaseNumber (5.12)	Case-ImportedCaseNumber	eArchive - Imported Case number.

7.1.2 Output

Data Contract: CaseOperationResult

Output Property	360° field	Comment
Recno	Case – Recno	Unique ID in 360° for the case.
CaseNumber	Case – Name	The case number given by 360.
ImportedCaseNumber (5.12)	Case-ImportedCaseNumber	eArchive - Imported Case number.
UID (6.3)	Case - UID	Globally unique identifier.
UIDOrigin (6.3)	Case - UIDOrigin	The origin of the UID: 360 or eArchive or Plan&Build.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

7.2 UpdateCase

Updates a case in 360. If the case has a closed status this operation can only be done by an archivist.

If a property is set to null, meaning not provided in the parameter passed to the method, the property is not updated. To clear the field in 360° the property has to be explicitly set to "". Only works for string properties. Archive codes supplied to this method is ignored and no changes to an archive code is possible once the case is created.

7.2.1 Input

Data Contract: UpdateCaseParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
CaseNumber (\)	Case – Name	The case number. This property will be used to determine which case will be updated. A case cannot have its case number updated.
ExternalId (\)		External id. This property will be used to determine which case will be updated. A case cannot have its external ID updated.

		Lookup is based on the combination of Id and Type. Provide only ONE of the two possible fields to ID the case.
Id	External Integration Keys – ExternalId	External id.
Type	External Integration Keys – ExternalSystem	If not provided, default value “SIF WS Case” will be used. This is the type set via CreateCase if type was not provided when importing a case.
Title	Case – Description	
UnofficialTitle	Case – UnofficialTitle	
StartDate	Case – StartDate	The start date of the case progress.
Status	Case – ToCaseStatus	May only be set to a closing status if ArchiveCode and ArchiveType are also set or have been set. If the status is set to a closing status (e.g. “Closed”) the closed date of the case is set to the current date.
JournalUnit	Case – ToJournalUnit	Can be code value or recno. E.g. JournalUnit=“Sentralarkiv”
SubArchive	Case – ToSubArchive	Can be code value or recno. E.g. SubArchive=“Sakarkiv”
FiledOnPaper	Case – Paper	Indicating (true/false) if the case is stored on paper.
ArchiveCodes	Case – ToClassCodes	At least one ArchiveCode needs to be set to close the case. This is a list of ClassCodeParameter objects. Codes are appended. Existing codes can not be modified. See the chapter “ Data Contract ClassCodeParameter ” for details.
Keywords	Case – Keywords	When updating keywords this is the update rules: 1) New keywords are added 2) Existing keywords are ignored 3) Missing keywords are ignored
AccessCode	Case – ToAccessCode	Can be code value or recno. E.g. AccessCode = “U” If the access code requires a paragraph the field paragraph has to offer a valid paragraph. N.B: If a recno value is used, this recno value <u>can not</u> also exist as a code value.
Paragraph	Case – Paragraph	Only code value is permitted. E.g. Paragraph = “OFL § 11”
AccessGroup	Case – ToAccessGroup	Can be code value or recno.

		E.g. AccessGroup = "Public"
Notes	Case – Notes	Notes of the case.
ResponsiblePersonIdNumber	Case – OurRef	The external ID of the responsible person. Looks for a contact with ExternalId equal to the property input. It is only possible to set a contactperson in the same enterprise hierarchy as the ADUserContext user as responsible. Provide only ONE of the four possible fields to ID responsible person.
ResponsiblePersonRecno	Case – OurRef	Looks for a contact with Recno equal to the property input.
ResponsiblePersonEmail	Case – OurRef	Looks for a contact with Email equal to the property input.
ResponsiblePersonUserId	Case – OurRef	Looks for a contact with UserId equal to the property input (username, E.g. "no\name.name")
ResponsibleEnterpriseNumber	Case – ToOrgUnit	The enterprise number of the responsible enterprise. Looks for a contact with ExternalID first, then for one with reference number equal to the property input. If neither this nor the ResponsibleEnterpriseRecno property is set, the responsible enterprise will be set to the responsible person's enterprise. If the responsible person is not set, the responsible enterprise will be set to the main enterprise of all the users. It is only possible to set the responsible enterprise to an enterprise in the same enterprise hierarchy as the ADUserContext user. Provide only ONE of the two possible fields to ID responsible enterprise.
ResponsibleEnterpriseRecno	Case – ToOrgUnit	This field is a fallback field and is only used if ResponsibleEnterpriseNumber is null or empty. Must be recno of a valid enterprise.
Contacts	Case – ToCaseContact	If SyncCaseContacts is set to false, then this adds contacts to the case. Existing case contacts will not be deleted or

		updated. You can also add an existing contact with a new role. If SyncCaseContacts is set to true, then this will do synchronize (add, update and delete) contacts to the case. See sub contract CaseContactParameter
UnregisteredContacts	Case – ToCaseContact	If SyncCaseContacts is set to false, then this adds unregistered CaseContacts with associated roles. If SyncCaseContacts is set to true, then this will do synchronize (add, update and delete) unregistered CaseContacts. See sub contract UnregisteredCaseContactParameter.
ReferringCases	Case – ReferringCases	List of case numbers of referring cases. E.g. ("14/0001", "14/0002") Ignored if empty.
Project	Case – Project	Project number of the project this case should be connected to.
ScrapCode	Case – ToScrapCode	Can be code value or recno. E.g. ScrapCode = "B"
Remarks	Case – ToNotes	List of remarks to be added to case
Title(\)	Note – Title	Remark title. See chapter Remark Validation for more details.
Content(\)	Note – Notes	Remark content. See chapter Remark Validation for more details.
RemarkType(*)	Note – ToNoteType	Uses code table: Note type Can be code value or recno. Mandatory
Category	Case – ToCaseCategory	Can be code value or recno. E.g. Category = "Leveranse" or "recno:1"
Estates	Case – ToEstates	This adds estates to the case. Existing case estates will not be deleted or updated. See sub contract CaseEstateParameter The Estates to be connected to case must already exist in 360°. NB: This field requires "Estate" 73unctionality to be activated in 360°, for example through the estate module, building case module or eByggesak 360°.
AdditionalFields	-	Additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.

AdditionalListFields	-	Additional multi-value fields – see AdditionalFieldListParameter for details
SyncCaseContacts		If provided it synchronizes (Add, update or delete) both contacts and unregistered contacts to the case. Default is set to false.
Permissions	RowPermission – Entity/Key	List of Permission objects. See Data Contract: Permission
RemoveResponsiblePerson		Boolean value, set true if you want to remove responsible person from case Default value is false.
SyncCaseEstates (available on version 5.10)		If provided it will add or delete estates to case. Default is set to false.
eArchiveXMLFragment (available from 5.11)		Virtual data through XML fragment on eArchive installation. Note: This property internally checks if current running installation is eArchive or not. If yes then only it will update XML fragment to case.
ImportedCaseNumber (5.12)	Case-ImportedCaseNumber	eArchive - Imported Case number.
SyncArchiveCodes (6.5)	-	If provided it will add or delete class codes connected to case. Default is set to false.

7.2.2 Output

Data Contract: CaseOperationResult

Output Property	360° field	Comment
Recno	Case – Recno	Unique ID in 360° for the case
CaseNumber	Case – Name	The case number given in 360.
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

7.3 GetCases

Retrieves a list of all cases fulfilling the criteria of all the nonblank properties of the supplied parameter. At least one search criterion parameter must be supplied.

Note: Some properties are behind the feature toggle, please contact Tietoevry Public 360 support to enable/disable the feature

7.3.1 Input

Data Contract: GetCasesQuery

Note: Use flags when it is required. Do not set all flags to true, it might hamper the performance.

Some flags are default set to false, set to true explicitly in request parameter. For example, if you want to return CaseContacts in result, set "IncludeCaseContacts" to true.

If searching with dates (CreateDate or ModifiedDate..), recommendation is to use DateCriteria property.

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
MaxReturnedCases	-	The maximum number of cases returned by the search. Default is 100.
Page		Int. Pagination parameter that should be used in conjunction with maxReturnedCases to decide what documents to be returned (e.g. maxReturnedCases=10 and Page=2 would return case 21-30) Note: Always use SortCriterion along with page, to get more accurate result.
SortCriterion		String value, provide either "RecnoDescending" or "RecnoAscending" to sort the resultset by recno. Note: Always use SortCriterion along with page, to get more accurate result.
Recno	Case – Recno	Recno (unique identifier in 360) of the case. Must be an exact match to return a case.
CaseNumber	Case – Name	The case number of the case you wish to retrieve.
ExternalId		The external id of the case you wish to retrieve. Search uses a combination of Id and Type.
Id	External Integration Keys – ExternalId	External id of a case.

Type	External Integration Keys – ExternalSystem	If not provided, default value “SIF WS Case” will be used. This is the type set via CreateCase if type was not provided when importing a case.
Title	Case – Description	From DLL version 1.0.0.58254: The title search is based on the SQL “LIKE” operator. It is still possible to search for exact matches, but the possibility to search with wildcards is now introduced. For instance, “%” can be used as a substitute for zero or more characters in the title search. Before DLL version: 1.0.0.58254: Only cases matching the exact title will be returned due to the search being based on the SQL “=” operator.
ArchiveCode	Case – ToClassCodes – Value	Archive code value
ProjectNumber	Case – Project	Project number of project connected to the case. E.g. “13-37”
CategoryCode	Case – ToCaseCategory	The case category (code value) to the cases you want to retrieve.
LastDate	Case - ModifiedDate	Returns cases that have been modified after the specified date. New delta support has been added in version 6.5 to get incremental changes. This functionality is enabled by default.
ContactReferenceNumber	Case – ContactConnection	Searches case-contact relations for a private person contact or an enterprise contact with the given property value. Value should be either a PersonalIdNumber or an EnterpriseNumber.
ContactExternalId	Case – ContactConnection	Searches case-contact relations for a contact with the given external identity number (unique identifier). Must be an exact match.
ContactRecnos	Case – ContactConnection	List of Contact recnos. Searches case-contact relations for contacts with the given recno.

		Input Format for REST should be comma separated Contact recno (e.g. 200001,200002)
SubArchive	Case – ToSubArchive	Can be code value or recno (using recno string syntax) E.g. CaseType="Saksarkiv" or "recno:60001"
CaseType	Case – CaseType	Can be code value or recno (using recno string syntax) E.g. CaseType="Sak" or "recno:2"
DateCriteria		Searches using DateCriteria, for more details refere chapter Data Contract: DateCriteriaType , what kind of fields and how to use this parameter.
AdditionalFields		Searches using additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
OnlyPublicInfo		Boolean value, set to true if you want to: only include case types that allow publishing, only include documents from a document archive that allows publishing, not return contacts with an access code different than "0" (Unclassified), not return files with an access code different than "0" (Unclassified). Default value is false
IncludeReferringCases		Boolean value, set true if you want to include case-case-relations in the result. Default value is false.
IncludeReferringDocuments		Boolean value, set true if you want to include case-document-relations in the result. Default value is false.
IncludeCaseContacts		Boolean value, set true if you want to include case-caseContact relations in the result. Default value is false.
IncludeCustomFields		Boolean value, set true if you want additional 360° fields which are not currently included in the webservice

		output objects. Default value is false. Refer chapter Get Case Custom Data for more details
IncludeCaseEstates		Boolean value, set true if you want to include case-estate relations in the result. Default value is false.
IncludeAccessMatrixRowPermissions		Boolean value, set true if you want to include access control matrix information in the result. Default value is false
UnofficialTitle	Case – UnofficialTitle	The UnofficialTitle search is based on the SQL “LIKE” operator. It is still possible to search for exact matches, but to search with wildcards is also possible. For instance, “%” can be used as a substitute for zero or more characters in the UnofficialTitle search.
AdditionalListFields		Searches using additional fields list parameter – see chapter for Data Contract: AdditionalFieldListParameter for details, what kind of fields and how to use this parameter.
ArchiveCodes	Case – ToClassCodes – Value	List of archive code values. You will get hits on cases with any of the values in the list.
ProgressPlanId	-	Connection to a progress plan. Can be a progress plan recno, workunit id or a progress plan description.
IncludeDocuments		Boolean value set to false if you do not want to include Documents in the result. Default value is true.
IncludeFiles		Boolean value set to false if you do not want to include files in the documents of the result. Default value is true.
IncludeSubjectSpecificMetaData		Boolean value set to true if you want to include Subject Specific Meta Data in the cases of the result. Default value is false.
IncludeProgressPlan		Boolean value set to false if you do not want to include progress

		plan in the result. Default value is true.
AdditionalRelations		<i>This functionality is available from 360° version 5.12 and SIF standalone version 2.1.6.</i> Searches using custom relations between two entities: Check details " Data Contract: AdditionalRelations " for type of fields and how to use it.
ImportedCaseNumber (5.12)	Case-ImportedCaseNumber	eArchive - Imported Case number.
IncludeRemarks (5.15)		If related remarks should be returned.
IncludeKeywords (5.15)		If related keywords should be returned.
IncludeMilestones (5.17)	Case-ToMilestones	Boolean value set to true if you do want to include connected milestones in the result. Default value is false
PropertyNumber (5.18 and 6.0)	Estate- EstateNumber/WorkNumber/ LeaseHoldNumber/SectionNumber	EstateNumber, WorkNumber, LeaseHoldNumber and SectionNumber of Estate. To use this property, please contact 360 support to turn on the feature toggle – " SIFMergeMyCaseInCase "
MyCasesConfig (6.2)	Case-ToCaseContact.ToRole	List of case-contact role. To use this property, please contact 360 support to turn on the feature toggle – " SIFMergeMyCaseInCase ". Data Contract: MyCaseConfig
IncludeUnregisteredDocuments (6.2)		GetCases API call with service user/endpoint user returns all the connected documents including "unregistered documents". With this new flag customer can limit to only registered documents.
UID (6.3)	Case - UID	Globally unique identifier.
UIDOrigin (6.3)	Case - UIDOrigin	The origin of the UID: 360 or eArchive or Plan&Build.
IncludeStages (6.4)	Case -ToStages	Return stages connected to case. Default false. Note: IncludeMilestone was added before this flag. If "IncludeStages" is true than Milestones connected to stages

will be returned in “Milestones” object.

7.3.2 Output

Data Contract: GetCasesResult

Output Property	360° field	Comment
Cases	Case	A list of CaseResult objects. See the chapter “Data Contract: CaseResult” for details.
TotalCount	-	Total number of hits.
TotalPageCount	-	Total number of pages.
NextDeltaLastDate (6.5)	-	This will contain the date and time information for the next set of incremental changes. It only holds a value if the request is a delta query, which is determined by the presence of the “LastDate” filter.
Successful	-	Will be true as long as no exception occurred during the execution. This means that successful will be true even if no private persons matching the criteria was found.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

7.3.3 Get Case Custom Data

To get additional 360° fields, which are not currently included in the webservice output objects.

Follow the below steps:

1. Open 360 admin and go to CONFIGURATION => SETTINGS and edit value for “SIF Case Custom Fields Query” which will include metaquery for getting the custom field, for e.g.

```
<QUERYDESC ENTITY="Case" NAMESPACE="SIRIUS" DATASETFORMAT="XML">
  <RESULTFIELDS>
    <METAITEM TAG="CF_testfield">CF_testfield</METAITEM>
  </RESULTFIELDS>
  <CRITERIA>
    <METAITEM NAME="Recno" OPERATOR="IN">
      <VALUE>{0}</VALUE>
    </METAITEM>
  </CRITERIA>
</QUERYDESC>
```

CF_testfield is the custom meta field in Case Entity.

Note: Entity name should start with capital letter. It returns Single value field only.

2. The result will be displayed in <CustomFields> .. <CustomFields> section in the CaseResult as follows:

```
<CustomFields>
```

```
<AdditionalFieldParameter>
  <Name>CF_testfield</Name>
  <Value>TestCustomField</Value>
</AdditionalFieldParameter>
</CustomFields>
```

7.3.4 Configure maximum documents to be return while getting case

You can configure the maximum number of documents to be returned for the cases in CaseResult. The default is 100, due to performance.

To do that follow the below steps:

1. Open 360 web admin and go to Configuration->Settings and look for “SIF MaxReturnedDocuments while searching case”.
2. Edit the value (integer value like 10, 20). To return all documents, put -1.
3. And save the settings.
4. After saving new setting, do a cache refresh.

7.4 Sub Contracts

This chapter defines data contracts in use by the main data contracts of the Case methods.

7.4.1 Data Contract: CaseContactParameter

Note:

1. ReferenceNumber is the PersonalIdNumber for a private person and EnterpriseNumber for an enterprise, so while connecting private person or enterprise to a case, make use of this field. ReferenceNumber is not used for contact persons.

However, if you are defining recno to a contact in this field, using the format “recno:xxxx”, the contact could be either a private person, enterprise or contact person. Choose whichever ID field you like. The connection will be set correctly in either case.

2. ExternalID is the unique identification number of a contact person *or* a private person or an enterprise. It's therefore possible to connect contacts to cases using this field, independent of the contact domain (type). A proper connection between the case and contact will be set either way.

If you are defining recno to the contact on the format “recno:xxxx”, you can use this field across all contact domains (be it a contact person, enterprise or private person).

This logic was implemented to make our customers and third-party suppliers use whichever ID field they like, without needing to consider the domain/type of the contact. It also potentially eliminates the need for extra calls to the contact service, to retrieve Recno, ExternalId and/or ReferenceNumber before connecting contacts to cases.

Note: When mentioning recno of P360 contact, if format is not as recno:xxxxx, there might be chances of matching with either PersonalId or ExternalId if one exists with same value as recno.

Input Property	360° field	Comment
ReferenceNumber (\)	CaseContact – ToContact – Referencenumber	The identification number of the contact. This is PersonalIdNumber for private persons and EnterpriseNumber for enterprises. Use either this field OR the ExternalId-field. If this contact doesn't have a reference number, the format will be "recno:xxxx". Note: If passing ReferenceNumber → Use this for private persons and enterprises. If passing Recno → Can be used for all contact domains.
ExternalId (\)	CaseContact – ToContact – ExternalID	The identification number of the contact. This is ExternalId for contact persons, private persons and enterprises. Use either this field OR the ReferenceNumber-field. If this contact doesn't have an external id, the format will be "recno:xxxx" Note: Can be used for all contact domains.
ContactId (\)	CaseContact – ToContact – Referencenumber	This field is obsolete, use ReferenceNumber instead if it is available.
Role (*)	CaseContact – ToRole	The contact's role for the specific case. Can be code or recno. E.g. Role = "Sakspart". The possible roles may be restricted based on the case type.
IsUnofficial		This value can be true, false or null/not included. It is used to define if a contact should be unofficial, which means screened from Public Journal. Should not be set if the access code on the case is U – Unclassified.
SubjectArea (6.4)	CaseContact-SubjectArea	The subject area of the case contact.
Notes (6.4)	CaseContact-Notes	Notes of the Case Contact.
ActionClass (6.4)	CaseContact-ActionClass	Refers to code table: ActionClass. It can take recno (recno:xxxxx) or code value.

7.4.2 Data Contract: UnregisteredCaseContactParameter

Used to create an unregistered contact on a case. The fields available in the 360° interface might differ based on settings, or between Service Packs.

Input Property	360° field	Comment
Role(*)	CaseContact – ToRole	The contact's role for the specific case. Can be code or recno. E.g. Role = "Contact". The possible roles may be restricted based on the document type. View common values.
IsUnofficial	CaseContact – Unofficial	This value can be true, false or null/not included. It is used to define if a contact should be unofficial, which means screened from Public Journal. Used when the access code on the document is not Unclassified.
ContactName(*)	CaseContact – Name2 / CaseContact – Name	Use this to set the name of the unregistered contact. This can be the name of a contact person, a private person or an enterprise. Mandatory field.
ContactCompanyName	CaseContact – Name	This can be used together with ContactName to set the name of the contact's company.
ReferenceNumber		Reference number
Address		Street address
Country		Country
State		State
ZipCode		ZipCode
ZipPlace		ZipPlace
Email		Email address
MobilePhone		Mobile phone number
Phone		Phone number
Notes (6.4)		Notes

7.4.3 Data Contract: ClassCodeParameter

Classification codes have a type and a value. The type refers to the code table *Noark classification type*. Most classification types use codes from the code table *Noark classification code* as values. Some use custom user-supplied values, for instance a personal identification number.

Property	360° field	Comment
Sort(*)	ToClassCodes – Sort	When cases have multiple classification codes, Sort is the index of the code, starting at 1. Primary code => 1, secondary => 2, and so on.
ArchiveType(*)	ToClassCodes – ToClassType	The classification type of this particular classification code. Can be code or recno, for instance "FAGCODE PRINSIPP" or «recno:60001»
IsManualText	-	True/false. Set to true if ArchiveCode is a user-supplied value and false if it's a code from <i>Noark classification code</i> .
ArchiveCode	Contact – ToClassCode/Value	The value or classification code itself. If code, it can be either the actual code or its recno, for instance "B32" or "recno:60002".

7.4.4 Data Contract: CaseEstateParameter

Input Property	360° field	Comment
Recno (\)	Estate – Recno	Unique id in 360° for the estate. Use either this field OR the ExternalId-field.
ExternalId (\)	Estate -	The external id of the estate. If the estate is imported from Matrikkel it's external Id from Matrikkel If the estate is synced through SIF it's the value from ExternalId on SynchronizeEstateParameter. Use either this field OR the Recno-field.

7.4.5 Data Contract: CaseResult

Some of these values are only returned if GetCases was called with specific input parameters. E.g. ReferringCases is only returned if GetCases was called with IncludeReferringCases = true.

You can configure the number of documents to be returned in CaseResult. For for information, please see [Configure maximum documents to be return while getting case.](#)

Property	360° field	Comment
Recno	Case – Recno	Unique id in 360° for the case.
Title	Case – Description	
CaseNumber	Case – Name	
ExternalId		External ID for the case.
Date	Case – StartDate	The start date of the case.
Status	Case – ToCaseStatus – Description	Description of case status, for example “In progress”.
ResponsibleEnterprise	Case – ToOrgUnit	Info about the responsible enterprise. See ResponsibleEnterprise
ResponsibleEnterpriseName	Case - ToOrgUnit – SearchName	The name of the responsible enterprise
ResponsiblePerson	Case – OurRef	Info about the responsible person. See ResponsiblePerson
ResponsiblePersonName	Case – OurRef – SearchName	The name of the responsible person
Contacts	CaseContact	List of CaseContactResult objects. See the chapter “ Data Contract: CaseContactResult ” for details.
LastChangedDate	Case – ModifiedDate	LastChangedDate for the case.
SubArchive	Case – ToSubArchive – Recno	Recno value of SubArchive, e.g. “60001”
SubArchiveCode	Case – ToSubArchive – Code	Code value of sub archive, e.g. “Saksarkiv”.
AccessCodeCode	Case – ToAccessCode – Code	Code value of access code, e.g. “U”
AccessCodeDescription	Case – ToAccessCode – Description	Description of access code, e.g. “Ugradert”
Paragraph	Case – ToAuthorization	Paragraph for cases with an access code different than unclassified.
Notes	Case – Notes	Notes of the case
CaseTypeCode	Case – CaseType – Code	Code value of case type, e.g. “Sak”
ArchiveCodes	Case – ToClassCodes	A list of all ArchiveType/ArchiveCode pairs on the case.
ReferringCases	Connection: Case – Case	List of case relations.
CaseNumber		Case number of related case
Relation		Code value of relation role
Notes		Notes added to relation
Title		Title of the related case
ReferringDocuments	ActivityCase	List of document relations. Does not include the documents connected to the case as main documents – only documents added as relations.
DocumentNumber	ActivityCase – ToCase	Document number of related document
Relation	ActivityCase – ToRole – Code	Code value of relation role

Notes	ActivityCase – Notes	Notes added to relation
Title	ActivityCase – ToCase	Title of the related document
Documents	Document	A list with the meta data for the documents connected to the case. Returns max 100 documents. Data Contract: CaseDocumentResult
CaseEstates	Case – ToCaseEstates	Returns list of estates connected to the case if includeCaseEstates is set to true in the query. Refere chapter Data Contract: CaseEstateResult for more details.
Recno	Estate – recno	Recno of the estate
Address	Estate – ToAddress	The address connected to the estate
Streetaddress	EstateAddress – Address	Streetaddress of the estate
State	EstateAddress – State	State of the estate
ZipCode	EstateAddress – ZipCode	ZipCode of the estate
ZipPlace	EstateAddress – ZipPlace	ZipPlace of the estate
Country	EstateAddress – Country	Country of the estate
County	EstateAddress – County	County of the estate
Area	EstateAddress – Area	Area of the estate
CaseRowPermissions		Access matrix info on the case
ProgressPlan	-	The ProgressPlan connected to the case. Data Contract: ProgressPlanResult
SubjectSpecificMetatData	-	XML string with subject specific metada for the particular case type.
SubjectSpecificMetaDataNamespace	-	Specifies the data contract that the subject specific metadata is provided on (namespace)
URL	-	A 360°/eArchive relative URL that can be used by authenticated users to view the Case Details. Note: For version below 5.9- The base of the URL is configured in the SI.WS.Core/web.config key SI.Biz.Serviced.Email.360WebApplicationUrl or Setting value in 360 webadmin (360 Public Url) and return absolute URL
AccessGroupRecno	Case-ToAccessGroup-Recno	Case AccessGroup recno E.g. AccessGroupRecno = "0" ("Public")
AccessGroup	Case- ToAccessGroup- Code	Case AccessGroup code E.g. AccessGroup = "Public"
eArchiveXMLFragment (available from 5.11)		Return XML fragment from case entity only on eArchive installation.
ImportedDocumentNumber (5.12)	Document-ImportedDocumentNumber	eArchive - Imported Document number.
Remarks (5.15)		List of remarks. Data Contract: RemarkInfo
Keywords (5.15)		List of keywords. Data Contract: Keyword
Milestones		List of milestones
UID (6.3)	Case - UID	Globally unique identifier.
UIDOrigin (6.3)	Case - UIDOrigin	The origin of the UID: 360 or eArchive or Plan&Build.
StatusRecno (6.4)	Case-CaseStatus.Recno	Return recno of case status.

Stages	Case -ToStage	Stages connected to case. Refer Data Contract: Stage
---------------	---------------	--

7.4.6 Data Contract: CaseContactResult

Output Property	360° field	Comment
ContactName	Contact - SearchName	The name of this contact.
Role	CaseContact – ToRole	Role of the contact on this case in code value.
Recno	CaseContact – ToContact – Recno	Recno of this contact.
ReferenceNumber	CaseContact – ToContact – ReferenceNumber	Reference number of the contact – if private person or enterprise.
ContactType	CaseContact – ToContact – Domain	Contact type of this contact e.g:- Enterprise, ContactPerson or PrivatePerson
Address	CaseContact – ToContact – Addresses	Address of this contact. See the chapter “ Data Contract: Address ” for details.
ExternalId	CaseContact – ToContact – ExternalID	External id of the contact – independent of contact domain (type).
IsUnofficial	CaseContact – Unofficial	Is contact unofficial. <i>Available from 360° version 5.12.* and SIF standalone 2.1.6.</i>
SubjectArea (6.4)	CaseContact-SubjectArea	The subject area of the case contact.
Notes (6.4)	CaseContact-Notes	Notes of the Case Contact.
ActionClass (6.4)	CaseContact-ActionClass	Refers to code table: ActionClass. Returns Code, Description and Recno of action class
RoleRecno (6.6)	CaseContact – ToRole.Recno	Role of the contact on this case in recno value.

7.4.7 Data Contract: AdditionalFieldParameter

This can be used for additional 360° fields which are not currently included in the webservice input objects. It can be used for creating and updating fields, and for searching within some 'Get' services. Both standard and custom (customer specific) fields can be set via this parameter, but there are limitations.

What **can** be done:

- Update single value fields

What **can not** be done:

- Multi value fields (see 7.4.8 Data Contract: AdditionalFieldListParameter for multi value fields)
- Fields on referenced entities (such as ToSomething.SomeField)

Fields that are connected as a relation to the entity in the meta model, can only be set in some cases, and if so using 360° recno values.

This parameter should only be used after consulting with a TietoEVRY employee or someone with knowledge of the 360° meta model.

For the create and update operations: If the supplied Name does not exist in the customer database, the input is just ignored and no error is thrown.

Property	360° field	Comment																				
Name <u>(*)</u>	-	The name of the field. This name is the name in the 360° meta model (Not always the same as seen in 360° GUI.) Example: “CF_key”																				
Value <u>(*)</u>	-	The string value to be set in the field.																				
OperatorType		Comparison operator, used only for “Get” services. Defaults to equal operator (=). Possible values (Operator column): <table><tr><th>Operator</th><th>Description</th></tr><tr><td>=</td><td>Equal</td></tr><tr><td>!=</td><td>Not equal</td></tr><tr><td>LIKE</td><td>Like, ‘%’ should be used as wildcard</td></tr><tr><td>GT</td><td>Greater than</td></tr><tr><td>GT=</td><td>Greater than or equal</td></tr><tr><td>LT</td><td>Less than</td></tr><tr><td>LT=</td><td>Less than or equal</td></tr><tr><td>IS NULL</td><td>Is null</td></tr><tr><td>IS NOT NULL</td><td>Is not null</td></tr></table>	Operator	Description	=	Equal	!=	Not equal	LIKE	Like, ‘%’ should be used as wildcard	GT	Greater than	GT=	Greater than or equal	LT	Less than	LT=	Less than or equal	IS NULL	Is null	IS NOT NULL	Is not null
Operator	Description																					
=	Equal																					
!=	Not equal																					
LIKE	Like, ‘%’ should be used as wildcard																					
GT	Greater than																					
GT=	Greater than or equal																					
LT	Less than																					
LT=	Less than or equal																					
IS NULL	Is null																					
IS NOT NULL	Is not null																					

7.4.8 Data Contract: AdditionalFieldListParameter

This can be used for additional 360° fields which are not currently included in the webservice input objects. It can be used for searching within some 'Get' services and certain insert and update services. With this field you

can pass list of values for multi-value fields. Both standard and custom (customer specific) fields can be used via this parameter, but there are limitations - Fields on referenced entities (such as ToSomething.SomeField) can not be used for searching,

Fields that are connected as a relation to the entity in the meta model, can only be used in some cases, and if so using 360° recno values.

You can pass name of 360 field in Name attribute and list of string in Value attribute, for e.g. you can search for cases with CaseStatus in 4,5,6. As mentioned above you can only pass recnos in this scenario, since case status is a relation to case.

For REST service, you can separate two attributes Name and Value with pipe operator ('|') and Value by (',') operator for e.g. CaseType|2,10

If the supplied Name does not exist in the customer database, the input is just ignored and no error is thrown.

Property	360° field	Comment
Name(*)	-	The name of the field. This name is the name in the 360° meta model (Not always the same as seen in 360° GUI.) Example: "CF_key"
Value(*)	-	List of values. Input format for REST GET operations can be comma separated string (e.g. CaseType 2,10)

7.4.9 Data Contract: CaseEstateResult

Property	360° field	Comment
Recno(\)	Estate - Recno	Unique id in 360° for the estate. Use either this field OR the ExternalId-field.
Address	Estate - ToAddress	The estate address is an Address object, see details under the chapter: "Data Contract: Address" .
EstateNumber	Estate - EstateNumber	Gnr (Gårdsnummer).
STC_PropertyNumber	Estate - STC_PropertyNumber	Fastighetsnummer.
STC_PropertyName	Estate - STC_PropertyName	Fastighetsbeteckning.

7.4.10 Data Contract: DateCriteriaType

This can be used to search the entity as per the any date fields whether it's "CreateDate", "ModifiedDate", "ClosedDate" etc. Both standard and custom (customer specific) Date fields can be used to Get entity.

Property	360° field	Comment
DateName(*)	-	The name of the Date field. This name is the name in the 360° meta model (Not always the same as seen in 360° GUI.) Example: "CreatedDate"
Operator	-	Operator includes '=', "GT", "LT", "GT=", "LT="
DateValue(*)	-	The Date value to get the records.

7.4.11 Data Contract: Permission

This object can be used for defining permissions (RowPermission) for cases and documents. Permissions can be defined for access groups or contacts.

Property	360° field	Comment
AccessGroup(**)	AccessGroupId	Access group name or recno. Example: "Restricted" or "20"
ContactExternalId(**)	ToContact	Contact ExternalID or recno in format "recno:123456"
AccessLevel	RowPermission - AccessLevel	Possible values: - Read - Insert - Edit - Delete Default value is "Read"
Grant	RowPermission - Rights	Boolean (true/false) For case and document. Allows permission management.
ViewFile	RowPermission - Rights	Boolean (true/false) For document. Allows viewing files.
InsertFile	RowPermission - Rights	Boolean (true/false) For document. Allows adding files.
ModifyFile	RowPermission - Rights	Boolean (true/false) For document. Allows modifying files.
InsertRev	RowPermission - Rights	Boolean (true/false) For document. Allows adding revision.
ModifyRev	RowPermission - Rights	Boolean (true/false) For document. Allows modifying revision.
InsertDoc	RowPermission - Rights	Boolean (true/false) For case. Allows adding document
Reference	RowPermission - Ref	Description which is shown on permissions page. Default value "SIF".

7.4.12 Data Contract: AdditionalRelations

This functionality is available from 360° version 5.12 and SIF standalone version 2.1.6.

This field is used to setup a “GET” query to fetch the data with custom or standard relations which are not provided in standard request parameter for Case and Documents only.
With this you can pass the list of relation fields.

You can pass name of 360 field in Name attribute, list of AdditionalFieldParameter as FieldCriteria and list of AdditionalFieldListParameter(optional) to search using realations.

Fields that are connected as a relation to the entity in the meta model can only be used

Note: We only support relation up to first level, e.g. Document -> ToCases

Name: ToCases

FieldCriteria: Recno (Case -> Recno)

Property	360° field	Comment
Name(*)	-	The name of the field. This name is the name in the 360° meta model (Not always the same as seen in 360° GUI.) Ex. (ToOrgUnit)
FieldCriteria(*)	-	List item to establish relation criteria “ Data Contract: AdditionalFieldParameter ”
FieldListCriteria	-	List item to specify multiple values “ Data Contract: AdditionalFieldListParameter ”

7.4.13 Data Contract: CaseDocumentResult

Output Property	360° field	Comment
Recno	Document – Recno	Recno of document.
DocumentNumber	Document – DocumentNumber	Document number.
DocumentTitle	Document- Title	Document title
Files		List of files connected to document. Data Contract: CaseDocumentFileResult
Category (v5.14)	Document- ToDocumentCategory	Document category. Data Contract: DocumentCategoryResult
ImportedDocumentNumber (5.15)	Document- ImportedDocumentNumber	eArchive - Imported Document number.

7.4.14 Data Contract: CaseDocumentFileResult

Output Property	360° field	Comment
Recno	File – Recno	Unique id in 360° for the file connected to the document
Title	File – Comment	The title of the file connected to the document
Format	File – Format	The format of the file connected to the document
Size	File- Size	Size of file

7.4.15 Data Contract: DocumentCategoryResult

Output Property	360° field	Comment
-----------------	------------	---------

Recno	Code table: Document category – Recno	Unique id in 360°
Code	Code table: Document category – Code	Document category code.
Description	Code table: Document category – Description	Document category description

7.4.16 Data Contract: RemarkInfo

Output Property	360° field	Comment
Title	Note- Title	Note title
Content	Note- Notes	Content of note
TypeCode	Note- ToNoteType.Code	Note type code
TypeDescription	Note- ToNoteType.Description	Note type description
CreatedDate	Note- CreatedDate	Created date
ModifiedDate	Note- ModifiedDate	Modified date
CreatedBy	Note- ToCreatedBy.ToUser.UserID	Created by
ModifiedBy	Note- ToModifiedBy.ToUser.UserID	Modified by
ExpirationDate	Note- ExpirationDate	Expiration date

7.4.17 Data Contract: Keyword

Output Property	360° field	Comment
Recno	Code table: Keywords – Recno	Unique id in 360°
Code	Code table: Keywords – Code	Keyword code.
Description	Code table: Keywords – Description	Keyword description

7.4.18 Data Contract: Milestone

Output Property	360° field	Comment
Recno	Milestone – Recno	Unique id in 360°
Description	Milestone – Description	Milestone description
MilestoneDate	Milestone- MilestoneDate	Milestone date.
Notes	Milestone- Notes	Notes of the Milestone
MilestoneStatus	Milestone- ToMilestoneStatus.Description	MilestoneStatus
MilestoneType	Milestone- ToMilestoneType.Description	MilestoneType
Title	Milestone-Title	Milestone title
PlannedDate	Milestone-PlannedDate	Used to specify what date this is planned to be done

7.4.19 Data Contact: ProgressPlanResult

Output Property	360° field	Comment
Recno	-	Progress plan Recno
Description	-	Progress plan Description
WorkunitId	-	Progress plan workunit id
ProgressPlanDetails (5.18 above)	-	Detail of progress plan. Data Contract: CaseProgressPlanActivityResult

ActivePhases (5.18 above)	-	List of active phases in progress plan. Data Contract: CaseProgressPlanActivityResult
----------------------------------	---	--

7.4.20 Data Contract: CaseProgressPlanActivityResult

Output Property	360° field	Comment
Recno	-	Activity Recno
Description	-	Activity Description
Type	-	Activity type
Status	-	Activity status

7.4.21 Data Contract: MyCaseConfig

Property	360° field	Comment
CaseType	-	A text value. It can take either code or recno of case type.
CaseContactRoles	-	List of possible CaseContact roles. Please refer code table: Contact - Case role. It can take either code or recno.

7.4.22 Data Contract: Stage

Output Property	360° field	Comment
Recno	Stage – Recno	Unique id in 360°
CalculationDays	Stage – Description	What will be the due date based on days from the day it gets created.
StartDate	Stage- StartDate	Stage date.
Notes	Stage- Notes	Notes of the Stage
Title	Stage-Title	Stage title
DeadlineDate	Stage-DeadlineDate	Calculated deadline for the stage instance
StageType	Stage-ToType	Stage type
StageStatus	Stage-ToStatus	Stage status
ProlongedCaseHandlingDays	Stage- ProlongedCaseHandlingDays	To update stage deadline
RemainingDays	Stage-RemainingDays	Remaining days to deadline
Milestones	Stage-ToMilestones	Connected milestones. Refer Data Contract: Milestone

8 Document service

Typical SOAP URL	http://[servername]:4000/Sl.WS.Core/SIF/DocumentService.svc
Typical REST URL	http://[servername]:4000/Sl.WS.Core/SIFREST/api/documents/
Typical RPC URL	https://[customer specific domain]/Biz/v2/api/call/Sl.Data.RPC/Sl.Data.RPC/DocumentService
Typical SOAP bridge URL	https://[customer specific domain]/Biz/v2-pbr/soapbridge/sif/DocumentService
(deprecated with v5.14)	

The fields "document date", "dispatched date" and "journal date" are made available through this service. In Norway, these are document specific dates that have defined behavior in line with NOARK. That implies the following:

1. Journal date is required to be after both dispatched date and document date.
2. Dispatched date is required to be before journal date but after document date.
3. Document date is required to be before journal date and dispatched date.

8.1 CreateDocument

8.1.1 Input

Data Contract: CreateDocumentParameter

Input Property	360° field	Comment
ADUserContext	-	Read Authentication and ADContextUser
Title(*)	Document - Title	
UnofficialTitle	Document - UnofficialTitle	If not set, Title will be used
DocumentDate	Document - DocumentDate	
Archive	Document – ToDocumentArchive	The Document archive for this document. Can be code or recno. E.g. Archive = "Generelt dokument" Defaults to "Saksdokument" (recno: 2) if not supplied.
Category(*)	Document – ToDocumentCategory	Can be code or recno. E.g. Category = "Referat". View common values.
Status(*)	Document – ToJournalStatus	Can be code or recno. E.g. Status = "J". View common values.
CaseNumber(\)	Document – ToCase	CaseNumber of the case this document belongs to. <i>Not mandatory in all archives.</i> Provide only ONE of the two possible fields to ID case.
CaseExternalId(\)	Document – ToCase	External ID of the case this document belongs to. Lookup is based on the combination of Id and Type. Provide only ONE of the two possible fields to ID the case. <i>Not mandatory in all archives</i>

Id	External Integration Keys – ExternalId	External id of the case.
Type	External Integration Keys - ExternalSystem	If not provided, default value “SIF WS Case” will be used. This is the type set via CreateCase if type was not provided when importing a case.
ExternalName	External Integration Keys - ExternalName	Name of the external key (optional)
ResponsiblePersonIdNumber	Document – OurRef - Referencenumber	The external ID of the responsible person. Looks for a contact with ExternalId equal to the property input. It is only possible to set a contactperson in the same enterprise hierarchy as the ADUserContext user as responsible, and the responsible needs to be a 360° user. Provide only ONE of the four possible fields to ID responsible person.
ResponsiblePersonRecno	Document – OurRef - Referencenumber	Looks for a contact with Recno equal to the property input.
ResponsiblePersonEmail	Document – OurRef	Looks for a contact with Email equal to the property input.
ResponsiblePersonUserId	Document – OurRef	Looks for a contact with UserId equal to the property input (username, E.g. “no\name.name”)
ResponsibleEnterpriseNumber	Document – ToOrgUnit	The enterprise number of the responsible enterprise. Looks for a contact with ExternalID first, then for one with reference number equal to the property input. If neither this nor the ResponsibleEnterpriseRecno property is set, the responsible enterprise will be set to the responsible person’s enterprise. If the responsible person is not set, the responsible enterprise will be set to the main enterprise of all the users. It is only possible to set the responsible enterprise to an enterprise in the same enterprise hierarchy as the ADUserContext user. Provide only ONE of the two possible fields to ID responsible enterprise.

ResponsibleEnterpriseRecno	Document – ToOrgUnit	This field is a fallback field and is only used if ResponsibleEnterpriseNumber is null or empty. Must be recno of a valid enterprise.
Contacts	Document – ToActivityContact	List of document contacts with associated roles. Must be existing contacts. See the chapter “Data Contract: DocumentContactParameter” for details.
UnregisteredContacts	Document - ToActivityContact	List of unregistered document contacts with associated roles. See the chapter “Data Contract: UnregisteredContactParameter” for details.
SendersReference	Document - ReferenceNo	External reference number.
AccessCode	Document – Access code	Can be code value or recno. E.g. AccessCode = “U” or “recno:0” Some access code require Paragraph to be specified as well. Contact screening: If access code is set to other than U and you want to screen contacts on the documents – use the field IsUnofficial on Contacts or UnregisteredContacts for each document contact to be screened.
Paragraph	Document - ToAuthorization	Only code value is permitted. E.g. Paragraph = “OFL § 11” Defaults to the same paragraph as the case.
AccessGroup	Case – ToAccessGroup	Can be code value or recno. E.g. AccessGroup = “Public”
JournalDate	Document - JournalDate	The date the document is closed. Should be used together with a closing status and is ignored otherwise. The following happens if the Status property is set to a closing status: - If this property is set, the document will gain this date as JournalDate If this property is not set 360° automatically sets the JournalDate to the current date.
DispatchedDate	Document - DispatchedDate	
FiledOnPaper	Document – Paper	
Keywords	Document – Keywords	Adds the given keywords to the document. E.g. ["Keyword 1","Keyword 2"] If they are not found in 360°, they are added

		to the Keyword code table (the user needs Admin rights to create keywords).
Notes	Document – Notes	
ReferringCases	-	List of referring cases, referred by case number. The document-case relation is hardcoded to “reference”. Ignored if empty
ReferringDocuments	-	List of referring documents, referred by document number. Ignored if empty
FilesFromTemplate	-	List of template id’s to create files from. See the chapter “ Data Contract: CreateFileFromTemplateParameter ” for details
Files	-	List of files. See the chapter “ Data Contract: File ” for details
Remarks	Document – ToNotes	List of remarks to be added to document
Title(\)	Note – Title	Remark title. See chapter Remark Validation for more details.
Content(\)	Note - Notes	Remark content. See chapter Remark Validation for more details.
RemarkType(*)	Note - ToNoteType	Uses code table: Note type Can be code value or recno. Mandatory
Project	Document – ToProject	The project number of the project you want to connect your document to. E.g. “15-51”
AdditionalFields		Additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
AdditionalListFields	-	Additional multi-value fields – see AdditionalFieldListParameter for details
DefaultValueSet	-	Default value set – see chapter Support for Default Values for more details.
SubArchive	Document – ToSubArchive	Can be code value or recno. E.g. SubArchive=“Sakarkiv”, “60001” or “recno:60001”
ArchiveCodes	Document – ToClassCodes	This is a list of ClassCodeParameter objects. See the chapter “ Data Contract ClassCodeParameter ” for details.
RecordType	Document – ToRecordType	Can be code value or recno. E.g. RecordType=“A1”, “60001” or “recno:60001”
Permissions	RowPermission – Entity/Key	List of Permission objects. See Data Contract: Permission
ExternalId		External ID for the document.
Id	External Integration Keys – ExternalId	External id. String value.

Type	External Integration Keys - ExternalSystem	External id type. Not mandatory. If not provided, default type "SI WS Document" will be used. External id is unique within each type, so type can be used if documents are imported from more than one external system which use ExternalId. Should have a name to reflect system and entity, e.g. "Visma Document".
SignOffWithResponseCode		Boolean value, set true if you want to sign off incoming document. Default value is false.
ResponseCode	ActivityContact – ResponseCode	The response code. This must be a value from the code table "Response code". E.g., ResponseCode = "TLF" Can be use code or recno in format (recno:xxxxx) Note: - If you want to sign off incoming document at the time of creation, use this property along with "SignOffWithResponseCode=true" - ResponsiblePerson or ResponsibleEnterprise is mandatory - Only one ActivityContact should be there i.e., "Sender"
eArchiveXMLFragment (available from 5.11)		Virtual data through XML fragment on eArchive installation. Note: This property internally checks if current running installation is eArchive or not. If yes, then only it will set XML fragment to document.
ImportedDocumentNumber (5.12)	Document-ImportedDocumentNumber	eArchive - Imported Document number.
RunFilesInDocumentBatch (v5.17)		Set this flag to true if you want to execute files insertion inside document batch. By this flag you can control each incoming request whether you want to execute it in separate batch or one. For global flag use setting SIF File Inserts in DocumentBatch (v5.17)
SearchUnregisteredDocument (v5.17)		If you are searching for unregistered document, make use of this flag. This will add document archive to 'import archive recno:7', committed=0. If you know the origin/source of unregistered document. Use the property UnregisteredDocumentOrigin.

UnregisteredDocumentOrigin (v5.17)

If you are searching for unregistered document and know the origin/source of unregistered document. Use the property UnregisteredDocumentOrigin.

8.1.2 Output

Data Contract: DocumentOperationResult

Output Property	360° field	Comment
Recno	Document – Recno	Unique ID in 360° for the document.
DocumentNumber	Document - DocumentNumber	The document number given by 360.
ImportedDocumentNumber (5.12)	Document- ImportedDocumentNumber	eArchive - Imported Document number.
UID (6.3)	Document - UID	Globally unique identifier.
UIDOrigin (6.3)	Document - UIDOrigin	The origin of the UID: 360 or eArchive or Plan&Build.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

8.1.3 Errors

8.1.3.1 The document type must have an external recipient

“(((\$((#AE1C48DFC#))The document type must have an external recipient\$))”

This happens if you try to create a document with a category that requires an external recipient. Typically the category “Dokument ut”/”Outbound document”.

Solve this by sending a [contact reference or unregistered contact](#) as the [Recipient role](#) with the webservice method call. If you need to create a contact to reference, you can do this by [creating/syncing a private person](#).

8.1.3.2 The document type must have an external sender

“(((\$((#AB094BFDD#))The document type must have an external sender\$))”

This happens if you try to create a document with a category that requires an external sender. Typically the category “Dokument inn”/”Incoming document”.

Solve this by sending a [contact reference or unregistered contact](#) as the [Sender role](#) with the webservice method call. If you need to create a contact to reference, you can do this by [creating/syncing a private person](#).

8.2 UpdateDocument

Updates a document in 360. If a property is set to null, meaning not provided in the parameter passed to the method, the property is not updated. To be able to clear the field in 360° the property has to be set to "". Only works for string properties.

What is possible and not possible with this method:

- It is **not** possible to change or delete files.
- It is **not** possible to add a new version of files.
- It is possible to add files to a document by supplying the Files and DocumentNumber property.

8.2.1 Input

Data Contract: UpdateDocumentParameter

Property	360° field	Comment
ADUserContext	-	Read Authentication and ADContextUser
DocumentNumber (\)	Document – DocumentNumber	Search field. This document will be updated. It's also possible to pass the document recno on the format "recno:123".
DocumentDate	Document - DocumentDate	
Title	Document – Title	
UnofficialTitle	Document – UnofficialTitle	
Category	Document – ToDocumentCategory	Can be code or recno. E.g. Category = "Referat". View common values.
Status	Document – ToJournalStatus	Can be code or recno. E.g. Status = "J". View common values.
ResponsiblePersonIdNumber	Document – OurRef – Referencenumber	The external ID of the responsible person. Looks for a contact with ExternalId equal to the property input. It is only possible to set a contactperson in the same enterprise hierarchy as the ADUserContext user as responsible. Provide only ONE of the four possible fields to ID responsible person.
ResponsiblePersonRecno	Document – OurRef – Referencenumber	Looks for a contact with Recno equal to the property input.
ResponsiblePersonEmail		Looks for a contact with Email equal to the property input.

ResponsiblePersonUserId		Looks for a contact with UserId equal to the property input (username, E.g. "no\name.name")
ResponsibleEnterpriseNumber	Document – ToOrgUnit	The enterprise number of the responsible enterprise. Looks for a contact with ExternalID first, then for one with reference number equal to the property input. If neither this nor the ResponsibleEnterpriseRecno property is set, the responsible enterprise will be set to the responsible person's enterprise. If the responsible person is not set, the responsible enterprise will be set to the main enterprise of all the users. It is only possible to set the responsible enterprise to an enterprise in the same enterprise hierarchy as the ADUserContext user. Provide only ONE of the two possible fields to ID responsible enterprise.
ResponsibleEnterpriseRecno	Document – ToOrgUnit	This field is a fallback field and is only used if ResponsibleEnterpriseNumber is null or empty. Must be recno of a valid enterprise.
Contacts	Document - ToActivityContact	List of document contacts with associated roles. Must be existing contacts. If SyncDocumentContacts is set to false, then this adds contacts to the document. Existing document contacts will not be deleted or updated. You can also add an existing contact with a new role. If SyncDocumentContacts is set to true, then this will do synchronize (add, update and delete) of contacts to the document. See the chapter "Data Contract: DocumentContactParameter" for details.
UnregisteredContacts	Document - ToActivityContact	List of unregistered document contacts with associated roles. Contacts already registered on the document will not be edited or deleted. If SyncDocumentContacts is set to false, then this adds contacts to the document.

		Existing document contacts will not be deleted or updated. You can also add an existing contact with a new role. If SyncDocumentContacts is set to true, then this will do synchronize (add, update and delete) of contacts to the document. See the chapter “Data Contract: UnregisteredContactParameter” for details.
SendersReference	Document - ReferenceNo	External reference number.
AccessCode	Document – Access code	Can be code value or recno. E.g. AccessCode = “U” If the access code requires a paragraph the field paragraph has to offer a valid paragraph. N.B: If a recno value is used, this recno value <u>can not</u> also exist as a code value. Contacts screening: If access code is set to other than U and you want to screen contacts on the documents – use the field IsUnofficial on Contacts or UnregisteredContacts for each document contact to be screened.
Paragraph	Document - ToAuthorization	Only code value is permitted. E.g. Paragraph = “OFL § 11” Ignored if used with an access code that doesn’t require a paragraph.
AccessGroup	Case – ToAccessGroup	Can be code value or recno. E.g. AccessGroup = “Public”
JournalDate	Document- JournalDate	The date the document is closed. Should be used together with a closing status and is ignored otherwise. The following happens if the Status property is set to a closing status: - If this property is set, the document will gain this date as JournalDate If this property is not set 360° automatically sets the JournalDate to the current date
DispatchedDate	Document - DispatchedDate	
FiledOnPaper	Document – Paper	
Keywords	Document – Keywords	Updating the keywords on the document by these rules: 1) New keywords are added 2) Existing keywords are ignored 3) Missing keywords are ignored

Notes	Document – Notes	
ReferringCases	Document – ToCase	List of referring cases, referred by case number. Ignored if empty.
ReferringDocuments	?	List of referring documents, referred by document number. Ignored if empty.
FilesFromTemplate		List of template id's to create files from. See the chapter " Data Contract: CreateFileFromTemplateParameter " for details
Files	?	List of files that will be added to the document. It is not possible to update previously added files. See the chapter " Data Contract: File " for details.
Remarks	Document – ToNotes	List of remarks to be added to document
Title(\)	Note – Title	Remark title. See chapter Remark Validation for more details.
Content(\)	Note - Notes	Remark content See chapter Remark Validation for more details.
RemarkType(*)	Note - ToNoteType	Uses code table: Note type Can be code value or recno. Mandatory
Project	Document – ToProject	The project number of the project you want to connect your document to. E.g. "15-51"
AdditionalFields		Additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
AdditionalListFields	-	Additional multi-value fields – see AdditionalFieldListParameter for details
SubArchive	Document – ToSubArchive	Can be code value or recno. E.g. SubArchive="Sakarkiv", "60001" or "recno:60001"
ArchiveCodes	Document – ToClassCodes	This is a list of ClassCodeParameter objects. See the chapter " Data Contract ClassCodeParameter " for details.
RecordType	Document – ToRecordType	Can be code value or recno. E.g. RecordType="A1", "60001" or "recno:60001"
SyncDocumentContacts		If provided it synchronizes (Add, update or delete) both contacts and unregistered contacts to the document. Default value is false, if not provided
Permissions	RowPermission – Entity/Key	List of Permission objects. See Data Contract: Permission
ExternalId(\)		External id. This property will be used to determine which document will be updated. A document cannot have its external ID updated.

		Lookup is based on the combination of Id and Type.
		Provide only ONE of the two possible fields to ID the document.
Id	External Integration Keys – ExternalId	External id.
Type	External Integration Keys - ExternalSystem	If not provided, default value “SIF WS Document” will be used. This is the type set via CreateDocument if type was not provided when importing a case.
RemoveResponsiblePerson		Boolean value, set true if you want to remove responsible person from document Default value is false.
eArchiveXMLFragment (available from 5.11)		Virtual data through XML fragment on eArchive installation. Note: This property internally checks if current running installation is eArchive or not. If yes then only it will update XML fragment to document.
ImportedDocumentNumber (5.12)	Document- ImportedDocumentNumber	eArchive - Imported Document number.

8.2.2 Output

Data Contract: DocumentOperationResult

Property	360° field	Comment
Recno	Document – Recno	Unique ID in 360° for the document.
DocumentNumber	Document - DocumentNumber	The document number in 360.
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

8.3 SignOffDocument

Method to sign off a document with a response code and an optional note.

While reply with document if you choose response code:

1. Answered with outbound document then you can only reply with outbound document to incoming document
2. Signed off with new memo then you can only reply to internal memo with internal memo

Response code (Recno)	Response code (Code)	Response code (Description)	Rule
1	AO (ENU) BU (NOR)	Answered with outbound document	If using this response code, you may only refer to an <i>outbound document</i> in the ReplyDocument parameter. This means that the referred document must have a document category that is connected to the <i>O – Outbound</i> (recno: 2) journal document type. The document referred in Document parameter must be an incoming document.
2	WM (ENU) NN (NOR)	Signed off with new memo	If using this response code, you may only refer to an <i>internal memo</i> in the ReplyDocument parameter. This means that the referred document/memo must have a document category that is connected to the <i>Memo – Internal memo with follow-up</i> (recno: 3) journal document type. The document referred in Document parameter must also be an internal memo.

8.3.1 Input

Data Contract: SignOffDocumentParameter

Input Property	360° field	Comment
ADContextUser		Read Authentication and ADContextUser
Document (*)	Document – DocumentNumber	The document number of the document to update. It's also possible to pass the document recno on the format "recno:123".
ResponseCode (*)	ActivityContact – ResponseCode	The response code. This must be a value from the code table "Response code". E.g. ResponseCode = "TLF" (From version 6.2, we have added support for "Preliminary answer sent" response code)
NoteTitle	Document – ToNotes – Title	This is the description of the note.

		If not supplied, default value is “Merknad ved avskrivning”
Note	Document – ToNotes – Notes	Adds a note to the document, about the sign off. Can be viewed under the tab “Merknader” in Document detail view
ReplyDocument	Document – DocumentNumber	Document number of the reply document e.g:- Suppose we have one incoming document and we are replying that document with outbound document and response code is “Answered with outbound document” that time ReplyDocument parameter is the document number of outbound document. It’s also possible to pass the document recno on the format “recno:123”.
SignOffContacts (6.4)	ActivityContact-Contact	List of contacts connect to document with role “Recipient”. If you want to sign-off particular contacts. See Data Contract: SignOffContactParameter

8.3.2 Output

Data Contract: [DocumentOperationResult](#)

Same return object as UpdateDocument

8.4 DispatchDocuments

Method to start the dispatch process for one or several documents.

All files on each document will be included, and it will be dispatched to all recipients.

Dispatch channel used for each recipient will be the channel chosen by 360°. This can be the one set as default channel or the one set on the document contact when creating or updating the document (See [Data Contract: DocumentContactParameter](#) and [Data Contract: UnregisteredContactParameter](#)).

If any of the documents fail, the operation will continue with the next document in the list. A list of result objects will be returned. NB: The result only indicates if the dispatch process was started successfully. To see if the dispatch was completed successfully – check status in 360°.

With version 6.7, This method will first validate the contacts to see if they have all necessary information to be able to start the dispatch workflow.

8.4.1 Input

Data Contract: DispatchDocumentsParameter

Input Property	360° field	Comment
ADContextUser		Read Authentication and ADContextUser
Documents(*)	-	
Recno(\)	Document – Recno	The recno of the document number to dispatch. Only provide one of the id fields Recno/DocumentNumber.
DocumentNumber(\)	Document – DocumentNumber	The document number of the document to dispatch

8.4.2 Output

Data Contract: DispatchDocumentsResult

NB: Only returns info about whether the dispatch process started ok – not whether it completed ok.

Property	360° field	Comment
Successful	-	If true, everything was successful. If false, the operation failed for one or more of the documents.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace
DocumentResult	-	List of DocumentOperationResult
Returns info about the result of each document operation.		

8.5 GetDocuments

Take note that this method in addition to getting meta data on documents; may also be used to get file meta data and the physical file(s) inside the document. At least one search criterion parameter must be supplied.

8.5.1 Input

Data Contract: GetDocumentsQuery

Note: Use flags when it is required. Do not set all flags to true, it might hamper the performance.

Some flags are default set to false, set to true explicitly in request parameter. For example, if you want to return DocumentContacts in result, set "IncludeDocumentContacts" to true.

If searching with dates (CreatedDate or ModifiedDate..), recommendation is to use DateCriteria property.

Input Property	360° field	Comment
ADContextUser		Read Authentication and ADContextUser
MaxReturnedDocuments	-	Maximum number of documents to return. Default 100.
Page		Int. Pagination parameter that should be used in conjunction with maxReturnedDocuments to decide what documents to be returned (e.g. maxReturnedDocuments=10 and Page=2 would return document 21-30) Note: Always use SortCriterion along with page, to get more accurate result.
SortingCriterion		String value, provide either: "RecnoDescending" or "RecnoAscending" to Sort the resultset by recno Note: Always use SortCriterion along with page, to get more accurate result.
IncludeFileData	-	If the file list should include an output property that contain the files base 64 encoded data. Defaults to false.
Recno		Searches using recno
CaseNumber	Case – Name	Searches using case number.
CaseExternalId		Searches using external case id, using the combination of Id and Type.
Id	External Integration Keys – ExternalId	External id of a case.

Type	External Integration Keys - ExternalSystem	If not provided, default value "SIF WS Case" will be used. This is the type set via CreateCase if type was not provided when importing a case.
DocumentNumber	Document – DocumentNumber	Searches using document number.
Title	Document – Title	From DLL version 1.0.0.58254: The title search is based on the SQL "LIKE" operator. It is still possible to search for exact matches, but the possibility to search with wildcards is now introduced. For instance, "%" can be used as a substitute for zero or more characters in the title search. Before DLL version 1.0.0.58254: Only documents matching the exact title will be returned due to the search being based on the SQL "=" operator.
LastDate	Document - ModifiedDate	Returns documents that have been modified after the specified date. New delta support has been added in version 6.5 to get incremental changes. This functionality is enabled by default.
DocumentArchive	Document – ToDocumentArchive	Can be code value or recno (using recno string syntax) E.g. DocumentArchive="Saksdokument" or "recno:2"
ContactReferenceNumber	Document – ToActivityContact – ToContact - Referencenumber	Find documents with a relation to this contact. Value should be either the PersonalIdNumber of a private person or the EnterpriseNumber of an enterprise contact.
ContactExternalId	Document – ToActivityContact – ToContact - ExternalID	Find documents with a relation to this contact, identifies by its ExternalId.
ContactRecnos	Document – ToActivityContact – ToContact, ToContactperson - Recno	List of Contact recnos. Find documents with a relation to these contacts. Input format for REST should be comma

		separated string (e.g. 200001,200002)
DateCriteria		Searches using DateCriteria, for more details refere chapter Data Contract: DateCriteriaType , what kind of fields and how to use this parameter.
IncludeRemarks		If related remarks should be returned.
IncludeReferringCases		Boolean value, set true if you want to include document-case-relations in the result. Default value is false.
IncludeReferringDocuments		Boolean value, set true if you want to include document-document-relations in the result. Default value is false.
IncludeCustomFields		Boolean value, set true if you want additional 360° fields which are not currently included in the webservice output objects. Default value is false. Refer chapter Get Document Custom Data for more details
IncludeDocumentContacts		Boolean value, set false if you want to exclude document contacts in the result. Default value is true.
OnlyPublicInfo		Boolean value, set to true if you only want to: only include documents from a document archive that allows publishing, not return contacts with an access code different than "0"(public), not return files with an access code different than "0"(public). Default value is false
IncludeAccessMatrixRowPermissions		Boolean value, set true if you want to include access control matrix information in the result. Default value is false
SubArchive	Document – ToSubArchive	Can be code value or recno. E.g. SubArchive="Sakarkiv", "60001" or "recno:60001"
ArchiveCode	Document – ToClassCodes – Value	Archive code value
RecordType	Document – ToRecordType	Can be code value or recno.

		E.g. RecordType="A1", "60001" or "recno:60001"
AdditionalListFields		Searches using additional fields list parameter – see chapter for Data Contract: AdditionalFieldListParameter for details, what kind of fields and how to use this parameter.
AdditionalFields(\)		Searches using additional fields. See chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
IncludeFiles		Boolean value set to false if you do not want to include files in the result. Default value is true.
ExternalId		The external id of the document you wish to retrieve. Search uses a combination of Id and Type.
Id	External Integration Keys – ExternalId	External id of a document.
Type	External Integration Keys - ExternalSystem	If not provided, default value "SIF WS Document" will be used. This is the type set via CreateDocument if type was not provided when importing a document.
AdditionalRelations		<i>This functionality is available from 360° version 5.12 and SIF standalone version 2.1.6.</i> Searches using custom relations between two entities: Check details " Data Contract: AdditionalRelations " for type of fields and how to use it.
ArchiveType	Document - ToClassCodes	Can be code value or recno. E.g. ArchiveType="EV TOS" or "recno:60001"
ImportedDocumentNumber (5.12)	Document- ImportedDocumentNumber	eArchive - Imported Document number.
IncludeKeywords (5.15)		If related keywords should be returned.
UID (6.3)	Document - UID	Globally unique identifier.
UIDOrigin (6.3)	Document - UIDOrigin	The origin of the UID: 360 or eArchive or Plan&Build.

8.5.2 Output

Data Contract: GetDocumentsResult

Output Property	360° field	Comment
Documents	-	List of DocumentResult objects. See the chapter “Data Contract: DocumentResult” for details.
TotalCount	-	Total number of hits.
TotalPageCount	-	Total number of pages.
NextDeltaLastDate (6.5)	-	This will contain the date and time information for the next set of incremental changes. It only holds a value if the request is a delta query, which is determined by the presence of the “LastDate” filter.
Successful	-	Will be true as long as no exception occurred during the execution. This means that successful will be true even if no private persons matching the criteria was found.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

8.5.3 Get Document Custom Data

To get additional 360° fields, which are not currently, included in the webservice output objects.

Follow the below steps:

1. Open 360 admin and go to CONFIGURATION => SETTINGS and edit value for “SIF Document Custom Fields Query” which will include metaquery for getting the custom field, for e.g.

```
<QUERYDESC ENTITY="Document" NAMESPACE="SIRIUS" DATASETFORMAT="XML">
  <RESULTFIELDS>
    <METAITEM TAG="CF_testfield">CF_testfield</METAITEM>
  </RESULTFIELDS>
  <CRITERIA>
    <METAITEM NAME="Recno" OPERATOR="IN">
      <VALUE>{0}</VALUE>
    </METAITEM>
  </CRITERIA>
</QUERYDESC>
```

CF_testField is the custom meta field in Document Entity.

Note: Entity name should start with capital letter. It returns Single value field only.

2. The result will be displayed in <CustomFields> .. <CustomFields> section in the DocumentResult as follows:

```
<CustomFields>
  <AdditionalFieldParameter>
    <Name>CF_testfield</Name>
  >
  <Value>TestCustomField</V
alue>
```

```
</AdditionalFieldParameter>
</CustomFields>
```

8.5.4 Configure the maximum files to return while getting document

You can configure the maximum number of files to be returned for the documents in DocumentResult. The default number is 100, due to performance.

To do that follow the below steps:

1. Open 360 web admin and go to Configuration->Settings and look for "SIF MaxReturnedFiles while searching document".
2. Edit the value (integer value like 10, 20). To return all files, put -1.
3. And save the settings.
4. After saving new setting, do a cache refresh.

8.5.5 Configure SQL query hints

This functionality is available from 360° version 5.12 and SIF standalone version 2.1.9.

In some scenarios if GetDocuments operation performs poorly, adding SQL query hints can help the issue. Most often this might be the case in on-premises environments and especially if the SQL database has been upgraded to newer version at some point. There is functionality in 360° and SIF that makes it possible to add a query hint to the generated SQL query. The desired query hint needs to be added to two settings (Web admin → Configuration → Settings):

1. **SIF Get Documents Query Hint**
([360url]/locator/Admin/Setting/Details?Id=sif.getdocumentsqueryhint&standalone=true)
 - This is a single value field
2. **Query hint options** ([360url]/locator/Admin/Setting/Details?Id=sql.hintoptions&standalone=true)
 - This is a system-wide comma separated multivalue field that lists all the available query hints in the system. The query hint specified in step 1. needs to be included here as well.

List of available query hints (for SQL 2019) can be found here: https://docs.microsoft.com/en-us/sql/t-sql/queries/hints-transact-sql-query?view=sql-server-ver15#use_hint.

8.6 Sub Contracts

This chapter defines data contracts in use by the main data contracts of the Document methods.

8.6.1 Data Contract: DocumentContactParameter

Note:

1. ReferenceNumber is the PersonalIdNumber for a private person and EnterpriseNumber for an enterprise, so while connecting private person or enterprise to a document, make use of this field. ReferenceNumber is not used for contact persons.

However, if you are defining recno to a contact in this field, using the format “recno:xxxx”, the contact could be either a private person, enterprise or contact person. Choose whichever ID field you like. The connection will be set correctly in either case.

2. ExternalID is the unique identification number of a contact person *or* a private person or an enterprise. It’s therefore possible to connect contacts to documents using this field, independent of the contact domain (type). A proper connection between the document and contact will be set either way.

If you are defining recno to the contact on the format “recno:xxxx”, you can use this field across all contact domains (be it a contact person, enterprise or private person).

This logic was implemented to make our customers and third-party suppliers use whichever ID field they like, without needing to consider the domain/type of the contact. It also potentially eliminates the need for extra calls to the contact service, to retrieve Recno, ExternalId and/or ReferenceNumber before connecting contacts to documents.

Input Property	360° field	Comment
ReferenceNumber (\)	ActivityContact – ToContact – Referencenumber	The identification number of the contact. This is PersonalIdNumber for private persons and EnterpriseNumber for enterprises. Use either this field OR the ExternalId-field. If this contact doesn’t have a reference number, the format will be “recno:xxxx”. Note: If passing ReferenceNumber → Use this for private persons and enterprises. If passing Recno → Can be used for all contact domains.
ExternalId (\)	ActivityContact – ToContact – ExternalID	The identification number of the contact. This is ExternalId for contact persons, private persons and enterprises. Use either this field OR the ReferenceNumber-field. If this contact doesn’t have an external id, the format will be “recno:xxxx” Note: Can be used for all contact domains.
Role (*)	ActivityContact – ToRole	The contact’s role for the specific document. Can be code or recno. E.g. Role = “Contact”.

		The possible roles may be restricted based on the document type.
IsUnofficial	ActivityContact – Unofficial	This value can be true, false or null/not included. It is used to define if a contact should be unofficial, which means screened from Public Journal. Should not be set if the access code on the document is U – Unclassified.
DispatchChannel	ActivityContact – ToDispatchChannel	Sets the preferred dispatch channel for this specific document contact. For example “recno:1” for E-mail.

8.6.2 Data Contract: UnregisteredContactParameter

Used to create an unregistered contact on a document. The fields available in the 360° interface might differ based on settings, or between Service Packs.

Input Property	360° field	Comment
Role(*)	ActivityContact – ToRole	The contact’s role for the specific document. Can be code or recno. E.g. Role = “Contact”. The possible roles may be restricted based on the document type. View common values.
IsUnofficial	ActivityContact – Unofficial	This value can be true, false or null/not included. It is used to define if a contact should be unofficial, which means screened from Public Journal. Used when the access code on the document is not Unclassified.
DispatchChannel	ActivityContact – ToDispatchChannel	Sets the preferred dispatch channel for this specific document contact. For example “recno:1” for E-mail.
ContactName(*)	ActivityContact – Name2/Name	Use this to set the name of the unregistered contact. This can be the name of a contact person, a private person or an enterprise. Mandatory field.
ContactCompanyName	ActivityContact – Name	This can be used together with ContactName to set the name of the contact’s company.
ReferenceNumber		Reference number
Address		Street address
Country		Country
State		State
ZipCode		ZipCode
ZipPlace		ZipPlace
Email		Email address
MobilePhone		Mobile phone number
Phone		Phone number
Fax		Fax number

8.6.3 Data Contract: ResponsibleEnterprise

Output Property	360° field	Comment
Recno	Contact – Recno	Unique 360° database id field
ReferenceNumber	Contact – Referencenumber	EnterpriseNumber for enterprises.
ExternalId	Contact – ExternalId	ExternalId.
Name	Contact – SearchName	Name.
Email	Contact – E-mail	Email address.

8.6.4 Data Contract: ResponsiblePerson

Output Property	360° field	Comment
Recno	Contact – Recno	Unique 360° database id field
UserId	User – UserID	Username, e.g. “domain\360.admin”
ExternalId	Contact – ExternalId	ExternalId
Name	Contact – SearchName	Name
Email	Contact – E-mail	Email address

8.6.5 Data Contract: DocumentResult

Some of these values are only returned if GetDocuments was called with specific input parameters. E.g. ReferringCases is only returned if GetDocuments was called with IncludeReferringCases = true.

You can configure the number of files to be returned in DocumentResult. For for information, please see [Configure the maximum files to return while getting document](#)

Output Property	360° field	Comment
Recno	Document – Recno	
DocumentNumber	Document – DocumentNumber	
CaseNumber	Document – ToCase	
CaseExternalId	Document – ToCase	
CaseRecno	Document – ToCase – Recno	
Title	Document – Title	
DocumentDate	Document – DocumentDate	
JournalDate	Document – JournalDate	
Category	Document - ToDocumentCategory	Document category
Recno		
Code		
Description		
Type	Document - ToDocumentType	Document type (“I”, “U”..). Code table “Journal document type”
Recno		
Code		
Description		

StatusCode	Document – ToJournalStatus – Code	Examples: “J”, “R”
StatusDescription	Document – ToJournalStatus – Description	Examples: «Journalført og/eller kontrollert av arkivet», «Reservert av/for saksbehandler»
LastChangedDate		Last modified date for the document
DocumentRowPermissions		Access matrix info on the document
DocumentArchive	Document – ToDocumentArchive	Reference to document archive, Code table “Document archive”
SubArchive	Document – ToSubArchive	Connection to the Subarchive of the Document, Code table “Noark Subarchive”
AccessCodeRecno	Document – ToAccessCode – Recno	Recno value of access code, e.g. “0”
AccessCodeCode	Document – ToAccessCode – Code	Code value of access code, e.g. “U”
AccessCodeDescription	Document – ToAccessCode – Description	Description of access code, e.g. “Ugradert”
AccessGroup	Document – ToAccessGroup	Can be code value or recno. E.g. AccessGroup = “Public” If nothing is specified, default is “Public” (recno:0)
Paragraph	Document – ToAuthorization	Paragraph for documents with an access code different than unclassified.
URL	-	A 360° relative URL that can be used by authenticated users to view the document. Note: For version below 5.9- The base of the URL is configured in the SI.WS.Core/web.config key SI.Biz.Serviced.Email.360WebApplicationUrl or Setting value in 360 web admin (360 Public Url) and return absolute URL
RecordType	Document – ToRecordType	Reference to RecordType, Code table “Noark Classification code”
ArchiveCodes	Document – ToClassCodes	A list of all ArchiveType/ArchiveCode pairs on the Document.
ResponsibleEnterprise	Document – ToOrgUnit	Info about the responsible enterprise. See ResponsibleEnterprise
ResponsibleEnterpriseName	Document – ToOrgUnit – SearchName	Name on the responsible enterprise.
ResponsiblePerson	Document – OurRef	Info about the responsible person. See ResponsiblePerson
ResponsiblePersonName	Document – OurRef – SearchName	Name on the responsible person.
Contacts	DocumentContact	List of DocumentContactResult objects. See the chapter “ Data Contract: DocumentContactResult ” for details.
ReferringCases	ActivityCase	List of case relations. Does not include the documents main case.
CaseNumber	ActivityCase – ToCase	Case number of related case

Relation	ActivityCase – ToRole – Code	Code value of relation role
Notes	ActivityCase – Notes	Notes added to relation
Title	ActivityCase – ToCase	Title of the related case
ReferringDocuments	Connection: Activity - Activity	List of document relations. Includes documents referring to this document, and documents this document refers to. List is similar to “Document relations” tab in 360° GUI.
DocumentNumber		Document number of related document
Relation		Code value of relation role
Notes		Notes added to relation
Title		Title of the related document
Remarks		List of remarks.
Title		
Content		
TypeCode		
TypeDescription		
CreatedDate		
ModifiedDate		
CreatedBy		
ModifiedBy		
ExpirationDate		
Files		List of files from the current (active) version of the document and ordered by “sorting” field value from 360°.
Recno	File - Recno	
Title	File – Comment	
Format	File – Format	
Base64Data		The file data in a base 64 encoded string. Will only be returned if the input property IncludeFileData is set to true.
URL	-	A 360° URL that can be used by authenticated users to view the file. The base of the URL is configured in the SI.WS.Core/web.config key SI.Biz.Serviced.Email.360WebApplicationUrl or Setting value in 360 web admin (360 Public Url)
Note	File - Note	
Paragraph	File – ToAuthorization	
RelationTypeDescription	File – ToRelationType - Description	
RelationTypeCode	File – ToRelationType - Code	
LastChangedDate	File – ModifiedDate / FileModifiedDate	Returns file last modified date – file information or actual file.
VersionFormatDescription	File – ToVersionFormat - Description	
VersionFormatCode	File – ToVersionFormat - Code	
Type	File – Type	
ModifiedBy	File – ToFileModifiedBy – ToContact	

CheckedOutBy	File – ToCheckedOutBy – ToContact	
CategoryCode	File – ToFileCategory - Code	
CategoryDescription	File – ToFileCategory - Description	
StatusDescription	File – ToFileStatus - Description	
StatusCode	File – ToFileStatus - Code	
AccessCodeDescription	File – ToAccessCode - Code	
AccessCodeCode	File – ToAccessCode - Description	
DegradeCode	File – ToDegradeCode	Downgrade/declassification code, Norwegian “Avgradering”
DegradeDate	File – DegradeDate	
DisposalCode	File – ToScrapCode	Code value of disposal code, Norwegian “Kassasjonskode”, e.g. “B” or “G”.
DisposalDate	File – ScrapDate	Calculated disposal date, Norwegian “Kassasjonsdato”. This date is in the future and gives info about when the document can be disposed via 360° GUI function for disposal of files.
FiledOnPaper	File – Paper	
PaperLocation	File – PaperLocation	
SignDate	File – ToFileVersion – ToContact	
LastChangedDate	File – FileModifiedDate / ModifiedDate	LastChangedDate for the file
AccessGroup	File – ToAccessGroup - Code	File AccessGroup code E.g. AccessGroup = “Public”
AccessGroupRecno	File – ToAccessGroup- Recno	File AccessGroup recno E.g. AccessGroupRecno = “0” (Public)
UID (6.4)	File-ToFileVersion-UID	FileVersion UID
UIDOrigin (6.4)	File-ToFileVersion.UIDOrigin	FileVersin UIDOrigin. 360 or eArchive or Plan&Build.
CustomFields		Refer chapter 8.5.3 for more details.
ExternalId		External ID for the document.
SendersReference	Document - ReferenceNo	External reference number.
AccessGroupRecno	Document- ToAccessGroup- Recno	Document AccessGroup recno E.g. AccessGroupRecno = “0” (Public)
eArchiveXMLFragment (available from 5.11)		Return XML fragment from document entity only on eArchive installation.
ImportedDocumentNumber (5.12)	Document- ImportedDocumentNumber	eArchive - Imported Document number.
Keywords (5.15)		List of keywords. Data Contract: Keyword
UID (6.3)	Document - UID	Globally unique identifier.
UIDOrigin (6.3)	Document - UIDOrigin	The origin of the UID: 360 or eArchive or Plan&Build.

8.6.6 Data Contract: DocumentContactResult

Output Property	360° field	Comment
ReferenceNumber	Contact - ReferenceNumber	Reference number of the contact – if private person or enterprise.
ExternalId	Contact – ExternalID	External id of the contact – independent of contact domain (type).
Role	ActivityContact – ToRole	Role of the contact on this document in code value.
SearchName	Contact - SearchName	The name of this contact.
ContactRecno	ActivityContact – ToContact	Recno of this contact.
Address	ActivityContact – Address	Address of this contact.
ZipCode	ActivityContact – ZipCode	Zipcode of this contact.
ZipPlace	ActivityContact – ZipPlace	Zipplace of this contact.
Country	Country - Description	Country of the contact on this document in code value.
Email	ActivityContact – Email	Email of this contact.
ContactType	DocumentContact –ToContact – Domain	Contact type of this contact e.g:- Enterprise, Contact Person or Private Person
IsUnofficial	ActivityContact – Unofficial	Is contact unofficial. <i>Available from 360° version 5.12.* and SIF standalone 2.1.6.</i>
RoleRecno (6.6)	ActivityContact – ToRole.Recno	Role of the contact on this document in recno value.

8.6.7 Data contract: CreateFileFromTemplateParameter

This can be used to create new files, either for a new document or to an existing documents. The files will be created based on the template defined. It is not possible to set any other metadata when creating the file from template. Recno to the template can be found in the database or in the web administrator. All available templates can be set.

If more than one file from template is defined, the first one will be added as Main Document and the other ones as Attachments.

If file from template and uploaded files (Se Data Contract: File) are included, the file from template will always be added as Main Document.

Property	360° field	Comment
Title(*)	File - FileName	
TemplateId(*)	File - TemplateID	Recno to the template.
ExternalId		External ID for the file
Id	External Integration Keys – ExternalId	External id. String value.
Type	External Integration Keys - ExternalSystem	External id type. Not mandatory. If not provided, default type “SI WS File” will be used. External id is unique within each type, so type can be used if files are imported from more than one external system which use ExternalId.

Should have a name to reflect system and entity, e.g. "Visma File".

8.6.8 Data Contract: File

There are two ways to upload a file to 360, either as byte array, or by first calling the [FileService.Upload\(\)](#) method, and then providing the file reference it returns in UploadedFileReference.

Property	360° field	Comment
Title(*)	File - Comment	
Format(*)	File - FileFormat	Can be code or recno. E.g. Format = "pdf" From version 5.10.164, added extra validation to restrict unknown file formats, this will depend on FileFormatControl flag from document archive.
Data(\)		File data as byte array.
Base64Data(\)		Semi-deprecated - File data as base64 string is supported, but we recommend sending the file data with the Data property.
UploadedFileReference(\)	-	This value is returned by FileService.Upload
RelationType	File - ToRelationType	Can be code or recno. E.g. RelationType = "H"
VersionFormat	File - ToVersionFormat	Can be code or recno. E.g. VersionFormat = "A"
Note	File – Note	
Category	File – ToFileCategory	Can be code or recno. E.g. Category = "Brev"
Status	File – ToFileStatus	Can be code or recno. E.g. Status = "B"
AccessCode	File – ToAccessCode	
DegradeCode	File – ToDegradeCode	The "Downgrade" values will only show up in the GUI if both properties DegradeCode and DegradeDate is set. Norwegian: "Avgradering".
DegradeDate	File – DegradeDate	The "Downgrade" field will only show up in the GUI if both properties DegradeCode and DegradeDate is set.
FiledOnPaper	File – Paper	
PaperLocation	File – PaperLocation	
AdditionalFields		Additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
ExternalId		External ID for the file
Id	External Integration Keys – ExternalId	External id. String value.
Type	External Integration Keys - ExternalSystem	External id type. Not mandatory. If not provided, default type "SI WS File" will be used.

External id is unique within each type, so type can be used if files are imported from more than one external system which use ExternalId.

Should have a name to reflect system and entity, e.g. "Visma File".

8.6.9 Data Contract: ClassCodeParameter

Classification codes have a type and a value. The type refers to the code table *Noark classification type*. Most classification types use codes from the code table *Noark classification code* as values. Some use custom user-supplied values, for instance a personal identification number.

Property	360° field	Comment
Sort(*)	ToClassCodes – Sort	When document have multiple classification codes, Sort is the index of the code, starting at 1. Primary code => 1, secondary => 2, and so on.
ArchiveType(*)	ToClassCodes – ToClassType	The classification type of this particular classification code. Can be code or recno, for instance "FAGKODE PRINSIPP" or «recno:60001»
IsManualText	-	True/false. Set to true if ArchiveCode is a user-supplied value and false if it's a code from <i>Noark classification code</i> .
ArchiveCode	ToClassCode/Value	The value or classification code itself. If code, it can be either the actual code or its recno, for instance "B32" or "recno:60002".

8.6.10 Data Contract: SignOffContactParameter

Input Property	360° field	Comment
Recno()	ActivityContact – Contact.Recno	The recno of the contact. Use either this field OR the ExternalId-field.
ExternalId()	ActivityContact – Contact – ExternalID	The identification number of the contact. This is ExternalId for contact persons, private persons and enterprises. Use either this field OR the Recno-field. If this contact doesn't have an external id, the format will be "recno:xxxx" Note: Can be used for all contact domains.

9 Project service

Typical SOAP URL	http://[servername]:4000/Sl.WS.Core/SIF/ProjectService.svc
Typical REST URL	<i>Not Implemented Yet</i>

Typical RPC URL	https://[customer specific domain]/Biz/v2/api/call/SI.Data.RPC/SI.Data.RPC/ProjectService
Typical SOAP Bridge URL	https://[customer specific domain]/Biz/v2- pbr/soapbridge/sif/ProjectService
(Deprecated with v5.14)	

9.1 CreateProject

Creates a project in 360° with the project type “Project”. The parameters in the data contracts accept either code value of the respective code or recno if nothing else is specified.

9.1.1 Input

Data Contract: CreateProjectParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
Title(*)	Project – Description	
ExternalId		External ID for the project.
Id	External Integration Keys – ExternalId	External id. String value.
Type	External Integration Keys - ExternalSystem	External id type. Not mandatory. If not provided, default type “SI WS Project” will be used. External id is unique within each type, so type can be used if projects are imported from more than one external system which use ExternalId. Should have a name to reflect system and entity, e.g. “Visma Project”.
ExternalName	External Integration Keys - ExternalName	Name of the external key (optional)
StartDate	Project – StartDate	Start date of the project progress.
EndDate	Project – EndDate	End date of the project progress.
Type	Project - ToType	Code or recno value, for instance “Project” or “recno:1”. Default: 1 (Project) Refers to the <i>Project type</i> code table.
Status	Project –Status	Code value or recno. View common values. Example of use:

		Status="Planning"; sets the status to "Planlegges". Defaults to "In progress" (recno:3) if nothing else is provided.
Category	Project – Category	Can be code value or recno. In standard 360, the corresponding code table (<i>Project category</i>) have no records/values. So, make sure that the customer has defined any values here before using this parameter.
AccessGroup	Project – ToAccessGroup	Can be code value or recno. E.g. AccessGroup = "Public" If nothing is specified, default is "Public" (recno:0).
Notes	Project – Notes	Notes on the project.
ResponsiblePersonIdNumber	Project – OurRef	The external ID of the responsible person. Looks for a contact with ExternalId equal to the property input. It is only possible to set a contact person in the same enterprise hierarchy as the ADUserContext user as responsible, and the responsible needs to be a 360° user. Provide only ONE of the four possible fields to ID responsible person. If none is provided, default responsible person is set to corresponding contact person of the user specified in ADContextUser (or the user that is authenticated against the web service).
ResponsiblePersonRecno	Project – OurRef	Looks for a contact with Recno equal to the property input.
ResponsiblePersonEmail	Project – OurRef	Looks for a contact with Email equal to the property input.
ResponsiblePersonUserId	Project – OurRef	Looks for a contact with UserId (username, E.g. "no\name.name")
AdditionalFields	-	Additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
Contacts	ProjectContact	List of contacts with associated roles. See sub contract ProjectContactParameter

9.1.2 Output

Data Contract: ProjectOperationResult

Output Property	360° field	Comment
Recno	Project - Recno	Unique ID in 360° for the project.
ProjectNumber	Project - Name	The project number given by 360.
UID (6.3)	Project - UID	Globally unique identifier.
UIDOrigin (6.3)	Project - UIDOrigin	The origin of the UID: 360 or eArchive or Plan&Build.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

9.2 UpdateProject

Updates a project in 360. If a property is set to null, meaning not provided in the parameter passed to the method, the property is not updated. To clear the field in 360° the property must be explicitly set to "". Only works for string properties.

9.2.1 Input

Data Contract: UpdateProjectParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
ProjectNumber (\)	Project – Name	The project number. This property will be used to determine which project will be updated. A project cannot have its project number updated.
ExternalId (\)		External id. This property will be used to determine which project will be updated. A project cannot have its external ID updated. Lookup is based on the combination of Id and Type. Provide only ONE of the two possible fields to ID the project.
Id	External Integration Keys – ExternalId	External id.
Type	External Integration Keys - ExternalSystem	If not provided, default value "SIF WS Project" will be used. This is the type set via Create Project if type was not provided when importing a project.
Title	Project – Description	
StartDate	Project – StartDate	Start date of the project progress.
EndDate	Project – EndDate	End date of the project progress.
Status	Project –Status	Code value or recno. View common values. Example of use: Status="Planning"; sets the status to "Planlegges" Defaults to "In progress" (recno:3) if nothing else is provided.
Category	Project – Category	Can be code value or recno. In standard 360, the corresponding code table (<i>Project category</i>) have no records/values. So, make sure that the

		customer has defined any values here before using this parameter.
AccessGroup	Project – ToAccessGroup	Can be code value or recno. E.g. AccessGroup = “Public” If nothing is specified, default is “Public” (recno:0).
Notes	Project – Notes	Notes on the project.
ResponsiblePersonIdNumber	Project – OurRef	The external ID of the responsible person. Looks for a contact with ExternalId equal to the property input. It is only possible to set a contact person in the same enterprise hierarchy as the ADUserContext user as responsible. Provide only ONE of the four possible fields to ID responsible person. If none is provided, default responsible person is set to corresponding contact person of the user specified in ADContextUser (or the user that is authenticated against the web service).
ResponsiblePersonRecno	Project – OurRef	Looks for a contact with Recno equal to the property input.
ResponsiblePersonEmail	Project – OurRef	Looks for a contact with Email equal to the property input.
ResponsiblePersonUserId	Project – OurRef	Looks for a contact with UserId (username, E.g. “no\name.name”)
AdditionalFields	-	Additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
Contacts	ProjectContact	If SyncProjectContacts is set to false, then this adds contacts to the project. Existing project contacts will not be deleted or updated. You can also add an existing contact with a new role. If SyncProjectContacts is set to true, then this will do synchronize (add, update and delete) contacts to the project. See sub contract ProjectContactParameter
SyncProjectContacts		If provided it synchronizes (Add, update or delete) contacts to the project. Default is set to false.

9.2.2 Output

Data Contract: ProjectOperationResult

Output Property	360° field	Comment
Recno	Project – Recno	Unique ID in 360° for the project.
ProjectNumber	Project – Name	The project number given in 360.
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

9.3 GetProjects

Retrieves a list of all projects fulfilling the criteria of all the nonblank properties of the supplied parameters.

9.3.1 Input

Data Contract: GetProjectsQuery

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
Recno (\)	Project – Recno	Recno (unique identifier in 360) of the project. Must be an exact match to return a project.
ProjectNumber (\)	Project – Name	The project number of the project you wish to retrieve.
ExternalId (\)		The external id of the project you wish to retrieve. Search uses a combination of Id and Type.
Id	External Integration Keys – ExternalId	External id of a project.
Type	External Integration Keys - ExternalSystem	If not provided, default value “SIF WS Project” will be used. This is the type set via CreateProject if type was not provided when importing a project.
Title (\)	Project – Description	The title search is based on the SQL “LIKE” operator, so it is possible to search with wildcards. For instance, “%” can be used as a substitute for zero or more characters in the title search. If you define “%test%” for instance, a search for all projects <i>containing</i> “test” in the Title will be performed. It is also possible to search for exact matches, simply by excluding any wildcards in the Title parameter.

CategoryCode (\)	Project – Category	The project category (code value) to the projects you want to retrieve.
StatusCode (\)	Project – Status	The project status (code value) to the projects you want to retrieve.
AdditionalFields (\)		Searches using additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
Page	-	Results are always returned paginated, meaning if your search results in 3000 objects, and MaxRows is 1000, then: Page 0 will have object 1-1000 Page 1 will have object 1001-2000, etc. First page is 0, meaning 0-indexed. Defaults to 0. Note: Always use SortCriterion along with page, to get more accurate result.
MaxRows	-	Read Page property for details. Defaults to all.
SortCriterion	-	Sort the search, is applied before Page and MaxRows limitations. Defaults to no sorting criterion, the database then controls the order. Enum values: - RecnoDescending - RecnoAscending Note: Always use SortCriterion along with page, to get more accurate result.
ContactReferenceNumber	ProjectContact – ToContact – Referencenumber	Searches project-contact relations for a private person contact or an enterprise contact with the given property value. Value should be either a PersonalIdNumber or an EnterpriseNumber
IncludeProjectContacts		Boolean value, set true if you want to include project-contact relations in the result. Default value is false.
ContactExternalId	ProjectContact-ToContactperson-ExternalId	Searches project-contact relations for a contact with the given external identity number (unique identifier). Must be an exact match.
ContactRecnos	ProjectContact	List of Contact recnos. Searches project-contact relations for contacts with the given recno.
IncludeCustomFields	-	Boolean value, set true if you want additional 360° fields which are not currently included in the webservice output objects. Default value is false.
UID (6.3)	Project - UID	Globally unique identifier.
UIDOrigin (6.3)	Project - UIDOrigin	The origin of the UID: 360 or eArchive or Plan&Build.

9.3.2 Output

Data Contract: GetProjectsResult

Output Property	360° field	Comment
Projects	Project	A list of ProjectResult objects. See the chapter " Data Contract: ProjectResult " for details.
TotalCount	-	Total number of hits.
TotalPageCount	-	Total number of pages.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

9.3.3 Get Project custom data

To get additional 360° fields, which are not currently, included in the webservice output objects.

Follow the below steps:

1. Open 360 admin and go to CONFIGURATION => SETTINGS and edit value for "SIF Project Custom Fields Query" which will include metaquery for getting the custom field, for e.g.

```
<QUERYDESC ENTITY="Project" NAMESPACE="SIRIUS" DATASETFORMAT="XML">
  <RESULTFIELDS>
    <METAITEM TAG="CF_testfield">CF_testfield</METAITEM>
  </RESULTFIELDS>
  <CRITERIA>
    <METAITEM NAME="Recno" OPERATOR="IN">
      <VALUE>{0}</VALUE>
    </METAITEM>
  </CRITERIA>
</QUERYDESC>
```

CF_testField is the custom meta field in Project Entity.

Note: Entity name should start with capital letter. It returns Single value field only.

2. The result will be displayed in <CustomFields> .. <CustomFields> section in the ProjectResult as follows:

```
<CustomFields>
  <AdditionalFieldParameter>
    <Name>CF_testfield</Name>
  >
    <Value>TestCustomField</V
  alue>
  </AdditionalFieldParameter>
</CustomFields>
```


9.4 Sub Contracts

This chapter defines data contracts in use by the main data contracts of the Project methods.

9.4.1 Data Contract: ProjectResult

Property	360° field	Comment
Recno	Project – Recno	Unique id in 360° for the project.
ProjectNumber	Project – Name	
ExternalId		External ID for the project.
Title	Project – Description	
StartDate	Project – StartDate	The start date of the project.
StatusDescription	Project – Status	The description value of the project status.
CategoryDescription	Project – Category	The description value of the project category.
AccessGroup	Project – ToAccessGroup	
Notes	Project – Notes	
ResponsiblePerson	Project – OurRef	Info about the responsible person. See ResponsiblePerson .
ResponsiblePersonName	Project – OurRef – SearchName	The name of the responsible person.
Contacts	ProjectContact	List of ProjectContactResult objects. See the chapter “ Data Contract: ProjectContactResult ” for details.
AccessGroupRecno	Project- ToAccessGroup- Recno	The Access Group Recno which is connected to project
CustomFields		Refer chapter 8.5.3 for more details.
UID (6.3)	Project - UID	Globally unique identifier.
UIDOrigin (6.3)	Project - UIDOrigin	The origin of the UID: 360 or eArchive or Plan&Build.

9.4.2 Data Contract: ProjectContactParameter

Note:

1. ReferenceNumber is the PersonalIdNumber for a private person and EnterpriseNumber for an enterprise, so while connecting private person or enterprise to a project, make use of this field. ReferenceNumber is not used for contact persons.

However, if you are defining recno to a contact in this field, using the format “recno:xxxx”, the contact could be either a private person, enterprise or contact person. Choose whichever ID field you like. The connection will be set correctly in either case.

2. ExternalID is the unique identification number of a contact person *or* a private person or an enterprise. It's therefore possible to connect contacts to projects using this field, independent of the contact domain (type). A proper connection between the project and project will be set either way.

If you are defining recno to the contact on the format “recno:xxxx”, you can use this field across all contact domains (be it a contact person, enterprise or private person).

This logic was implemented to make our customers and third-party suppliers use whichever ID field they like, without needing to consider the domain/type of the contact. It also potentially eliminates the need for extra calls to the contact service, to retrieve Recno, ExternalId and/or ReferenceNumber before connecting contacts to projects.

Input Property	360° field	Comment
ReferenceNumber (\)	ProjectContact – ToContact – Referencenumber	The identification number of the contact. This is PersonalIdNumber for private persons and EnterpriseNumber for enterprises. Use either this field OR the ExternalId-field. If this contact doesn't have a reference number, the format will be "recno:xxxx". Note: If passing ReferenceNumber → Use this for private persons and enterprises. If passing Recno → Can be used for all contact domains.
ExternalId (\)	ProjectContact – ToContact – ExternalID	The identification number of the contact. This is ExternalId for contact persons, private persons and enterprises. Use either this field OR the ReferenceNumber-field. If this contact doesn't have an external id, the format will be "recno:xxxx" Note: Can be used for all contact domains.
Role (*)	ProjectContact – ToRole	The contact's role for the specific project. Can be code or recno. E.g. Role = "Ansvarlig". The possible roles may be restricted based on the project type.

9.4.3 Data Contract: ProjectContactResult

Output Property	360° field	Comment
ContactName	Contact - SearchName	The name of this contact.
Role	ProjectContact – ToRole	The contact's role for the specific project
Recno	ProjectContact – ToContact – Recno	Recno of this contact.
Referencenumber	ProjectContact – ToContact – Referencenumber	Reference number of the contact – if private person or enterprise.
ContactType	ProjectContact – ToContact – Domain	Contact type of this contact e.g:- Enterprise, ContactPerson or PrivatePerson
Address	ProjectContact – ToContact – Addresses	Address of this contact. See the chapter " Data Contract: Address " for details.
ExternalId	ProjectContact – ToContact – ExternalID	External id of the contact – independent of contact domain (type).

10 File service

Typical SOAP URL	http://[servername]:4000/SI.WS.Core/SIF/FileService.svc
Typical REST URL	http://[servername]:4000/SI.WS.Core/SIFREST/api/files/
Typical RPC URL	https://[customer specific domain]/Biz/v2/api/call/SI.Data.RPC/SI.Data.RPC/FileService
Typical SOAP Bridge URL	https://[customer specific domain]/Biz/v2-pbr/soapbridge/sif/FileService
(Deprecated with v5.14)	

Note: ADContextUser/User field is mandatory for File related methods (CreateFile, DeleteFile, UpdateFile, Upload, CheckOutAndGetFileForExternalControl, UploadAndCheckInFileFromExternalControl)

10.1 Upload

Streams a file to the 360° server, where it is stored temporarily, and should be referred to in CreateDocument() or UpdateDocument().

It should be noted that if neither the *FileName* (including extension) nor the *FileFormat* input parameter is provided to the Upload operation, the files created using this service will default to PR – Production format, regardless of the file format specified in the *Format* parameter (on the File data contract) in the Create- and UpdateDocument operations of the Document service.

If a file format is defined in either *FileName*, *FileFormat* or both parameters – 360° will automatically handle and set the correct File Variant/Version format (*Production format* or *Archive format*) on the uploaded file.

10.1.1 Input

Input Property	Comment
FileStream/ FileData	The file data. FileStream is used in SOAP and FileData is used in RPC. NB! The FileStream should be of type Stream in SOAP and bytearray in RPC.
User	The uploaded file is stored in this users 360° cache. This user <i>must</i> be the same as the user you authenticate (ADUserContext) with when referring to the file, otherwise it will not be able to locate the it.
FileName	The file name. <i>See note above regarding use.</i>
FileFormat	The file format. <i>See note above regarding use.</i>

10.1.2 Output

Data Contract: UploadFileResult

Output Property	Comment
Successful	If true, the file was uploaded.
FileReference	Use this value to refer to the uploaded file.

ErrorMessage	If unsuccessful, this contains a short error message
ErrorDetails	If unsuccessful, this contains a full stack trace

10.2 Upload large file

To upload large file into 360 system using integrations, make use of the endpoint:
/v2/support/Uploadfile

10.2.1 Create Endpoint

To add new endpoint through web admin, "TechnicalAdministrator" role is must.

Go to 360 web admin, under Configuration -> Endpoint configuration

You are here
Configuration » Endpoint configuration » Endpoint configuration

Endpoint configuration

Add new endpoint

Third party application *

FileUpload

Integration point *

Custom

Provide custom integration point *

/v2/support/Uploadfile

Authentication type *

Auth Key

Use existing auth key

No

Valid from

To date

Service user

Create new service user (Recommended)

Permissions *


Write

Client id

Save



Cancel

You will get the url with authkey,

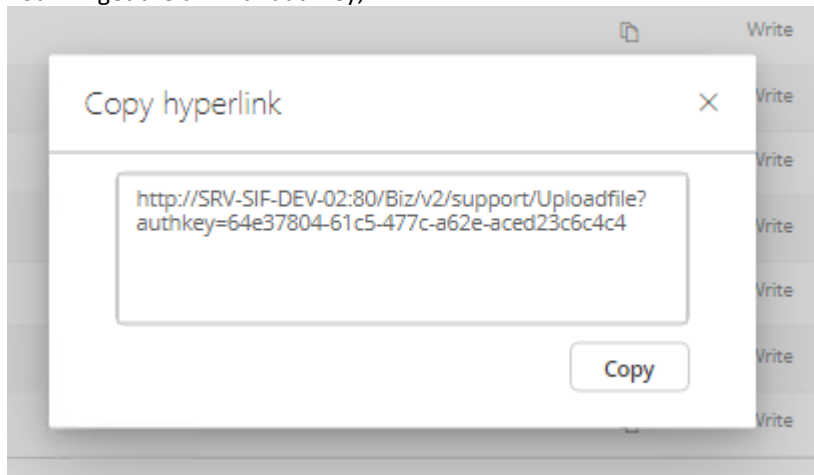

Usage is exactly like SIF endpoints

Sample postman call.

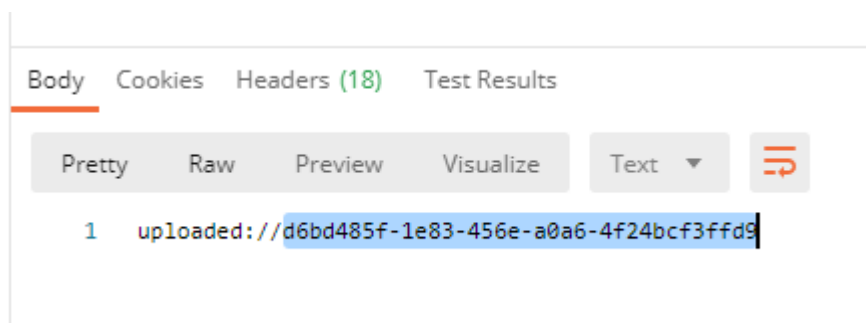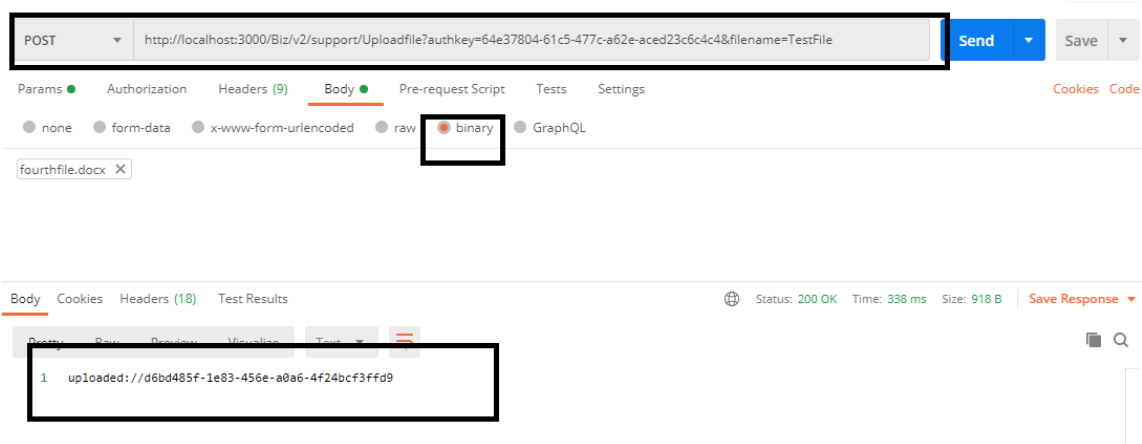


Use highlighted part in Document or File Service in property "UploadedFileReference". This way you can upload large file.

Note: With v5.12, we have done some changes to our internal create file implementation. There might be chances that if you provide file name without extension like in above sample UploadFile endpoint request will not work. File will get created into 360 but with unknown file format.

So, it is highly recommended that you should specify file extension with filename in UploadFile request parameter- "filename".

See below sample screen dump.:

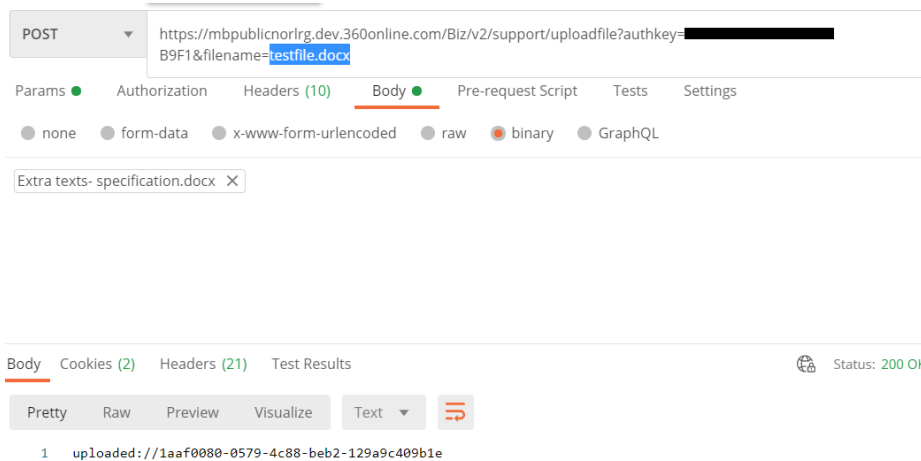

SIF FileService/Upload, will work as it is. No changes have been done to this method.

10.3 CheckOutAndGetFileForExternalControl

Checks out a file for external control, and retrieves the same file as a Stream. The file must later be checked in with the same user and external system, so use this method in combination with UploadAndCheckInFileFromExternalControl

10.3.1 Input

Data Contract: CheckOutAndGetFileForExternalControlMessage

Input Property	360° field	Comment
User	User – UserID	Username of the user checking out the file. This locks the file to this user and the same user must check the file back in. The user must also have permission to check out the file.
ExternalSystem	File – ExternalControlledCheckOut	The name of the external system. This can be any string value, but the exact same value must be supplied when checking in the file.
FileRecno	File – Recno	Recno value of the file. This is the file's unique id in the 360° database.
ReturnFileReferenceToken		True or false. If ReturnFileReference is true means It will return File reference token and If

ReturnFileReference set to false means it will return byte array data in response

10.3.2 Output

Data Contract: CheckOutAndGetFileForExternalControlResult

Output Property	360° field	Comment
FileStream / FileData	-	FileStream is used in SOAP and FileData is used in RPC. NB! The FileStream should be of type Stream in SOAP and bytearray in RPC.
CheckoutFileInfo		Information about whether the checkout and retrieval was successful, and meta data about the file if it was successful.
Title	File – Comment	Title of the file
TemplateId	File – TemplateID	Recno of the file template
FileRecno	File – Recno	Recno value of the file. This is the file's unique id in the 360° database.
FileReferenceToken		Use this value to refer to the uploaded file from temp path
Successful	-	If true, the file was checked out ok.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

10.4 UploadAndCheckInFileFromExternalControl

Streams a file to the 360° server, where it is checked in by the external system. This can be used on files that have been checked out with the method `CheckOutAndGetFileForExternalControl`.

10.4.1 Input

Data Contract: `UploadAndCheckInFileFromExternalControlMessage`

Input Property	360° field	Comment
FileStream / FileData	-	FileStream is used in SOAP and FileData is used in RPC. NB! The FileStream should be of type Stream in SOAP and bytearray in RPC.
CheckInFileInfo		Information about the file to check in.
FileRecno	File – Recno	Recno value of the file. This is the file's unique id in the 360° database.
Title	File – Comment	Title of the file.
FileFormat	File – Format	Format of the file, e.g. "docx"
User	User – UserID	Username of the user checking in the file. This user must be the same user that checked out the file.
ExternalSystem	File – ExternalControlledCheckOut	The name of the external system. This can be any string value, but it must be the exact same value that was supplied when checking out the file.

10.4.2 Output

Data Contract: `UploadAndCheckInFileFromExternalControlResult`

Output Property	360° field	Comment
Successful	-	If true, the file was uploaded and checked in ok.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace
FileRecno	File – Recno	Recno value of the file. This is the file's unique id in the 360° database.

10.5 CreateFile

CreateFile will create file on given document recno or number

10.5.1 Input

Data Contract: FileParameterBase

Input Property	360° field	Comment
ADContextUser(*)	-	Read Authentication and ADContextUser
DocumentRecno(\)	-	Recno (unique identifier in 360) of the Document
DocumentNumber(\)	-	DocumentNumber of the Document.
Note	File – Note	Note field in File entity used, while creating properties of the file.
Category	File – Category	Category of in File used, while creating properties of the file
FiledOnPaper	File – Paper	Paper field in File entity could be true or false
Base64Data	-	File contents that can be send in using Base64 format.
Data(\)	-	File contents that be send in using byte format.
VersionFormat	ToVersionFormat	Attribute value: File – ToVersionFormat
Title(*)	File – Comment	Title the field in File entity used, while creating file properties.
Format(*)	File - ToFileFormat	Format need to be passed during creation of file. There are two option: 1. Pass it with the file name (e.g.: TestFile.txt) Pass it in format field. (e.g.: Format = "txt"). Note: With version 5.10, we added extra validation to restrict invalid or not supported file formats if FileFormatControl flag is on for Document archive. If FileFormatControl if off (set to 0), SIF will skip validation.
PaperLocation	File – PaperLocation	Paper Location

UploadedFileReference (V)	-	This value is returned by FileService.Upload
RelationType	File - ToRelationType	Can be code or recno. E.g. RelationType = "H"
Status	File – ToFileStatus	Can be code or recno. E.g. Status = "B"
AccessCode	File – ToAccessCode	
DegradeCode	File – ToDegradeCode	The "Downgrade" values will only show up in the GUI if both properties DegradeCode and DegradeDate is set. Norwegian: "Avgradering".
DegradeDate	File – DegradeDate	The "Downgrade" field will only show up in the GUI if both properties DegradeCode and DegradeDate is set.
AdditionalFields		Insert Additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields can be inserted.
ExternalId (Available from 5.9 version)		External ID for the file
Id	External Integration Keys – ExternalId	External id. String value.
Type	External Integration Keys - ExternalSystem	External id type. Not mandatory. If not provided, default type "SI WS File" will be used. External id is unique within each type, so type can be used if files are imported from more than one external system which use ExternalId. Should have a name to reflect system and entity, e.g. "Visma File".
ExternalName	External Integration Keys - ExternalName	Name of the external key (optional)

10.5.2 Output

Data Contract: FileOperationResult

Output Property	360° field	Comment
Recno	File - Recno	Recno (unique identifier in 360) of the File.
UID (6.3)	FileVersion- UID	Globally unique identifier.
UIDOrigin (6.3)	FileVersion- UIDOrigin	The origin of the UID: 360 or eArchive or Plan&Build.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

10.6 UpdateFile

Update file will create new version of the existing file and update the file properties.

If creating a new version of the existing file, “Comment” property is mandatory in SIF/FileService/UpdateFile

Create a new version of this file

Select a file	Choose File No file chosen Add file
Selected file *	
Comment	New file
File variant *	

If only editing the file properties, and you want to update the file name, use “Title” property.

Edit file properties
?

File name	261322_2_1.PDF
Title	New file
File format	PDF - Archive format
Related as	Main Document
File variant *	A - Archive format
Note	

10.6.1 Input

Data Contract: UpdateFileParameter

Input Property	360° field	Comment
FileRecno (*)	File – Recno	Recno (unique identifier in 360) of the File.
Comment	File – Comment	Comment the field in File entity used, while creating new versions of the file. This property is needed while creating a new version of a file.
Note	File – Note	Note field in File entity used, while updating properties of the file.
Category	File – Category	Category of in File used, while updating properties of the file
FiledOnPaper	File – Paper	Paper field in File entity could be true or false
ADContextUser (*)	-	Read Authentication and ADContextUser
Data	-	File contents which be send in using byte format.
VersionFormat	ToVersionFormat	Attribute value: File - ToVersionFormat
Title	File – Comment	Title the field in File entity used, while updating file properties.
Format	-	Format need to be passed during update file. There are two option: 2. Pass it with the file name (e.g.: TestFile.txt) 3. Pass it in format field. (e.g.: Format = “txt”).
UploadedFileReference (\)	-	This value is returned by FileService.Upload
AdditionalFields		To update the fields that were sent in the input as AdditionalFields with ‘Name’ and ‘Value’ – see chapter for AdditionalFieldParameter for details, what kind of fields can be used to update

ExternalId()		External id. This property will be used to determine which file will be updated. A file cannot have its external ID updated. Lookup is based on the combination of Id and Type. Provide only ONE of the two possible fields to ID the case.
Id	External Integration Keys – ExternalId	External id.
Type	External Integration Keys - ExternalSystem	If not provided, default value “SIF WS File” will be used. This is the type set via CreateFile if type was not provided when importing a file.
Status	File – ToFileStatus	Can be recno of status. E.g. Status = “1”
AccessCode	File – ToAccessCode	Can be recno of AccessCode. E.g. AccessCode = “5”
AccessParagraph	File – ToAuthorization	Can be string value. E.g. AccessParagraph = “Offl § 13”
CreateNewFileVersion	Boolean	Set this flag to false if you want to update only file properties without data. Default is true.
DisposalCode	File – ToScrapDate	Can be Code. E.g. DisposalCode = “D”
DisposalDate	File – ScrapDate	Provide date of disposal. E.g. DisposalDate = “3/25/2022”
RetentionTimeInYears	File – PreserveYears	Provide number of years. E.g. RetentionTimeInYears = “1”
RetentionTimeInMonths	File – PreserveMonths	Provide number of months. E.g. RetentionTimeInMonths = “1”

10.6.2 Output

Data Contract: FileOperationResult

Output Property	360° field	Comment
Recno	File - Recno	Recno (unique identifier in 360) of the File.
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

10.7 DeleteFile

Delete File will delete file permanently from 360 according to input parameters if user has access to delete the file.

10.7.1 Input

Data Contract: DeleteFileParameter

Input Property	360° field	Comment
FileRecno(*)	Recno(File)	Recno (unique identifier in 360) of the File.
ADContextUser(*)	-	Read Authentication and ADContextUser

10.7.2 Output

Data Contract: FileOperationResult

Output Property	360° field	Comment
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

10.8 GetFilesWithMetadata

Get multiple files with metadata and actual file data as base64 if "IncludeFileData" is set "true".

10.8.1 Input

Data Contract: GetFilesWithMetadataQuery

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
Recno	Recno(File)	Recno (unique identifier in 360) of the File.
IncludeFileData	-	If the file list should include an output property that contain the files base 64 encoded data. Defaults to false.
MaxReturnedFiles	-	Maximum number of files to return. Default 100.

Page		Int. Pagination parameter that should be used in conjunction with MaxReturnedFiles to decide what documents to be returned (e.g. MaxReturnedFiles=10 and Page=2 would return file 21-30)
LastDate	File – ModifiedDate or File – FileModifiedDate	Returns files that have been modified after the specified date. New delta support has been added in version 6.5 to get incremental changes. This functionality is enabled by default.
DocumentNumber	File - VersionConnection – ToVersion - ToDocument	Searches using document number.
CaseNumber	File - VersionConnection – ToVersion – ToDocument - ToCase	Searches using case number.
AdditionalFields		Searches using additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
AdditionalListFields		Searches using additional fields list parameter – see chapter for Data Contract: AdditionalFieldListParameter for details, what kind of fields and how to use this parameter.
IncludeCustomFields	-	Boolean value, set true if you want additional 360° fields, which are not currently included in the webservice output objects. Default value is false. Refer chapter Get Files Custom Data for more details.
SortCriterion (v5.14 onwards)	-	Sort the search, is applied before Page and MaxRows limitations. Defaults to no sorting criterion, the database then controls the order. Enum values: - RecnoDescending - RecnoAscending Note: Always use SortCriterion along with page, to get more accurate result.
UID (6.3)	FileVersion- UID	Globally unique identifier.
UIDOrigin (6.3)	FileVersion- UIDOrigin	The origin of the UID: 360 or eArchive or Plan&Build.

10.8.2 Output

Data Contract: GetFilesWithMetadataResult

Output Property	360° field	Comment
Files	-	List of FileResult objects. See the chapter Data Contract: FileResult for details.
TotalCount	-	Total number of hits.
TotalPageCount	-	Total number of pages.
NextDeltaLastDate (6.5)	-	This will contain the date and time information for the next set of incremental changes. It only holds a value if the request is a delta query, which is determined by the presence of the “LastDate” filter.
Successful	-	Will be true as long as no exception occurred during the execution. This means that successful will be true even if no files matching the criteria was found.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

10.9 GetFileWithMetadata

Returns file metadata according to recno provided.

10.9.1 Input

Data Contract: GetFileWithMetadataQuery

Input Property	360° field	Comment
Recno(*)	Recno(File)	Recno (unique identifier in 360) of the File. This field mandatory, if not send then result will be empty.
ADContextUser	-	Read Authentication and ADContextUser
IncludeFileData	-	If the file list should include an output property that contain the files base 64 encoded data. Defaults to false.
IncludeCustomFields	-	Boolean value, set true if you want additional 360° fields which are not currently included in the webservice output objects. Default value is false. Refer chapter Get Files Custom Data for more details.
UID (6.3)	FileVersion- UID	Globally unique identifier.

10.9.2 Output

Data Contract: GetFileWithMetadataResult

Output Property	360° field	Comment
Files	-	FileResult object. See the chapter Data Contract: FileResult for details.

Successful	-	Will be true as long as no exception occurred during the execution. This means that successful will be true even if no file matching the criteria was found.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

10.10 GetFile

Get the file as a Stream.

10.10.1 Input

Data Contract: GetFileQuery

Input Property	360° field	Comment
Recno (*)	Recno(File)	Recno (unique identifier in 360) of the File.
ADContextUser	-	Read Authentication and ADContextUser
FileReferenceToken	-	Filereferencetoken(generate using Upload method)

10.10.2 Output

HttpResponseMessage

Output Property	360° field	Comment
HttpResponseMessage.Content	-	Actual file data in stream format.
HttpResponseMessage.Content.Headers.ContentType	-	File MIME type
HttpResponseMessage.StatusCode	-	NotFound OK Internal server error

10.11 CreateFileVariant (v5.13 onwards)

This method will allow you to insert a new variant on an existing file.

10.11.1 Input

Data Contract: CreateFileVariantParameter

Input Property	360° field	Comment
FileRecno (*)	File – Recno	Recno (unique identifier in 360) of the File.
Comment	File – Comment	Comment the field in File entity used, while creating new variant of the file.

ADContextUser(*)	-	Read Authentication and ADContextUser
Data	-	File contents which be send in using byte format.
VersionFormat(*)	ToVersionFormat	Attribute value: File – ToVersionFormat Note: only code value supported.
Title	File – Name	File title
Format	-	Format need to be passed during create file variant.
UploadedFileReference()	-	This value is returned by FileService.Upload
ExternalId()		External id. This property will be used to determine which file will be updated. A file cannot have its external ID updated. Lookup is based on the combination of Id and Type. Provide only ONE of the two possible fields to ID the case.
Id	External Integration Keys – ExternalId	External id.
Type	External Integration Keys - ExternalSystem	If not provided, default value “SIF WS File” will be used. This is the type set via CreateFile if type was not provided when importing a file.
DocumentRecno	Document- Recno	Recno (unique identifier in 360) of the Document.
DocumentNumber	Document- DocumentNumber	Document number

10.11.2 Output

Data contract: FileVariantOperationResult

Output Property	360° field	Comment
FileRecno	File - Recno	Recno (unique identifier in 360) of the File.
FileVariantRecno	File- ToFileVersion- Recno	Recno (unique identifier in 360) of the File variant.
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

10.12 UploadStream (v5.17)


This new method removes the limitation of existing “Upload” method of size up to 300MB. With this new method, you can upload large file. This method works like [Upload large file](#)

10.12.1 Input

filename – query string

fileformat – query string


body – file stream content.



10.12.2 Output

Data Contract: UploadFileResult

Output Property	Comment
Successful	If true, the file was uploaded.
FileReference	Use this value to refer to the uploaded file.
ErrorMessage	If unsuccessful, this contains a short error message
ErrorDetails	If unsuccessful, this contains a full stack trace

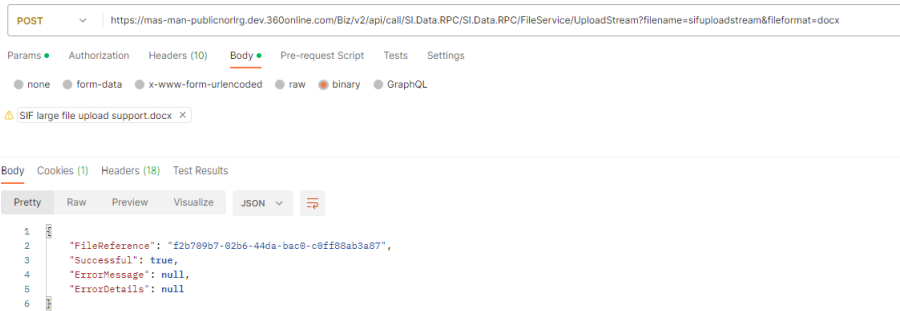

10.13 Sub Contracts

This chapter defines data contracts in use by the main data contracts of the File methods.

10.13.1 Data Contract: FileResult

Output Property	360° field	Comment
DocumentRecno	File – VersionConnection – ToVersion – ToDocument - Recno	Recno of Document
DocumentNumber	File – VersionConnection – ToVersion – ToDocument - DocumentNumber	Document number
AccessGroup	File – ToAccessGroup - Code	File's access group
Recno	File - Recno	Recno of File.
Title	File – Comment	File Title
Format	File – Format	File format
Base64Data		The file data in a base 64 encoded string. Will only be returned if the input property IncludeFileData is set to true.
URL	-	A 360° URL that can be used by authenticated users to view the file. The base of the URL is configured in the SI.WS.Core/web.config key SI.Biz.Serviced.Email.360WebApplicationUrl or Setting value in 360 web admin (360 Public Url)
Note	File - Note	Notes on File
Paragraph	File – ToAuthorization	
RelationTypeDescription	File – ToRelationType - Description	
RelationTypeCode	File – ToRelationType - Code	
VersionFormatDescription	File – ToVersionFormat - Description	
VersionFormatCode	File – ToVersionFormat - Code	
Type	File – Type	
ModifiedBy	File – ToFileModifiedBy – ToContact	File Modified By
CheckedOutBy	File – ToCheckedOutBy – ToContact	File Checked out by.
CategoryCode	File – ToFileCategory - Code	

CategoryDescription	File – ToFileCategory - Description	
StatusDescription	File – ToFileStatus - Description	File status description
StatusCode	File – ToFileStatus - Code	File status code
AccessCodeDescription	File – ToAccessCode - Code	Access Code
AccessCodeCode	File – ToAccessCode - Description	AccessCode description
AccessCodeRecno	File – ToAccessCode - Recno	AccessCode Recno
DegradeCode	File – ToDegradeCode	Downgrade/declassification code, Norwegian “Avgradering”
DegradeDate	File – DegradeDate	
DisposalCode	File – ToScrapCode	Code value of disposal code, Norwegian “Kassasjonskode”, e.g. “B” or “G”.
DisposalDate	File – ScrapDate	Calculated disposal date, Norwegian “Kassasjonsdato”. This date is in the future and gives info about when the document can be disposed via 360° GUI function for disposal of files.
FiledOnPaper	File – Paper	
PaperLocation	File – PaperLocation	
SignDate	File – ToFileVersion – ToContact	
Version	File - ToFileVersion	File version
LastChangedDate	File – FileModifiedDate / ModifiedDate	LastChangedDate for the file
CustomFields		Refer chapter Get Files Custom Data for more details.
AccessGroupRecno	File – ToAccessGroup - Recno	File AccessGroup recno E.g. AccessGroupRecno = “0” (Public)
UID (6.3)	FileVersion- UID	Globally unique identifier.
UIDOrigin (6.3)	FileVersion- UIDOrigin	The origin of the UID: 360 or eArchive or Plan&Build.
Size	FileVersion-Size	File Size in bytes

10.14 Get Files Custom Data

To get additional 360° fields, which are not currently, included in the webservice output objects.

Follow the below steps:

1. Open 360 admin and go to CONFIGURATION => SETTINGS and edit value for “SIF File Custom Fields Query” which will include metaquery for getting the custom field, for e.g.

```
<QUERYDESC ENTITY="File" NAMESPACE="SIRIUS" DATASETFORMAT="XML">
  <RESULTFIELDS>
    <METAITEM TAG="CF_testfield">CF_testfield</METAITEM>
  </RESULTFIELDS>
  <CRITERIA>
    <METAITEM NAME="Recno" OPERATOR="IN">
      <VALUE>{0}</VALUE>
    </METAITEM>
  </CRITERIA>
</QUERYDESC>
```

CF_testfield is the custom meta field in File Entity.

Note: Entity name should start with capital letter. It returns Single value field only.

2. The result will be displayed in <AdditionalFields> .. <AdditionalFields> section in the as follows:

```
<AdditionalFields>
  <AdditionalFieldParameter>
    <Name>CF_testfield</Name>
    <Value>TestCustomField</Value>
  </AdditionalFieldParameter>
</AdditionalFields>
```

11 AccessGroup Service

Typical SOAP URL	http://[servername]:4000/Sl.WS.Core/SIF/AccessGroupService.svc
Typical REST URL	http://[servername]:4000/Sl.WS.Core/SIFREST/api/accessgroups/
Typical RPC URL	https://[customer specific domain]/Biz/v2/api/call/Sl.Data.RPC/Sl.Data.RPC/AccessGroupService
Typical SOAP bridge URL	https://[customer specific domain]/Biz/v2-pbr/soapbridge/sif/AccessGroupService
(Deprecated with v5.14)	

11.1 GetAccessGroups

Returns info about the access groups and their members.

11.1.1 Input

Data Contract: GetAccessGroupsQuery

Input Property	360° field	Comment
Recno	AccessGroup-recno	Recno (unique identifier in 360) of the access group. If left blank, the service will return all access groups.
LastDate	AccessGroup-ModifiedDate	Returns only access groups changed after the given date.
ADContextUser	-	Read Authentication and ADContextUser
MaxRows	-	Read Page property for details. Defaults to all.
Page	-	Results are always returned paginated, meaning if your search results in 3000 objects, and MaxRows is 1000, then: Page 0 will have object 1-1000 Page 1 will have object 1001-2000, etc. First page is 0, meaning 0-indexed. Defaults to 0 Note: Always use SortCriterion along with page, to get more accurate result.
SortingCriterion	-	String value, provide either: "RecnoDescending" or "RecnoAscending" to Sort the resultset by recno Note: Always use SortCriterion along with page, to get more accurate result.
Code	AccessGroup-Code	Name (code value) of the access group
IncludeMembers	-	Boolean value set to false if you do not want to include members (users) in the result. Default value is true.
Active (6.5)	-	Flag to get only active or inactive groups

IncludeSystemGenerated (6.5)	AccessGroup-IsSystemGenerated	Indicates whether group was created by business logic or by user.
IncludeCustomGroups (6.5)	-	Flag to get only custom generated groups
IncludeDistributionGroups (6.5)	AccessGroup - IsDistributionGroup	Flag to indicate if the Access Group is used for Distribution purpose.
IsVisibleForAllUsers (6.5)	AccessGroup - IsVisibleForAllUsers	If true, all users can select this access group even if they are not a member of this group.
AdditionalRelations (6.5)	-	Searches using custom relations between two entities: Check details " Data Contract: AdditionalRelations " for type of fields and how to use it.
IncludeCustomFields (6.5)	-	Boolean value, set true if you want additional 360° fields which are not currently included in the webservice output objects. Default value is false. Refer chapter SIF AccessGroup Custom Fields Query (v6.5)

11.1.2 Output

Data Contract: GetAccessGroupsResult

Output Property	360° field	Comment
AccessGroups	-	List of AccessGroupResult objects. See the chapter Data Contract: AccessGroupResult for details.
Successful	-	If true, it returns access group data with matching criteria.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

11.2 Sub Contracts

This chapter defines data contracts in use by the main data contracts of the AccessGroup methods.

11.2.1 Data Contract: AccessGroupResult

Output Property	360° field	Comment
Recno	AccessGroup – Recno	Recno value of the access group.
Code	AccessGroup - Name	The Name of the access group.
Description	AccessGroup – Description	The Description of access group.
Users	-	List of AccessGroupUserResult Objects. See the Chapter Data Contract: AccessGroupUserResult for details.
Active	-	Flag indicating status of access group.
IsSystemGenerated	AccessGroup- IsSystemGenerated	Indicates whether group was created by business logic or by user.
IsDistributionGroup	AccessGroup - IsDistributionGroup	Flag to indicate if the Access Group is used for Distribution purpose.
IsVisibleForAllUsers	AccessGroup - IsVisibleForAllUsers	If true, all users can select this access group even if they are not a member of this group.
CustomFields		Refer chapter 8.5.3 for more details.

11.2.2 Data Contract: AccessGroupUserResult

Output Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser .
UserRecno	User -Recno	Gets all recnos of users who are present in that particular access group
ContactRecno	-	Get contact recnos of all the users present in particular access group

12 MyCases Service

Note: With version 5.18 and above, we have merged most of the *GetMyCases* filters with *GetCases*. If any customer/vendor using this method *GetMyCases* should start using *GetCases*. In future releases we will deprecate the *MyCases* service.

Typical SOAP URL	http://[servername]:4000/Sl.WS.Core/SIF/MyCasesService.svc
Typical REST URL	http://[servername]:4000/Sl.WS.Core/SIFREST/api/mycases/
Typical RPC URL	https://[customer specific domain]/Biz/v2/api/call/Sl.Data.RPC/Sl.Data.RPC/MyCasesService
Typical SOAP bridge URL	https://[customer specific domain]/Biz/v2- pbr/soapbridge/sif/MyCasesService
(Deprecated with v5.14)	

12.1 GetMyCases

Returns all the cases where either a private person, an enterprise or an estate is related to the case. It is possible to configure a limitation of the roles in the relation to the case that should be returned in the response.

12.1.1 Input

Data Contract: GetMyCasesQuery

Input Property	360° field	Comment
PersonalId	CaseContact-ReferenceNumber	The personal identity number of the contact.
OrganizationalId	CaseContact-ReferenceNumber	The organization number of the enterprise.
PropertyNumber	Estate- EstateNumber/WorkNumber/ LeaseHoldNumber/SectionNumber	EstateNumber, WorkNumber, LeaseHoldNumber and SectionNumber of Estate.
MaxRows		Read Page property for details. Defaults to all.
Page		Results are always returned paginated, meaning if your search results in 3000 objects, and MaxRows is 1000, then: Page 0 will have object 1-1000 Page 1 will have object 1001-2000, etc. First page is 0, meaning 0-indexed. Defaults to 0

	Note: Always use SortCriterion along with page, to get more accurate result.
ADContextUser	Read Authentication and ADContextUser
SortingCriterion	Sort the search, is applied before Page and MaxRows limitations. Defaults to no sorting criterion, the database then controls the order. Enum values: - RecnoDescending - RecnoAscending Note: Always use SortCriterion along with page, to get more accurate result.
IncludeSubjectSpecificMetaData	Boolean value set to true if you want to include Subject Specific Meta Data in the cases of the result. Default value is false.

12.1.2 Output

Data Contract: GetMyCasesResult

Output Property	360° field	Comment
MyCases	Case	A list of MyCaseResult objects. See the chapter “ Data Contract: MyCaseResult ” for details.
TotalCount	-	Total number of hits.
TotalPageCount	-	Total number of pages.
Successful	-	Will be true as long as no exception occurred during the execution. This means that successful will be true even if no private persons matching the criteria was found.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

12.1.3 MyCases Config

MyCases config setting value set as criteria when you pass OrganizationalId and PersonalId.

Follow the below steps:

1. Open 360 admin and go to CONFIGURATION => SETTINGS and edit value for “SIF MyCases Config” which will filter cases based on Case type and CaseRoles specified in this setting , for e.g.

```
{"data":{{"CaseType":"2","CaseRoles":[{"Role":"9"}]}}
```

“2” is the Case type recno of Code table: Case type.

“9” is the Contact – Case Role recno of Code table Contact – Case Role.

Note: You need to verify that ToCaseTypes is connected with CaseType: Case in Code table Contact – Case Role.

12.2 Sub Contracts

This chapter defines data contracts in use by the main data contracts of the MyCases methods.

12.2.1 Data Contract: MyCaseResult

Output Property	360° field	Comment
Recno	Case-Recno	Recno value of the Case. This is the Case’s unique id in the 360° database.
CaseNumber	Case-Name	Case Name
Title	Case- UnofficialTitle	Case UnofficialTitle
OfficialTitle	Case- Description	Case detail description
ResponsibleUnitRecno	Case-ToOrgUnit	The Organization Unit number of the responsible Organizational Unit

ResponsibleUnitName	Case-ToOrgUnit	The Organization Unit Name of the responsible Organizational Unit
ResponsiblePersonRecno	Case – OurRef	Info about the responsible person. See ResponsiblePerson
ResponsiblePersonName	Case – OurRef – SearchName	The name of the responsible person
CreatedDate	Case-CreatedDate	Case created date
CaseStatus	Case-ToCaseStatus	Status of Case
Note	Case- Notes	Notes related to case
CaseTypeCode	Case-CaseType	Type of case
CaseTypeDescription	Case-CaseType	Case Type description
LastChangedDate	Case-ModifiedDate	Last modified date of case
Estate	Estate-Recno	Estates related to case
ProgressPlan	Activity-Recno	ProgressPlan Activities related to case
ActivePhase	Activity- Recno	ActivePhase Activities related to case
Contacts	Contact	Contacts related to Case Data Contract: MyCasesContactResult
Documents	Document	Documents related to Case Data Contract: MyCasesDocumentResult
SubjectSpecificMetatData	-	XML string with subject specific metadata for the particular case type.
SubjectSpecificMetadataNamespace	-	Specifies the data contract that the subject specific metadata is provided on (namespace)

12.2.2 Data Contract: MyCasesDocumentResult

Output Property	360° field	Comment
Recno	Document – Recno	Recno value of the Document. This is the unique id in the 360° database.
DocumentTitle	Document-Title	Document title
DocumentNumber	Document – DocumentNumber	Document number
CreatedDate	Document – DocumentDate	Date on which document has been created.
JournalDate	Document – JournalDate	The date the document is closed. Should be used together with a closing status and is ignored otherwise. The following happens if the Status property is set to a closing status: - If this property is set, the document will gain this date as JournalDate If this property is not set 360° automatically sets the JournalDate to the current date

Type	Document - ToDocumentType	Document type ("I", "U" ..). Code table "Journal document type"
Files	File	List of files from the current (active) version of the document. Data Contract: MyCasesDocumentFileResult

12.2.3 Data Contract: MyCasesDocumentFileResult

Output Property	360° field	Comment
Reco	File - Recno	Recno value of the File. This is the file's unique id in the 360° database.
FileName	File-Filename	Name of file
FileSize	File – Size	Size of file
FileType	File – Format	Type of file

12.2.4 Data Contract: MyCasesContactResult

Output Property	360° field	Comment
Reco	CaseContact – Recno	Recno value of the Contact. This is the Contact's unique id in the 360° database.
ContactName	CaseContact-Name	The Name of the Case Contact.
Role	CaseContact – ToRole	The role of the Case Contact in the Case.
PersonalID	CaseContact – Referencenumber	The personal identity number of the contact used as a unique identifier for the contact in 360. If unique, a new contact is created, otherwise the contact is updated.
OrganizationalID	CaseContact – Referencenumber	The personal identity number of the contact used as a unique identifier for the contact in 360. If unique, a new contact is created, otherwise the contact is updated.

13 Support Service

Typical SOAP URL	http://[servername]:4000/Sl.WS.Core/SIF/SupportService.svc
Typical REST URL	<i>Not Implemented Yet</i>
Typical RPC URL	https://[customer specific domain]/Biz/v2/api/call/Sl.Data.RPC/Sl.Data.RPC/SupportService
Typical SOAP bridge URL	https://[customer specific domain]/Biz/v2-pbr/soapbridge/sif/SupportService
(Deprecated with v5.14)	

13.1 GetCodeTableRows

This method makes it possible to get out the values of different code tables in 360°. See description in the chapter [Code Table – common values](#).

13.1.1 Input

Data Contract: GetCodeTableRowsQuery

Input Property	360° field	Comment
CodeTableName	-	The name of code table. e.g: “code table: Document category”, “code table: Case status”.
IncludeExpiredValues	CodeTableName-IsExpired	Set this to false if you only want valid code tables. In version 6.2, some improvements have been done on this flag. If feature toggle – SIFGetCodeTableRowsIncludeExpiredValues is turned on, and this flag is set to true then all (inactive and active) codes will return. Default is turned on.
Language	CodeTableName-Language	You can specify which language you want the rows to be displayed in. e.g: NOR, ENU, SWE, DKK
IncludeAllLangauges (6.2)		Default set to false. Set this true to return codes for all supported languages in 360.

13.1.2 Output

Data Contract: GetCodeTableRowsResult

Output Property	360° field	Comment
Language	CodeTableName-Language	Which language the row is displayed in e.g: NOR, ENU, SWE

IsExpired	CodeTableName-IsExpired	If true, record is valid and can be used, otherwise it's expired (not in use)
Recno	CodeTableName-Recno	Recno value of the respective code table row. This is the row's unique id in the 360° database
Code	CodeTableName-Code	The Code of the code table row.
Description	CodeTableName-Description	Description of the code table row.
Successful	-	Will be true as long as no exception occurred during the execution. This means that successful will be true even if no rows matching the criteria was found.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

13.2 GetSIFVersion

This operation makes it possible to check which SIF build you have.

13.2.1 Input

No input.

13.2.2 Output

String with the build number of the installed version of the SIF API (of the IntegrationBase dll, to be specific).

13.3 GetLogs

This method makes it possible to return all the logs related to particular entity.

13.3.1 Input

DataContract: GetLogsQuery

Input Property	360° field	Comment
EntityName (*)	Entitylog-Name	The name of Entity. e.g: "Case", "Document". (Mandatory field)
EntityRecno (*)	Entitylog-Key	Recno of Entity. e.g: if you want to get "Case" related logs, mentioned the recno of Case. (mandatory field)
MaxReturnedLogs	-	Maximum number of logs to return. Default 100.

Page	-	Results are always returned paginated, meaning if your search results in 3000 objects, and MaxReturnedLogs is 1000, then: Page 0 will have object 1-1000 Page 1 will have object 1001-2000, etc. First page is 0, meaning 0-indexed. Defaults to 0
SortingCriterion	-	Sort the search, is applied before Page and MaxReturnedLogs limitations. Defaults to no sorting criterion, the database then controls the order. Enum values: - RecnoDescending RecnoAscending

13.3.2 Output

DataContract: GetLogsResult

Output Property	360° field	Comment
Logs	Log	A list of LogResult objects. See the chapter Data Contract: LogResult for details.
TotalCount	-	Total number of hits.
TotalPageCount	-	Total number of pages.
Successful	-	Will be true if no exception occurred during the execution. This means that successful will be true even if no logs matching the criteria was found.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

13.4 GetEvents

This method makes it possible to return events based on 360 logs for the input specified.

13.4.1 Input

DataContract: GetEventsQuery

Input Property	360° field	Comment
Recno	Entitylog-Recno	Recno of Entitylog
LogCount	-	Number of log entries which are processed during one execution. e.g: Recno = 200001 and LogCount=10,

		all the events for logs recno 200001, 200002, ... , 200010. Note: Default value 100. Max value = 1000
FromDate	Entitylog- CreatedDate	Log created date
ToDate	Entitylog- CreatedDate	Log created date

Note: Input fields should be used in combination/pair,

1. (Recno – LogCount)

If you want events on basis of Recno, then recno is mandatory. If Recno is present and LogCount is not set, then 100 will set by default. Upper limit for LogCount value = 1000

2. (FromDate – ToDate)

If you want events between two dates then you can make use of this pair, both are mandatory.

Validations:

- a. FromDate should not be greater than ToDate.
- b. ToDate should not be less than FromDate.

3. You can not pass all four values to events, otherwise it will throw exception.

4. You can set additional criteria to exclude the entity logs which you don't want while getting events. See the chapter [GetEvent Setting](#) for more details.

13.4.2 Output

DataContract: GetEventsResult

Output Property	360° field	Comment
Events	Events	A list of EventResult objects. See the chapter Data Contract: EventResult for details.
SkippedLogs	-	Total number of logs skipped.
IsEndOfLog	-	Will be false if more logs available in DB, else it will be true.
HighestProcessedRecno	-	Represent the highest processed log recno, regardless of being skipped over or returned in the result.
Successful	-	Will be true if no exception occurred during the execution. This means that successful will be true even if no events matching the criteria was found.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

13.4.3 GetEvent Setting

GetEventDynamicCriteria setting value set as criteria when you want to exclude logs while getting events.

Follow the below steps:

1. Open 360 admin and go to CONFIGURATION => SETTINGS and edit value for “SIF GetEventDynamicCriteria while getting event(s)” to excludes the logs of entity which will satisfied the criteria. Setting value will be in XML format.

```
<Setting>

    <{EntityName}>

        <MetaFieldName>

            {value}

        </MetaFieldName>

    </{EntityName}>

</Setting>
```

e.g.:

```
<Setting>
  <Case>
    <CaseType>
      2
    </CaseType >
  </Case>
</Setting>
```

EntityName: Case

MetaFieldName: CaseType

Value: 2

In this way you can specify the criteria.

13.5 CreateLog

Creates log in 360° based on parameters in data contracts.

13.5.1 Input

Data Contract: CreateLogParameter

Input Property	360° field	Comment
EntityRecno (*)	Entitylog – Key	Recno of Entity. e.g: if you want to create “Case” related logs, mentioned the recno of Case. (Mandatory field)
EntityName (*)	Entitylog – Name	The name of Entity. e.g: “Case”, “Document”. (Mandatory field)
Logdata (*)	Entitylog – Logdata	The log data is a text message. (Mandatory field)
CreatedBy	Entitylog – ToCreatedBy	The user id of user or recno on the format “recno:123”. If none is provided, default login user or integration user is set.
ExternalSystemName (*)		The name of external system for which log is created. (Mandatory field)

13.5.2 Output

Data Contract: LogOperationResult

Output Property	360° field	Comment
Recno	Entitylog - Recno	Unique ID in 360° for the entity log.
Name	Entitylog - Name	The name of entity for which log is inserted like case, document, file etc.
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

13.6 GenerateJSONClient

This method helps you to download the JSON specification of RPC service and use that JSON to generate client of any language.

Note: This method only available from v5.10 onwards.

13.6.1 Input

Input Property	360° field	Comment
ServiceName	-	Name of service. e.g. { "serviceName": "CaseService" }

13.6.2 Output

Output Property	360° field	Comment
-----------------	------------	---------

13.7 Sub Contracts

This chapter defines data contracts in use by the main data contracts of the Support Service methods.

13.7.1 Data Contract: LogResult

Output Property	360° field	Comment
Recno	Entitylog-Recno	Recno value of the log. This is the log's unique id in the 360° database.
EntityName	Entitylog-Name	Entity Name
EntityRecno	Entitylog- Key	Entity Recno
InfoTypeCode	Entitylog- ToEntityLogMessages- Infotype	Log infotype code
InfoTypeDescription	Entitylog- ToEntityLogMessages- Message	Log infotype description
CreatedDate	Entitylog- CreatedDate	Log created date
CreatedBy	Entitylog – ToCreatedBy	Log created by
Data	Entitylog – Logdata	Log data
DataFrom	Entitylog- LogdataFrom	Old data of property
DataTo	Entitylog-LogdataTo	New data of property

13.7.2 Data Contract: EventResult

Output Property	360° field	Comment
Recno	Entitylog-Recno	Recno value of the log. This is the log's unique id in the 360° database.
Type	-	Type event
EntityName	Entitylog-Name	Entity Name
EntityRecno	Entitylog- Key	Entity Recno
InsertedDate	Entitylog- CreatedDate	Log inserted date
Data	DataResult	A list of DataResult objects. See chapter Data Contract: DataResult for more details Note: This field will be null in case of Create, Delete events.

13.7.3 Data Contract: DataResult

Output Property	360° field	Comment
Recno	Entitylog-Recno	Recno value of the log. This is the log's unique id in the 360° database.
Name	-	Name of property which has been changed
InfoTypeCode	Entitylog-ToEntityLogMessages-Infotype	Log infotype code
InfoTypeRecno	Entitylog-ToEntityLogMessages-Recno	Log infotype recno
Type	Entitylog-Name	Type of field, e.g: string, int
From	Entitylog- Key	Old value of property
To	Entitylog- CreatedDate	New value of property

13.8 GetClassifications

This method is available from 360° version 5.12 and SIF standalone 2.1.8.

This method makes it possible to retrieve information from classification systems based on passed criteria.

13.8.1 Input

DataContract: GetClassificationsQuery

Input Property	360° field	Comment
Recno	Classificationcode -Recno	Recno of classification code
Code	Classificationcode-Code	Code of classification code
External ID	Classificationcode - External ID	External ID of classification code
Description	Classificationcode - Description	Description of classification code
ClassificationSystem	Classification system name or recno, from code table "Noark Classification type": ToClassType	Classification system name or recno, from code table "Noark Classification type"
Series	series name or recno, from code table "Noark Subarchive"	series name or recno, from code table "Noark Subarchive"
IncludeParentClass	True or false: Include parent class in the response	Include parent class in the response. Default. default: false
IncludeSubClasses	True or false: Include subclasses in the response	Include subclasses in the response. default: false
IncludeAllowedOnly	True or false: Include only classes that are allowed to be used on case or document registration	Include only classes that are allowed to be used on case or document registration. default: true
Page	Page to return, 0-based	Page to return, 0-based
MaxRows	Number of rows on a page	Number of rows on a page. Default 100, use 0 to return all

IncludeCustomFields	True or false: Include CustomFields in the response	Include CustomFields in the response. default: false
----------------------------	---	--

13.8.2 Output

DataContract: GetClassificationsResult

Output Property	360° field	Comment
Classifications	Classification	A list of ClassificationResult objects. See the chapter Data Contract: ClassificationResult for details.
TotalCount	-	Total number of hits.
TotalPageCount	-	Total number of pages.
Successful	-	Will be true if no exception occurred during the execution. This means that successful will be true even if no logs matching the criteria was found.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

13.8.3 Data Contract: ClassificationResult

Output Property	360° field	Comment
Recno	Noark Classification Code -Recno	Recno of classification code
Code	Noark Classification Code-code	Code of Noark Classification Code
Description	Noark Classification Code-Description	Description of Noark Classification Code
AllowUse	Noark Classification Code -Can the classification code be used for registering cases or documents	
Notes	Noark Classification Code -ScrapRule	ScrapRule of Noark Classification Code
ClassificationSystem	Recno, Name and External ID of "Noark Classification Code" relation ToClassType	
ParentClass	Recno, Code and Description of "Noark Classification Code" relation ToOwner	
SubClasses	Direct descendants of class	
StructureNumber	Noark Classification Code-StructureNumber	Structure Number of Noark Classification Code
SortOrder	Noark Classification Code-SortID	SortID of Noark Classification Code
SecondaryClassificationSystem	Recno, Name and Description of "Noark Classification Code" relation ToSecondaryClassType	
DefaultAccesscode	Recno, Code and Description of "Noark Classification Code" relation ToAccessCode	

DefaultParagraphs	Noark Classification Code - ToRestrictionSecurityReason	
Series	Recno, Code and Description of "Noark Classification Code" relation ToSubArchive	
DisposalCode	Recno, Code and Description of "Noark Classification Code" relation ToScrapCode	
RetentionTimeYears	Noark Classification Code- PreserveYears	PreserveYears of Noark Classification Code
External ID	Noark Classification Code - External ID	External ID of Noark Classification Code
CustomFields	-	Returns additional implementation-specific information, for example Sähke2 fields for Finnish subsetup. Returned fields can be configured from settings.

13.8.4 Get Classification Custom Data

To get additional 360° fields, which are not currently included in the webservice output objects.

Follow the below steps:

1. Open 360 admin and go to CONFIGURATION => SETTINGS and edit value for "SIF Classification Custom Fields Query" which will include metaquery for getting the custom field, for e.g.

```
<QUERYDESC ENTITY="Noark Classification code" NAMESPACE="SIRIUS" DATASETFORMAT="XML">
  <RESULTFIELDS>
    <METAITEM TAG="CF_testfield">CF_testfield</METAITEM>
  </RESULTFIELDS>
  <CRITERIA>
    <METAITEM NAME="Recno" OPERATOR="IN">
      <VALUE>{0}</VALUE>
    </METAITEM>
  </CRITERIA>
</QUERYDESC>
```

CF_testfield is the custom meta field in Case Entity.

Note: Entity name should start with capital letter. It returns Single value field only.

2. The result will be displayed in <CustomFields> .. <CustomFields> section in the GetClassificationsResult as follows:

```
<CustomFields>
  <AdditionalFieldParameter>
    <Name>CF_testfield</Name>
    <Value>TestCustomField</Value>
  </AdditionalFieldParameter>
</CustomFields>
```

13.9 AddCodeTableRow (v5.14)

This method will allow to add/insert a new row in existing code table.

13.9.1 Input

Data Contract: AddCodeTableRowParameter

Input Property	360° field	Comment
CodeTableName(*)	-	Code table name
IsLanguageDependent	-	This flag should be set to true if the value is language dependent. Else false. Default is set to false.
CodeTableFields	-	List of fields with name value pair. This should be used for single value fields. Data Contract: AdditionalFieldParameter
CodeTableListFields	-	List if fields with name and multiple values. Values currently supporting recno only. This property should be used to add relational fields with multiple values. Data Contract: AdditionalFieldListParameter

13.9.2 Output

Data Contract: CodeTableOperationResult

Output Property	360° field	Comment
Recno	Code table row- Recno	Recno (unique identifier in 360) of the code table entry.
CodeTableResult	-	Information about code table entry. Data Contract: CodeTableResult
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

13.9.3 Sub contract

13.9.3.1 Data Contract: CodeTableResult

Output Property	360° field	Comment
Recno	Code table row- Recno	Recno (unique identifier in 360) of the code table entry.
Description	Code table- Description	Description of the code table entry. If this column available
Code	Code table- Code	Code of the code table entry. If this column available

13.10 UpdateCodeTableRow (v5.14)

This method allows to update an existing code table row.

13.10.1 Input

Data Contract: UpdateCodeTableRowParameter

Input Property	360° field	Comment
CodeTableName(*)	-	Code table name
Recno(\)	-	Code table row's recno
Code(\)	-	Code value. Send either recno or code as unique value along with code table name for update.
IsLanguageDependent	-	This flag should be set to true if the value is language dependent. Else false. Default is set to false.
CodeTableFields	-	List of fields with name value pair. This should be used for single value fields. Data Contract: AdditionalFieldParameter
CodeTableListFields	-	List of fields with name and multiple values. Values currently supporting recno only. This property should be used to add relational fields with multiple values. This will add to existing relation list and not delete old relations. Data Contract: AdditionalFieldListParameter

13.10.2 Output

Data Contract: CodeTableOperationResult

Output Property	360° field	Comment
Recno	Code table row- Recno	Recno (unique identifier in 360) of the code table entry.
CodeTableResult	-	Information about code table entry. Data Contract: CodeTableResult
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

13.11 AutomaticArchivingEnabler SIF support (Under development)

Do not use these methods before taking assistance from SIF team. These methods are still under development. Full documentation and implementation will release in future version.

This new integration will archive the documents/cases from external system to P360. To be able to archive correctly to P360, external system should use new added endpoints (SupportService/BulkImportSync or SupportService/BulkImportAsync) and follow standard schema protocol.

Note: This is still under development

13.11.1 BulkImportSync (under development)

With this method, you can archive documents or cases in bulk. In response you will receive information about archived entities synchronously.

Note: This is still under development

13.11.2 BulkImportAsync (under development)

With this method, you can archive documents or cases in bulk asynchronously. Bulk request will be stored in queue and will be processed later by nightly/scheduled job "Automatic Archiving job".

Note: This is still under development.

13.11.3 Input

Input to both above methods is zip file containing request and actual files.

Note: This is still under development.

13.11.4 Output

DataContract: BulkImportResult

Output Property	360° field	Comment
countOfRequestResponse	-	Count of successful imports.
Imports	-	List of successful imports.
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

13.11.5 Subcontracts

13.11.5.1 Data Contract: ImportResult

Input Property	360° field	Comment
Entity	-	Name of entity. Eg. Case or Document
Title	-	Title. Eg. Case title or document title
Recno	-	Entity recno.
EntityNumber	-	Entity number. Eg. CaseNumber or DocumentNumber
ErrorMessage	-	Error message if archive fails.
ExternalID	-	ExternalId of entity.

13.12 GetEntitiesExternalIds (v5.17 onwards)

This method can be used to get the external id's of entities for the configured system. Refer [SIF GetEntitiesExternalIds Config \(v5.17\)](#) to configure external system.

13.12.1 Input

Data Contract: GetExternalIdsParameter

Input Property	360° field	Comment
EntityName	External Integration Keys-Entity	Entity name created in 360. Eg. Case, Document, File
EntityKey	External Integration Keys -Key	Recno of the entity created. Eg. Case recno, file recno
ExternalId	External Integration Keys -ExternalId	External Id of the entity created. See chapter Data contract: ExternalIdSearchParameter

ExternalSystemName(*)	External Integration Keys - ExternalSystem	System name which was used while creating the entity. This is mandatory property.
SortCriterion	-	Sort the search, is applied before Page and MaxRows limitations. Defaults to no sorting criterion, the database then controls the order. Enum values: - InsertDateDescending - InsertDateAscending Note: Always use SortCriterion along with page, to get more accurate result.
Page	Page to return, 0-based	Page to return, 0-based
MaxReturnedIds	Number of rows on a page	Number of rows on a page. Default 100, use 0 to return all

13.12.2 Output

Data Contract: GetExternalIdsResult

Output Property	360° field	Comment
ExternalId	External Integration Keys- ExternalId	External Id of the entity as per criteria.
ExternalName	ExternalName	If true, record is valid and can be used, otherwise it's expired (not in use)
ExternalSystem	ExternalSystem	System name which was used while creating the entity.
Entity	Entity	Entity name created in 360. Eg. Case, Document, File
EntityKey	Key	Recno of the entity created. Eg. Case recno, file recno
Entitykey2	Key2	-
TotalPageCount	-	No. of pages for a total result
TotalCount	-	No. of total records for the selected criteria
Successful	-	Will be true as long as no exception occurred during the execution. This means that successful will be true even if no rows matching the criteria was found.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

13.12.3 Subcontracts

13.12.3.1 Data contract: ExternalIdSearchParameter

Property	360° field	Comment
Id(*)	-	External Id

OperatorType	Comparison operator. Defaults to equal operator (=).	
	Possible values (Operator column):	
	Operator	Description
	=	Equal
	!=	Not equal
	LIKE	Like, '%' should be used as wildcard
	GT	Greater than
	GT=	Greater than or equal
	LT	Less than
	LT=	Less than or equal
	IS NULL	Is null
	IS NOT NULL	Is not null

13.13 AddExternalId (v6.2 onwards)

This method can be used to add an external id for an entity. The method is available from version 6.2.

13.13.1 Input

Data Contract: AddExternalIdParameter

Input Property	360° field	Comment
Entity (*)	External Integration Keys - Entity	Entity name in 360°. Currently supported entities are: Case, Document, File
EntityKey (*)	External Integration Keys - Key	Recno (integer) of the entity in 360°; Case recno, document recno or file recno. E.g. 200001
ExternalId (*)	External Integration Keys -ExternalId	External Id for the entity. String, max length 254.
ExternalSystemName (*)	External Integration Keys - ExternalSystem	System name for the External Id. String, max length 80.
ExternalName	External Integration Keys - ExternalName	External name for the External Id. Optional. String, max length 40.
EntityKey2	External Integration Keys – Key2	External Integration Keys – Key2. Optional. String, max length 200.

13.13.2 Output

On **success**, returns HTTP 201 with no content.

On **error**, returns HTTP status based on error:

- HTTP 403 – When user is not allowed to access the endpoint or given entity.
- HTTP 400 – When request is not valid.
- HTTP 500 – If there is an error while processing the request.

On **error**, the following JSON content is returned:

Data Contract: WSOperationResult

Output Property	360° field	Comment
Successful	-	Will always be false in error scenarios
ErrorMessage	-	Contains a short error message
ErrorDetails	-	Contains a full stack trace if stack trace is enabled from settings .

13.14 DeleteExternalId (v6.4 onwards)

This method can be used to Delete external id for an entity. The method is available from version 6.4.

13.14.1 Input

Data Contract: DeleteExternalIdParameter

Input Property	360° field	Comment
Entity(*)	External Integration Keys - Entity	Entity name in 360°. Currently supported entities are: Case, Document, File
EntityKey(*)	External Integration Keys - Key	Recno (integer) of the entity in 360°; Case recno, document recno or file recno. E.g. 200001
ExternalSystemName(*)	External Integration Keys - ExternalSystem	System name for the External Id. String, max length 80.
ExternalName(*)	External Integration Keys - ExternalName	External name for the External Id. Optional. String, max length 40.
EntityKey2(*)	External Integration Keys – Key2	External Integration Keys – Key2. Optional. String, max length 200.

13.14.2 Output

On **success**, returns HTTP 204 with no content.

On **error**, returns HTTP status based on error:

- HTTP 403 – When user is not allowed to access the endpoint or given entity.
- HTTP 400 – When request is not valid.
- HTTP 500 – If there is an error while processing the request.

On **error**, the following JSON content is returned:

Data Contract: WSOperationResult

Output Property	360° field	Comment
Successful	-	Will always be false in error scenarios
ErrorMessage	-	Contains a short error message
ErrorDetails	-	Contains a full stack trace if stack trace is enabled from settings .

13.15 GetSwaggerOpenAPIServiceDefinition (v5.17 onwards)

Generate Open API service definition.

Please see the chapter for sample API specification. [RPC C# sample client](#)

13.15.1 Input

serviceName like CaseService,

DocumentService,ContactService,AccessGroupService,ContikiService,EstateService,FileService,KGVService,MyCasesService,ProjectService,RevisionService,SupportService,UserService

Input Property	360° field	Comment
ServiceName	-	Name of service. e.g. { "serviceName": "CaseService" }

13.15.2 Output

Output Property	360° field	Comment
JSON Specification	-	Download JSON specification.

13.16 TempEntityStorage Text Support (v5.18 onwards)

With methods defined in subchapters, you can get, add/modify, and delete text content in the TempEntityStorage. The access to TempEntityStorage is limited to configured systems (owner), which are defined in setting [SIF TempEntityStorage Config \(v5.18\)](#).

These functions are available from v5.18 onwards.

13.16.1 GetTempEntityStorageText

Get text content from TempEntityStorage if it exists.

13.16.1.1 Input

Data Contract: GetTempEntityStorageTextParameter

Input Property	360° field	Comment
EntityName(*)	TempEntityInfo.Entity	Entity name in 360°. E.g., Case, Document, File <i>Required value</i> <i>String, max length: 254</i>
EntityKey(*)	TempEntityInfo.EntityKey	Recno of the entity in 360°. E.g., Case recno, file recno

		<i>Required value</i> <i>Numeric value between 1 and 2147483647</i>
ExternalSystemName(*)	TempEntityInfo.Owner	System name which was used while creating the entry. <i>Required value</i> <i>String, max length 100</i> <i>The provided value needs to be defined in setting <u>SIF TempEntityStorage Config (v5.18)</u></i>

13.16.1.2 Output

Data Contract: GetTempEntityStorageTextResult

Output Property	360° field	Comment
Text	TempEntityStorage - TextInput	Text content in TempEntityStorage for given entity and system. <i>If not found, returns null</i>
Successful	-	Will be true as long as no exception occurred during the execution. This means that successful will be true even if no rows matching the criteria was found.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

13.16.2 AddTempEntityStorageText

Add or update text to TempEntityStorage. If text exists, it can be overridden with Overwrite parameter. By default, existing text will be overwritten.

13.16.2.1 Input

Data Contract: AddTempEntityStorageTextParameter

Input Property	360° field	Comment
EntityName(*)	TempEntityInfo.Entity	Entity name in 360°. E.g., Case, Document, File <i>Required value</i> <i>String, max length: 254</i>
EntityKey(*)	TempEntityInfo.EntityKey	Recno of the entity in 360°. E.g., Case recno, file recno <i>Required value</i> <i>Numeric value between 1 and 2147483647</i>
ExternalSystemName(*)	TempEntityInfo.Owner	System name which to use when creating the entry. <i>Required value</i> <i>String, max length 100</i>

		<i>The provided value needs to be defined in setting <u>SIF TempEntityStorage Config (v5.18)</u></i>
Text(*)	TempEntityStorage - TextInput	Text content
Overwrite	-	Controls if text should be overwritten if it already exists. <i>Boolean</i> <i>Default value: true</i>
ExpirationDays	TempEntityStorage - Expires	Controls when the entry should expire. Value is expected in days. <i>Numeric value between 1 and 3650</i> <i>Default value is 365</i>

13.16.2.2 Output

Data Contract: AddTempEntityStorageTextResult

Output Property	360° field	Comment
Successful	-	True if entry was added successfully, otherwise false. <i>Boolean</i>
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

13.16.3 DeleteTempEntityStorageText

Delete text from TempEntityStorage.

13.16.3.1 Input

Data Contract: DeleteTempEntityStorageTextParameter

Input Property	360° field	Comment
EntityName(*)	TempEntityInfo.Entity	Entity name in 360°. E.g., Case, Document, File <i>Required value</i> <i>String, max length: 254</i>
EntityKey(*)	TempEntityInfo.EntityKey	Recno of the entity in 360°. E.g., Case recno, file recno <i>Required value</i> <i>Numeric value between 1 and 2147483647</i>
ExternalSystemName(*)	TempEntityInfo.Owner	System name which was used while creating the entry. <i>Required value</i> <i>String, max length 100</i> <i>The provided value needs to be defined in setting <u>SIF TempEntityStorage Config (v5.18)</u></i>

13.16.3.1 Output

Data Contract: DeleteTempEntityStorageTextResult

Output Property	360° field	Comment
Successful	-	True if entry was removed successfully, otherwise false. <i>Boolean</i>
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

13.17 CreateHistoricLog (6.5)

To support data migration and retain historic logs from other IT solutions, like Public 360, a new SupportService/**CreateHistoricLog** method is needed to be used in eArchive.

Being able to import historic event logs from other sources, to preserve historic accuracy and improve eArchive as a flexible archive core for all markets.

13.17.1 Input

Data Contract: CreateHistoricLogParameter

Input Property	360° field	Comment
EntityKey(*)	Imported Noark Changelog – EntityKey	Recno of Entity. e.g: if you want to create “Case” related logs, mentioned the recno of Case. (Mandatory field)
Entity(*)	Imported Noark Changelog – Entity	The name of Entity. e.g: “Case”, “Document”. (Mandatory field)
ModifiedDate	Imported Noark Changelog - endretDato	Changed date
Data(*)	Imported Noark Changelog – referanseMetadata	The log data is a text message. (Mandatory field)
ModifiedBy	Imported Noark Changelog – endretAv	Changed performed by.
OldValue	Imported Noark Changelog - tidligereVerdi	Old value
NewValue	Imported Noark Changelog- nyVerdi	New value

13.17.2 Output

Data Contract: LogOperationResult

Output Property	360° field	Comment
Recno	Entitylog - Recno	Unique ID in 360° for the entity log.
Name	Entitylog - Name	The name of entity for which log is inserted like case, document, file etc.
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

13.18 GetDocumentTemplateMetadata

Method to get all document production templates from 360.

13.18.1 Input

Data Contract: GetTemplateMetdataQuery

Input Property	360° field	Comment
TemplateRecno	Template– Recno	Recno of template.
TemplateName	Template– Name	The display name of the Template.
TemplateDescription	Template- Description	Detailed item description.
TemplateType	Template– Type	The Template Type (document, email campaign etc). Refer to code table: Template type. Can take code or recno value.
DocumentArchive	Template– ToDocumentArchive	The Document Archive which can use this Template. Refer to code table: Document archive. Can take code or recno value.
DocumentCategory	Template- ToDocumentCategory	The Document Categories which can be use this Template. Refer to code table: Document category. Can take code or recno value.
AdditionalFields		Searches using additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
AdditionalRelations		Searches using custom relations between two entities: Check details “ Data Contract: AdditionalRelations ” for type of fields and how to use it.

13.18.2 Output

Data Contract: GetTemplatesResult

Output Property	360° field	Comment
-----------------	------------	---------

Templates	-	List of templates
Successful	-	Will be true if no exception occurred during the execution. This means that success will be true even if no rows matching the criteria was found.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

13.18.3 Subcontracts

13.18.3.1 Data contract: TemplateMetadataResult

Output Property	360° field	Comment
Description	Template-Description	Detailed item description.
DispatchType	Template-DispatchType	Type of dispatch: 1 - Use Individual dispatch (personal letter), 2 - Support single electronic dispatch (info letter), 3 - No individual dispatch, only single recipient), null - not used as main document on Outbound documents.
Entity	Template-Entity	The entity of the Template.
Filename	Template-Filename	The Filename of the template.
TemplateFormat	Template-Format	The Format of the Template.
Name	Template-Name	The display name of the Template.
Recno	Template-Recno	Unique Record Number.
StructureNumber	Template-StructureNumber	Structure number used to organize templates in hierachies.
DefaultLanguage	Template-DefaultLanguage	Default template language
Group	Template-Group.Name	Template Group.
AutomationScript	Template-ToAutomationScript	The Automation Script used when producing Files with this Template. Refer Data contract: TemplateScript
BookmarkScript	Template-ToBookmarkScript	The Client Script used when producing Files with this Template. Refer Data contract: TemplateScript
CaseType	Template-ToCaseType	Connected case types. Refer Data Contract: CodeTableResult
CheckInComponent	Template-ToCheckinComponent	Check-in component. Refer Data Contract: CodeTableResult
CheckOutComponent	Template-ToCheckoutComponent	Check-out component. Refer Data Contract: CodeTableResult
DocumentArchive	Template-ToDocumentArchive	The Document Archive which can use this Template. Refer Data Contract: CodeTableResult
DocumentCategory	Template-ToDocumentCategory	The Document Categories which can be use this Template. Refer Data Contract: CodeTableResult
FileFormat	Template-ToFileFormat	The File Format. Refer Data Contract: CodeTableResult

ClassificationCode	Template-ToNoarkClassificationCode	Connected class codes. A list of all ArchiveType/ArchiveCode pairs on the case.
OpenComponent	Template-ToOpenComponent	Document open component. Refer Data Contract: CodeTableResult
Orgunit	Template-ToOrgUnit	Organization Unit. Data Contract: ResponsibleEnterprise
ProduceComponent	Template-ToProduceComponent	A component used to produce the document. Refer Data Contract: CodeTableResult
ProgressPlan	Template-ToProgressPlan	Connected progress plan. Data Contract: ProgressPlanResult
ProjectCategory	Template-ToProjectCategory	Project category. Refer Data Contract: CodeTableResult
TemplateType	Template-Type	The Template Type (document, email campaign etc). Refer Data Contract: CodeTableResult

13.18.3.2 Data contract: TemplateScript

Output Property	360° field	Comment
Description	TemplateScript-Description	Detailed item description.
Script	TemplateScript-Script	Script
Type	TemplateScript-Type	This item's particular type.
Recno	TemplateScript-Recno	Unique Record Number.
Name	TemplateScript-Name	The item's name.

13.19 DownloadDocumentTemplate

Method to download the template file.

13.19.1 Input

Data contract: GetTemplateQuery

Input Property	360° field	Comment
TemplateFileName	Template- Filename	The Filename of the template.
TemplateFileFormat	Template- Format	The File Format.

13.19.2 Output

HttpResponseMessage

Output Property	360° field	Comment
HttpResponseMessage.Content	-	Actual file data in stream format.
HttpResponseMessage.Content.Headers.ContentType	-	application/octet-stream
HttpResponseMessage.StatusCode	-	NotFound OK BadRequest Internal server error

14 Revision Service

14.1 CreateRevision

Creates New Revision with following input parameter. Revision can be created with statuses like In progress, Completed, Void, In Revision, Approved, In approval process. At a time, there can be only one revision in “In Progress” status. If you try to create new revision with In progress and if it already have one with In Progress it will automatically makes the previous revision status as “Completed” and created new revision with “In Progress”.

14.1.1 Input

Data Contract: CreateRevisionParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
DocumentNumber (\)	ToDocument(DocumentNumber)	DocumentNumber of the Document.
DocumentRecno (\)	ToDocument(Recno)	Recno (unique identifier in 360) of the Document.
RevisionStatus (*)	ToDocumentStatus	Mapped to code table Version Status. Code Table - Version Status
Description	Description	Description of the Revision user enters while creating Revision.

14.1.2 Output

Data Contract: RevisionOperationResult

Output Property	360° field	Comment
Recno	Version - Recno	Recno (unique identifier in 360) of the Version.
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

14.2 UpdateRevision

Update existing Revision with following input parameter.

Revision Status –

It can be updated if existing revision is in status “In Progress”, “In approval process” or “In Revision”. User cannot modify revision status if it has other status.

Revision Description – User can update revision description anytime no criteria applied on it.

These Revision fields could be updated depend on Document Number, Document Recno or Revision Recno. So, either DocumentRecno, DocumentNumber Or Revision Recno is mandatory while updating Revision.

14.2.1 Input

Data Contract: UpdateRevisionParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
DocumentNumber (\)	ToDocument(DocumentNumber)	DocumentNumber of the Document.
DocumentRecno (\)	ToDocument(Recno)	Recno (unique identifier in 360) of the Document.
RevisionStatus	ToDocumentStatus	Mapped to code table Version Status. Code Table - Version Status
Description	Description	Description of the Revision user enters while updating Revision.
Recno (\)	Recno	Recno (unique identifier in 360) of the Version.

14.2.2 Output

Data Contract: RevisionOperationResult

Output Property	360° field	Comment
Recno	Version - Recno	Recno (unique identifier in 360) of the Version.
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

14.3 GetRevision

GetRevision will fetch data based on input parameters. Revision Data will be fetched based on DocumentNumber, DocumentRecno or RevisionRecno.

GetRevisionInProgress and RevisionRecno parameters are either or. If GetRevisionInProgress is passed by user as input parameter then RevisionRecno will not be considered.

If GetRevisionInProgress is set True, it will return Revision with status InProgress. If it is set False, it will return last closed Revision.

RevisionRecno- If RevisionRecno is passed then GetRevisionInProgress will not be considered. Revision data will be fetched based on revision Recno.

14.3.1 Input

Data Contract: GetRevisionParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
DocumentNumber(*)	ToDocument(DocumentNumber)	DocumentNumber of the Document.
DocumentRecno(*)	ToDocument(Recno)	Recno (unique identifier in 360) of the Document.
GetRevisionInProgress	-	Boolean value, set true if you want to get In progress revision and if False returns last closed revision. Default value is false.
RevisionRecno(*)	Recno	Recno (unique identifier in 360) of the Version.
MaxReturnedRevision	-	Count of Revisions needs to be returned.

14.3.2 Output

Data Contract: GetRevisionResult

Output Property	360° field	Comment
DocumentNumber	ToDocument(DocumentNumber)	DocumentNumber of the Document.
DocumentRecno	ToDocument(Recno)	Recno (unique identifier in 360) of the Document.
Recno	Recno	Recno (unique identifier in 360) of the Version.
RevisionNumber	Seqno	Seqno of Version Entity, which shows sequence number of revision.
RevisionStatus	ToDocumentStatus	Mapped to code table Version Status. Code Table - Version Status
RevisionDate	CreatedDate	CreatedDate of Version Entity
ClosedDate	ClosedDate	ClosedDate of Version Entity
ResponsibleEnterprise	-	Returns the Responsible Enterprise related to Revision. " Data Contract: ResponsibleEnterprise "
ResponsiblePerson	-	Returns the Responsible person related to Revision. " Data Contract: ResponsiblePerson "
Files	-	Returns the files related to Revision. " Data Contract: File "
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

14.4 GetRevisions

GetRevisions fetch data based on Input parameters. It will take input parameter as DocumentRecno or DocumentNumber and based on that it will return list of Revisions related to that DocumentRecno or DocumentNumber.

14.4.1 Input

Data Contract: GetRevisionsParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
DocumentNumber(*)	ToDocument(DocumentNumber)	DocumentNumber of the Document.
DocumentRecno(*)	ToDocument(Recno)	Recno (unique identifier in 360) of the Document.

MaxReturnedRevision	-	Count of Revisions needs to be returned.
AdditionalFields	-	Searches using additional fields – see chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
AdditionalRelations	-	Searches using custom relations between two entities: Check details “ Data Contract: AdditionalRelations ” for type of fields and how to use it.
AdditionalListFields	-	Searches using additional fields list parameter – see chapter for Data Contract: AdditionalFieldListParameter for details, what kind of fields and how to use this parameter.
RevisionStatus	Document – ToDocumentStatus	Can be code or recno of ToDocumentStatus.
DocumentCategory	ToDocument(ToDocumentCategory)	DocumentCategory of the Document.
IncludeFiles	-	Boolean value set to false if you do not want to include files in the revisions of the result. Default value is false.
IncludeFileData	-	If the file list should include an output property that contain the files base 64 encoded data. Defaults to false.
DateCriteria		Searches using DateCriteria, for more details refer chapter Data Contract: DateCriteriaType , what kind of fields and how to use this parameter.
SortingCriterion		String value, provide either: "RecnoDescending" or "RecnoAscending" to Sort the resultset by recno Note: Always use SortCriterion along with page, to get more accurate result.
Page		Int. Pagination parameter that should be used in conjunction with MaxReturnedRevision to decide what revisions to be returned (e.g. MaxReturnedRevision =10 and Page=2 would return revision 21-30) Note: Always use SortCriterion along with page, to get more accurate result.

14.4.2 Output

Data Contract- GetRevisionsResult

Output Property	360° field	Comment
RevisionRecno	Recno	Recno (unique identifier in 360) of the Version.
RevisionNumber	Seqno	Seqno of Version Entity, which shows sequence number of revision.
RevisionStatus	ToDocumentStatus	Mapped to code table Version Status. Code Table - Version Status
RevisionDate	CreatedDate	CreatedDate of Version Entity
ClosedDate	ClosedDate	ClosedDate of Version Entity
Files		List of files from the current (active) version of the Revision and ordered by “sorting” field value from 360°.
Recno	File - Recno	
Title	File – Comment	
Format	File – Format	
Base64Data		The file data in a base 64 encoded string. Will only be returned if the input property IncludeFileData is set to true.
URL	-	A 360° URL that can be used by authenticated users to view the file. The base of the URL is configured in the SI.WS.Core/web.config key SI.Biz.Serviced.Email.360WebApplicationUrl or Setting value in 360 web admin (360 Public Url)
Note	File - Note	
Paragraph	File – ToAuthorization	
RelationTypeDescription	File – ToRelationType - Description	
RelationTypeCode	File – ToRelationType - Code	
LastChangedDate	File – ModifiedDate / FileModifiedDate	Returns file last modified date – file information or actual file.
VersionFormatDescription	File – ToVersionFormat - Description	
VersionFormatCode	File – ToVersionFormat - Code	
Type	File – Type	
ModifiedBy	File – ToFileModifiedBy – ToContact	
CheckedOutBy	File – ToCheckedOutBy – ToContact	
CategoryCode	File – ToFileCategory - Code	
CategoryDescription	File – ToFileCategory - Description	
StatusDescription	File – ToFileStatus - Description	
StatusCode	File – ToFileStatus - Code	
AccessCodeDescription	File – ToAccessCode - Code	
AccessCodeCode	File – ToAccessCode - Description	
DegradeCode	File – ToDegradeCode	Downgrade/declassification code, Norwegian “Avgradering”
DegradeDate	File – DegradeDate	
DisposalCode	File – ToScrapCode	Code value of disposal code, Norwegian “Kassasjonskode”, e.g. “B” or “G”.
DisposalDate	File – ScrapDate	Calculated disposal date, Norwegian “Kassasjonsdato”. This date is in the future and gives info about when the document can be

		disposed via 360° GUI function for disposal of files.
FiledOnPaper	File – Paper	
PaperLocation	File – PaperLocation	
SignDate	File – ToFileVersion – ToContact	
LastChangedDate	File – FileModifiedDate / ModifiedDate	LastChangedDate for the file
AccessGroup	File – ToAccessGroup - Code	File AccessGroup code E.g. AccessGroup = “Public”
AccessGroupRecno	File – ToAccessGroup- Recno	File AccessGroup recno E.g. AccessGroupRecno = “0” (Public)
DocumentCategory	ToDocument – ToDocumentCategory	Document Category for connected Document of version.
DocumentNumber	ToDocument – DocumentNumber	Document Number to connected Document of version
DocumentRecno	ToDocument – DocumentRecno	Document Recno to connected document of version
RevisionDescription	Description	Description of the version

15 Activity Service

Typical RPC URL	https://[customer specific domain]/Biz/v2/api/call/SI.Data.RPC/SI.Data.RPC/ActivityService
-----------------	--

Get/Add/Update activities through SIF.

Note: Currently, we support limited set of activities through this endpoint, read below for more information.

Currently this service is available for 5.13,5.17 and 5.16 versions of 360.

15.1 CreateWorkflowActivity

Creates an activity in 360° with activity type category review sequential, review parallel and approval. The parameters in the data contracts accept either code value of the respective code or recno if nothing else is specified.

15.1.1 Input

Data Contract: CreateWorkflowParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
WorkflowType	Activity – ActivityCategory	Code or recno value. E.g. “Approval” or “recno:22”
AccessGroup	Activity – ToAccessGroup	Can be code value or recno. E.g. AccessGroup = “Public”
Documents	Activity – ToDocument	List or single document number to this activity belongs to.

ReferenceMaterials	Activity – ToActivities	List of referring documents, referred by document number. Ignored if empty, only applicable for approval workflow type.
ResponsiblePersonRecno	Activity – OurRef	Looks for a contact with Recno equal to the property input.
ResponsiblePersonIdNumber	Activity – OurRef	The external ID of the responsible person. Looks for a contact with ExternalId equal to the property input.
ResponsiblePersonEmail	Activity – OurRef	Looks for a contact with Email equal to the property input.
ResponsiblePersonUserId	Activity – OurRef	Looks for a contact with UserId (username, E.g. “no\name.name”)
ResponsibleEnterpriseRecno	Activity – ToOrgUnit	Looks up enterprise based on recno. Must be recno of a valid enterprise.
ResponsibleEnterpriseNumber	Activity – ToOrgUnit	The enterprise number of the responsible enterprise. Looks for a contact with ExternalID first, then for one with reference number equal to the property input.
Title(*)	Activity – Description	Title on the activity.
Notes	Activity – Notes	Notes on the activity.
DueDate	Activity – EndDate	Due date on the activity.
Priority	Activity – ActivityPriority	Code or recno value. E.g. “Standard” or “recno:50002” Refers to the Activity priority code table.
Recipients	Activity – ToActivityContact	List of contacts with associated roles. See sub contract : ActivityContactParameter

15.1.2 Output

Data contract: WorkflowOperationalResult

Output Property	360° field	Comment
Recno	Activity – Recno	Unique ID in 360° for the activity.
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

15.2 UpdateWorkflowActivity

15.2.1 Input

Data contract: UpdateWorkflowParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
Recno	Activity – Recno	This property will be used to determine which activity will be updated.
Title(*)	Activity – Description	Title on the activity.
Notes	Activity – Notes	Notes on the activity.

DueDate	Activity – EndDate	Due date on the activity.
Priority	Activity – ActivityPriority	Code or recno value. E.g. “Standard” or “recno:50002” Refers to the Activity priority code table.
Recipients	Activity – ToActivityContact	List of contacts with associated roles. See sub contract : ActivityContactParameter
SyncRecipients		If provided it synchronizes (Add, update or delete) contacts on the activity. Default value is false, if not provided

15.2.2 Output

Data contract: WorkflowOperationalResult

Output Property	360° field	Comment
Recno	Activity – Recno	Unique ID in 360° for the activity.
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

15.3 GetWorkflowActivities

This method supports fetching activity of type – Approval, Review

15.3.1 Input

Data contract: GetWorkflowActivityParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
Title	Activity-Description	The title search is based on the SQL “LIKE” operator. It is still possible to search for exact matches, but the possibility to search with wildcards is now introduced. For instance, “%” can be used as a substitute for zero or more characters in the title search.
Page		Int. Pagination parameter that should be used in conjunction with MaxReturnedActivities to decide what activities to be returned (e.g. MaxReturnedActivities =10 and Page=2 would return activity 21-30) Note: Always use SortCriterion along with page, to get more accurate result.
MaxReturnedActivities	-	Maximum number of activities to return. Default 100.

SortCriterion		String value, provide either: "RecnoDescending" or "RecnoAscending" to Sort the resultset by recno Note: Always use SortCriterion along with page, to get more accurate result.
Recno	Activity-Recno	Recno (unique identifier in 360) of the activity.
StartDate	Activity-StartDate	Activity start date
CaseNumber	Activity-ToActivityCase.Name	Activities connected to CaseNumber
WorkflowType	Activity-ActivityCategory	The category can be used to classify activities. Refer code table: Activity type category in P360. Code or recno (recno:xxxx) E.g., "recno:20" or "Review"
Project	Activity-ToActivityProject	Activities connected to project. Accepts valid project number.
AccessGroup	Activity-ToAccessGroup	Activity's access group.
Priority	Activity-ActivityPriority	The priority of an Activity. Refer code table: Activity priority in P360. Code or recno (recno:xxxx) E.g., "recno:50001" or "High"
DocumentNumber	Activity-ToDocumentRevision. ToDocument.DocumentNumber	Activities connected to DocumentNumber
Status	Activity-ActivityStatus	The status is used to tell what "Phase" an activity is in. Refer code table: Activity status in P360. Code or recno (recno:xxxx) E.g., "recno:50001" or "Open"
IncludeCustomFields		Boolean value, set true if you want additional 360° fields which are not currently included in the webservice output objects. Default value is false.
AdditionalListFields		Searches using additional fields list parameter – see chapter for Data Contract: AdditionalFieldListParameter for details, what kind of fields and how to use this parameter.
AdditionalFields		Searches using additional fields. See chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
AdditionalRelations		Searches using custom relations between two entities: Check details " Data Contract: AdditionalRelations " for type of fields and how to use it.

15.3.2 Output

Data contract: GetWorkflowActivitiesResult

Output Property	360° field	Comment
Activities	-	List of WorkflowActivityResult objects. See the chapter Data contract: WorkflowActivityResult for details.
TotalCount	-	Total number of hits.
TotalPageCount	-	Total number of pages.
Successful	-	Will be true as long as no exception occurred during the execution. This means that successful will be true even if no private persons matching the criteria was found.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

15.3.3 Get Activity Custom Data

To get additional 360° fields, which are not currently included in the webservice output objects.

Follow the below steps:

1. Open 360 admin and go to CONFIGURATION => SETTINGS and edit value for “SIF Activity Custom Fields Query” which will include metaquery for getting the custom field, for e.g.

```
<QUERYDESC ENTITY="Activity" NAMESPACE="SIRIUS" DATASETFORMAT="XML">
  <RESULTFIELDS>
    <METAITEM TAG="CF_testfield">CF_testfield</METAITEM>
  </RESULTFIELDS>
  <CRITERIA>
    <METAITEM NAME="Recno" OPERATOR="IN">
      <VALUE>{0}</VALUE>
    </METAITEM>
  </CRITERIA>
</QUERYDESC>
```

CF_testfield is the custom meta field in Case Entity.

Note: Entity name should start with capital letter. It returns Single value field only.

2. The result will be displayed in <CustomFields> .. <CustomFields> section as follows:

```
<CustomFields>
  <AdditionalFieldParameter>
    <Name>CF_testfield</Name>
    <Value>TestCustomField</Value>
  </AdditionalFieldParameter>
</CustomFields>
```

15.4 GetProgressPlanDetails

This method supports fetching progress plan type activity based on filter criteria.

15.4.1 Input

Data contract: GetProgressPlanDetailsParameter

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
Title	Activity-Description	The title search is based on the SQL “LIKE” operator. It is still possible to search for exact matches, but the possibility to search with wildcards is now introduced. For instance, “%” can be used as a substitute for zero or more characters in the title search.
Page		Int. Pagination parameter that should be used in conjunction with MaxReturnedActivities to decide what activities to be returned (e.g. MaxReturnedActivities =10 and Page=2 would return activity 21-30) Note: Always use SortCriterion along with page, to get more accurate result.
MaxReturnedActivities	-	Maximum number of activities to return. Default 100.
SortCriterion		String value, provide either: “RecnoDescending” or “RecnoAscending” to Sort the resultset by recno Note: Always use SortCriterion along with page, to get more accurate result.
Recno	Activity-Recno	Recno (unique identifier in 360) of the activity.
CaseNumber	Activity-ToActivityCase.Name	Activities connected to CaseNumber
Project	Activity-ToActivityProject	Activities connected to project. Accepts valid project number.
AccessGroup	Activity-ToAccessGroup	Activity’s access group.
Status	Activity-ActivityStatus	The status is used to tell what “Phase” an activity is in. Refer code table: Activity status in P360. Code or recno (recno:xxxx) E.g., “recno:39” or “Approved”
IncludeCustomFields		Boolean value, set true if you want additional 360° fields which are not currently included in the webservice output objects. Default value is false.

IncludePhases	Boolean value, set true if you want to return phases of progress plan. Default value is false. Data contract: ProgressPlanActivityBase
IncludeOtherActivities	Boolean value, set true if you want to return other activities connected to progress plan. Default value is false. Data contract: ProgressPlanActivityBase
IncludeDecisions	Boolean value, set true if you want to return decisions from progress plan. Default value is false. Data contract: ProgressPlanActivityBase
AdditionalListFields	Searches using additional fields list parameter – see chapter for Data Contract: AdditionalFieldListParameter for details, what kind of fields and how to use this parameter.
AdditionalFields	Searches using additional fields. See chapter for AdditionalFieldParameter for details, what kind of fields and how to use this parameter.
AdditionalRelations	Searches using custom relations between two entities: Check details “ Data Contract: AdditionalRelations ” for type of fields and how to use it.

15.4.2 Output

Data contract: [GetProgressPlanResult](#)

Output Property	360° field	Comment
Activities	-	List of ProgressPlanDetailsResult objects. See the chapter Data contract: ProgressPlanDetailsResult for details.
TotalCount	-	Total number of hits.
TotalPageCount	-	Total number of pages.
Successful	-	Will be true as long as no exception occurred during the execution. This means that successful will be true even if no private persons matching the criteria was found.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

15.5 GetHandlingActivities

This method supports fetching activity of type handling for proposition documents.

15.5.1 Input

Data contract: [GetHandlingActivityParameter](#)

Input Property	360° field	Comment
ADContextUser	-	Read Authentication and ADContextUser
Title	Activity-Description	The title search is based on the SQL “LIKE” operator. It is still possible to search for exact matches, but the possibility to search with wildcards is now introduced. For instance, “%” can be used as a substitute for zero or more characters in the title search.
Page		Int. Pagination parameter that should be used in conjunction with MaxReturnedActivities to decide what activities to be returned (e.g. MaxReturnedActivities =10 and Page=2 would return activity 21-30) Note: Always use SortCriterion along with page, to get more accurate result.
MaxReturnedActivities	-	Maximum number of activities to return. Default 100.
SortCriterion		String value, provide either: “RecnoDescending” or “RecnoAscending” to Sort the resultset by recno Note: Always use SortCriterion along with page, to get more accurate result.
Recno	Activity-Recno	Recno (unique identifier in 360) of the activity.
CaseNumber	Activity-ToActivityCase.Name	Activities connected to CaseNumber
DocumentNumber	Activity-ToHandlingDocument.DocumentNumber	Activities connected to DocumentNumber
Status	Activity-ActivityStatus	The status is used to tell what "phase" an activity is in. Refer code table: Activity status in P360. Code or recno (recno:xxx) E.g., “recno:16” or “On the Agenda”
IncludeCustomFields		Boolean value, set true if you want additional 360° fields which are not currently included in the webservice output objects. Default value is false.
AdditionalListFields		Searches using additional fields list parameter – see chapter for Data Contract: AdditionalFieldListParameter for details, what kind of fields and how to use this parameter.
AdditionalFields		Searches using additional fields. See chapter for AdditionalFieldParameter for details,

	what kind of fields and how to use this parameter.
AdditionalRelations	Searches using custom relations between two entities: Check details " Data Contract: AdditionalRelations " for type of fields and how to use it.

15.5.2 Output

Data contract: GetHandlingActivitiesResult

Output Property	360° field	Comment
Activities	-	List of HandlingActivityResult objects. See the chapter Data contract: HandlingActivityResult for details.
TotalCount	-	Total number of hits.
TotalPageCount	-	Total number of pages.
Successful	-	Will be true as long as no exception occurred during the execution. This means that successful will be true even if no private persons matching the criteria was found.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

15.6 AddHandlingActivity

This method supports adding handling type activity to proposition type document.

15.6.1 Input

Data contract: AddHandlingActivityParameter

Input Property	360° field	Comment
SequenceNumber	Activity-AT_Nr	Used in MU for sort order of handling activities in a meeting. Integer value. Like 1, 2. If not provided, then default will be set 1 for the first handling activity under document.
ActivityType	Activity-ActivityType	Activity Type. code table: Activity type. Can take recno or code. Default value: recno:8 "Board handling"
Title(*)	Activity – Description	Activity Title
ActivityTypeCategory	Activity-ActivityCategory	Activity category. code table: Activity type category Can take recno or code. Default value: recno:4 "For decision"
Notes	Activity-Notes	Activity Notes
IsRestricted	Activity- AT_Unofficial	IsRestricted Boolean value.
ActivityStatus	Activity-ActivityStatus	Activity status. code table: Activity status

		Default value= "recno:16", On the Agenda ""
Board	Activity-ToBoard	Board recno or name. Recno should be in the format "recno:xxx"
Meeting	Activity-ToBoardMeeting	Meeting recno or name. Meeting recno format. "recno:xxx"
NominatingHandling	Activity-NominatingHandling	Boolean value.
DocumentRecno (\)	Activity-ToHandlingDocument.Recno	Document recno
DocumentNumber (\)	Activity – ToHandlingDocument.DocumentNumber	Document number
DocumentExternalId (\)	Activity – ToHandlingDocument	External ID of the document this activity belongs to. Lookup is based on the combination of Id and Type. Provide only ONE of the two possible fields to ID the case. <i>Not mandatory in all archives</i>
Id	External Integration Keys – ExternalId	External id of the document.
Type	External Integration Keys - ExternalSystem	If not provided, default value "SIF WS Document" will be used. This is the type set via CreateDocument if type was not provided when importing a document.
ReferenceDocuments		List of related documents. Data contract: RelatedDocument
ResponsiblePersonIdNumber	Activity – OurRef	The external ID of the responsible person. Looks for a contact with ExternalId equal to the property input. It is only possible to set a contactperson in the same enterprise hierarchy as the ADUserContext user as responsible, and the responsible needs to be a 360° user. Provide only ONE of the four possible fields to ID responsible person.
ResponsiblePersonRecno	Activity – OurRef	Looks for a contact with Recno equal to the property input.
ResponsiblePersonEmail	Activity – OurRef	Looks for a contact with Email equal to the property input.
ResponsiblePersonUserId	Activity – OurRef	Looks for a contact with UserId (username, E.g. "no\name.name")

ResponsibleEnterpriseNumber	Activity – ToOrgUnit	The enterprise number of the responsible enterprise. Looks for a contact with ExternalID first, then for one with reference number equal to the property input. If neither this nor the ResponsibleEnterpriseRecno property is set, the responsible enterprise will be set to the responsible person's enterprise. If the responsible person is not set, the responsible enterprise will be set to the main enterprise of all the users. Provide only ONE of the two possible fields to ID responsible enterprise.
ResponsibleEnterpriseRecno	Activity – ToOrgUnit	Looks up enterprise based on recno. Must be recno of a valid enterprise. See also ResponsibleEnterpriseNumber.

15.6.2 Output

Data contract: ActivityOperationalResult

Output Property	360° field	Comment
ActivityRecno	Activity – Recno	Unique ID in 360° for the activity.
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

15.7 UpdateHandlingActivity

This method supports updating the handling type activity.

15.7.1 Input

Data contract: UpdateHandlingActivityParameter

Input Property	360° field	Comment
ActivityRecno(*)	Activity-Recno	Unique ID in 360° for the activity.
SequenceNumber	Activity-AT_Nr	Used in MU for sort order of handling activities in a meeting. Integer value. Like 1, 2
ActivityType	Activity-ActivityType	Activity Type. code table: Activity type. Can take recno or code.

Title	Activity – Description	Title
ActivityTypeCategory	Activity-ActivityCategory	Activity category. code table: Activity type category
Notes	Activity-Notes	Notes
IsRestricted	Activity- AT_Unofficial	IsRestricted Boolean value.
ActivityStatus	Activity-ActivityStatus	Activity status
Board	Activity-ToBoard	Board recno or name
Meeting	Activity-ToBoardMeeting	Meeting recno or name
NominatingHandling	Activity- NominatingHandling	Boolean value.
DocumentRecno (\)	Activity- ToHandlingDocument.Recno	Document recno
DocumentNumber (\)	Activity – ToHandlingDocument. DocumentNumber	Document number
DocumentExternalId (\)	Activity – ToHandlingDocument	External ID of the document this activity belongs to. Lookup is based on the combination of Id and Type. Provide only ONE of the two possible fields to ID the case. <i>Not mandatory in all archives</i>
Id	External Integration Keys – ExternalId	External id of the document.
Type	External Integration Keys - ExternalSystem	If not provided, default value “SIF WS Document” will be used. This is the type set via CreateDocument if type was not provided when importing a document.
ReferenceDocuments		List of related documents. Data contract: RelatedDocument
ResponsiblePersonIdNumber	Activity – OurRef	The external ID of the responsible person. Looks for a contact with ExternalId equal to the property input. It is only possible to set a contactperson in the same enterprise hierarchy as the ADUserContext user as responsible, and the responsible needs to be a 360° user. Provide only ONE of the four possible fields to ID responsible person.
ResponsiblePersonRecno	Activity – OurRef	Looks for a contact with Recno equal to the property input.

ResponsiblePersonEmail	Activity – OurRef	Looks for a contact with Email equal to the property input.
ResponsiblePersonUserId	Activity – OurRef	Looks for a contact with UserId (username, E.g. “no\name.name”)
ResponsibleEnterpriseNumber	Activity – ToOrgUnit	The enterprise number of the responsible enterprise. Looks for a contact with ExternalID first, then for one with reference number equal to the property input. If neither this nor the ResponsibleEnterpriseRecno property is set, the responsible enterprise will be set to the responsible person’s enterprise. If the responsible person is not set, the responsible enterprise will be set to the main enterprise of all the users. Provide only ONE of the two possible fields to ID responsible enterprise.
ResponsibleEnterpriseRecno	Activity – ToOrgUnit	Looks up enterprise based on recno. Must be recno of a valid enterprise. See also ResponsibleEnterpriseNumber.
SyncRelatedDocuments		If provided it synchronizes (Add, update or delete) reference documents. Default value is false, if not provided

15.7.2 Output

Data contract: ActivityOperationalResult

Output Property	360° field	Comment
ActivityRecno	Activity – Recno	Unique ID in 360° for the activity.
Successful	-	If true, everything is ok. If false, the operation failed.
ErrorMessage	-	If unsuccessful, this contains a short error message
ErrorDetails	-	If unsuccessful, this contains a full stack trace

15.8 Subcontracts

15.8.1 Data contract: WorkflowActivityResult

Output Property	360° field	Comment
Recno	Activity-Recno	Activity recno.
Title	Activity-Description	Activity title
StartDate	Activity-StartDate	Activity start date
Status	Activity-ActivityStatus	Activity status. Data contract: ActivityStatus

Type	Activity-ActivityType	Activity type. Data contract: ActivityType
ResponsiblePerson	Activity-OurRef	Activity responsible person. Data contract: ResponsibleContact
ResponsibleUnit	Activity-ToOrgUnit	Activity responsible unit. Data contract: ResponsibleCompany
Project	Activity-ToActivityProject	Project.
Case	Activity-ToActivityCase	Connected case number.
Document	Activity-ToDocument	List of document numbers
ReferenceDocument		List of referenced document numbers
AccessGroup	Activity-ToAccessGroup	Activity access group. Data contract: ActivityAccessGroupResult
Deadline	Activity-Deadline	Deadline.
Priority	Activity-ActivityPriority	The priority of an Activity.
DueDate	Activity-DeadlineDate	DeadlineDate.
Recipients	Activity-ToActivityContact	Participants connected to activity. Data contract: Recipients
CustomFields		Refer chapter Get Activity Custom Data for more details.

15.8.2 Data contract: ProgressPlanDetailsResult

Output Property	360° field	Comment
Recno	Activity-Recno	Activity recno.
Title	Activity-Description	Activity title
StartDate	Activity-StartDate	Activity start date
Status	Activity-ActivityStatus	Activity status. Data contract: ActivityStatus
Type	Activity-ActivityType	Activity type. Data contract: ActivityType
ResponsiblePerson	Activity-OurRef	Activity responsible person. Data contract: ResponsibleContact
ResponsibleUnit	Activity-ToOrgUnit	Activity responsible unit. Data contract: ResponsibleCompany
Project	Activity-ToActivityProject	Project number
Case	Activity-ToActivityCase	Connected case number
AccessGroup	Activity-ToAccessGroup	Activity access group. Data contract: ActivityAccessGroupResult
Deadline	Activity-Deadline	Deadline.
DueDate	Activity-DeadlineDate	DeadlineDate.
CustomFields		Refer chapter Get Activity Custom Data for more details.
Phases		List of Phases connected to progress plan. Data contract: ProgressPlanActivityBase
Decisions		List of Decisions connected to progress plan. Data contract: ProgressPlanActivityBase
OtherActivities		List of other activities connected to progress plan. Data contract: ProgressPlanActivityBase

15.8.3 Data contract: ProgressPlanActivityBase

Output Property	360° field	Comment
Recno	Activity-Recno	Activity recno.
Title	Activity-Description	Activity title

StartDate	Activity-StartDate	Activity start date
Status	Activity-ActivityStatus	Activity status. Data contract: ActivityStatus
Type	Activity-ActivityType	Activity type.
ResponsiblePerson	Activity-OurRef	Activity responsible person.
DeadlineDate	Activity-DeadlineDate	DeadlineDate.
WarningDate	Activity- WarningDate	WarningDate.
Comment	Activity-Comment	Comment

15.8.4 Data contract: HandlingActivityResult

Output Property	360° field	Comment
Recno	Activity-Recno	Activity recno.
Title	Activity-Description	Activity title
StartDate	Activity-StartDate	Activity start date
Status	Activity-ActivityStatus	Activity status. Data contract: ActivityStatus
Type	Activity-ActivityType	Activity type. Data contract: ActivityType
Deadline	Activity-Deadline	Deadline.
DueDate	Activity- EndDate	DueDate
Case	Activity-ToActivityCase	Connected case
Document	Activity-ToDocument	List of documents. Data contract: ActivityDocument
ReferenceDocument	Activity-ToDocument	List of reference documents. Data contract: ActivityDocument
Board		Board details. Data contract: Boards
Meeting		Meeting details. Data contract: BoardMeeting
AgendaItem		AgendaItem. code table: Activity type category
CustomFields		Refer chapter Get Activity Custom Data for more details.
AccessGroup	Activity-ToAccessGroup	Activity access group. Data contract: ActivityAccessGroupResult

15.8.5 Data contract: Board

Output Property	360° field	Comment
BoardRecno	Contact-Recno	Contact/Board recno.
BoardName	Contact-SearchName	Board name
BoardCase	Contact- ToCaseForBoardDocumentsName	Case information
BoardType	Contact-BoardType	1 = External Board, 2 = Internal Board.
BoardPeriodFrom	Contact- AT_PeriodeFrom	Board period from date
BoardPeriodTo	Contact- AT_PeriodeTo	Board period to date.

15.8.6 Data contract: BoardMeeting

Output Property	360° field	Comment
MeetingRecno	Activity-Recno	Meeting recno.
MeetingLocation	Activity-Location	Meeting location
MeetingNote	Activity-Notes	Meeting notes
MeetingTitle	Activity-Description	Meeting title
ActivityType	Activity-ActivityType	Activity type

StartDate	Activity-StartDate	Meeting start date
EndDate	Activity-EndDate	Meeting end date.

15.8.7 Data contract: ActivityDocument

Output Property	360° field	Comment
DocumentRecno	Document-Recno	Document recno.
DocumentNumber	Document-DocumentNumber	Document number
DocumentDate	Document-DocumentDate	Document date
DocumentTitle	Document-title	Document title
DocumentUnofficialTitle	Document-UnofficialTitle	Document unofficial title
DocumentRoleType	Activity-Activity.ToRole.Code	Activity connection role code
DocumentRoleTypeRecno	Activity-Activity.ToRole.Recno	Activity connection role recno.

15.8.8 Data contract: RelatedDocument

Output Property	360° field	Comment
DocumentRecno (\)	Document.Recno	Document recno
DocumentNumber (\)	Document. DocumentNumber	Document number
DocumentExternalId (\)	Document-ExternalId	External ID of the document this activity belongs to. Lookup is based on the combination of Id and Type. Provide only ONE of the two possible fields to ID the case. <i>Not mandatory in all archives</i>

15.8.9 Data contract: ActivityContactParameter

Input Property	360° field	Comment
Role (*)	ActivityContact – ToRole	The contact's role for the specific activity. Can be code or recno. E.g. Role = "Participant". The possible roles may be restricted based on the activity type category.
ReferenceNumber (\)	ActivityContact – ToContact - Referencenumber	The identification number of the contact. This is PersonalIdNumber for private persons and EnterpriseNumber for enterprises. Use either this field OR the ExternalId-field. If this contact doesn't have a reference number, the format will be "recno:xxxx". Note:

		If passing ReferenceNumber → Use this for private persons and enterprises. If passing Recno → Can be used for all contact domains.
ExternalId (V)	ActivityContact – ToContact – ExternalID	The identification number of the contact. This is ExternalId for contact persons, private persons and enterprises. Use either this field OR the ReferenceNumber-field. If this contact doesn't have an external id, the format will be "recno:xxxx" Note: Can be used for all contact domains.
CopyRecipients		Copy recipients for the activity.
Role	ActivityContact – ToRole	
ReferenceNumber	ActivityContact – ToContact - Referencenumber	
ExternalId	ActivityContact – ToContact – ExternalID	

15.8.10 Data contract: ActivityType

Output Property	360° field	Comment
Recno	Code table: Activity type – Recno	Unique id in 360°
Code	Code table: Activity type – Code	Activity type code.
Description	Code table: Activity type – Description	Activity type description

15.8.11 Data contract: ActivityStatus

Output Property	360° field	Comment
Recno	Code table: Activity status – Recno	Unique id in 360°
Code	Code table: Activity status – Code	Activity status code.
Description	Code table: Activity status – Description	Activity status description

15.8.12 Data contract: ActivityPriority

Output Property	360° field	Comment
Recno	Code table: Activity priority – Recno	Unique id in 360°
Code	Code table: Activity priority – Code	Activity priority code.
Description	Code table: Activity priority – Description	Activity priority description

15.8.13 Data contract: ActivityAccessGroupResult

Output Property	360° field	Comment
Recno	AccessGroup – Recno	Unique id in 360°
Code	AccessGroup – Code	AccessGroup code.
Description	AccessGroup – Description	AccessGroup description

15.8.14 Data contract: Recipients

Output Property	360° field	Comment
ContactRecno	ActivityContact –ToContactperson.Recno	Contact recno in 360°
Role	ActivityContact-ToRole	Activity contact role
ReferenceNumber	ActivityContact-ToContactperson.Referencenumber	Contact referencenumber
ExternalId	ActivityContact-ToContactperson.ExternalId	Contact externalId
DueDate	ActivityContact-DueDate	The Due Date of the recipient of a Document.
ConatctName	ActivityContact.ToContactperson.Searchname	Contact’s search name
ConatctEnterpriseName	ActivityContact-ToContactperson.ToEmployer.Searchname	Contact’s employer search name
Notes	ActivityContact-Notes	Notes
ActivityStatus	ActivityContact-ToActivity.ActivityStatus	Status
DistributionGroupName	ActivityContact-ToDistributionGroup	Connection to persisted distribution group
DistributionGroupRecno	ActivityContact-ToDistributionGroup	Connection to persisted distribution group

15.8.15 Data contract: ResponsibleContact

Output Property	360° field	Comment
Recno	Contact – Recno	Unique 360° database id field
UserId	User – UserID	Username, e.g. “domain\360.admin”
ExternalId	Contact – ExternalId	ExternalId
Name	Contact – SearchName	Name
Email	Contact – E-mail	Email address
Referencenumber	Contact-Referencenumber	Referencenumber

15.8.16 Data contract: ResponsibleCompany

Output Property	360° field	Comment
Recno	Contact – Recno	Unique 360° database id field
ReferenceNumber	Contact – Referencenumber	EnterpriseNumber for enterprises.
ExternalId	Contact – ExternalId	ExternalId.
Name	Contact – SearchName	Name.
Email	Contact – E-mail	Email address.

15.8.17 Data contract: ActivityDocument

Output Property	360° field	Comment
DocumentRecno	Document – Recno	Unique 360° database id field of document
DocumentNumber	Document – Documentnumber	Document number
DocumentDate	Document – DocumentDate	Document date

DocumentRoleType	Activity-Document role	Activity- document connection role code. code table: Activity - Activity role
DocumentRoleTypeRecno	Activity-Document role recno	Activity- document connection role recno. code table: Activity - Activity role
DocumentTitle	Document-Description	Document title
DocumentUnofficialTitle	Document-UnofficialTitle	Document UnofficialTitle

16 Ping methods

Each service endpoint has a Ping() method that can be used to test that you have access to the service, that it is correctly installed, and that your user has at least read permissions to 360°. If it returns without throwing an exception, everything is ok.

17 Code Table - common values

360° stores much of its configuration in Code Tables and Code Table values. These values are database rows that defines what values can be used as metadata for entities 360°. An example is Code Table: Document status, which is a list of all possible document statuses allowed and metadata related to that status.

Consider the case of document status. Customers with a standard 360° installation usually have the same possible document statuses. However, some do not, and that is why we do not supplement an enum of available values. Some code table values is also different based on which country the customer is located in – e.g. Denmark may have different case types than Finland. So, any third party that integrates with 360° should verify what values can be used.

When calling a service method with an input that reference one of these code table values, you can do two things:

- Input "recno:[recno_from_code_table]". Example "recno:6".
- Sometimes only using the recno may work. Example "6". But prefixing it with recno is recommended.
- Input "[code_from_code_table]": Example: "J".

Be warned, valid codes vary by configured web.config value for key SI.Data.BL.LanCode. Since code tables are localized with different code values for each language, it's important to use codes from the right language. The default language for the SIF SOAP web service is Norwegian.

17.1 Case Status

Valid codes vary by configured web.config value for key SI.Data.BL.LanCode.

Recno	Code	Description NOR	Description ENG
4	R	Reservert	Reserved
5	B	Under behandling	In process
6	A	Avsluttet	Closed
7	X	Ikke gjenstand for oppfølging	No follow-up
8	U	Utgår	Cancelled
9	KU	Kopiert utdrag	Copied extract
17	AS	Avsluttet av saksbehandler	Closed by Caseworker

17.2 Document Status

Valid codes vary by configured web.config value for key SI.Data.BL.LanCode.

Recno	Code	Description NOR	Description ENG
1	R	Reservert	Reserved
2	M	Midlertidig journalført	Preliminary recorded
3	S	Registrert av ansvarlig person/leder	Registered by responsible person
4	F	Ferdig fra ansvarlig person/leder	Finished by responsible person
5	E	Ekspedert	Dispatched
6	J	Journalført	Officially recorded
7	A	Registrering avsluttet	Registration completed
8	U	Utgår	Cancelled
9	T	Til godkjenning	In approval process
10	G	Godkjent	Approved
11	I	Ikke godkjent	Not approved
12	K	Til kommentering	For review

17.3 Document Category

Recno	Code NOR	Code ENG
110	Dokument inn	Incoming document
111	Dokument ut	Outbound document
112	Referat	Minutes
113	Internt notat med oppfølging	Internal memo with follow-up
114	E-post inn	Incoming e-mail
115	E-post ut	Outbound e-mail
116	Innkommende fax	Incoming faxes
117	Utgående fax	Outbound fax
118	Møteinnkalling	Meeting summons
120	Håndbok	User guide
121	Instruks	Instructions
122	Prosedyre	Procedure
123	Skjema	Form
124	Plan	Plan
125	Kontrakt	Contract
127	Innsynsbegjæringsdokument	Request for access document
216	Kampanjemal	Campaign Template
217	Kampanje eksport	Campaign Export
218	Saksfremlegg/innstilling	Proposition
60005	Internt notat uten oppfølging	Internal memo without follow-up
60006	Vedtak	Decision
95507	Presentasjon	Presentation
95509	Personalhåndbok	Personnell handbook
95514	Rammeavtale	Frame agreement
95515	Support og vedlikeholdsavtale	Support and maintenance agreement
95516	Leieavtale	Rental agreement
95517	Driftsavtale	Operating agreement
95518	Inkøpsavtale	Purchase agreement
95519	Assistanseavtale	Assistance agreement
95520	Oppdragsavtale	Assignment agreement
95524	Intensjonsavtale	Letter of intent
95525	Oppdragsbeskrivelse	Assignment description

17.4 Document Contact Role (Activity - Contact role)

Recno	Code NOR	Code ENG
1	Kontakt	Contact
2	Kunde	Customer
3	Deltaker	Participant
4	Ressurs	Resource
5	Avsender	Sender
6	Mottaker	Recipient
7	Medavsender	Co-sender
8	Kopi til	Carbon copy
9	Godkjenningsinstans	Approval authority
10	Ekstern deltaker	External participant
11	Behandles i	Handled in
20	Blindkopi	Blind Carbon Copy
30	Rådgiver	Advisor
31	Leverandør	Vendor
33	Medforfatter	Co-writer
34	Bestiller	Orderer
35	Datafølgessedel saksparter	Data consignment note case parties
95501	Godkjenner	Approver
95502	Revisjonsansvarlig	Revision responsible

17.5 Version Status

Recno	Code	Description NOR	Description ENG
1	H	Behandles	Handled
2	F	Ferdig	Finished
100	In progress	Under arbeid	In progress
101	Completed	Ferdigstilt	Completed
104	Void	Utgått	Void
110	For approval	Under godkjenning	For approval
111	Approved	Godkjent	Approved
112	In revision	Under revidering	In revision
50000	Approved	Godkjent	Approved
50001	Not Approved	Ikke godkjent	Not Approved
50002	In approval process	Til godkjenning	In approval process

18 Support for Default Values

This functionality enables SIF to have set of defined values for Case and Documents entities, which are used to create case and document with those values as default if not passed.

18.1 Brief about Default values and its related tables in 360:

18.1.1 What is Default value?

A default value refers to the pre-existing value of a user-configurable setting that is assigned to a software application.

They are standard values that are universal to an instance and intended to make entity as accessible as possible "out of the box" without necessitating a lengthy configuration process prior to use.

The user add/update default values according to their personal preferences.

18.1.2 Why it is required?


It will make things simpler for the consumer to use the system. User don't have to enter repetitive values every time.

User don't have any idea about internal structure of data in 360, so default value makes his life easy if he has these default value sets configured in system by integration systems or by someone for him.

Once we set the values using default value it will get automatic populate to the forms or in integrations. No need to enter again and again. It will save time and makes the system more user friendly.

18.1.3 Code table structure:

This default value sets are structured in a hierarchy as defined below.

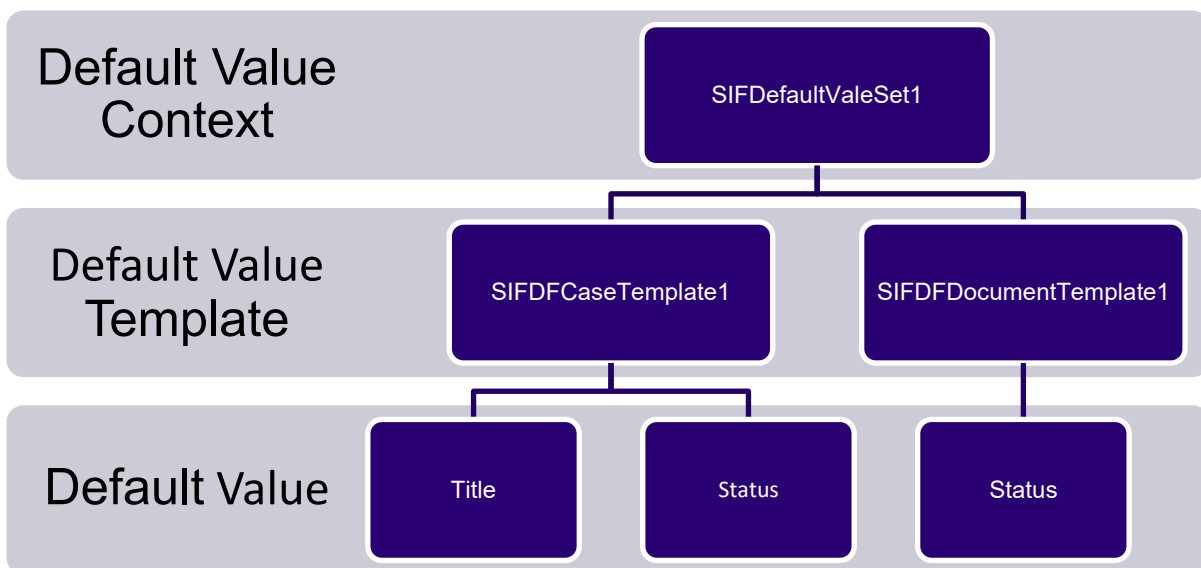

First, we should create default value context, then we can create default value template related to default value context after this we can create default values related to specific templates.

A single default value context can be associated to multiple templates.

A single template can be associated to multiple default values.

The following code tables are used, listed in hierarchically order:

- Code Table: DefaultContext: Top node. Consider this as a name of the Set.
- Code Table: DefaultValueTemplate: Template that all default values are connected.
- Code Table: DefaultValue: One row here equals one default value to an object.

18.2 Usage of Default values:

SIF uses Default Value Context and its values to set these values to input parameters for CreateCaseParameter or CreateDocumentParameter.

To use this feature, we need set name of Default Value Context to CreateCaseParameter or CreateDocumentParameter property named as 'DefaultValueSet'. Once this property is set with default value context name, the DefaultValueApplier in SIF validates properties of input parameter with Default value set and updates those values for respective properties which are null or empty. You must then call the API in the usual way.

18.3 Creating new Default Value sets

You can configure these sets by mmc 360 Red admin UI.

There is an alternate to MMC 360 Red admin which is present under Web Admin configuration menu, this configuration UI (**Default values configuration - Web Admin UI**) under Web Admin configuration menu can be used to manage Default Value sets and its values.

This 'Default values configuration - Web Admin UI' is not installed as part of the Public 360 or SIF API setup, but rather as a separate installation.

18.4 Example:


Following example illustrate configuring default value set and pass default value set to SIF CreateCaseParameter.

18.4.1 Configure Default Value Context:

In the Default value context table 'MyDefaultValueSet1' is a SIF default value context. Here we can define as many as default value sets we want for.

Code (The ID of the Context)	Description (Description of who uses the Default Value Sets in this context)
SIFDefaultValueSet1	This is an SIF default value context

This is how it looks in Web Admin UI,

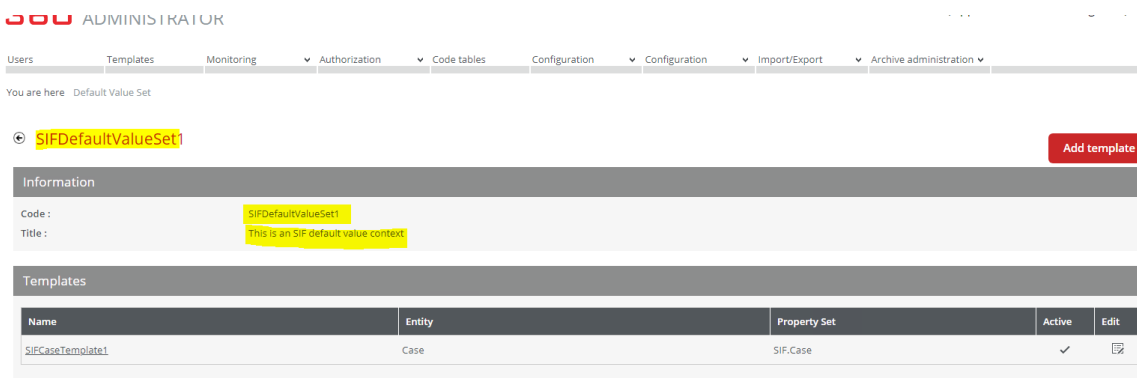


18.4.2 Configure Default Value Template:

In the Default Value Template table 'MyCaseTemplate1' is a template for Case Entity.

Here we can have more than one templates defined for 'MyDefaultValueSet1' or for other default value sets.

Name (Unique name of the Template)	Entity (The entity to which default value set will be applied)	Description (Description for Template)	ToContexts (Reference to the Default Value Context)
SIFCaseTemplate1	Case	This is SIF case template	SIFDefaultValueSet1

This is how it looks in Web Admin UI,

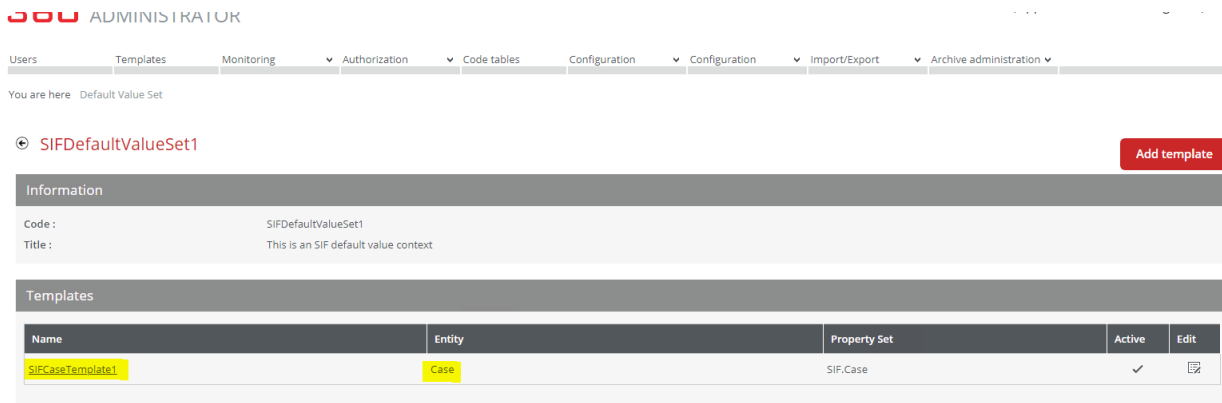

Name	Entity	Property Set	Active	Edit
SIFCaseTemplate1	Case	SIF.Case	✓	

18.4.3 Configure Default Values:

The Default value you want to set to a given property of an entity. Here we can have more than one default values defined for 'MyCaseTemplate1' or for other default value templates.

SIF support single value and multi value properties of objects.

We can configure multi value properties with two different ways.

- 1) Treating multi value property as single value and store its default value as whole in the form of json string.
- 2) Defining set of values for each sub properties of a multi value property, using dot (.) separator.

To configure multi value properties you can use any one way out of these 2.

Below code table is example of single value properties of Case entity.

Key (Property name of an entity)	Value (Value for the property)	Description (Description for default value)	ToTemplate (Reference to Default Value Template)
Title	This is my Case	Official Title for Case	SIFCaseTemplate1
SubArchive	60001	Sub Archive for Case	SIFCaseTemplate1
Status	5	Case Status	SIFCaseTemplate1

Below code table is example of multi value properties in json format of Case entity value.

Key (Property name of an entity)	Value (Value for the property)	Description (Description for default value)	ToTemplate (Reference to Default Value Template)
ArchiveCodes	[{'Sort': 1, 'ArchiveCode': '00', 'ArchiveType': '60001', 'IsManualText': false}, {'Sort': 2, 'ArchiveCode': '10', 'ArchiveType': '60001', 'IsManualText': false}, {'Sort': 3, 'ArchiveCode': '1', 'ArchiveType': '60001', 'IsManualText': false}]	Case Archive Codes	SIFCaseTemplate1
AdditionalFields	[{"name": "CreatedDate", "value": "1/22/2019 7:18:29 AM"}, {"name": "CF_Key", "value": "SYSTEMID WHOA"}, {"name": "ImportedCNumber", "value": "importedtCNum"}]	Additional Fields for case	SIFCaseTemplate1

Below code table is example of multi value properties in dot (.) separator format of Case entity value.

Key (Property name of an entity)	Value (Value for the property)	Description (Description for default value)	ToTemplate (Reference to Default Value Template)
ArchiveCodes.1.Sort	1	Case Archive Code 1	SIFCaseTemplate1
ArchiveCodes.1.ArchiveCode	00	Case Archive Code 1	SIFCaseTemplate1
ArchiveCodes.1.ArchiveType	60001	Case Archive Code 1	SIFCaseTemplate1
ArchiveCodes.2.IsManualText	false	Case Archive Code 1	SIFCaseTemplate1
ArchiveCodes.2.Sort	2	Case Archive Code 2	SIFCaseTemplate1
ArchiveCodes.2.ArchiveCode	10	Case Archive Code 2	SIFCaseTemplate1
ArchiveCodes.2.ArchiveType	60001	Case Archive Code 2	SIFCaseTemplate1

ArchiveCodes.2.IsManualText	false	Case Archive Code 2	SIFCaseTemplate1
ArchiveCodes.3.Sort	3	Case Archive Code 3	SIFCaseTemplate1
ArchiveCodes.3.ArchiveCode	1	Case Archive Code 3	SIFCaseTemplate1
ArchiveCodes.3.ArchiveType	60001	Case Archive Code 3	SIFCaseTemplate1
ArchiveCodes.3.IsManualText	false	Case Archive Code 3	SIFCaseTemplate1
AdditionalFields.1.Name	CreatedDate	Case Additional Field Name 1	SIFCaseTemplate1
AdditionalFields.1.Value	1/22/2019 7:18:29 AM	Case Additional Field Value 1	SIFCaseTemplate1
AdditionalFields.2.Name	CF_Key	Case Additional Field Name 2	SIFCaseTemplate1
AdditionalFields.2.Value	SYSTEMID WHOA	Case Additional Field Value 2	SIFCaseTemplate1
AdditionalFields.3.Name	ImportedCNumber	Case Additional Field Name 3	SIFCaseTemplate1
AdditionalFields.3.Value	importedtCNum	Case Additional Field Value 3	SIFCaseTemplate1

This is how it looks in Web Admin UI,

Configuration	
Case title :	This is my Case
Case status :	In progress
SubArchive :	Case archive
Classcode 1 sort :	1
Classcode 1 archive type :	Emneorientert arkivnøkkel
Classcode 1 is manual :	False
Classcode 1 archive code :	00 - Organisasjon og administrasjon generelt
Classcode 2 sort :	2
Classcode 2 archive type :	Emneorientert arkivnøkkel
Classcode 2 is manual text :	False
Classcode 2 archive code :	10 - Økonomi generelt
Classcode 3 sort :	3
Classcode 3 archive type :	Emneorientert arkivnøkkel
Classcode 3 is manual text :	False
Classcode 3 archive code :	1 - Økonomi
Case Additional Field Name 1 :	CreatedDate
Case Additional Field Value 1 :	1/22/2019 7:18:29 AM
Case Additional Field Name 2 :	CF_Key
Case Additional Field Value 2 :	SYSTEMID WHOA
Case Additional Field Value 3 :	ImportedTCNum

18.4.4 CreateCaseParameter with Default Value Set:

Based on above default value set and its value configurations we just need set 'DefaultValueSet' property of CreateCaseParameter to 'MyDefaultValueSet1'.

Below is the example from WS/SOAP service request for create case,

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:si="http://software-innovation.com/SI.Data" xmlns:arr="http://schemas.microsoft.com/2003/10/Serialization/Arrays">
```

```
<soapenv:Header/>
```

```
<soapenv:Body>
```

```
<si:CreateCase>
```

```
<!--Optional:-->
```

```
<si:parameter>
```

```
<!--Optional:-->
```

```
<si:ADContextUser?></si:ADContextUser>
```

```
<!--Optional:-->
```

```
<si:AccessCode?></si:AccessCode>
```

```
<!--Optional:-->
```

```
<si:AccessGroup?></si:AccessGroup>
```

```
<!--Optional:-->
```

```
<si:AdditionalFields>
```

```
<!--Zero or more repetitions:-->
```

```
<si:AdditionalFieldParameter>
```

```
<!--Optional:-->
```

```
<si:Name?></si:Name>
```

```
<!--Optional:-->
```

```
<si:Value?></si:Value>
```

```
</si:AdditionalFieldParameter>
```

```
</si:AdditionalFields>
```

```
<!--Optional:-->
```

```
<si:ArchiveCodes>
```

```
<!--Zero or more repetitions:-->
```

```
<si:ClassCodeParameter>
```

```
<!--Optional:-->
```

```
<si:ArchiveCode?></si:ArchiveCode>
```

```
<!--Optional:-->
```

```
<si:ArchiveType?></si:ArchiveType>
```

```
<!--Optional:-->
```

```
<si:IsManualText?></si:IsManualText>
```

```

<!--Optional:-->
<si:Sort?></si:Sort>
</si:ClassCodeParameter>
</si:ArchiveCodes>
<!--Optional:-->
<si:Category?></si:Category>
<!--Optional:-->
<si:Contacts>
  <!--Zero or more repetitions:-->
  <si:CaseContactParameter>
    <!--Optional:-->
    <si:ContactId?></si:ContactId>
    <!--Optional:-->
    <si:ExternalId?></si:ExternalId>
    <!--Optional:-->
    <si:IsUnofficial?></si:IsUnofficial>
    <!--Optional:-->
    <si:ReferenceNumber?></si:ReferenceNumber>
    <!--Optional:-->
    <si:Role?></si:Role>
  </si:CaseContactParameter>
</si:Contacts>
<!--Optional:-->
<si:ExternalId>
  <!--Optional:-->
  <si:Id?></si:Id>
  <!--Optional:-->
  <si:Type?></si:Type>
</si:ExternalId>
<!--Optional:-->
<si:FiledOnPaper?></si:FiledOnPaper>
<!--Optional:-->
<si:JournalUnit?></si:JournalUnit>
<!--Optional:-->
<si:Keywords>
  <!--Zero or more repetitions:-->
  <arr:string?></arr:string>
</si:Keywords>
<!--Optional:-->
<si:Notes?></si:Notes>
<!--Optional:-->
<si:Paragraph?></si:Paragraph>
<!--Optional:-->
<si:Project?></si:Project>
<!--Optional:-->
<si:ReferringCases>
  <!--Zero or more repetitions:-->
  <arr:string?></arr:string>
</si:ReferringCases>
<!--Optional:-->
<si:Remarks>
  <!--Zero or more repetitions:-->
  <si:Remark>
    <!--Optional:-->
    <si:Content?></si:Content>
    <!--Optional:-->
    <si:RemarkType?></si:RemarkType>
  </si:Remark>
</si:Remarks>

```

```

<!--Optional:-->
<si:Title?</si:Title>
</si:Remark>
</si:Remarks>
<!--Optional:-->
<si:ResponsibleEnterpriseNumber?</si:ResponsibleEnterpriseNumber>
<!--Optional:-->
<si:ResponsibleEnterpriseRecno?</si:ResponsibleEnterpriseRecno>
<!--Optional:-->
<si:ResponsiblePersonEmail?</si:ResponsiblePersonEmail>
<!--Optional:-->
<si:ResponsiblePersonIdNumber?</si:ResponsiblePersonIdNumber>
<!--Optional:-->
<si:ResponsiblePersonRecno?</si:ResponsiblePersonRecno>
<!--Optional:-->
<si:ResponsiblePersonUserId?</si:ResponsiblePersonUserId>
<!--Optional:-->
<si:ScrapCode?</si:ScrapCode>
<!--Optional:-->
<si:StartDate?</si:StartDate>
<!--Optional:-->
<si:Status?</si:Status>
<!--Optional:-->
<si:SubArchive?</si:SubArchive>
<!--Optional:-->
<si:Title?</si:Title>
<!--Optional:-->
<si:UnofficialTitle?</si:UnofficialTitle>
<!--Optional:-->
<si:UnregisteredContacts>
  <!--Zero or more repetitions:-->
  <si:UnregisteredCaseContactParameter>
    <!--Optional:-->
    <si:Address?</si:Address>
    <!--Optional:-->
    <si:ContactCompanyName?</si:ContactCompanyName>
    <!--Optional:-->
    <si:ContactName?</si:ContactName>
    <!--Optional:-->
    <si:Country?</si:Country>
    <!--Optional:-->
    <si:Email?</si:Email>
    <!--Optional:-->
    <si:IsUnofficial?</si:IsUnofficial>
    <!--Optional:-->
    <si:MobilePhone?</si:MobilePhone>
    <!--Optional:-->
    <si:Phone?</si:Phone>
    <!--Optional:-->
    <si:ReferenceNumber?</si:ReferenceNumber>
    <!--Optional:-->
    <si:Role?</si:Role>
    <!--Optional:-->
    <si:State?</si:State>
    <!--Optional:-->
    <si:ZipCode?</si:ZipCode>
    <!--Optional:-->

```

```

        <si:ZipPlace?></si:ZipPlace>
    </si:UnregisteredCaseContactParameter>
</si:UnregisteredContacts>
<!--Optional:-->
<si:Estates>
    <!--Zero or more repetitions:-->
    <si:CaseEstateParameter>
        <!--Optional:-->
        <si:ExternalId?></si:ExternalId>
        <!--Optional:-->
        <si:Recno?></si:Recno>
    </si:CaseEstateParameter>
</si:Estates>
<!--Optional:-->
<si:CaseType?></si:CaseType>
<!--Optional:-->
<si:ClosedDate?></si:ClosedDate>
<!--Optional:-->
<si:DefaultValueSet>MyDefaultValueSet1</si:DefaultValueSet>
</si:parameter>
</si>CreateCase>
</soapenv:Body>

</soapenv:Envelope>

```

Below is the example from RPC service request for create case in json format,

```

{
    "parameter":
    {
        "DefaultValueSet": " MyDefaultValueSet1"
    }
}

```

18.5 Limitations:

For now, SIF only support Creating case and Creating document with default value set.

19 Generic SIF Settings


We have configuration settings which are useful for SIF operation some of them are present in web.config file and some of them on 360 web admin setting. In future we have a plan to move all settings in one place i.e 360 web admin.

1. Web config settings
2. 360 web admin settings


19.1 Web config settings

- a. If you are using **SIF WS service**, then you need to add/modify these settings under sif web config file.

Open the IIS, then select SI360 Application Support_360_INST01(in your case the application name may be different) → SI.WS.Core → SIF → Explore

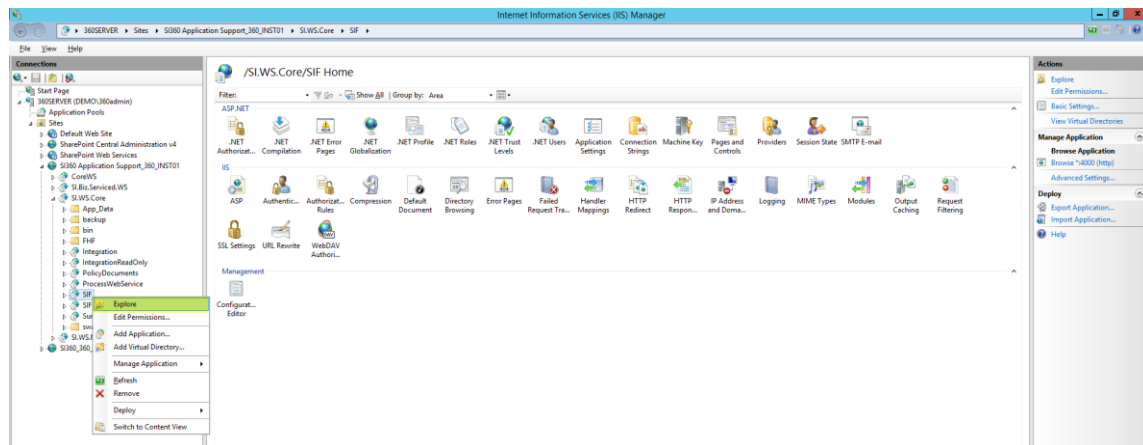


Select the “Web.config” file and open it in any editor, so we can modify the setting

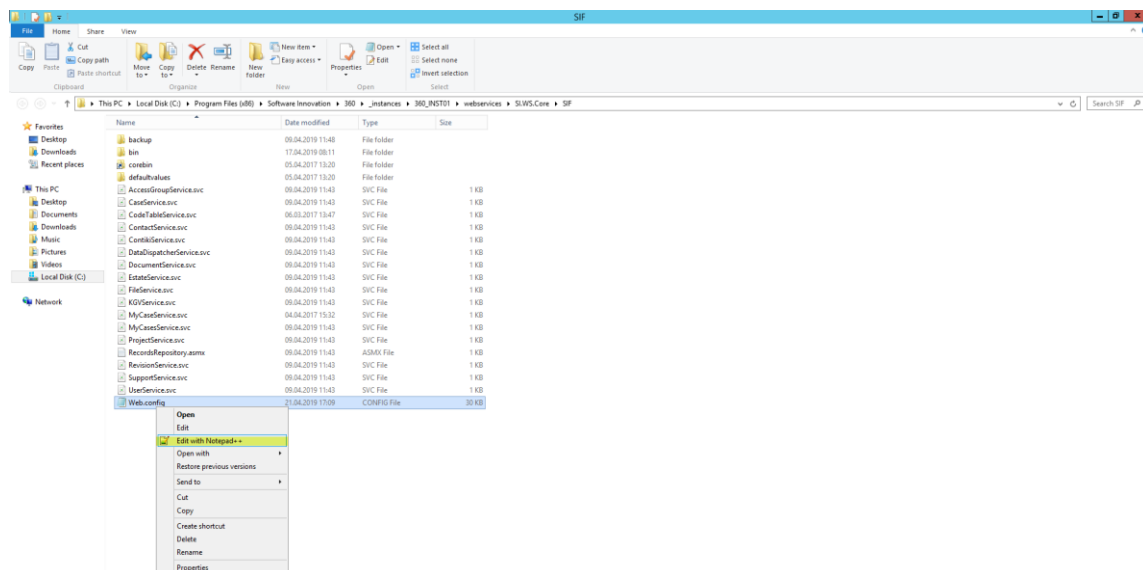


- b. If you are using **SIF REST**, then you need to add/modify these settings under sif rest web config file.

Open the IIS, then select SI360 Application Support_360_INST01(in your case the application name may be different) → SI.WS.Core → SIFREST → Explore

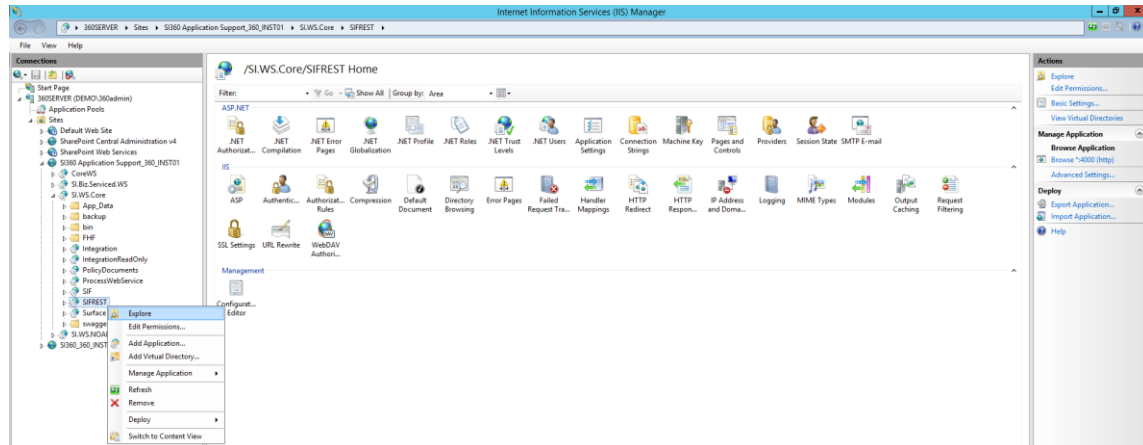


Select the “Web.config” file and open it in any editor, so we can modify the setting

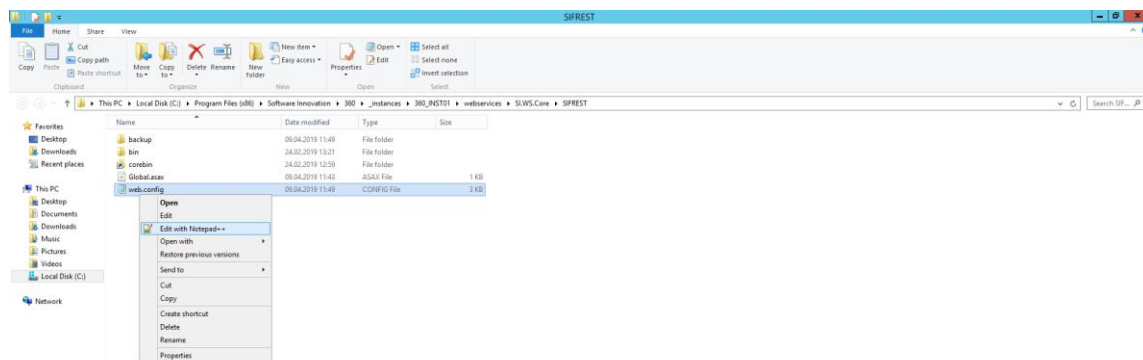


- c. If you are using **SIF RPC**, then you need to add/modify these settings under SI.WS.Core web config file.

Open the IIS, then select SI360 Application Support_360_INST01(in your case the application name may be different) → SI.WS.Core → Explore

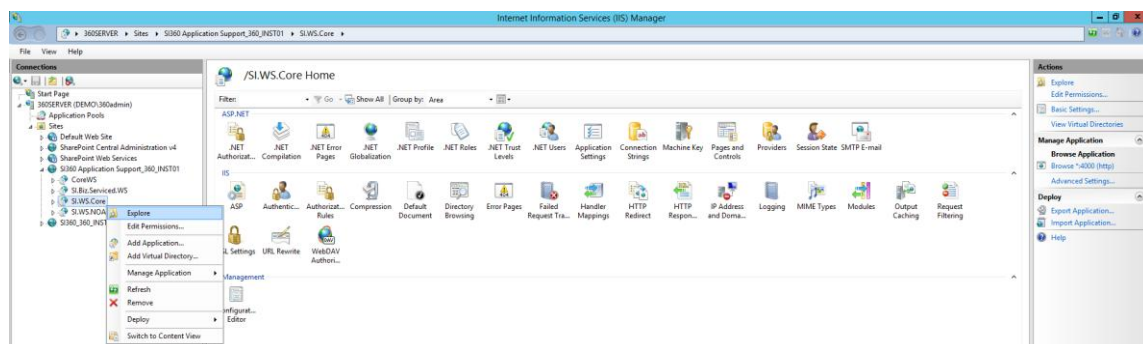

Select the “Web.config” file and open it in any editor, so we can modify the setting

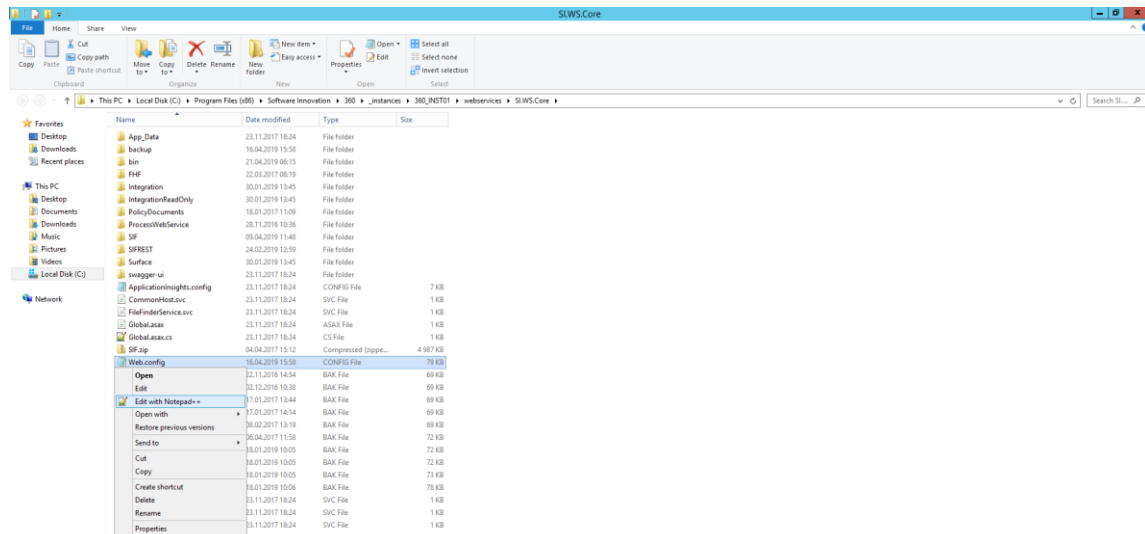

19.1.1 SI.Data.SkipValidateResponsible

We have an app setting `SI.Data.SkipValidateResponsible` which is default set to false. It validates that the integration user is in the same organisation that the responsible org unit and person is on the case or document that is being created.

The error message when it doesn't validate is: "Problem with validation: Contactperson with ID: recno:XX does not belong in the same top organisation as OrgUnit with ID: recno:XXX"

How to change setting `SI.Data.SkipValidateResponsible`:

Please refer the points a, b and c in chapter [17.1](#) for how to find location of web.config file

If the setting is not present then you can also add the below setting as per your requirement for SIF WS, REST or RPC else you can update the value either **true** or **false** then just save the file.

```
<add key="SI.Data.SkipValidateResponsible" value="true" />
```

19.1.2 SI.Data.WS.ValidateContactId

We have an app setting `SI.Data.WS.ValidateContactId` which is default set to false. It validates the ContactId as follows: -

PersonalIdNumber of PrivatePerson: -

The error message when it validates the PersonalIdNumber: "The field PrivatePersonIdNumber must be a number with a minimum length of 11 and a maximum length of 11. It also has to pass mod11 validation"

EnterpriseNumber of Enterprise: -

The error message when it validates the EnterpriseNumber: "The field EnterpriseNumber must be a number with a minimum length of 9 and a maximum length of 9. It also has to pass mod11 validation"

How to change setting `SI.Data.WS.ValidateContactId`:

Please refer the points a, b and c in chapter [17.1](#) for how to find location of web.config file

If the setting is not present then you can also add the below setting as per your requirement for SIF WS, REST or RPC else you can update the value either **true** or **false** then just save the file.

```
<add key="SI.Data.WS.ValidateContactId" value="false" />
```

19.1.3 SI.Data.WS.MaxExceptionLength

We have an app setting SI.Data.WS.MaxExceptionLength which is default set to 8000. It is used in to set the max length for SIF error message and error details.

How to change setting SI.Data.WS.MaxExceptionLength:

Please refer the points a, b and c in chapter [17.1](#) for how to find location of web.config file

If the setting is not present then you can also add the below setting as per your requirement for SIF WS, REST or RPC else you can update the value then just save the file.

```
<add key="SI.Data.WS.MaxExceptionLength" value="10000" />
```

19.1.4 SI.Data.BL.UserName

We have an app setting SI.Data.BL.UserName which is useful to run the SIF operation based on this user. This key is not present by default, but you can add it in web config file as per the requirement.

How to change setting SI.Data.BL.UserName:

Please refer the points a, b and c in chapter [17.1](#) for how to find location of web.config file


If the setting is not present then you can also add the below setting as per your requirement for SIF WS, REST or RPC else you can update the value then just save the file.

```
<add key="SI.Data.BL.UserName" value="demo\360admin" />
```

19.2 360 Web admin settings

These are the settings which are supported for all **SIF WS, REST** and **RPC**. All these settings are added through SIF setup if the settings are not found then you need to install the latest SIF package. If you want to modify these settings, then refer the following steps:


Open the 360 Administrator then select **“Configuration”** → **“Settings”** as shown in following screenshot.

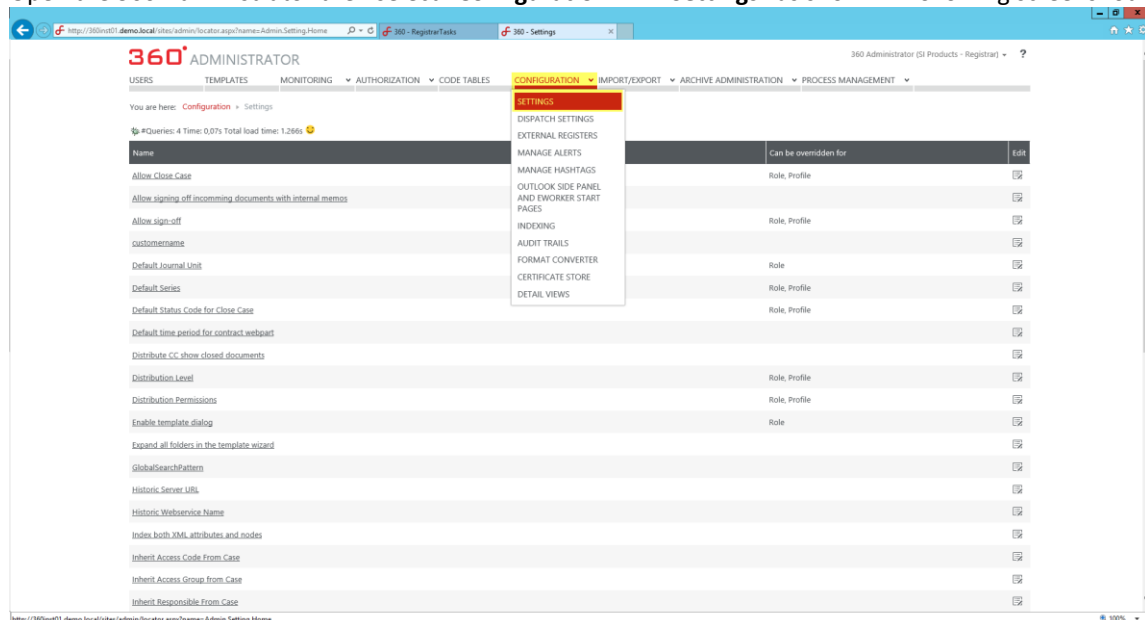

Now select the respective setting then click on **Edit** after that provide the value for that setting, then just click on **Save** button. Likewise, you can modify the setting value.

One more step here required that whenever we update the setting value then we must need to refresh the cache from 360, otherwise the updated setting value will not be reflected.

Just go to the **Monitoring → Cache Refresh** then click on **Referesh system cache** and **Refresh all user sessions**

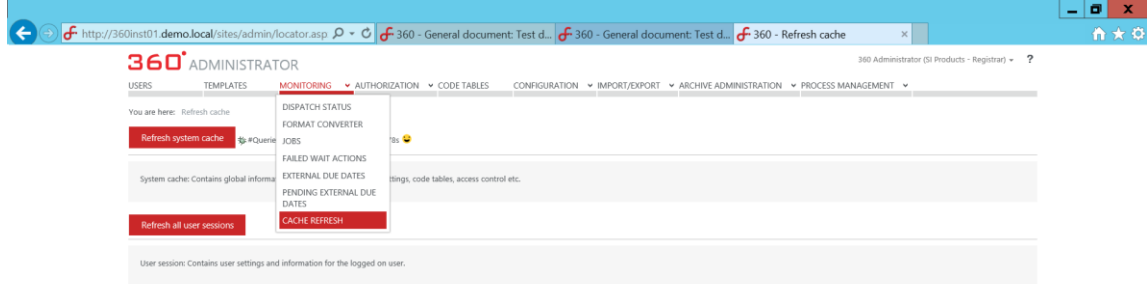


19.2.1 SIF BL Lan Code


We have 360 web admin setting for “**LanCode**” i.e “**SIF BL Lan Code**” valid codes vary by setting the value for key SIF BL Lan Code. Since code tables are localized with different code values for each language, it’s important to use codes from the right language. The default language for the SIF is Norwegian.

How to change setting SIF BL Lan Code:


Select the setting **SIF BL Lan Code** as shown below:

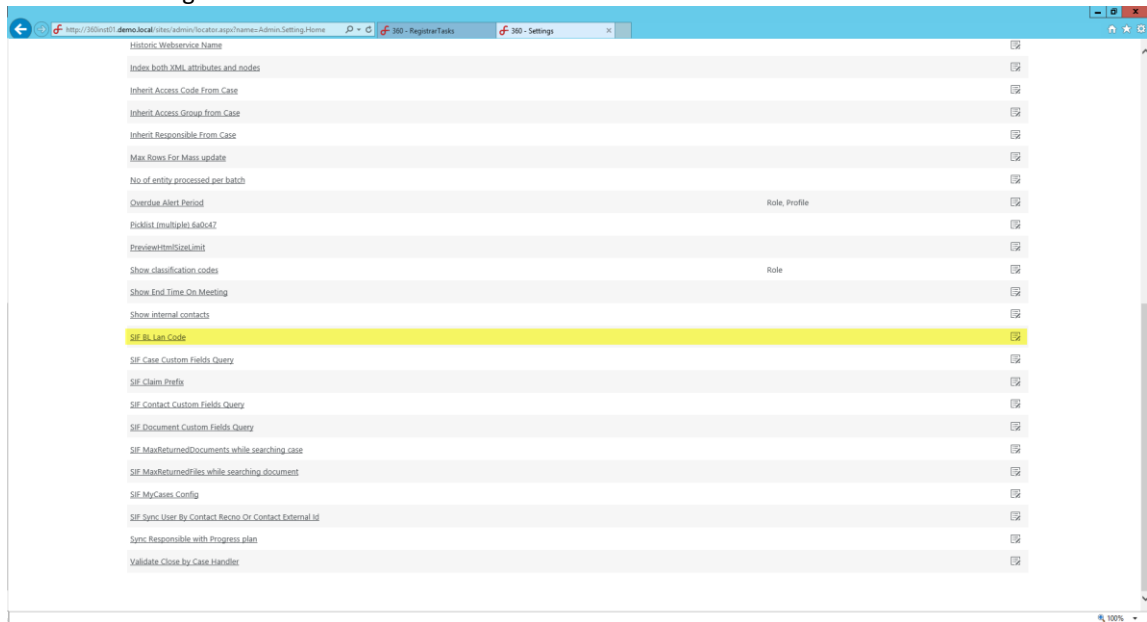

Now you can provide the lan code just click on **Edit** button

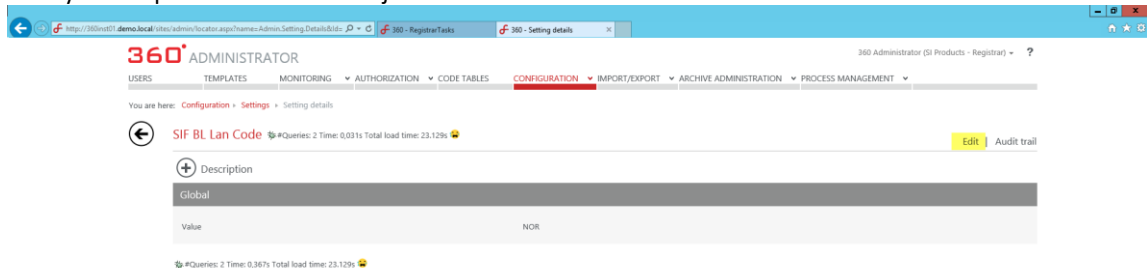

After that just click on **Save** button.

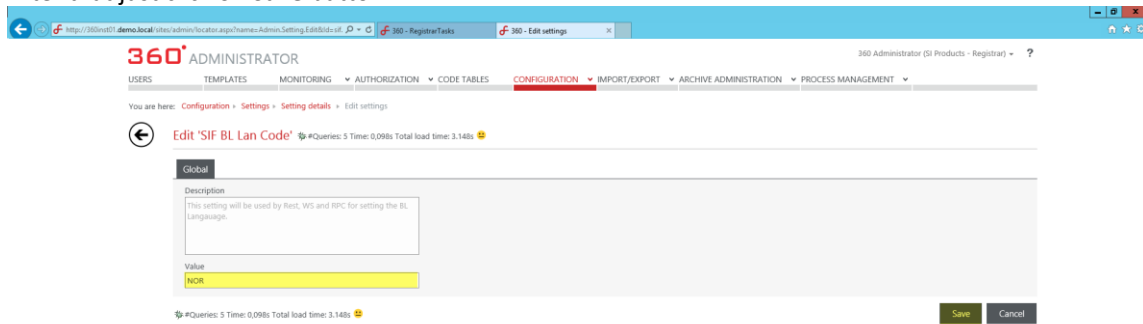


19.2.2 SIF Claim Prefix


We have 360 web admin setting for claim user prefix i.e. "**SIF Claim Prefix**" which is useful to set the user claim prefix. Whatever value we put for this setting that will sets for user claim prefix (us_prefix in us_user table). The default value for this setting is null or empty.

How to change setting SIF Claim Prefix:


Select the setting **SIF Claim Prefix** as shown below:

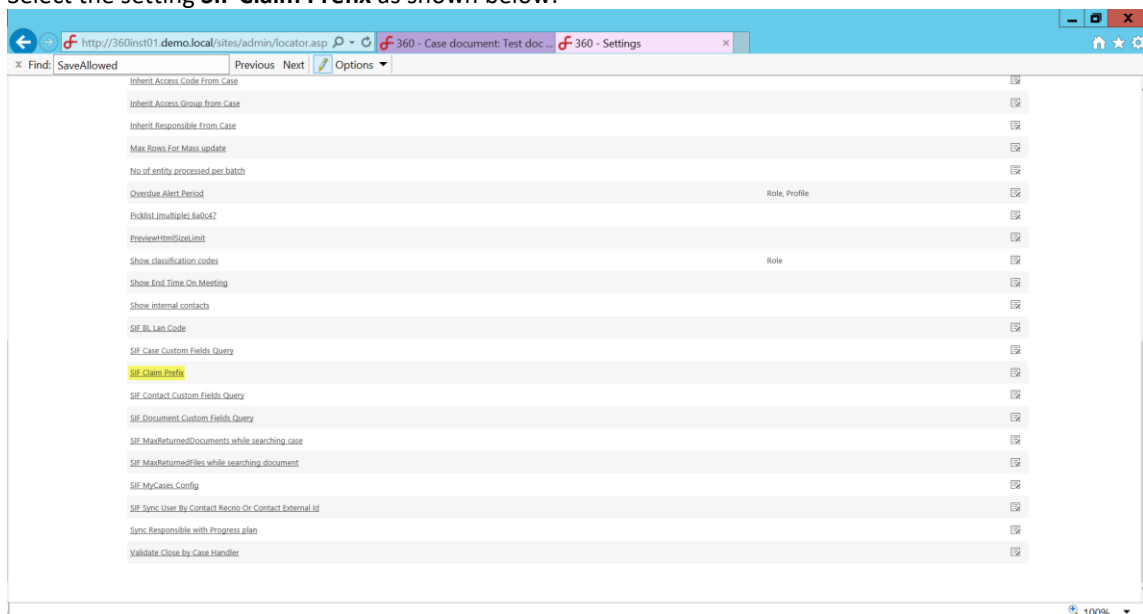

Now you can provide the claim prefix for user sync just click on **Edit** button

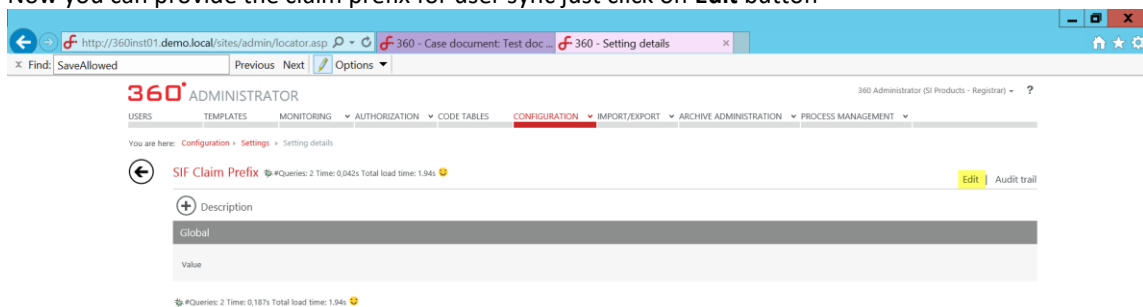

After that just click on **Save** button.

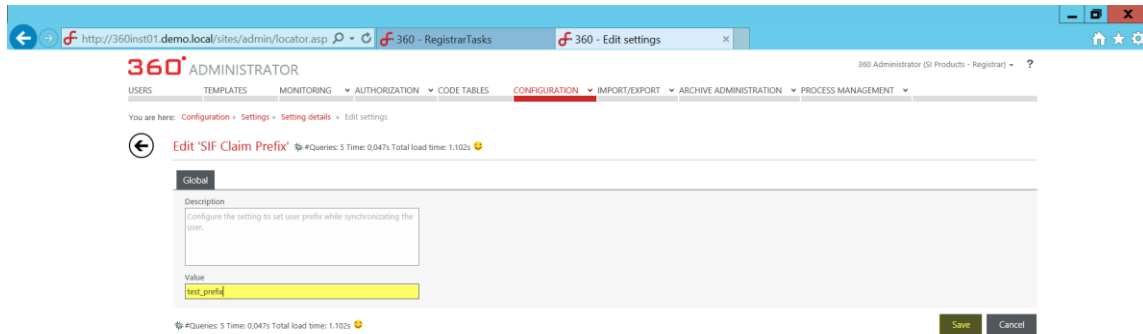


19.2.3 SIF Show Stack Trace

Previously in SIF we were returning the stacktrace in the responses from SIF API. That's a security breach. We should turn this default off. We should still always get stacktrace in the logs (event log and trace). It should be possible to turn on the stacktrace if needed. We have 360-web admin setting to turn on or off the stack trace from “SIF Show Stack Trace” setting.

How to change setting SIF Show Stack Trace:

Select the setting **SIF Show Stack Trace** as shown below:

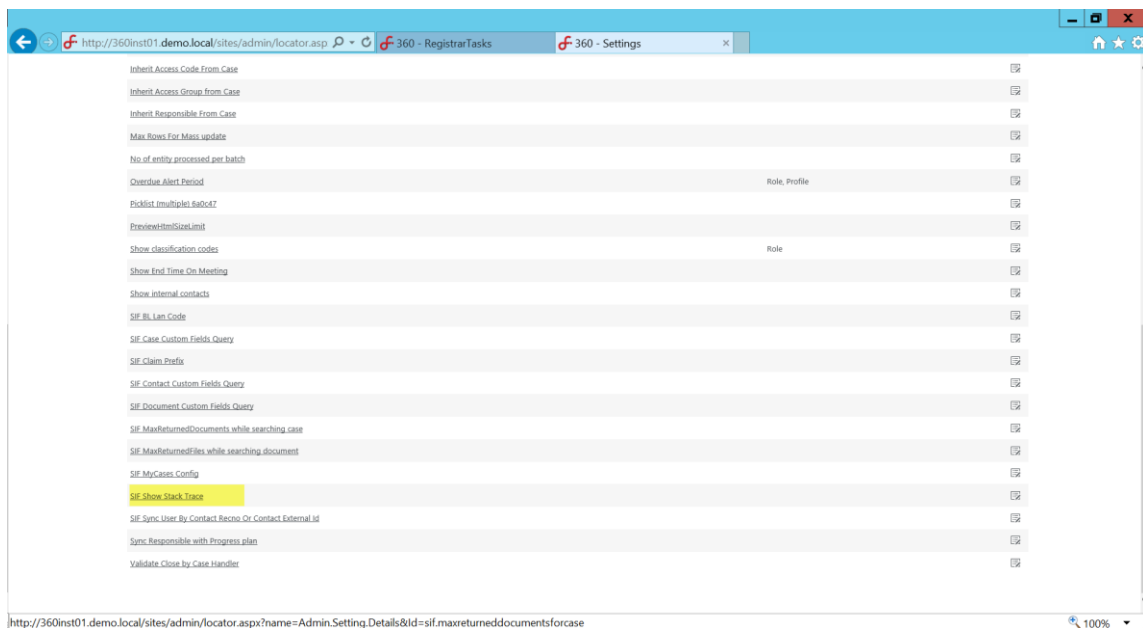

Just click on **Edit** button so you can provide value for setting either “Yes” or “No”. “No” to turn off the stack trace and “Yes” to turn on the stack trace.

360° ADMINISTRATOR 360 Administrator (SI Products - Administrator) ▾ ?

Users ▾ Templates ▾ Monitoring ▾ Authorization ▾ Code tables ▾ Configuration ▾ Import/Export ▾

Archive administration ▾

You are here [Configuration](#) ▸ [Settings](#) ▸ Setting details

[←](#) **SIF Show Stack Trace** [Edit](#) [Audit trail](#)

[+](#) Description

Global

Value	No
-------	----

After that just click on **Save** button.

360° ADMINISTRATOR 360 Administrator (SI Products - Administrator) ▾ ?

Users ▾ Templates ▾ Monitoring ▾ Authorization ▾ Code tables ▾ Configuration ▾ Import/Export ▾

Archive administration ▾

You are here [Configuration](#) ▸ [Settings](#) ▸ [Setting details](#) ▸ Edit settings

[←](#) **Edit 'SIF Show Stack Trace'**

Global

Description

This setting will be used by Rest, WS and RPC for configuring the stack trace.

Value

No ▾

[Save](#) [Cancel](#)

19.2.4 SIF Case Custom Fields Query

Refer chapter: - [Get Case Custom Data](#)

19.2.5 SIF MaxReturnedDocuments while searching case

Refer chapter: - [Configure maximum documents to be return while getting case](#)

19.2.6 SIF Contact Custom Fields Query

Refer chapter: - [Get Contact Custom Data](#)

19.2.7 SIF Document Custom Fields Query

Refer chapter: - [Get Document Custom Data](#)

19.2.8 SIF MaxReturnedFiles while searching document

Refer chapter: - [Configure the maximum files to return while getting document](#)

19.2.9 SIF MyCases Config


Refer chapter: - [MyCases Config](#)

19.2.10 SIF Sync User By Contact Recno Or Contact External Id

We have 360 web admin setting for synchronising user, "SIF Sync User By Contact Recno Or Contact External Id " which is useful to sync the user on the basis of contact recno or contact external id.

Before this implementation suppose if we want to update the login for existing user then it is not possible, it will create new user, so we have two entries for that user with old and new user login. So, we introduce this new setting.


- Suppose if we want to update login for the existing user in that case either we can select **Contact Recno** or **Contact External Id** from this web admin setting like follows: -

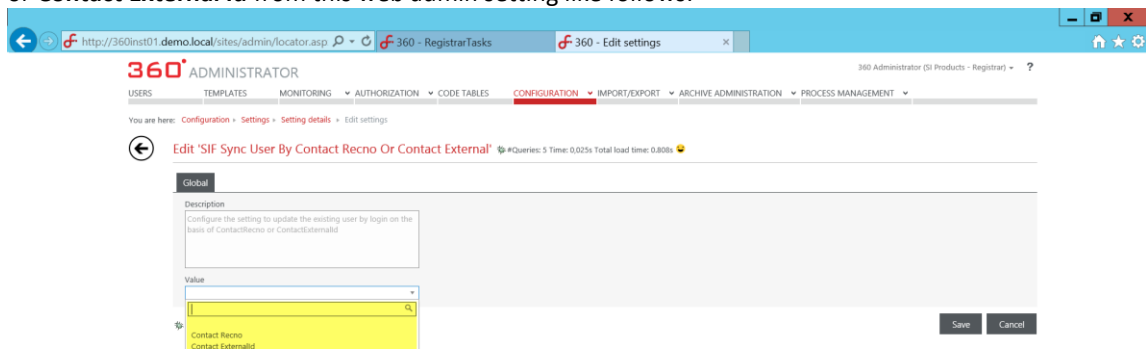


- If you select **Contact Recno** from the setting, then you should pass **Contact Recno** in parameter list
- If you select **Contact External Id** from the setting, then you should pass **Contact External Id** in parameter list
- By default, the setting value is null, so if you pass the updated login for existing user then it will always create the new user. If you want to modify the existing user login then use the setting as describe in above points.

How to change setting SIF Sync User By Contact Recno Or Contact External Id:

Select the setting **SIF Sync User By Contact Recno Or Contact External Id** as shown below: -

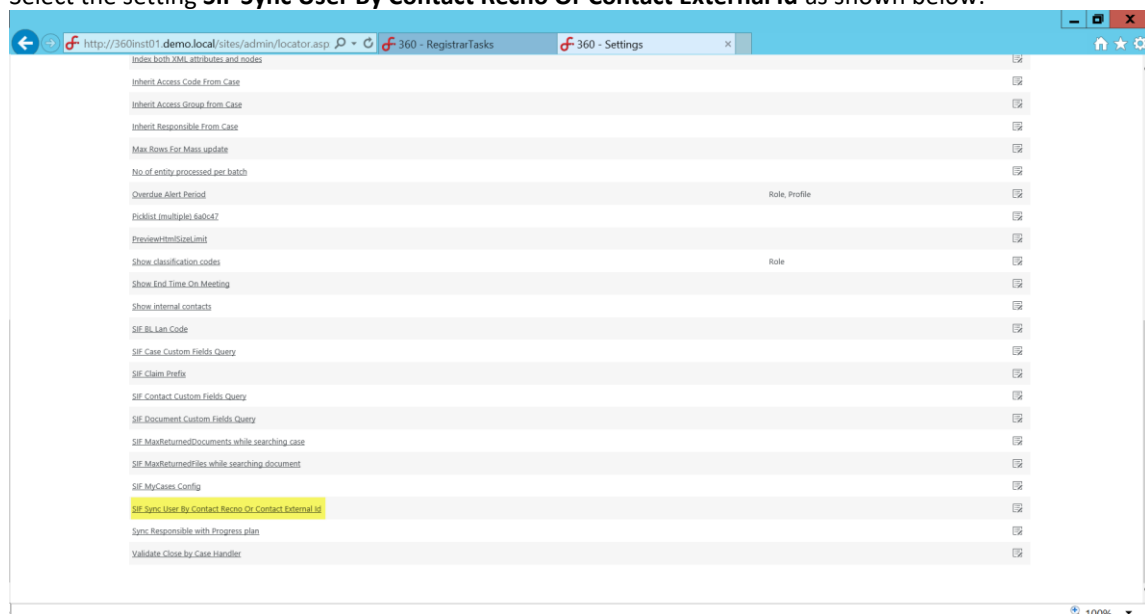


Now you can provide the value for this setting for user sync just click on **Edit** button

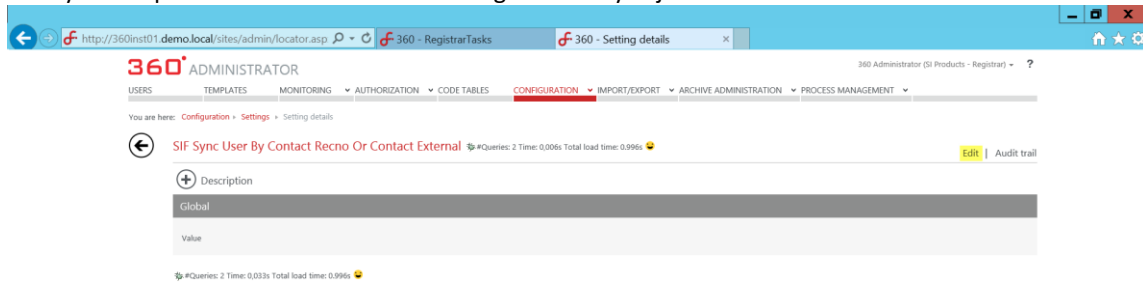

The screenshot shows the 360 Administrator web interface. The breadcrumb trail is 'You are here: Configuration > Settings > Setting details'. The setting being edited is 'SIF Sync User By Contact Recno Or Contact External'. The 'Edit' button is highlighted in yellow. The 'Value' field is currently empty.

Select any of the value from following drop down then just click on **Save** button.

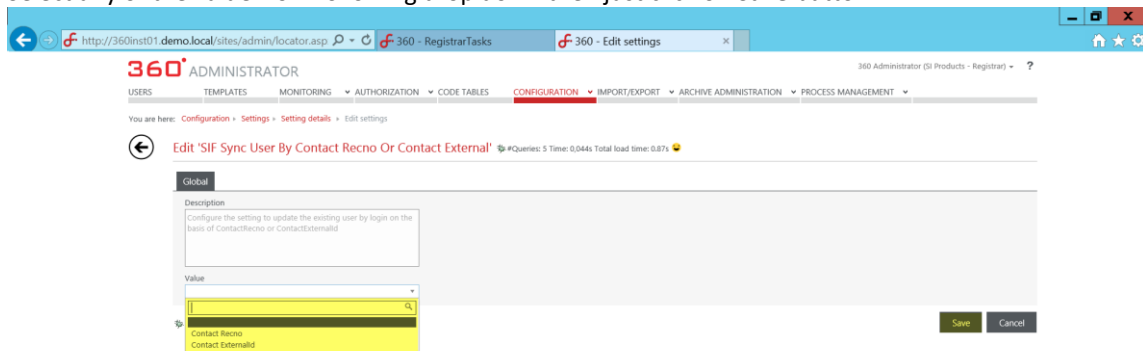


The screenshot shows the 360 Administrator web interface. The breadcrumb trail is 'You are here: Configuration > Settings > Setting details > Edit settings'. The setting being edited is 'SIF Sync User By Contact Recno Or Contact External'. The 'Value' dropdown menu is open, showing two options: 'Contact Recno' and 'Contact External'. The 'Save' button is highlighted in yellow.

19.2.11 SIF Enable ADContextUser

A new setting has been introduced to make our customers decide whether to be able to use the ADContextUser parameter in the SIF API calls (to run in the context of another user than the service/integration user).

This setting is by default *disabled* (setting value is “No”), meaning you’re not able to use the ADContextUser parameter. If you are used to using this parameter, or want to start using it, you can *enable* it again by editing this setting and switching to “Yes” in the dropdown menu. This setting, “**SIF Enable ADContextUser**”, can be found in the list of settings in web admin like with the other SIF settings. It looks like this:

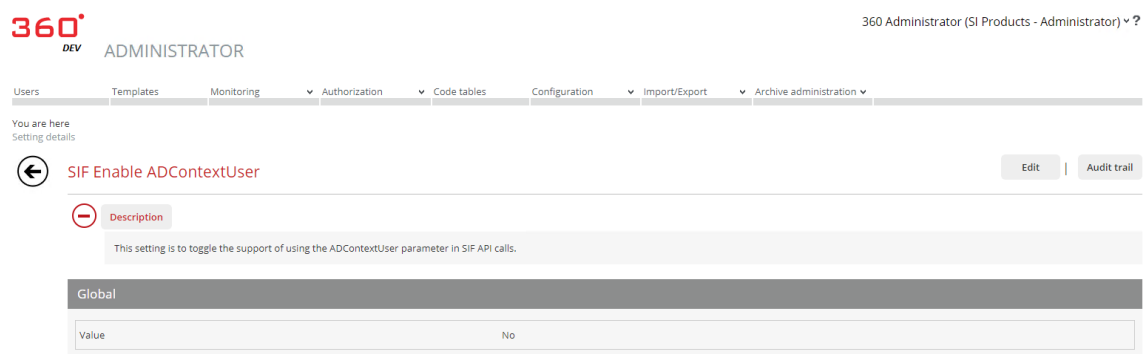


The screenshot shows the 360 Administrator web interface. The breadcrumb trail is 'You are here: Setting details'. The setting being edited is 'SIF Enable ADContextUser'. The 'Value' dropdown menu is open, showing 'No' as the selected option. The 'Edit' button is highlighted in yellow.

19.2.12 SIF Log Frequency

A new setting has been introduced to control the logs generated through SIF API.

This setting is by default logs only errors. There are two more options available “No Logs” or “Log Everything”. If you want more intense debugging, then make use of “Log Everything” option. This setting, “**SIF Log Frequency**”, can be found in the list of settings in web admin like with the other SIF settings. It looks like this:

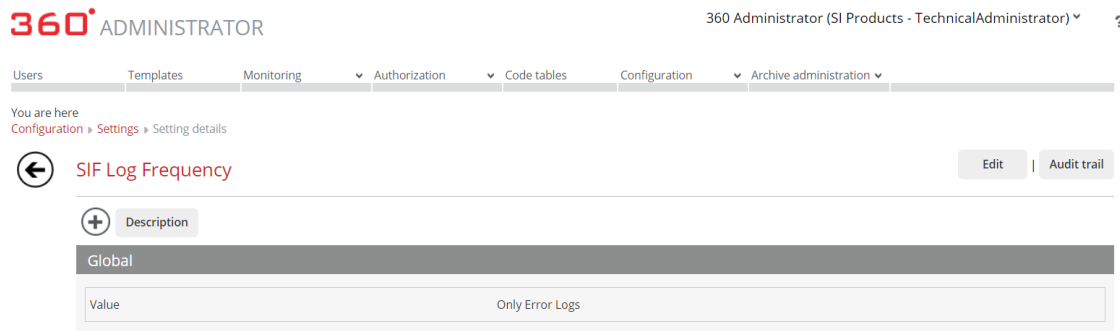


19.2.13 SIF Inherit Responsible From Case (Available from 5.9 version)

A new setting has been introduced to inherit responsible from case while creating document using DocumentService/CreateDocument endpoint.

This setting is by default set to “Do not inherit”. There are two more options, “Inherit organization unit” and “Inherit organization unit and responsible person”.

If set to Inherit organization unit or Inherit organization unit and responsible person, the document will inherit responsible from the case. This setting relevant or taken into consideration only for create document endpoint (SIF- DocumentService/CreateDocument) and if Responsibles (ResponsibleEnterprise and ResponsiblePerson) are not set in the request payload.

This setting, “**SIF Inherit Responsible From Case**”, can be found in the list of settings in web admin like with the other SIF settings. It looks like this:

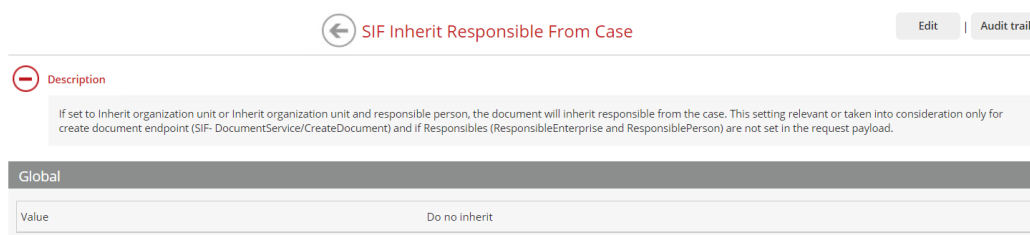

19.2.14 SIF GetClassification Custom Fields Query


Refer chapter: - [Get Classification Custom Data](#)

19.2.15 SIF Project Custom Fields Query

Refer chapter: [Get Project custom data](#)

19.2.16 SIF LastDate look-up in entitylog (v5.16)

This setting will be used to improve the performance when searching with LastDate in GetCases/GetDocuments/GetFilesWithMetadata. Default set to Yes meaning, search query will do look-up in EntityLog table along with ModifiedDate to get the result. If set to No, then search query will only look-up on ModifiedDate

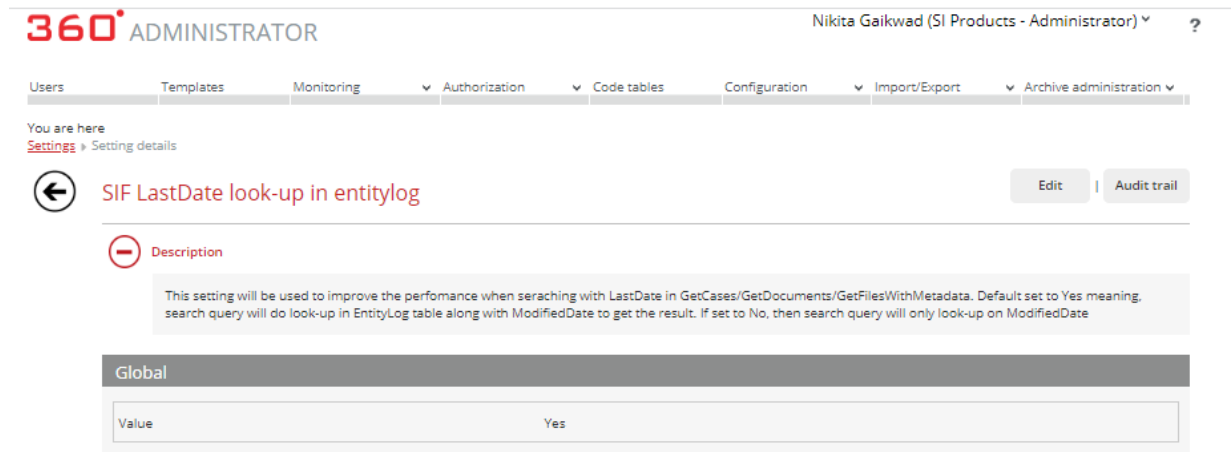


The screenshot shows the 360° Administrator interface. The user is logged in as Nikita Gaikwad (SI Products - Administrator). The navigation menu includes Users, Templates, Monitoring, Authorization, Code tables, Configuration, Import/Export, and Archive administration. The breadcrumb trail shows 'You are here' > Settings > Setting details. The main heading is 'SIF LastDate look-up in entitylog'. There are 'Edit' and 'Audit trail' buttons. A description box states: 'This setting will be used to improve the performance when searching with LastDate in GetCases/GetDocuments/GetFilesWithMetadata. Default set to Yes meaning, search query will do look-up in EntityLog table along with ModifiedDate to get the result. If set to No, then search query will only look-up on ModifiedDate'. Below this is a 'Global' section with a table containing one row: 'Value' with the value 'Yes'.

19.2.17 SIF GetEntitiesExternalIds Config (v5.17)

This setting should be used to configured external systems for which external ids should be fetched using SupportService/GetEntitiesExternalIds.

You can have comma separated system name. Default set to empty.

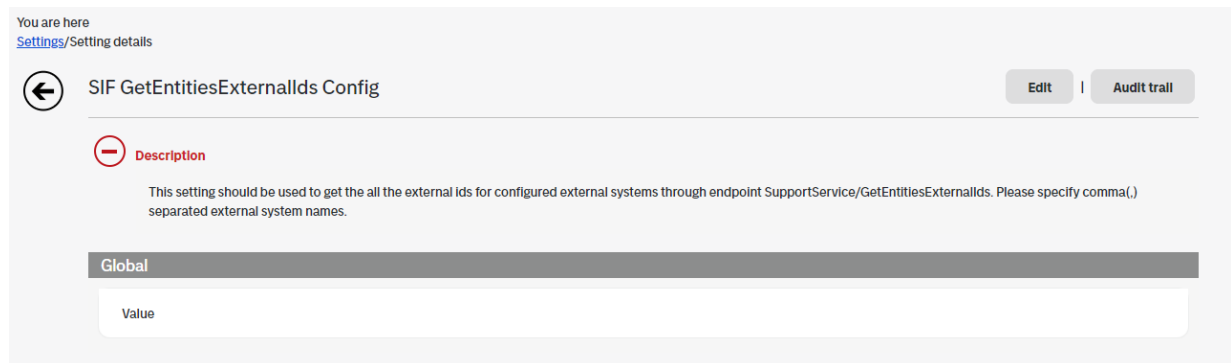

The screenshot shows the 360° Administrator interface. The user is logged in as Nikita Gaikwad (SI Products - Administrator). The navigation menu includes Users, Templates, Monitoring, Authorization, Code tables, Configuration, Import/Export, and Archive administration. The breadcrumb trail shows 'You are here' > Settings > Setting details. The main heading is 'SIF GetEntitiesExternalIds Config'. There are 'Edit' and 'Audit trail' buttons. A description box states: 'This setting should be used to get the all the external ids for configured external systems through endpoint SupportService/GetEntitiesExternalIds. Please specify comma(,) separated external system names.'. Below this is a 'Global' section with a table containing one row: 'Value' with an empty text input field.

19.2.18 SIF Enable Transactions (v5.17)

Using this setting you can decide if action should run inside business transaction scope or not. Default it is set to true. All the SIF actions will be inside BL transaction scope. If we are outside the BL context, or transactions have been disabled with the setting, the action is executed without a transaction scope.

You are here
[Settings](#) » Setting details



SIF Enable Transactions

[Edit](#)
[Audit trail](#)


Description

Global

Value	Yes
-------	-----

19.2.19 SIF File Inserts in DocumentBatch (v5.17)

Run files transaction inside document transaction. Default set to No. This setting will be used in DocumentService/CreateDocument if request contains files list.

If set to “Yes”, then all the create document requests will use this setting.

You are here
[Settings](#) » Setting details



SIF File Inserts In DocumentBatch

[Edit](#)
[Audit trail](#)


Description

Run files transaction inside document transaction. Default set to No.

Global

Value	No
-------	----


19.2.20 SIF Activity Custom Fields Query

Refer chapter - [Get Activity Custom Data](#)

19.2.21 SIF TempEntityStorage Config (v5.18)

This setting should be used to define which external systems has access to TempEntityStorage through SupportService/*TempEntityStorageText endpoints. Please specify a comma (,) separated list of external system names.

Default value is empty, which means that you can't use the TempEntityStorage endpoints at all.

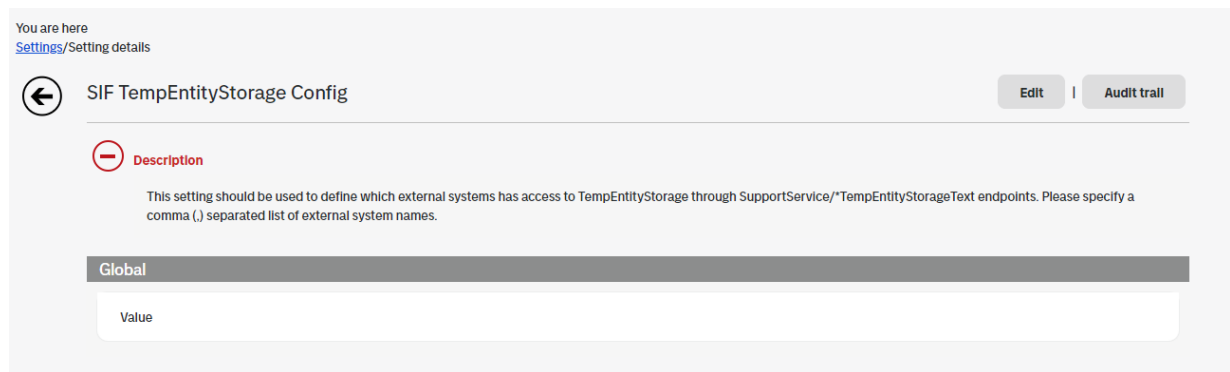

This setting is available from v5.18 onwards.

19.2.22 SIF AccessGroup Custom Fields Query (v6.5)

To get additional 360° fields, which are not currently included in output objects.

Follow the below steps:

1. Open 360 admin and go to CONFIGURATION => SETTINGS and edit value for "SIF AccessGroups Custom Fields Query" which will include metaquery for getting the custom field, for e.g.

```
<QUERYDESC ENTITY="AccessGroup" NAMESPACE="SIRIUS" DATASETFORMAT="XML">
  <RESULTFIELDS>
    <METAITEM TAG="CF_testfield">CF_testfield</METAITEM>
  </RESULTFIELDS>
  <CRITERIA>
    <METAITEM NAME="Recno" OPERATOR="IN">
      <VALUE>{0}</VALUE>
    </METAITEM>
  </CRITERIA>
</QUERYDESC>
```

CF_testfield is the custom meta field in AccessGroup Entity.

Note: Entity name should start with capital letter. It returns Single value field only.

2. The result will be displayed in <CustomFields> .. <CustomFields> section as follows:

```
<CustomFields>
  <AdditionalFieldParameter>
    <Name>CF_testfield</Name>
    <Value>TestCustomField</Value>
  </AdditionalFieldParameter>
</CustomFields>
```


20 SIF API Calling Examples

20.1 SOAP Service


Following is the example that gives the details about CaseService how to create case, update case and get case using SOAP UI.

How to create new SOAP project in SOAP UI?

Just open the SOAP UI it looks like follows

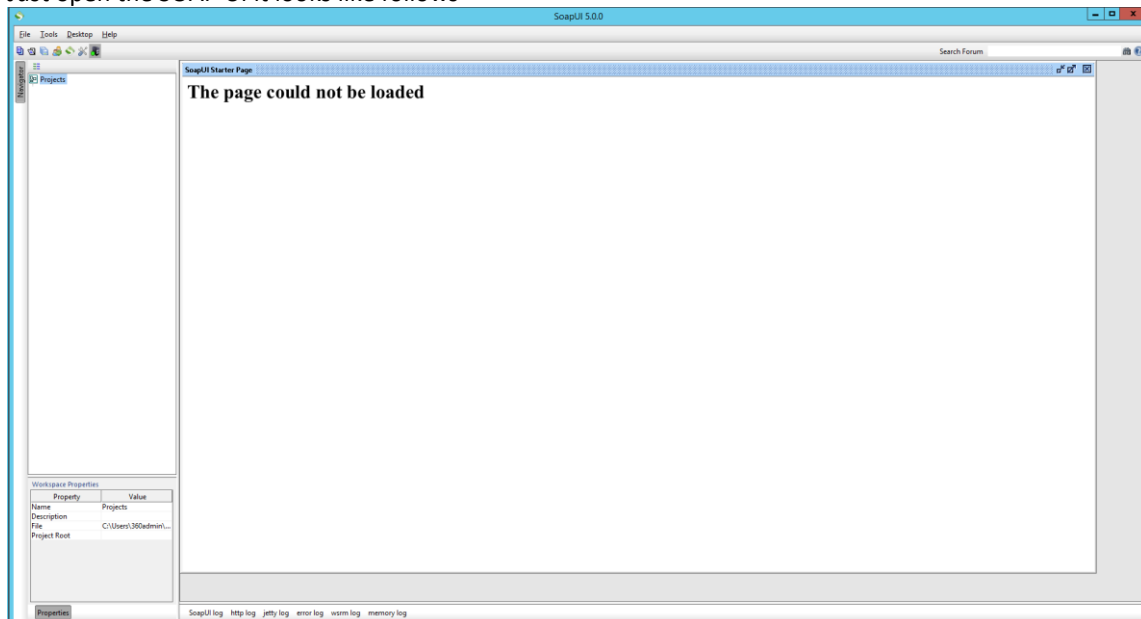


Just go to the **File → New SOAP Project**

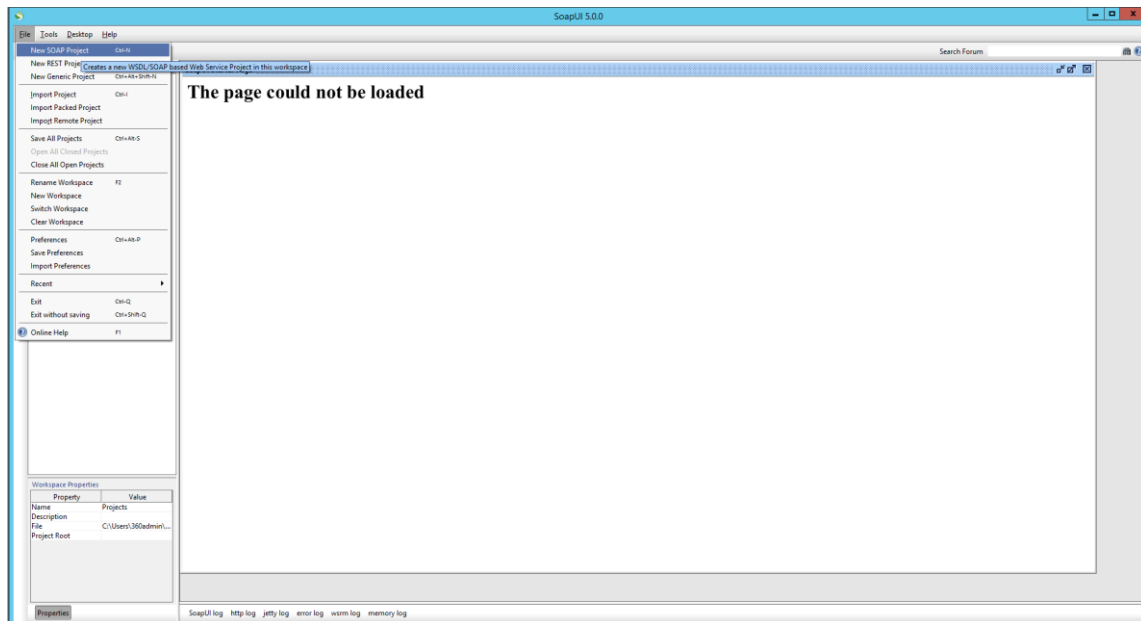


Now provide the details with WSDL definition

(<http://servername:portnumber/SI.WS.Core/SIF/CaseService.svc?wsdl>), it should point to the installed SIF version, then click on **OK** button it will create SOAP project for you

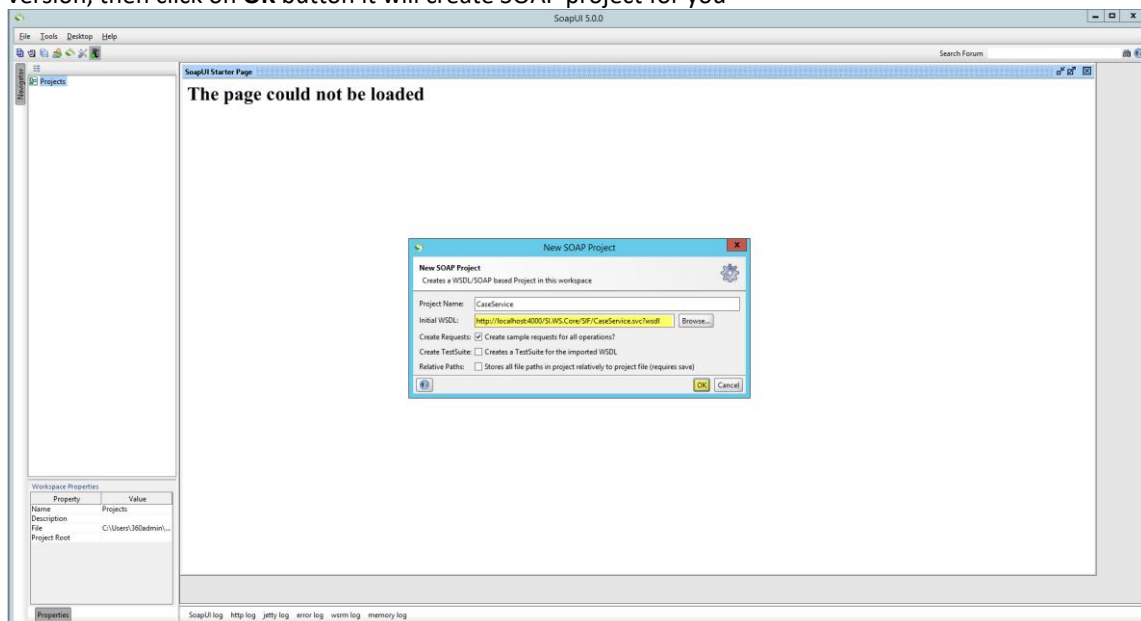


The SOAP project looks like as follows: -

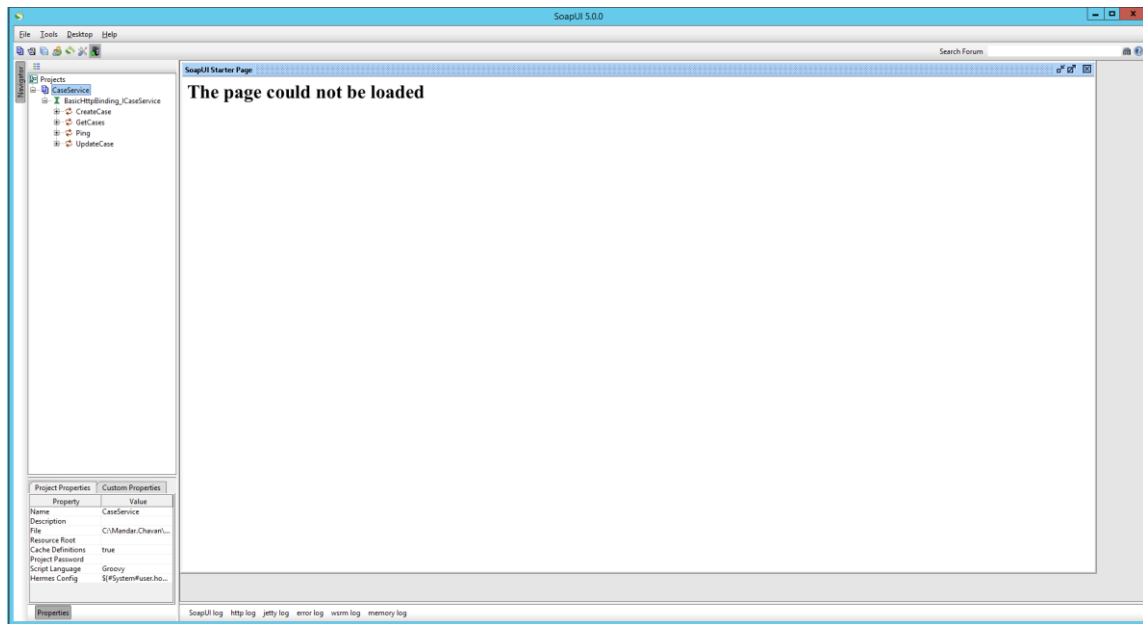


20.1.1 Create Case

20.1.1.1 Clone Request


Expand the CreateCase request, you will see the **Request1**, right click on it, select **Clone Request**.

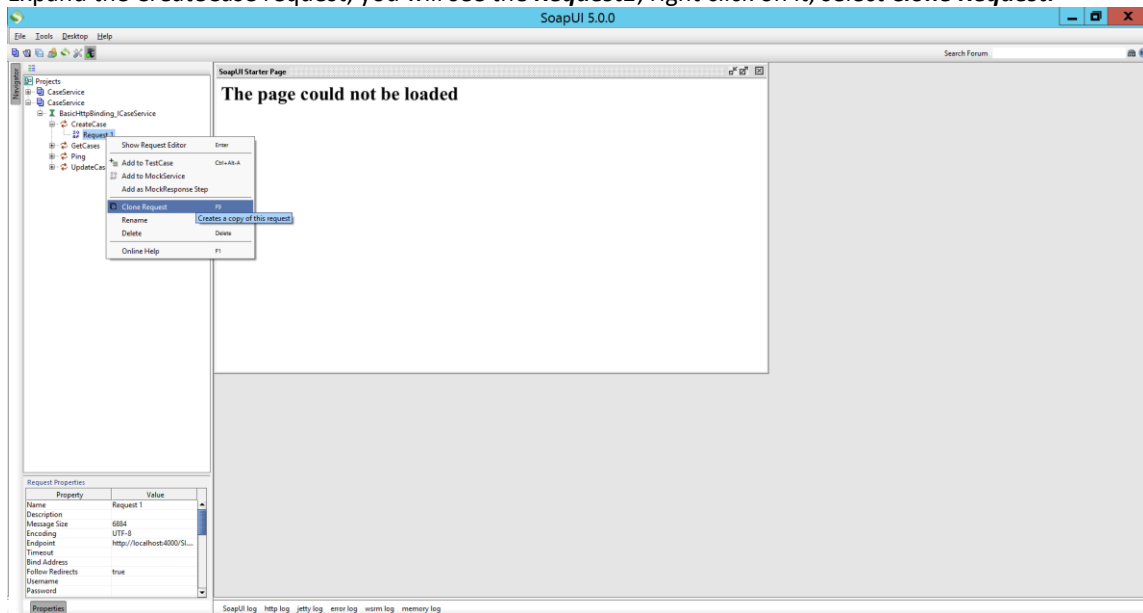


After that provide the suitable request name e.g: *CreateCase* then just click on *Ok* button.

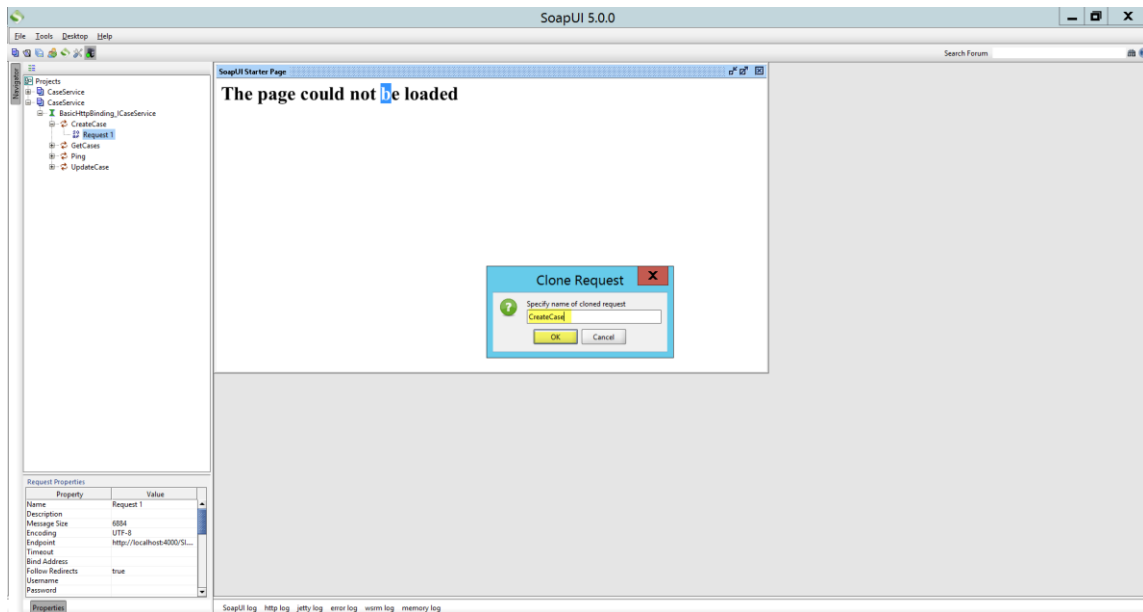

Do the necessary steps as per following screen shot

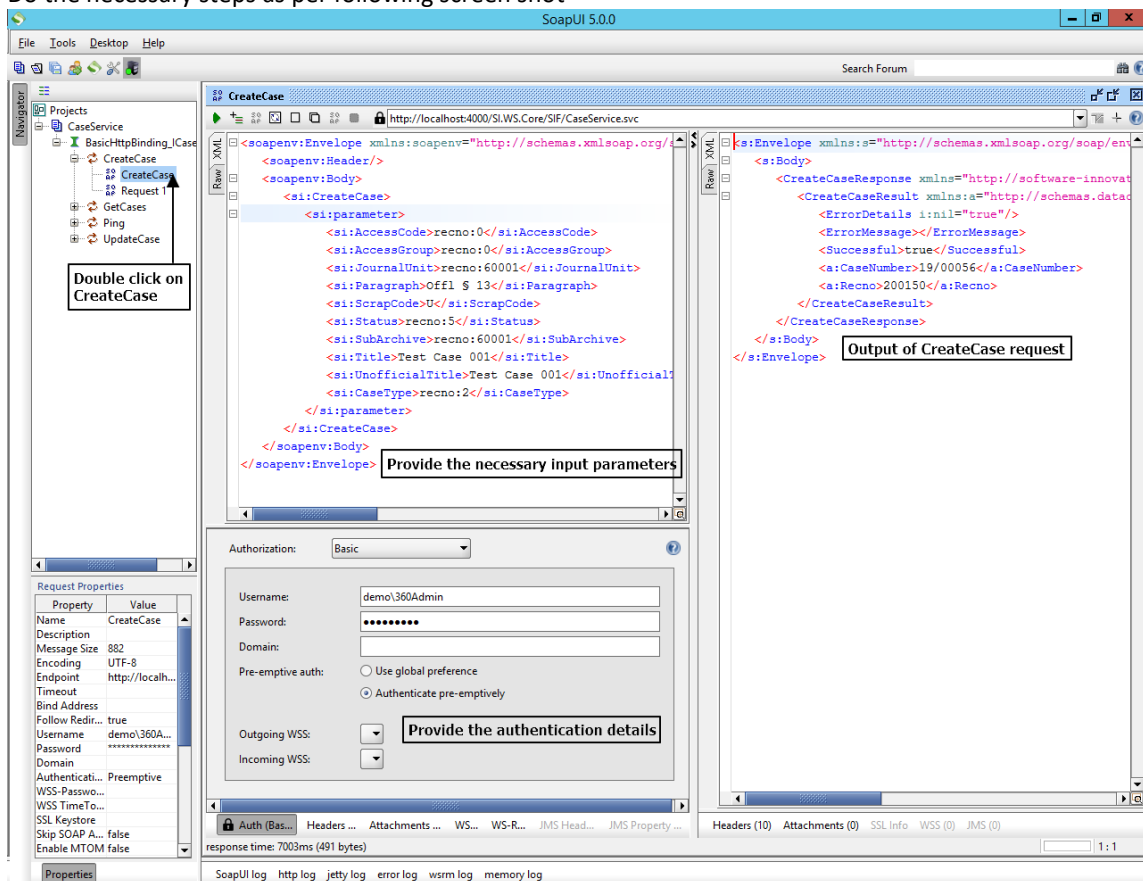


You can also check newly created case on 360 UI, it looks like follows: -

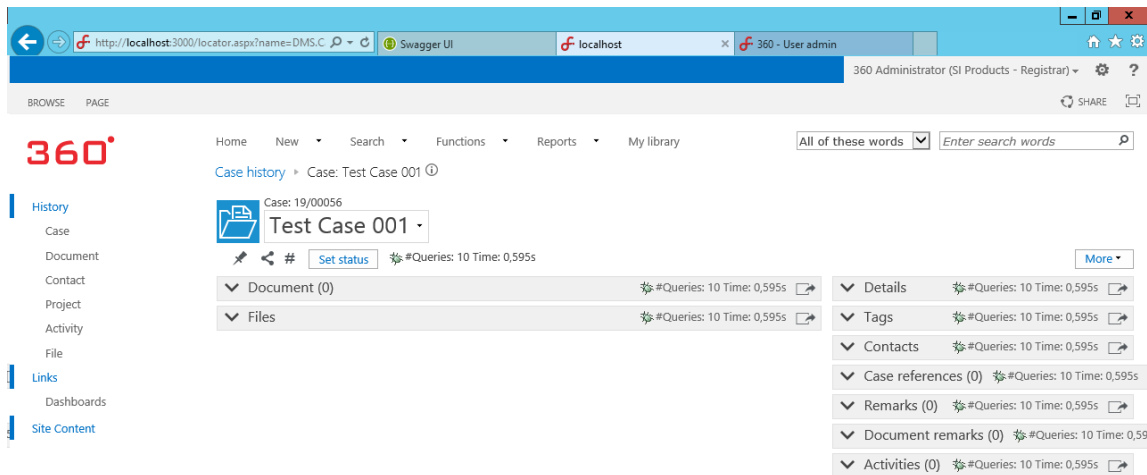

20.1.2 Get Case

Clone the request to get a case as mentioned above ([Clone Request](#)) then provide suitable name like *GetCaseByRecno*


Get case from SOAP UI, refer the following screen shot

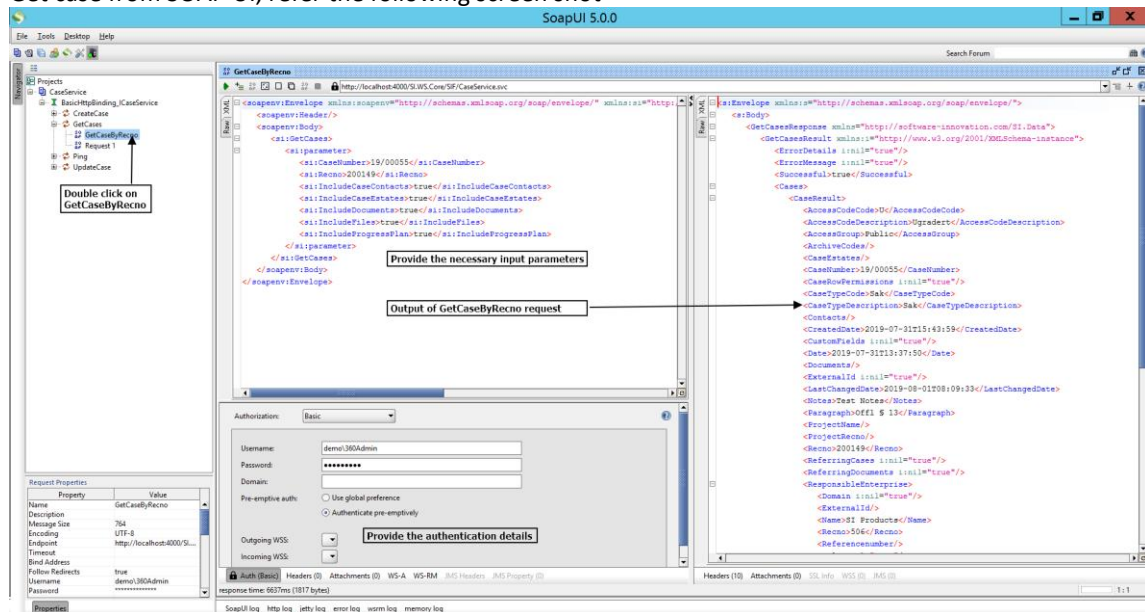


20.1.3 Update Case

Clone the request for updating a case as mentioned above ([Clone Request](#)) then provide suitable name like *UpdateCaseByCaseNumber*

Update case from SOAP UI, refer the following screen shot

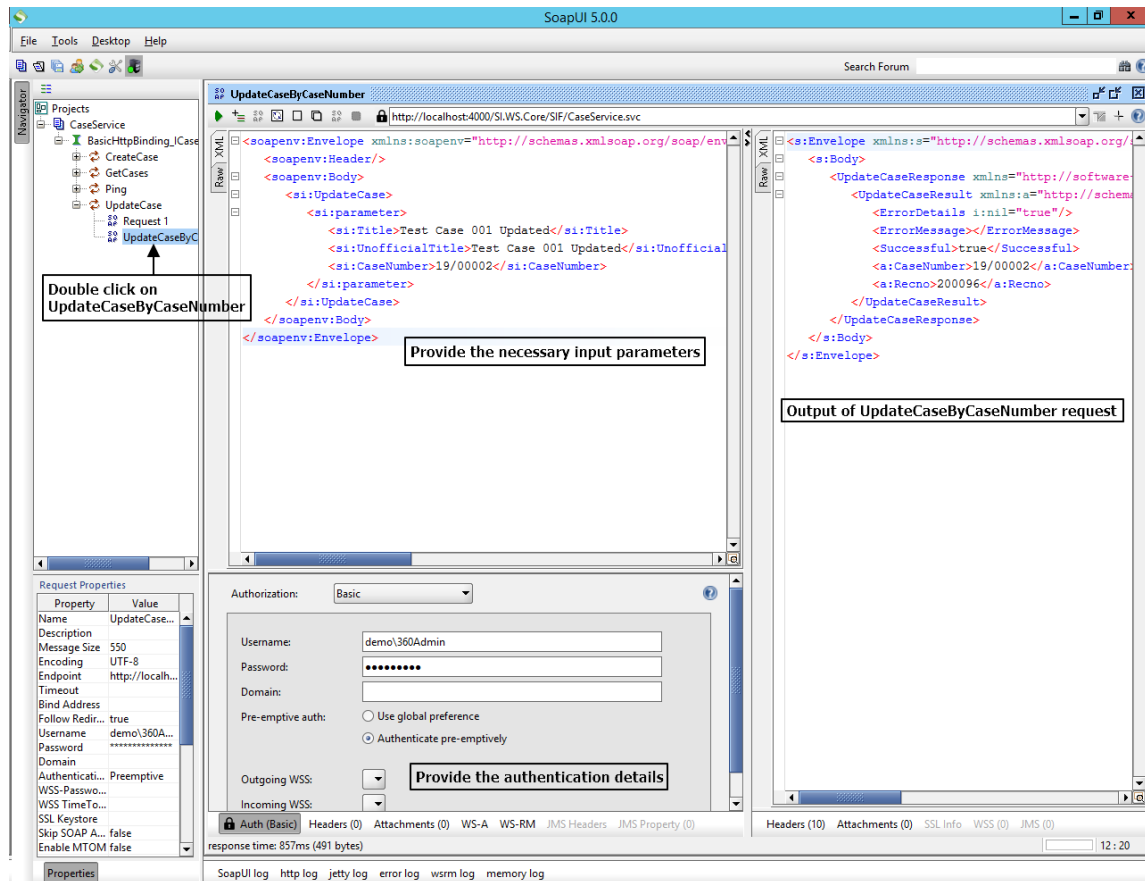

Updated case on 360 UI:

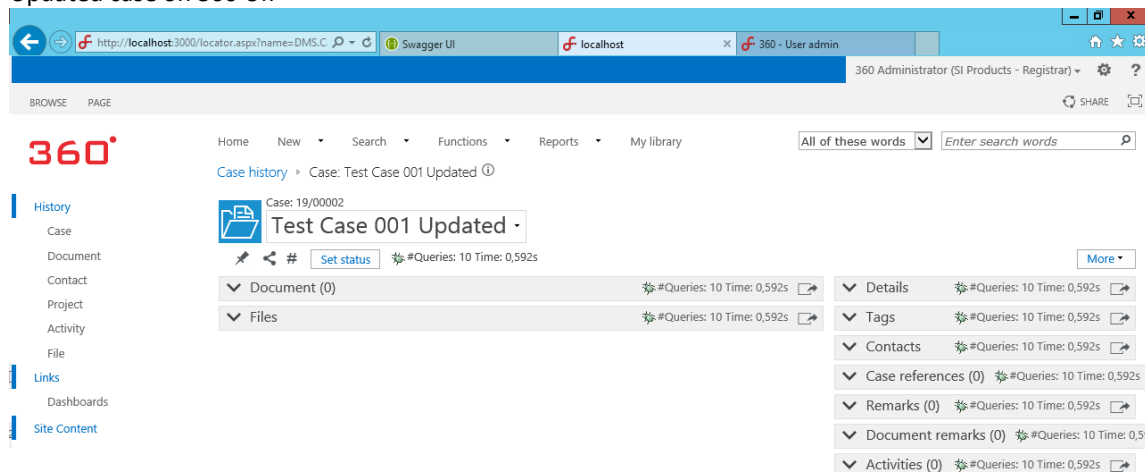


20.2 REST API

Following is the example gives the details about CaseService how to create case, update case and get case using Postman.


How to create new request in Postman to test the REST API, either you can create a **Collection** or **Request**.

How to create new Collection?


Click on **New → Collection** as shown in following figure

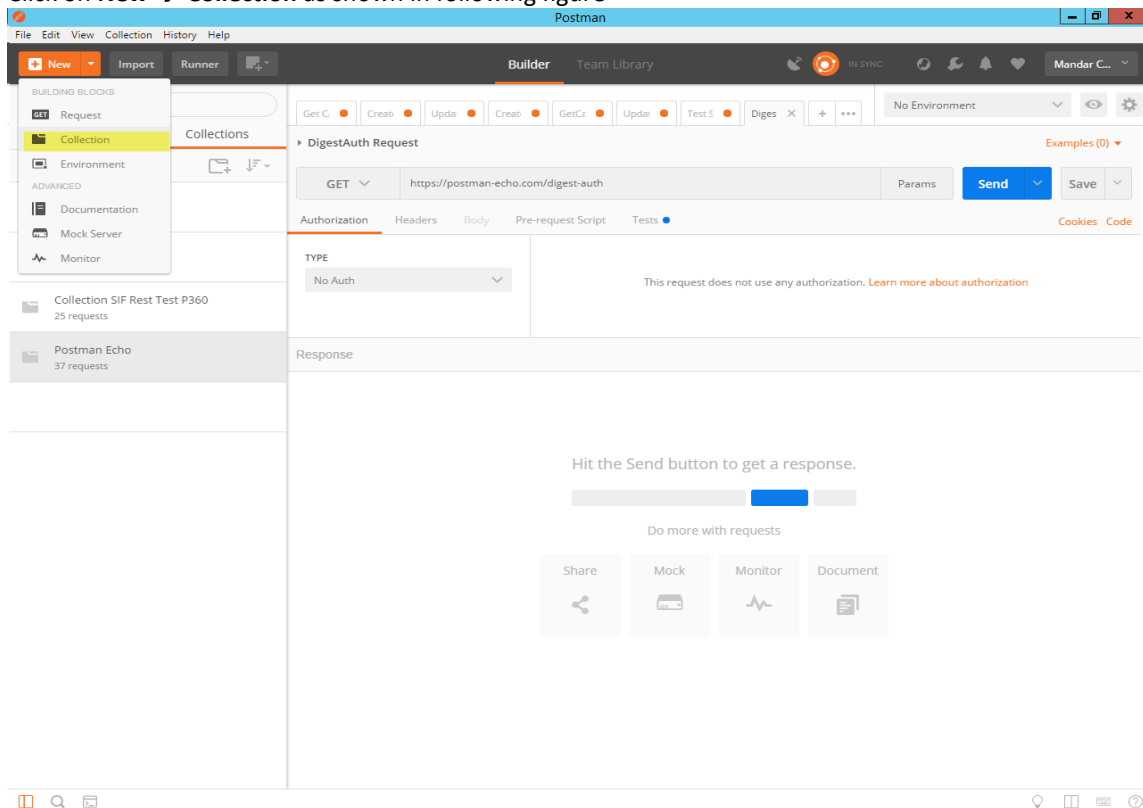


Provide the collection **Name** and **Description** then just click on **Create** button like follows: -

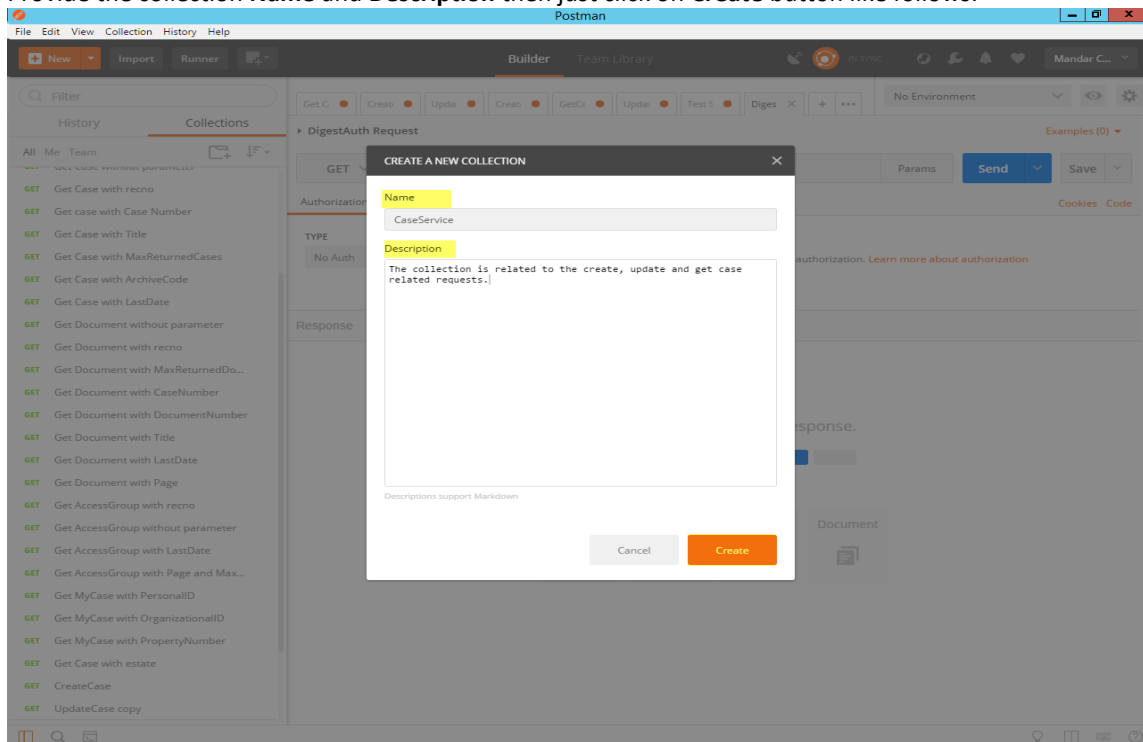


Once it is created then click on **Add request** link

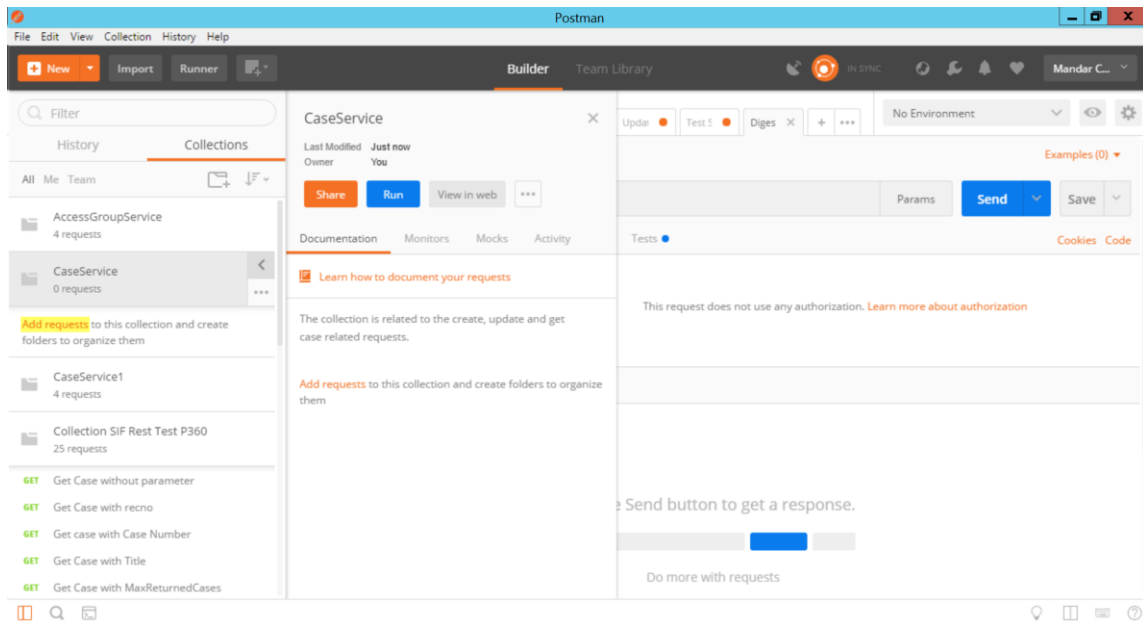

Now provide the necessary input for newly create case request as follows then just click on **Save to CaseService** button

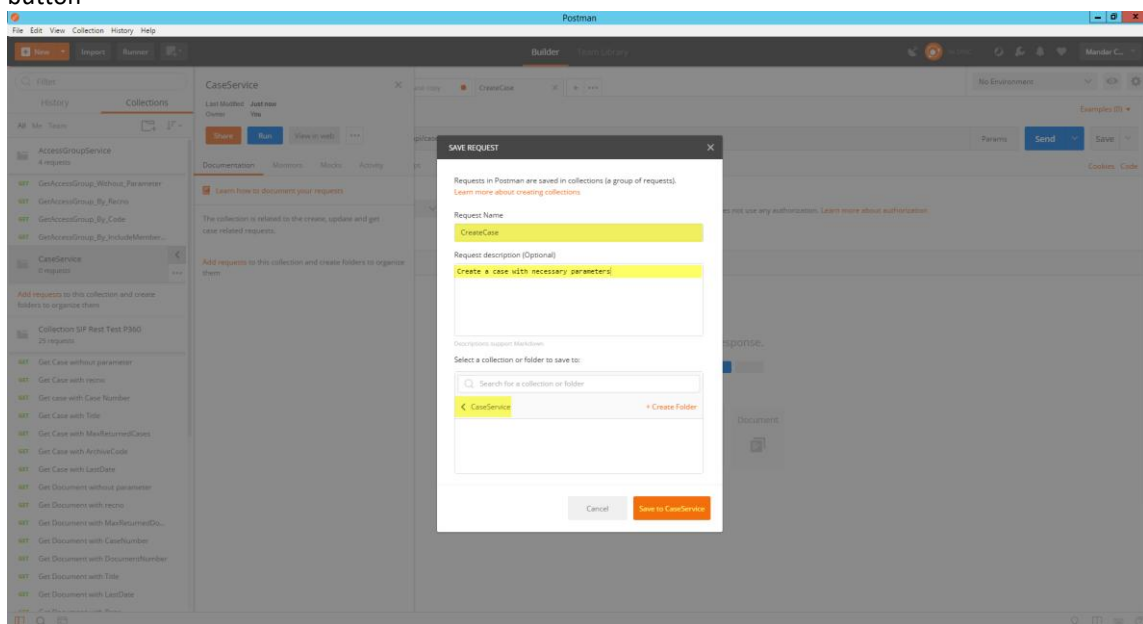


Now the new request is created under the **CaseService** collection as follows: -

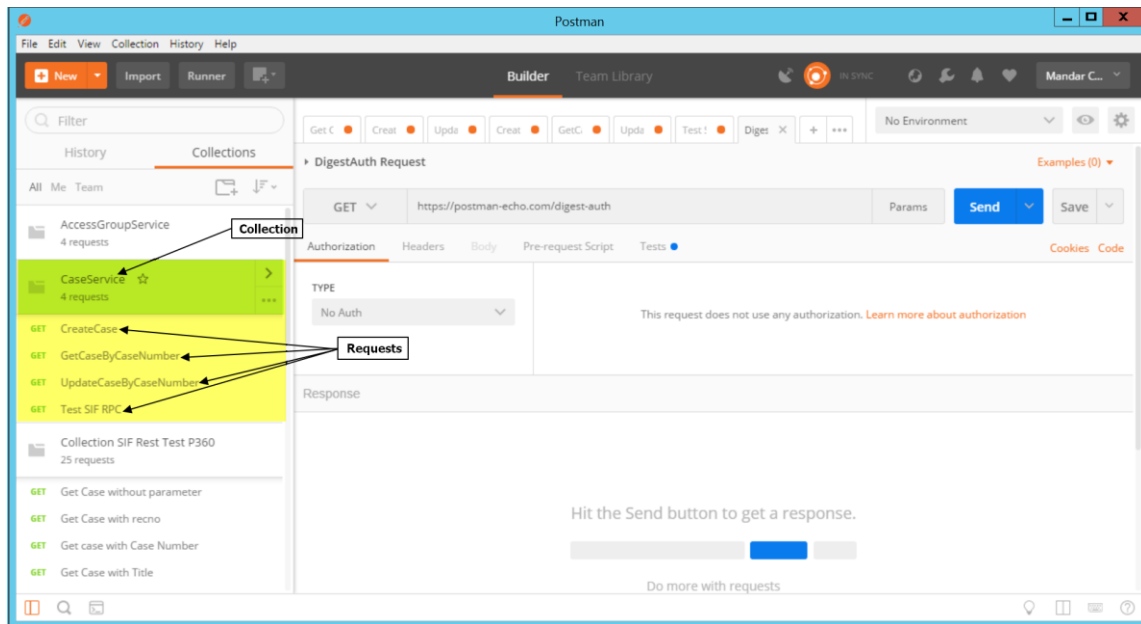


20.2.1 Create Case


Now you can create the case by using SIF REST API, follow the following steps as shown in screen shot

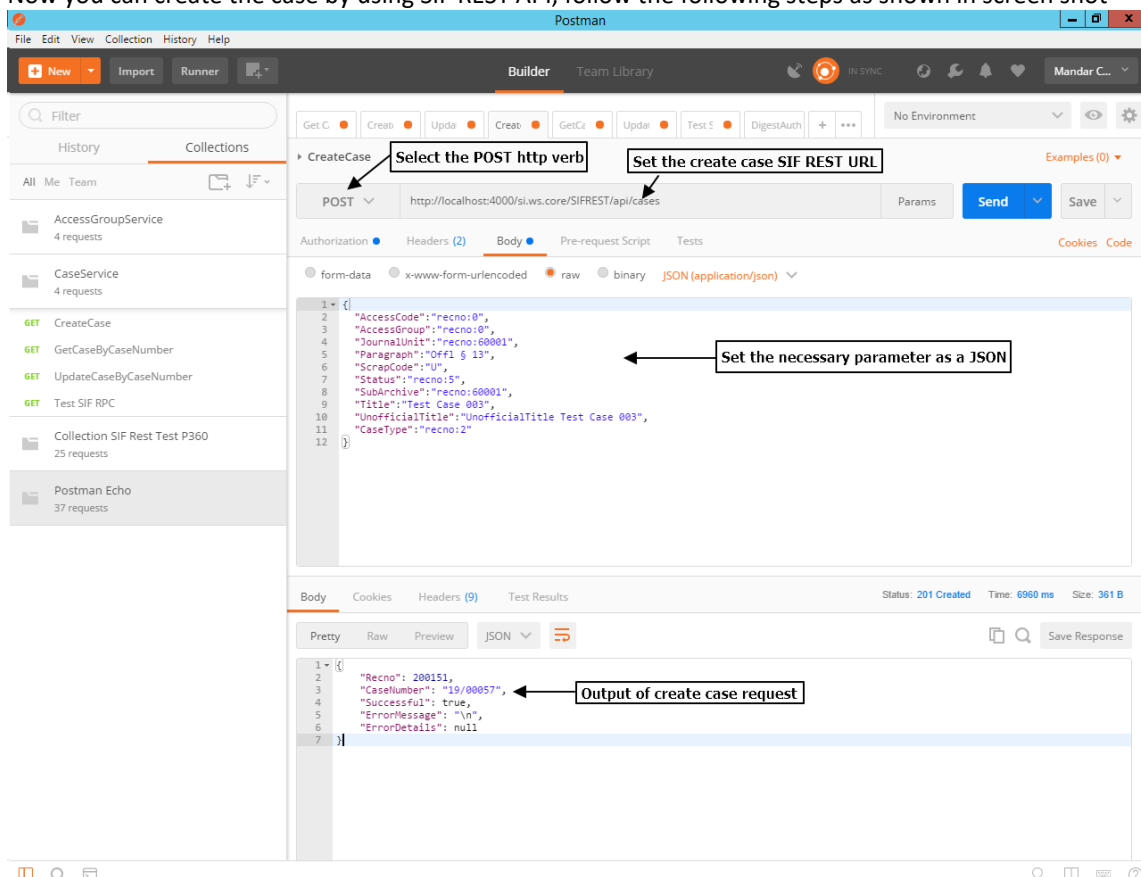

Set the authentication for above create case request

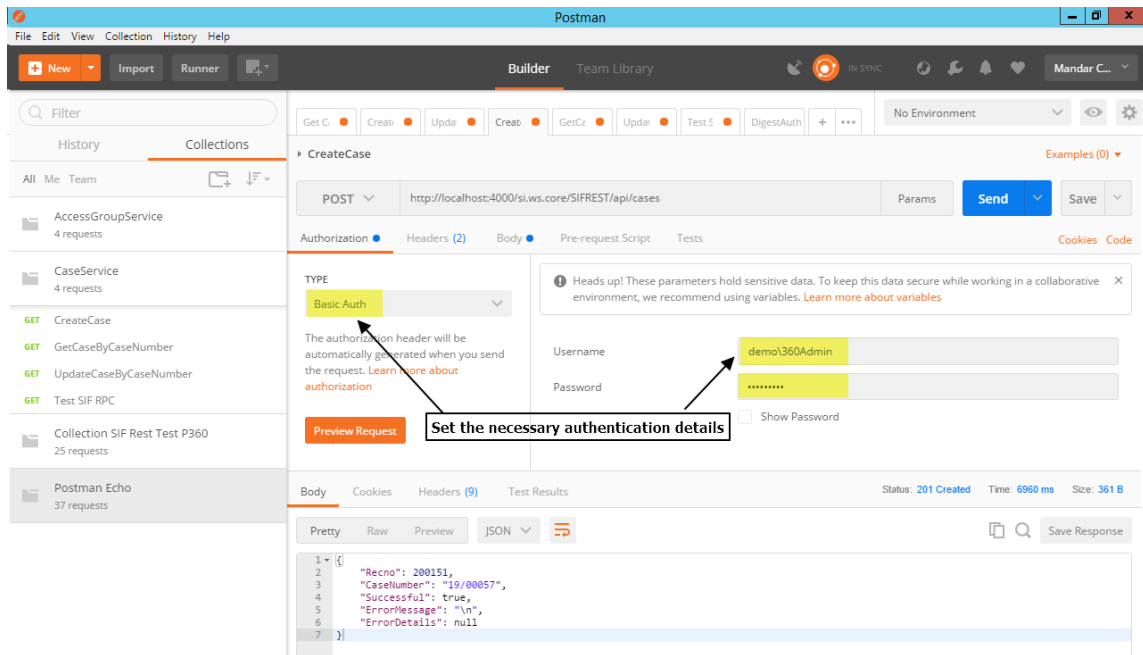


The newly created case is looks like follows on 360 UI

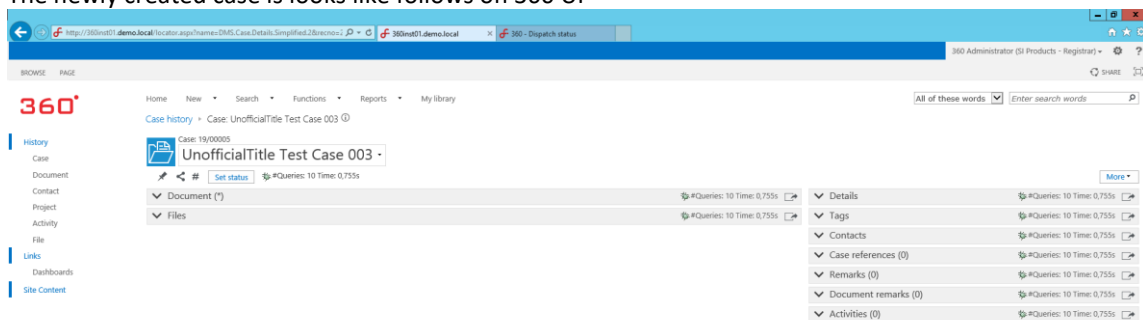


20.2.2 Get Case

20.2.2.1 How to create new request?


Click on **New → Request** as shown in following screen shot

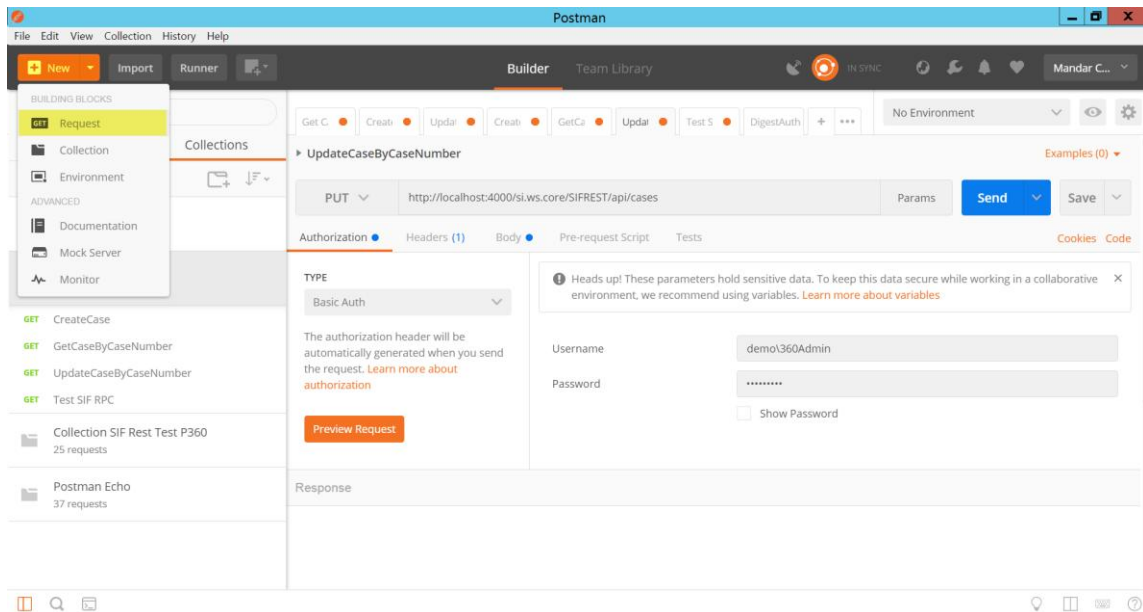

Now provide the **Request Name**, **Request description** as per your requirement then select **CaseService** from collection list box after that just click on **Save to CaseService** button following is the screen shot for your reference.

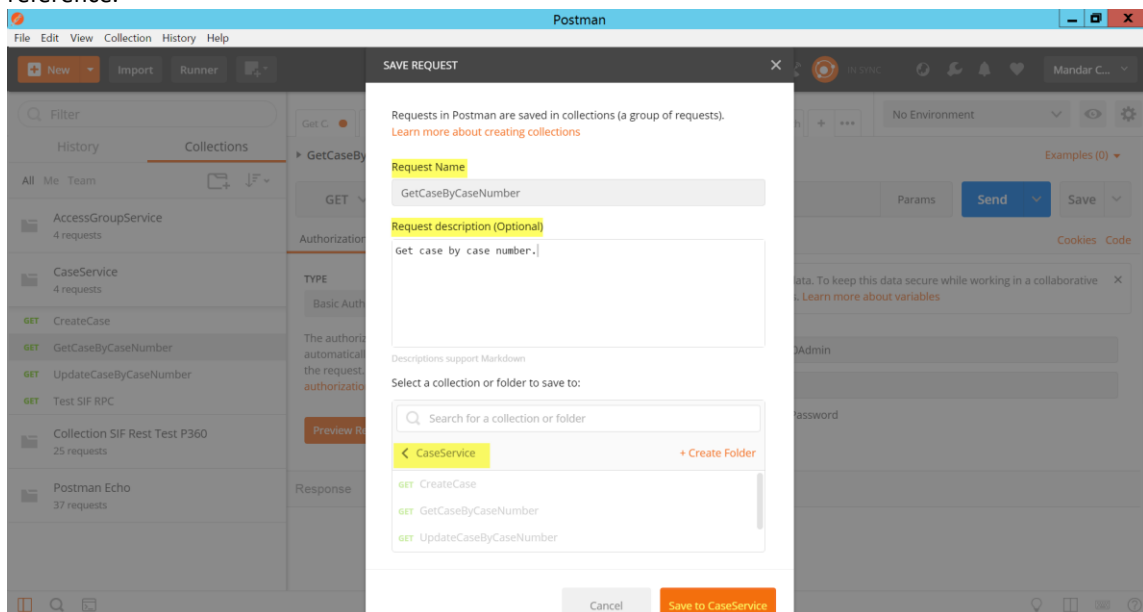


Get case from SIF REST using Postman, refer the following screen shot

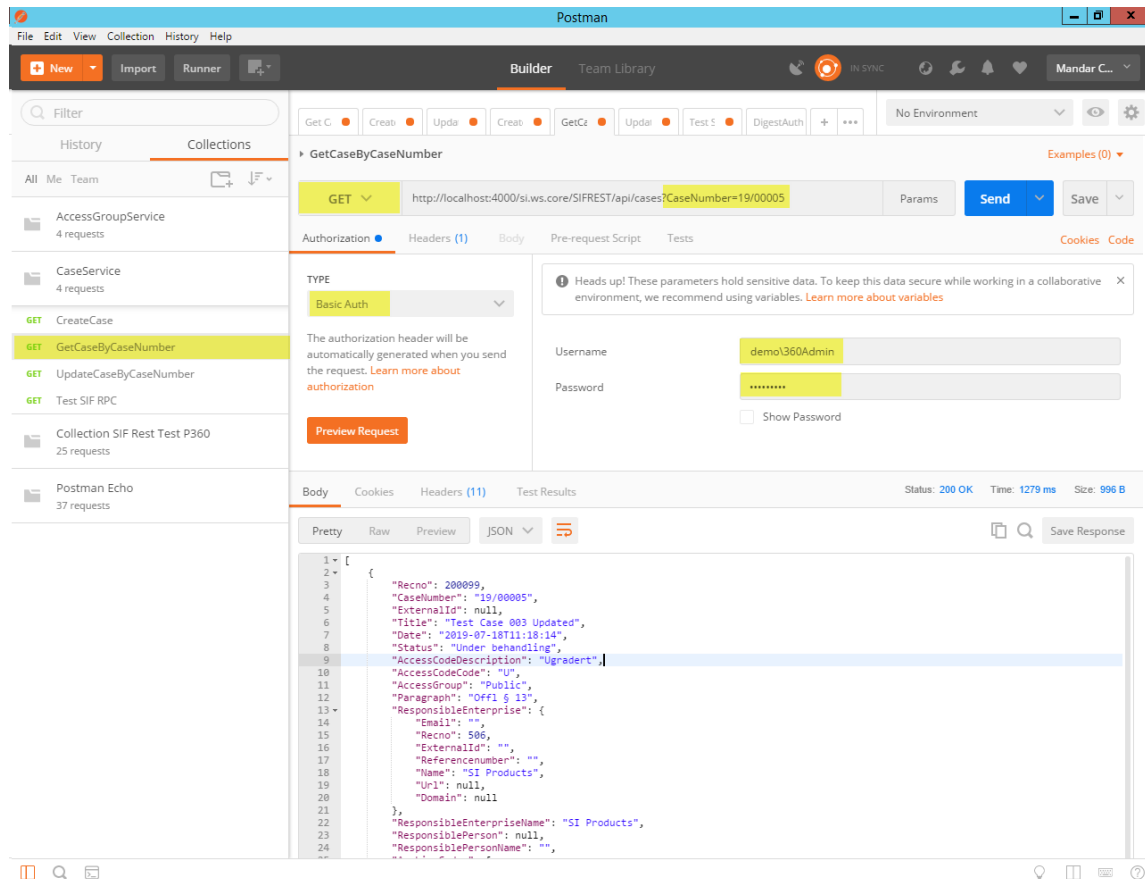


20.2.3 Update Case

To create new request for update case, follow [How to create new request?](#)


Update case from SIF REST using Postman, refer the following screen shot

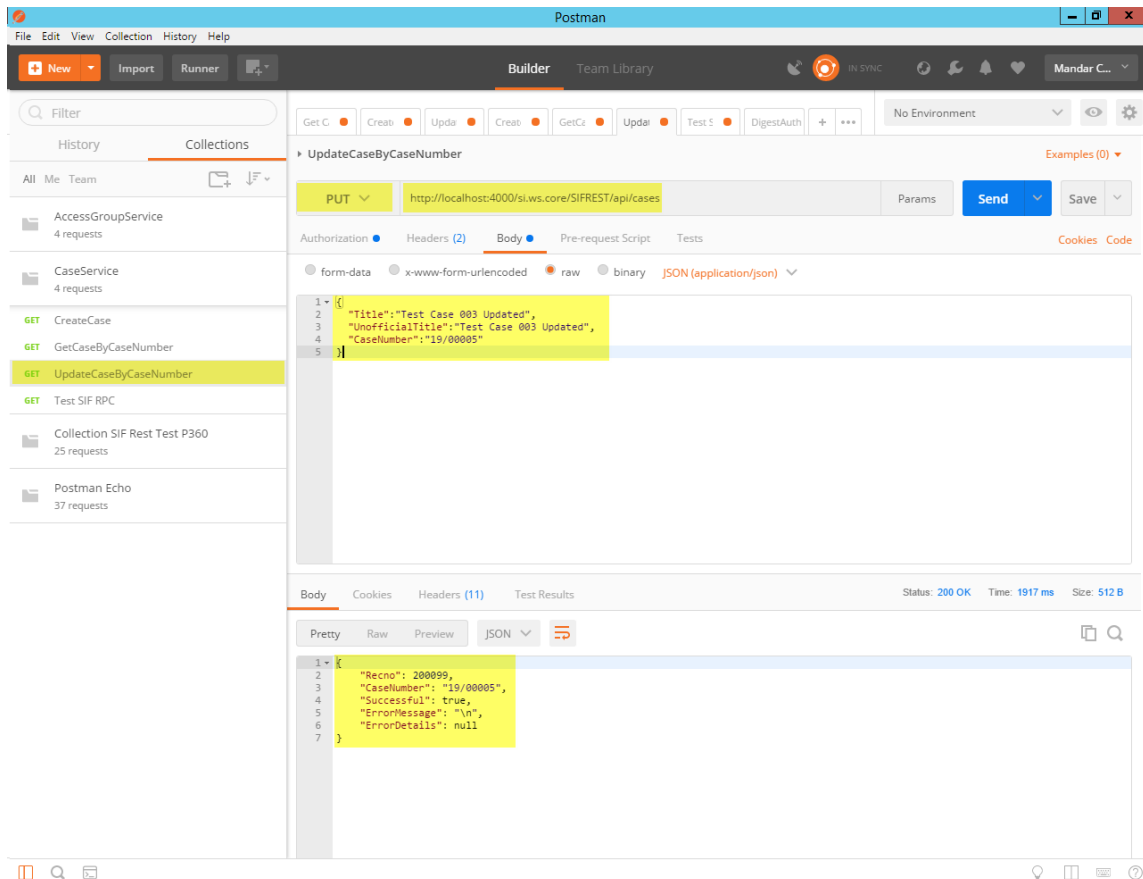

Set the authentication as follows:

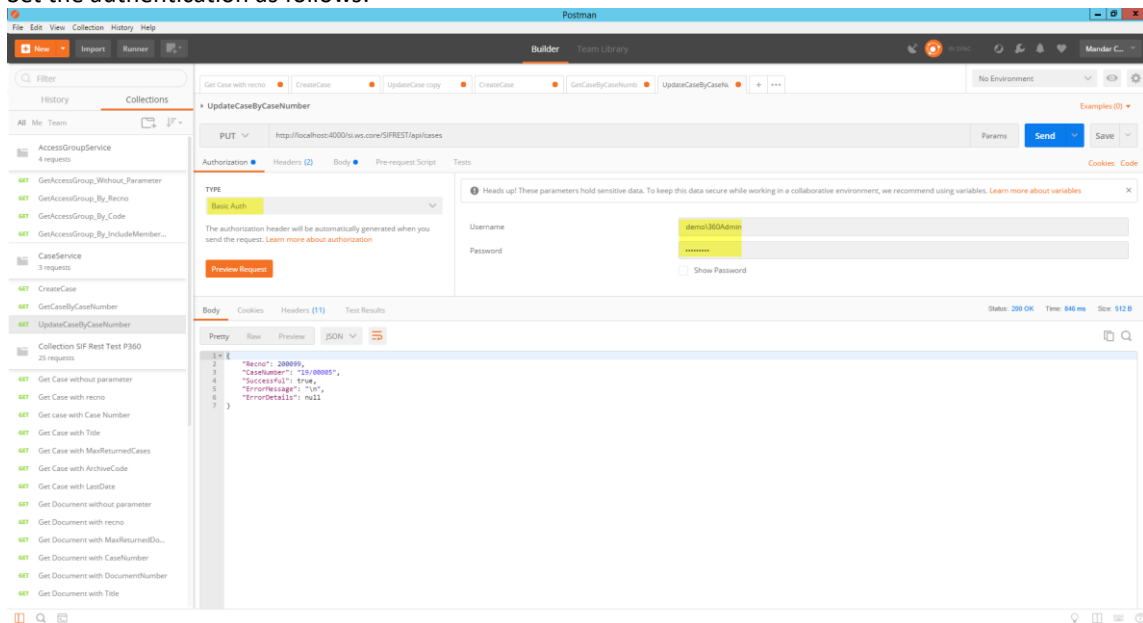


The updated case details look like on 360 UI as follows: -

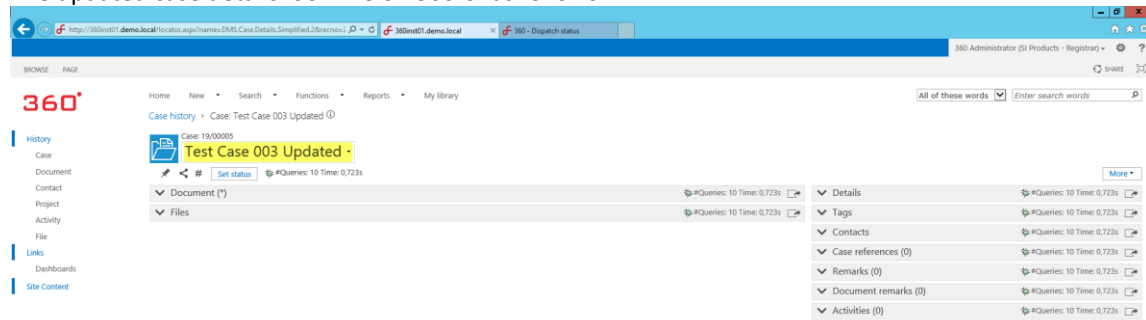


20.3 SIF RPC

Open the swagger UI (do the necessary changes like modify the server name and port number as per your requirement) in the following URL, after that paste that URL in your browser to hit swagger UI


<http://servername:portnumber/Biz/swagger-ui/index.html?url=http://servername:portnumber/Biz/v2/api/swagger/Sl.Data.RPC/Sl.Data.RPC/CaseService>

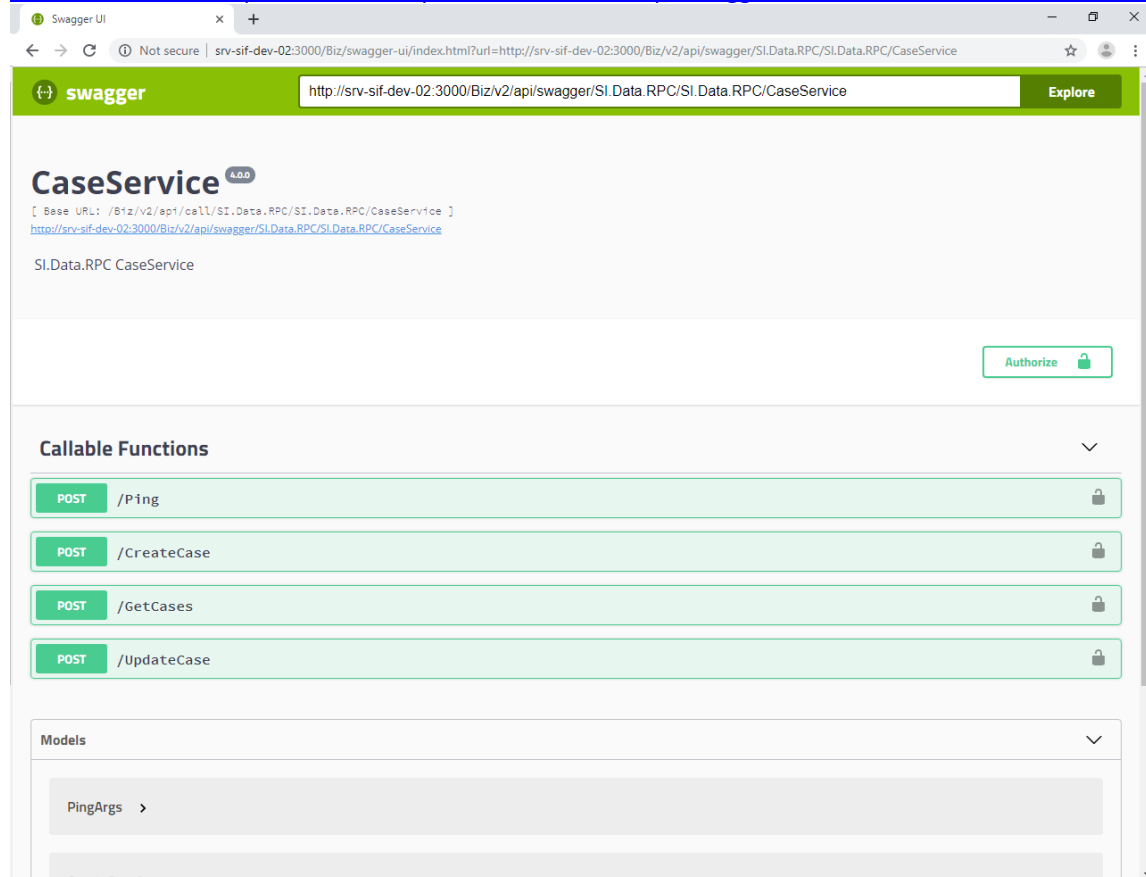

Set auth key in swagger UI, just click on **Authorize** button

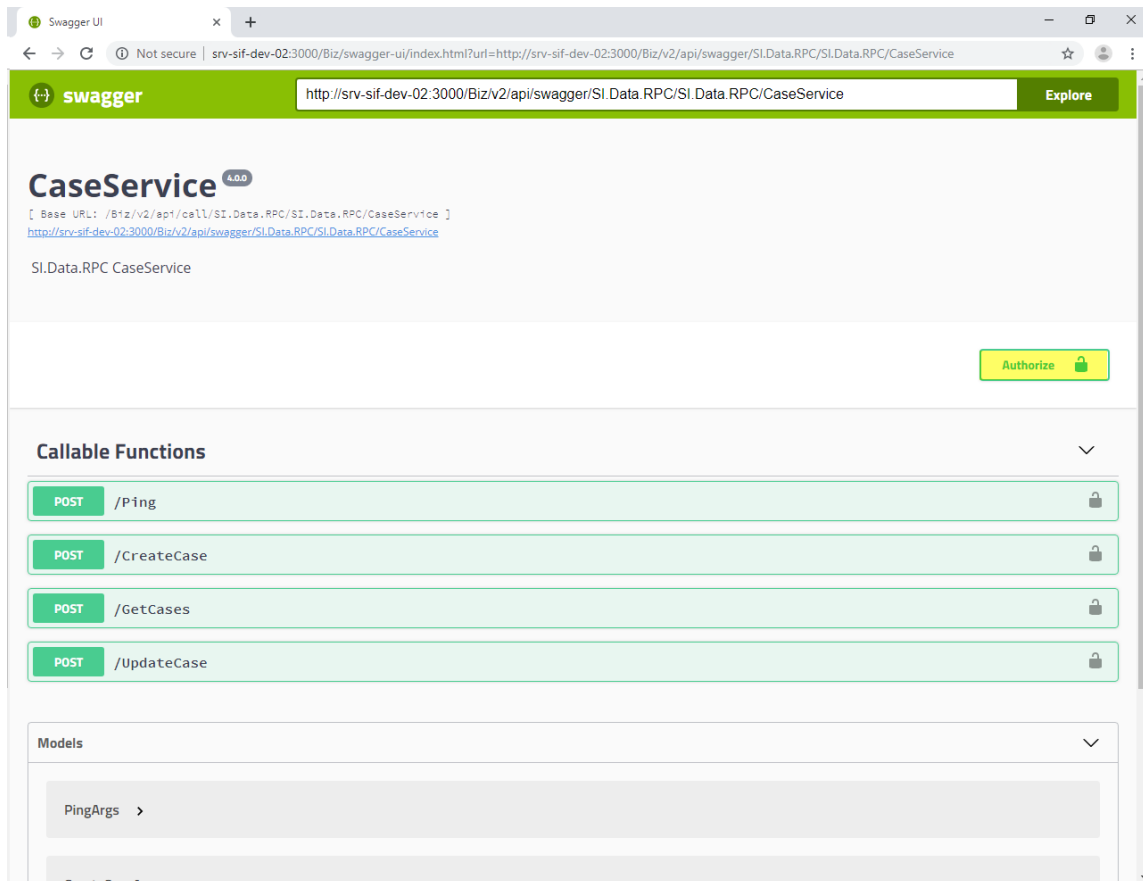


Now provide the value for auth key, after that click on **Authorize** button

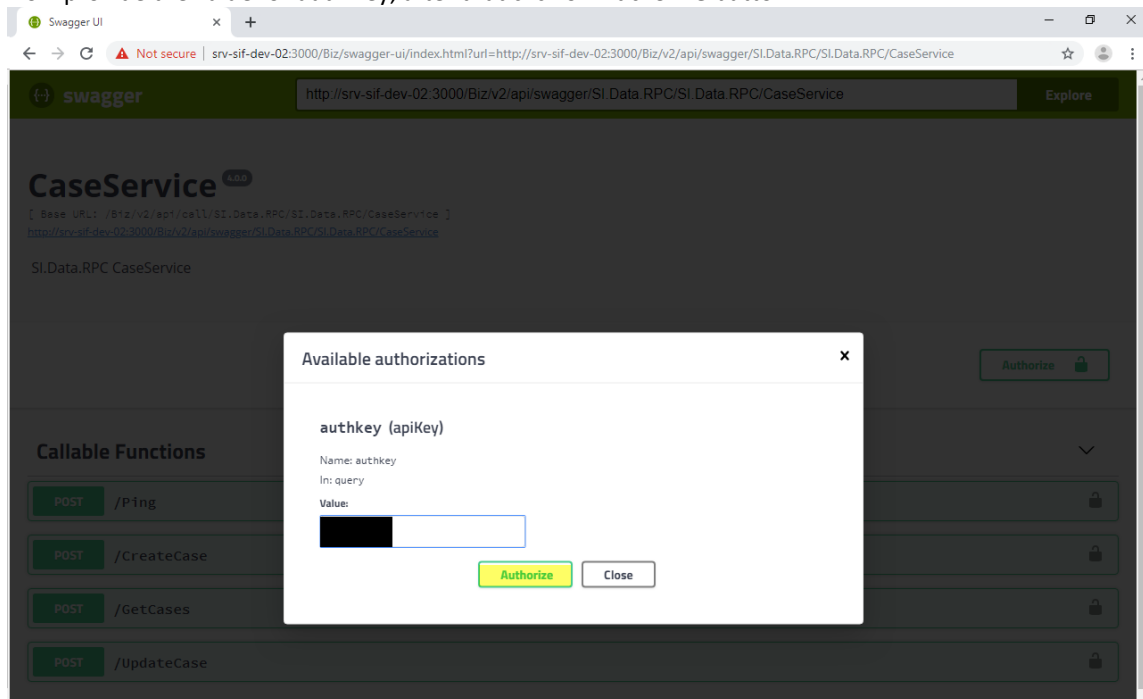

20.3.1 Create Case

Click on **CreateCase** → **Try it out**

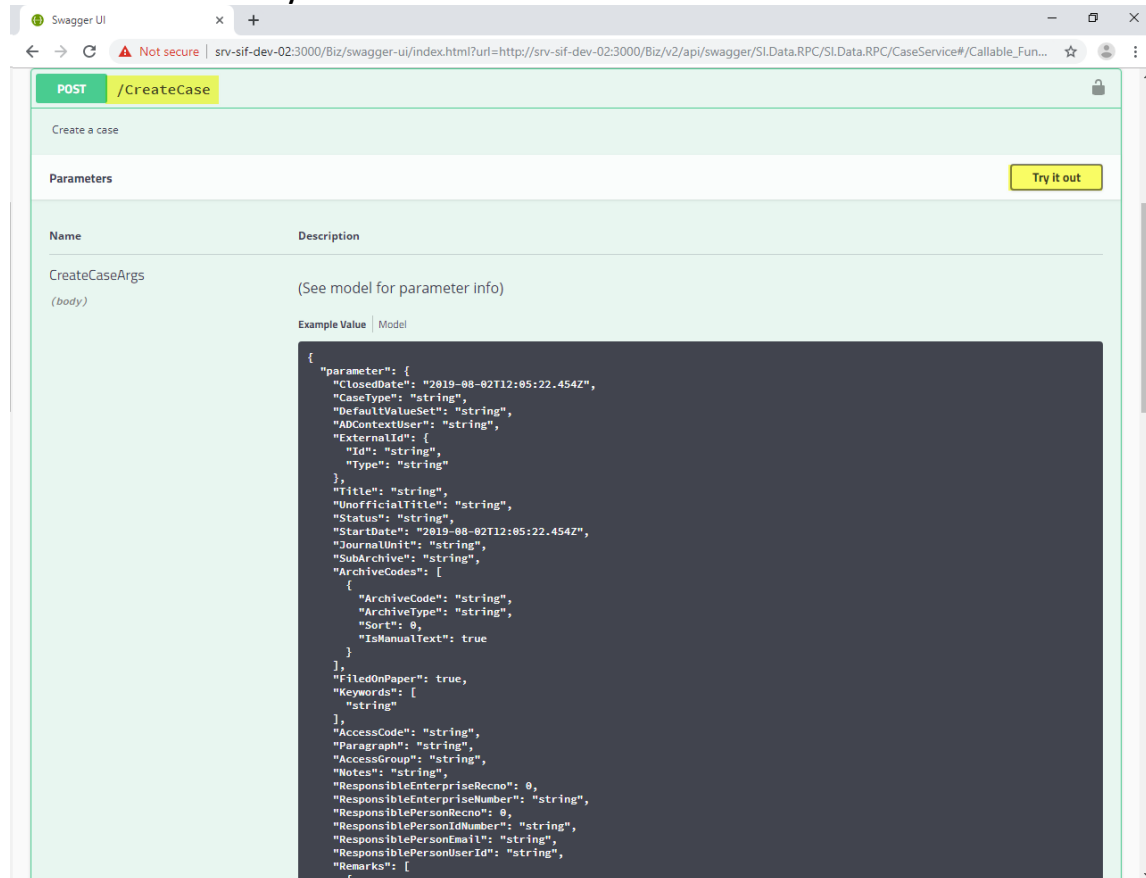


The screenshot shows the Swagger UI for a REST API. The endpoint is **POST /CreateCase**. The description is "Create a case". There is a "Try it out" button. The parameters section shows a body parameter named **CreateCaseArgs** with the description "(See model for parameter info)". Below this, there is a tabbed interface with "Example Value" selected, displaying a JSON object:

```
{
  "parameter": {
    "ClosedDate": "2019-08-02T12:05:22.454Z",
    "CaseType": "string",
    "DefaultValuesSet": "string",
    "ADContextUser": "string",
    "ExternalId": {
      "Id": "string",
      "Type": "string"
    },
    "Title": "string",
    "UnofficialTitle": "string",
    "Status": "string",
    "StartDate": "2019-08-02T12:05:22.454Z",
    "JournalUnit": "string",
    "SubArchive": "string",
    "ArchiveCodes": [
      {
        "ArchiveCode": "string",
        "ArchiveType": "string",
        "Sort": 0,
        "IsManualText": true
      }
    ],
    "FiledOnPaper": true,
    "Keywords": [
      "string"
    ],
    "AccessCode": "string",
    "Paragraph": "string",
    "AccessGroup": "string",
    "Notes": "string",
    "ResponsibleEnterpriseRecno": 0,
    "ResponsibleEnterpriseNumber": "string",
    "ResponsiblePersonRecno": 0,
    "ResponsiblePersonIdNumber": "string",
    "ResponsiblePersonEmail": "string",
    "ResponsiblePersonUserId": "string",
    "Remarks": [

```

Now provide necessary parameters as shown following screen shot.
after that click on **Execute** button it will create a case for you.

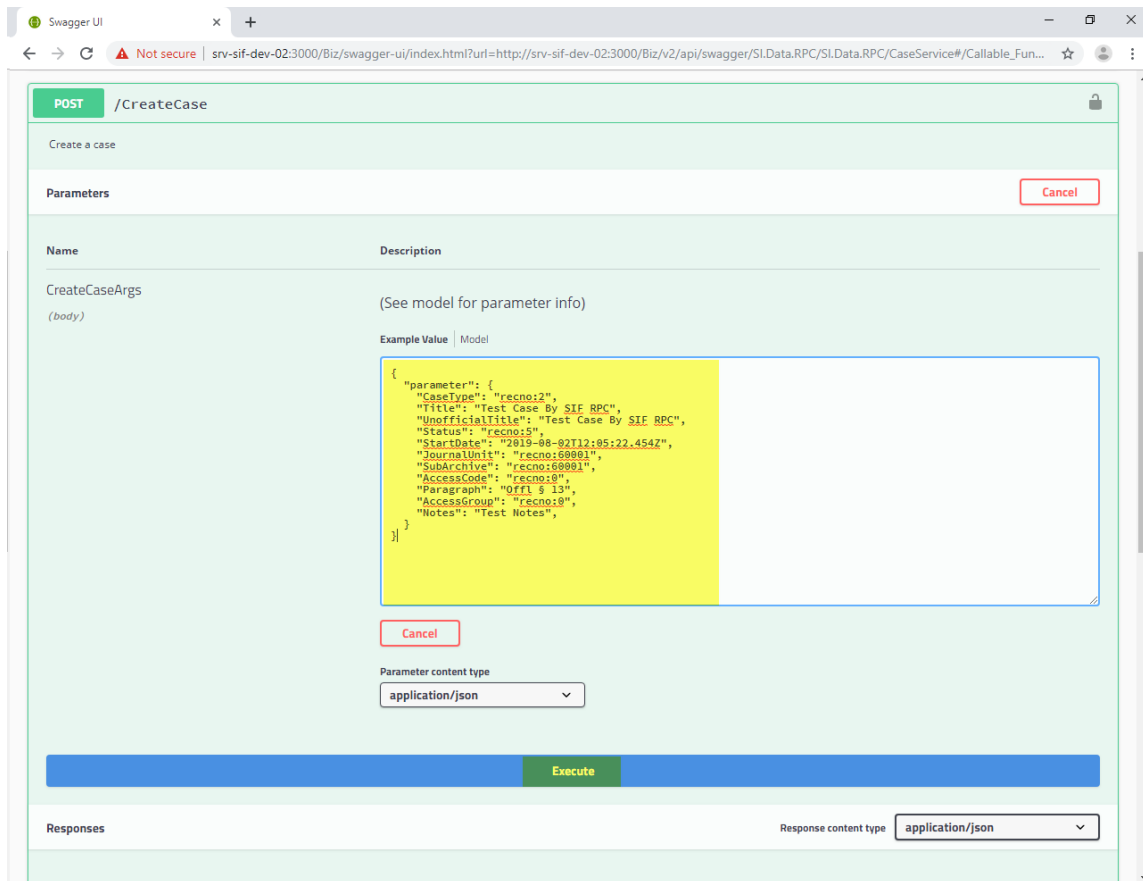

POST /CreateCase

Create a case

Parameters

Cancel

Name	Description
CreateCaseArgs (body)	(See model for parameter info)

Example Value | Model

```
{
  "parameter": {
    "CaseType": "recno:2",
    "Title": "Test Case By SIF RPC",
    "UnofficialTitle": "Test Case By SIF RPC",
    "Status": "recno:5",
    "StartDate": "2019-08-02T12:05:22.454Z",
    "JournalUnit": "recno:60001",
    "SubArchive": "recno:60001",
    "AccessCode": "recno:8",
    "Paragraph": "Offl § 13",
    "AccessGroup": "recno:8",
    "Notes": "Test Notes",
  }
}
```

Cancel


Parameter content type
application/json

Execute

Responses

Response content type
application/json

It will show the response code 200 and response body with successful = true if the case is created successfully

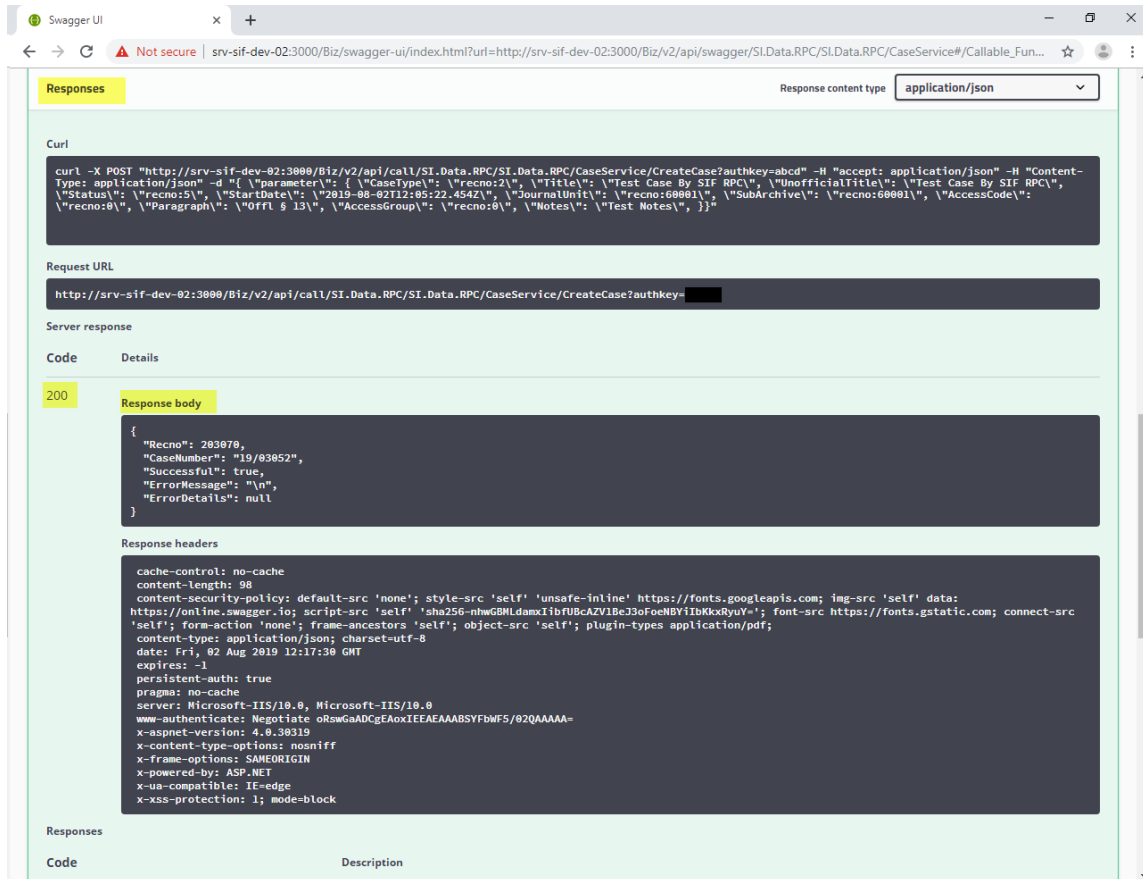


Swagger UI interface showing a successful POST request to the endpoint `http://srv-sif-dev-02:3000/Biz/v2/api/call/SI.Data.RPC/SI.Data.RPC/CaseService/CreateCase?authkey=abcd`. The response is a JSON object with the following details:

- Code:** 200
- Response body:**

```
{
  "Recno": 283879,
  "CaseNumber": "19/03052",
  "Successful": true,
  "ErrorMessage": null,
  "ErrorDetails": null
}
```
- Response headers:**

```
cache-control: no-cache
content-length: 98
content-security-policy: default-src 'none'; style-src 'self' 'unsafe-inline' https://fonts.googleapis.com; img-src 'self' data: https://online.swagger.io; script-src 'self' 'sha256-nhwGWLdaxIibfUBcAZV1BeJ3oFoeNBvYiIBKxxByuV='; font-src https://fonts.gstatic.com; connect-src 'self'; form-action 'none'; frame-ancestors 'self'; object-src 'self'; plugin-types application/pdf;
content-type: application/json; charset=utf-8
date: Fri, 02 Aug 2019 12:17:38 GMT
expires: -1
persistent-auth: true
pragma: no-cache
server: Microsoft-IIS/10.0, Microsoft-IIS/10.0
www-authenticate: Negotiate oRawGaADCgEAoxIEEAEAAAABSYFbWf5/02QAAAA=
x-asnet-version: 4.0.38319
x-content-type-options: nosniff
x-frame-options: SAMEORIGIN
x-powered-by: ASP.NET
x-ua-compatible: IE=edge
x-xss-protection: 1; mode=block
```

The newly created case is look like following on 360 UI

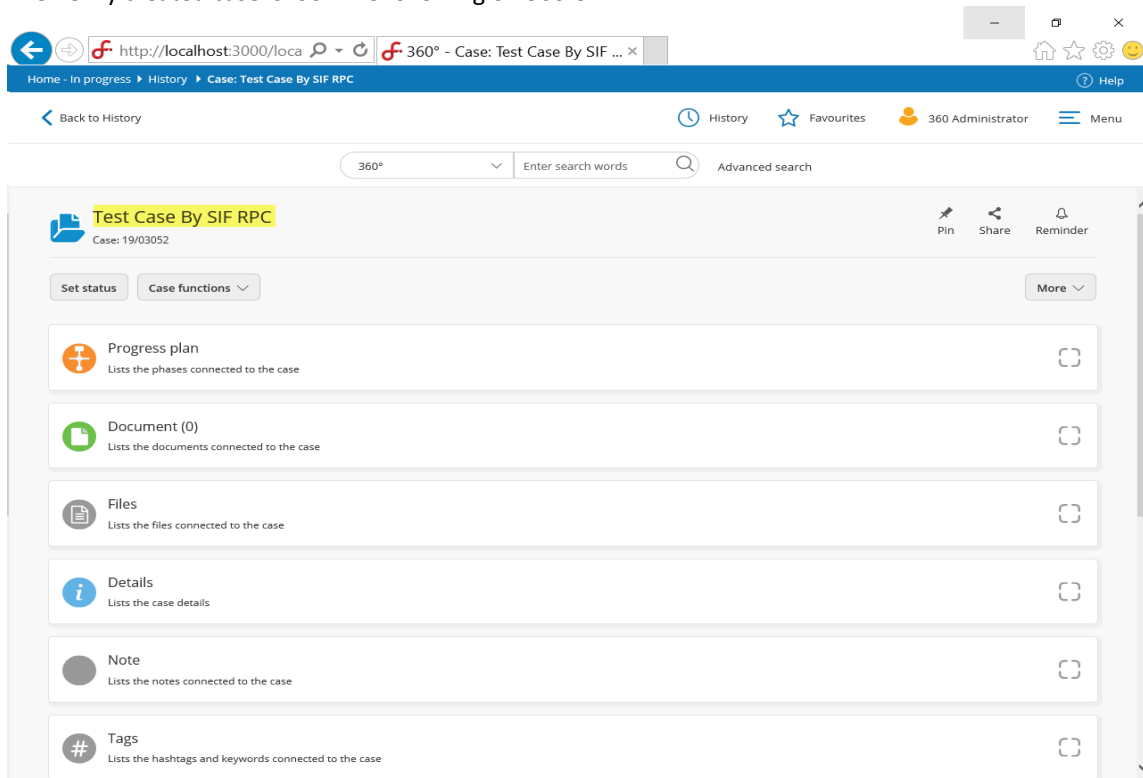


The 360 UI interface displays the newly created case "Test Case By SIF RPC" (Case: 19/03052). The interface includes a navigation bar with "Home", "In progress", "History", and "Case: Test Case By SIF RPC". The main content area shows the case details and a list of connected items:

- Progress plan:** Lists the phases connected to the case.
- Document (0):** Lists the documents connected to the case.
- Files:** Lists the files connected to the case.
- Details:** Lists the case details.
- Note:** Lists the notes connected to the case.
- Tags:** Lists the hashtags and keywords connected to the case.

20.3.2 Get Case

Click on **GetCases** → **Try it out**

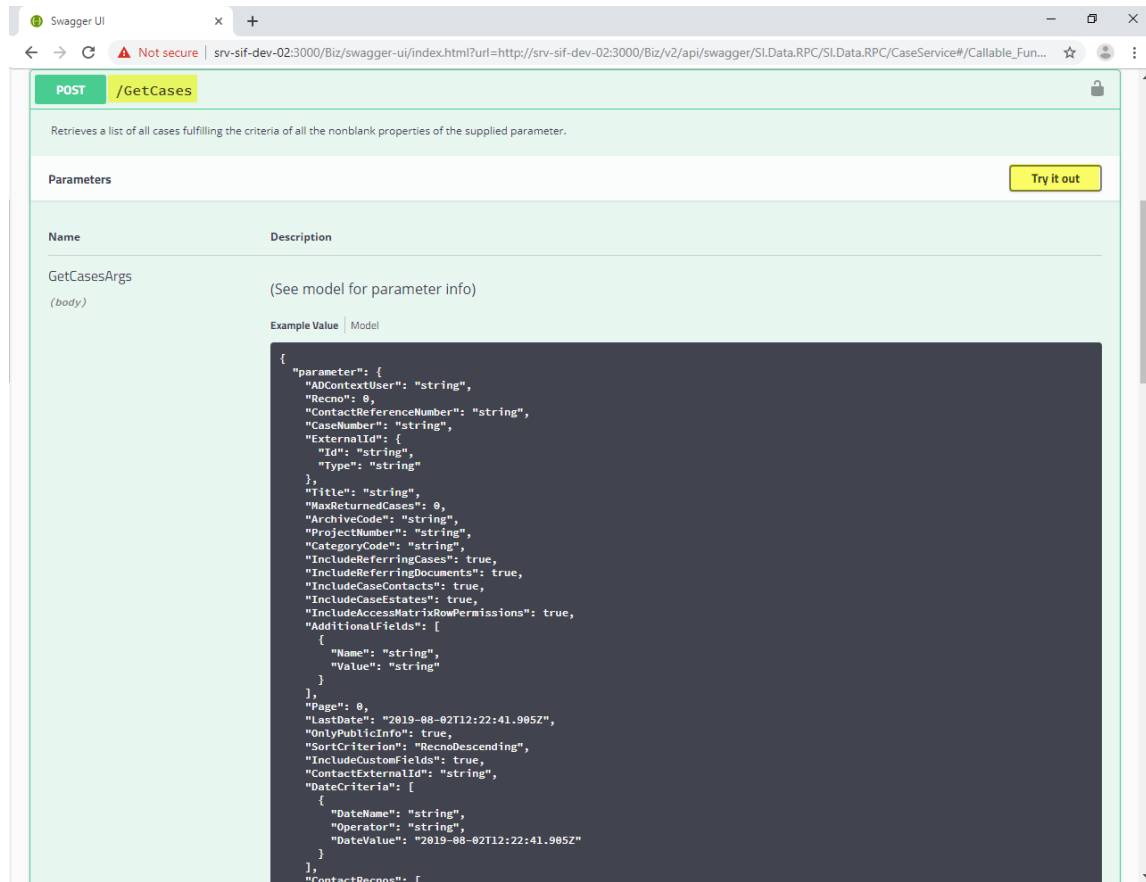

The screenshot shows the Swagger UI for the **POST /GetCases** endpoint. The description states: "Retrieves a list of all cases fulfilling the criteria of all the nonblank properties of the supplied parameter." A **Try it out** button is visible in the top right corner of the parameters section.

Parameters


Name	Description
GetCasesArgs (body)	(See model for parameter info)

Below the table, there are tabs for **Example Value** and **Model**. The **Example Value** tab is selected, displaying a JSON object:

```
{
  "parameter": {
    "ADContextUser": "string",
    "Recno": 0,
    "ContactReferenceNumber": "string",
    "CaseNumber": "string",
    "ExternalId": {
      "Id": "string",
      "Type": "string"
    },
    "Title": "string",
    "MaxReturnedCases": 0,
    "ArchiveCode": "string",
    "ProjectNumber": "string",
    "CategoryCode": "string",
    "IncludeReferringCases": true,
    "IncludeReferringDocuments": true,
    "IncludeCaseContacts": true,
    "IncludeCaseEstates": true,
    "IncludeAccessMatrixRowPermissions": true,
    "AdditionalFields": [
      {
        "Name": "string",
        "Value": "string"
      }
    ],
    "Page": 0,
    "LastDate": "2019-08-02T12:22:41.985Z",
    "OnlyPublicInfo": true,
    "SortCriterion": "RecnoDescending",
    "IncludeCustomFields": true,
    "ContactExternalId": "string",
    "DateCriteria": [
      {
        "DateName": "string",
        "Operator": "string",
        "DateValue": "2019-08-02T12:22:41.985Z"
      }
    ],
    "ContactRecnos": [

```

Now provide necessary parameters as shown following screen shot.
after that click on **Execute** button it will find a case for you.

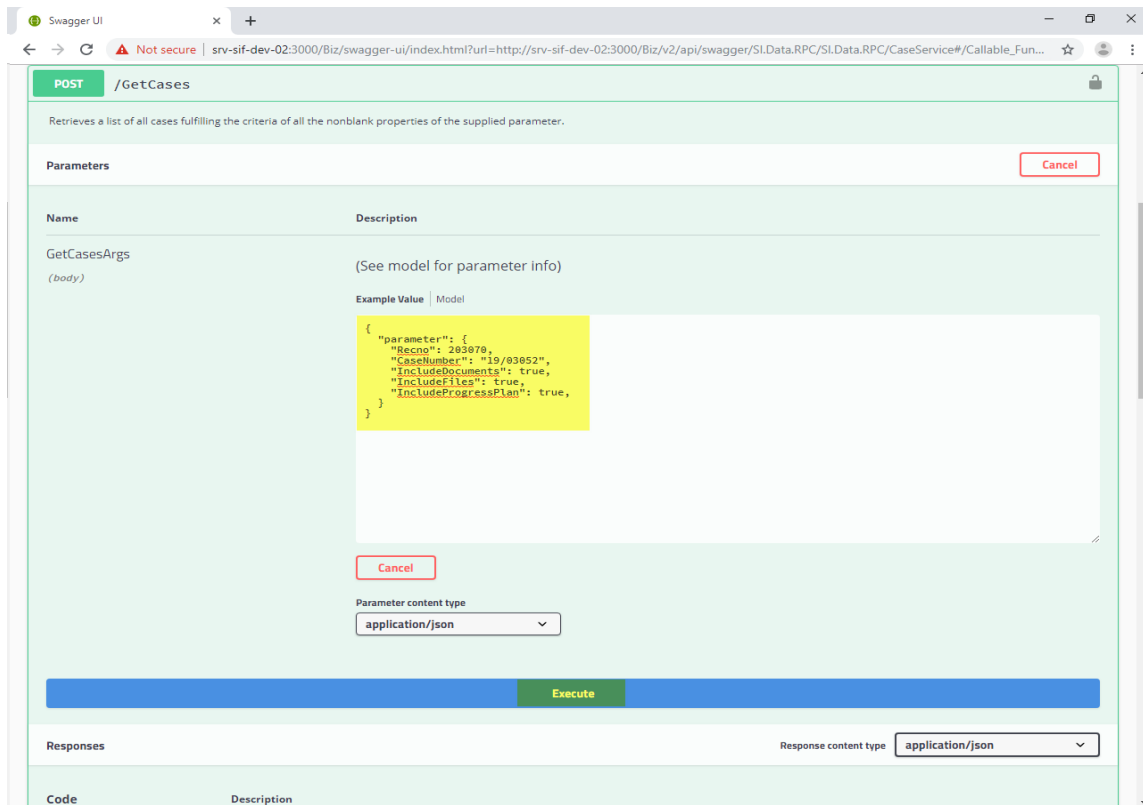

POST /GetCases

Retrieves a list of all cases fulfilling the criteria of all the nonblank properties of the supplied parameter.

Parameters

Name	Description
GetCasesArgs (body)	(See model for parameter info)

Example Value | Model

```
{
  "parameter": {
    "Recno": 203070,
    "CaseNumber": "19/03052",
    "IncludeDocuments": true,
    "IncludeFiles": true,
    "IncludeProgressPlan": true,
  }
}
```

Parameter content type: application/json


Execute

Responses

Response content type: application/json

Code	Description
------	-------------

If you able to find a case, it will show the response code 200 and response body with successful = true.

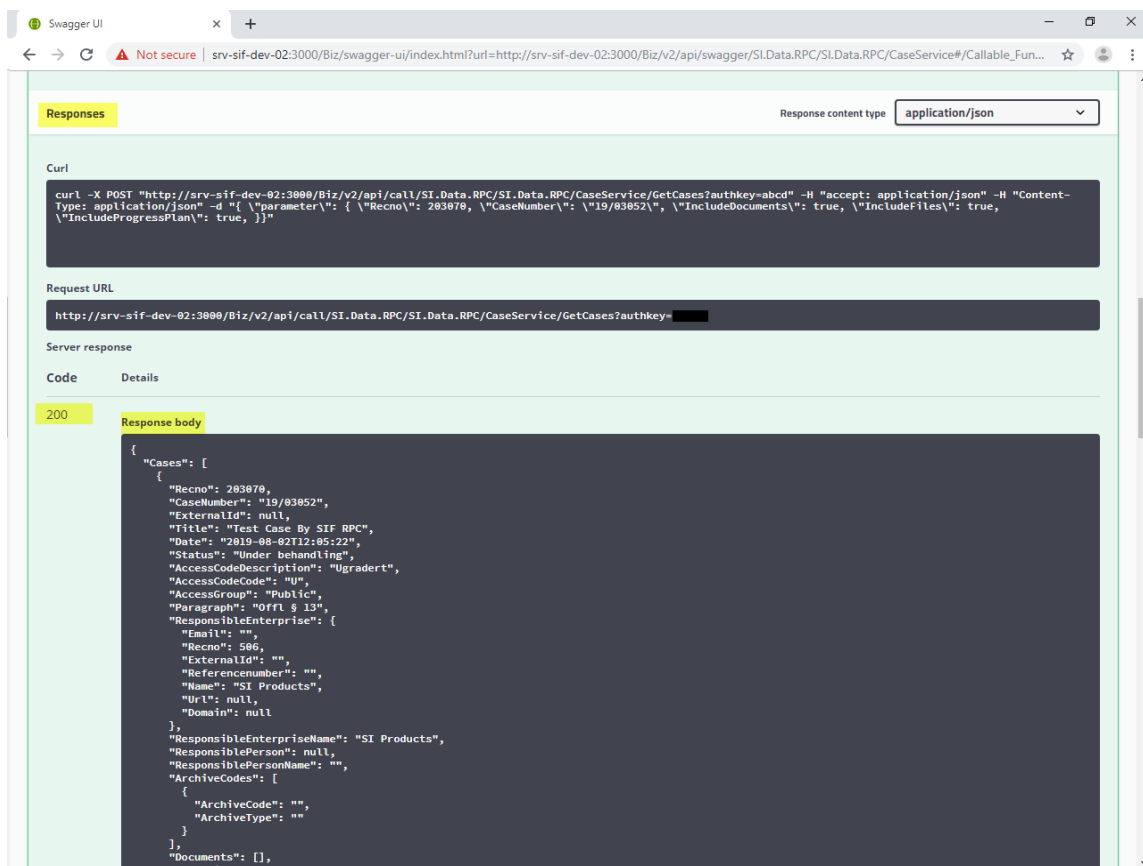

Responses

Response content type: application/json

Curl

```
curl -X POST "http://srv-sif-dev-02:3000/Biz/v2/api/call/SI.Data.RPC/SI.Data.RPC/CaseService/GetCases?authkey=abcd" -H "accept: application/json" -H "Content-Type: application/json" -d "{ \"parameter\": { \"Recno\": 203070, \"CaseNumber\": \"19/03052\", \"IncludeDocuments\": true, \"IncludeFiles\": true, \"IncludeProgressPlan\": true, } }"
```

Request URL


```
http://srv-sif-dev-02:3000/Biz/v2/api/call/SI.Data.RPC/SI.Data.RPC/CaseService/GetCases?authkey=
```

Server response

Code	Details
200	Response body <pre>{ "Cases": [{ "Recno": 203070, "CaseNumber": "19/03052", "ExternalId": null, "Title": "Test Case By SIF RPC", "Date": "2019-08-02T12:05:22", "Status": "Under handling", "AccessCodeDescription": "Ugradert", "AccessCodeCode": "u", "AccessGroup": "Public", "Paragraph": "Offrl § 13", "ResponsibleEnterprise": { "Email": "", "Recno": 500, "ExternalId": "", "Referencenumber": "", "Name": "SI Products", "Url": null, "Domain": null }, "ResponsibleEnterpriseName": "SI Products", "ResponsiblePerson": null, "ResponsiblePersonName": "", "ArchiveCodes": [{ "ArchiveCode": "", "ArchiveType": "" }], "Documents": [], "AccessCodeDescription": null }], "AccessCodeDescription": null }</pre>

20.3.3 Update Case


Click on **UpdateCase** → **Try it out**

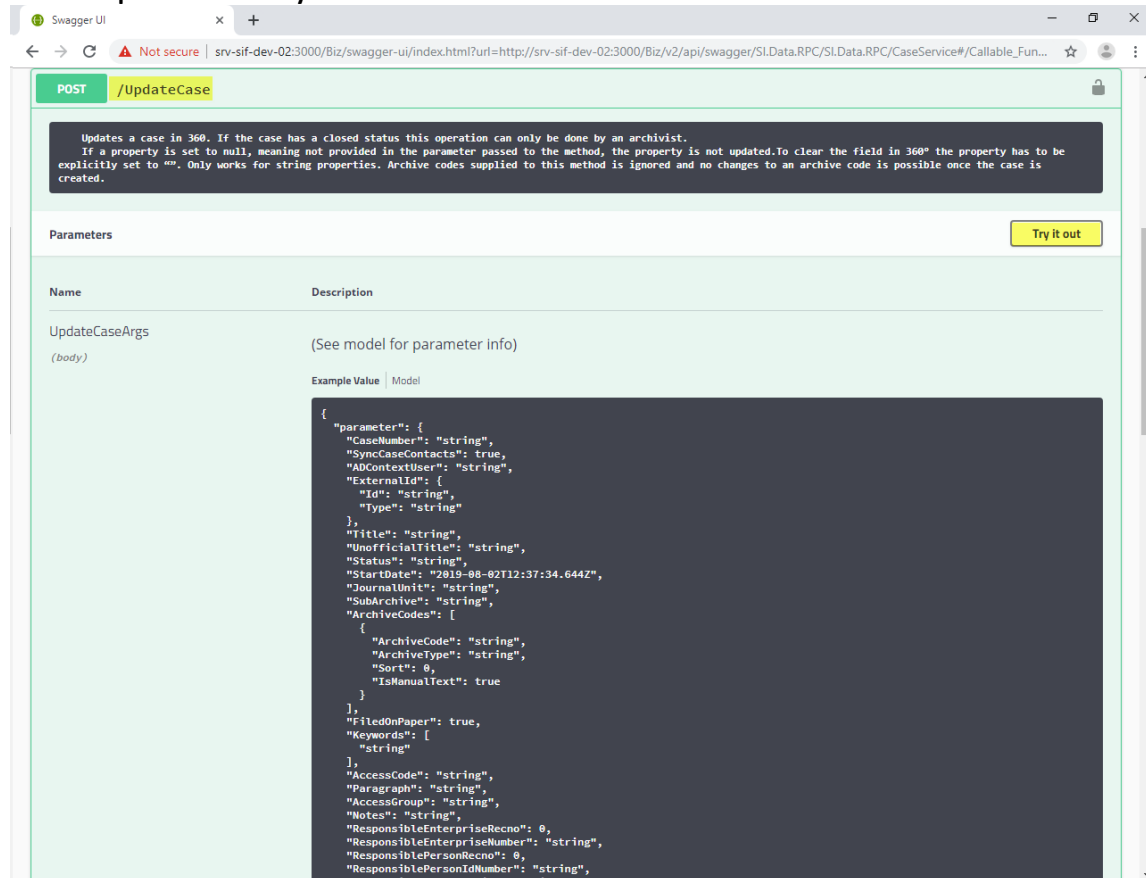

The screenshot shows the Swagger UI for the `POST /UpdateCase` endpoint. At the top, a warning message states: "Updates a case in 360. If the case has a closed status this operation can only be done by an archivist. If a property is set to null, meaning not provided in the parameter passed to the method, the property is not updated. To clear the field in 360 the property has to be explicitly set to ''. Only works for string properties. Archive codes supplied to this method is ignored and no changes to an archive code is possible once the case is created." Below this, the **Parameters** section shows a single parameter, `UpdateCaseArgs`, with the description "(See model for parameter info)". To the right of the parameter name is a **Try it out** button. Below the parameter name, there are tabs for **Example Value** and **Model**. The **Example Value** tab is selected, displaying a JSON object with various fields like `parameter`, `CaseNumber`, `SyncCaseContacts`, `ADContextUser`, `ExternalId`, `Title`, `UnofficialTitle`, `Status`, `StartDate`, `JournalUnit`, `SubArchive`, `ArchiveCodes`, `FiledOnPaper`, `Keywords`, `AccessCode`, `Paragraph`, `AccessGroup`, `Notes`, `ResponsibleEnterpriseRecno`, `ResponsibleEnterpriseNumber`, `ResponsiblePersonRecno`, `ResponsiblePersonIdNumber`, and `ResponsiblePersonEmail`.

Now provide necessary parameters as shown following screen shot.

after that click on **Execute** button it will update a case with the details that you provided.

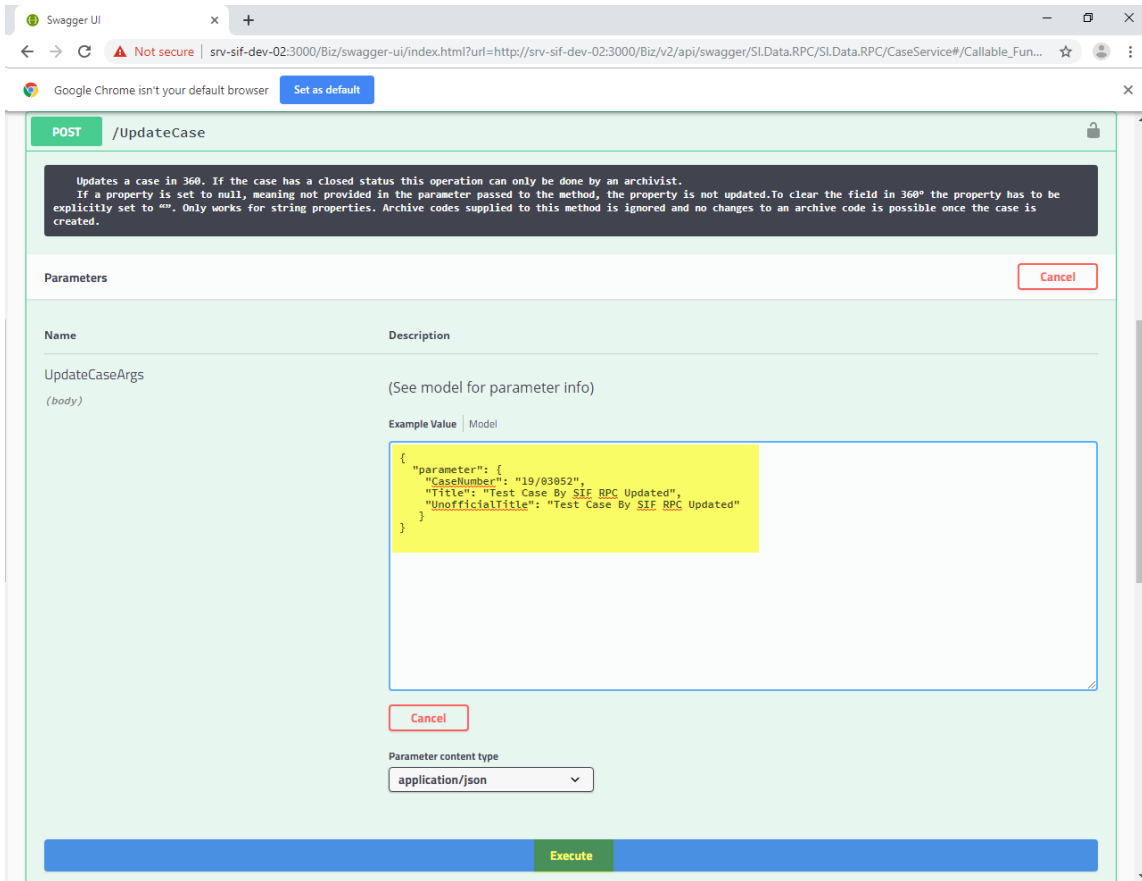

Swagger UI

Not secure | srv-sif-dev-02:3000/Biz/swagger-ui/index.html?url=http://srv-sif-dev-02:3000/Biz/v2/api/swagger/SLData.RPC/SLData.RPC/CaseService#/Callable_Fun...

Google Chrome isn't your default browser [Set as default](#)

POST /UpdateCase

Updates a case in 360. If the case has a closed status this operation can only be done by an archivist.
If a property is set to null, meaning not provided in the parameter passed to the method, the property is not updated. To clear the field in 360 the property has to be explicitly set to `""`. Only works for string properties. Archive codes supplied to this method is ignored and no changes to an archive code is possible once the case is created.

Parameters [Cancel](#)

Name	Description
UpdateCaseArgs (body)	(See model for parameter info) Example Value Model <pre>{ "parameter": { "CaseNumber": "19/83052", "Title": "Test Case By SIF RPC Updated", "UnofficialTitle": "Test Case By SIF RPC Updated" } }</pre> Cancel

Parameter content type
application/json

[Execute](#)

It will show the response code 200 and response body with successful = true if the case is updated successfully

Swagger UI

Not secure | srv-sif-dev-02:3000/Biz/swagger-ui/index.html?url=http://srv-sif-dev-02:3000/Biz/v2/api/swagger/SlData.RPC/SlData.RPC/CaseService#/Callable_Fun...

Response content type: application/json

Responses

Curl

```
curl -X POST "http://srv-sif-dev-02:3000/Biz/v2/api/call/Sl.Data.RPC/Sl.Data.RPC/CaseService/UpdateCase?authkey=abcd" -H "accept: application/json" -H "Content-Type: application/json" -d '{"parameter":{"CaseNumber":"19/03052","Title":"Test Case By SIF RPC Updated","UnofficialTitle":"Test Case By SIF RPC Updated"}}'
```

Request URL

```
http://srv-sif-dev-02:3000/Biz/v2/api/call/Sl.Data.RPC/Sl.Data.RPC/CaseService/UpdateCase?authkey=
```

Server response

Code **Details**

200 **Response body**

```
{
  "Recno": 203070,
  "CaseNumber": "19/03052",
  "Successful": true,
  "ErrorMessage": "",
  "ErrorDetails": null
}
```


Response headers

```
cache-control: no-cache
content-length: 98
content-security-policy: default-src 'none'; style-src 'self' 'unsafe-inline' https://fonts.googleapis.com; img-src 'self' data: https://online.swagger.io; script-src 'self' 'sha256-nhwGBMLdamIibFUBcAZV1BeJ3oFoeNBvYiBkKxRyuV='; font-src https://fonts.gstatic.com; connect-src 'self'; form-action 'none'; frame-ancestors 'self'; object-src 'self'; plugin-types application/pdf;
content-type: application/json; charset=utf-8
date: Fri, 02 Aug 2019 12:46:57 GMT
expires: -1
persistent-auth: true
pragma: no-cache
server: Microsoft-IIS/10.0, Microsoft-IIS/10.0
www-authenticate: Negotiate oRswGaADCGEaoxiEEAEAAABXIJqV455v3wAAAA=
x-aspnet-version: 4.0.30319
x-content-type-options: nosniff
x-frame-options: SAMEORIGIN
x-powered-by: ASP.NET
x-ua-compatible: IE=edge
x-xss-protection: 1; mode=block
```

Responses

Code	Description
------	-------------


The updated case details look like on 360 UI as follows: -

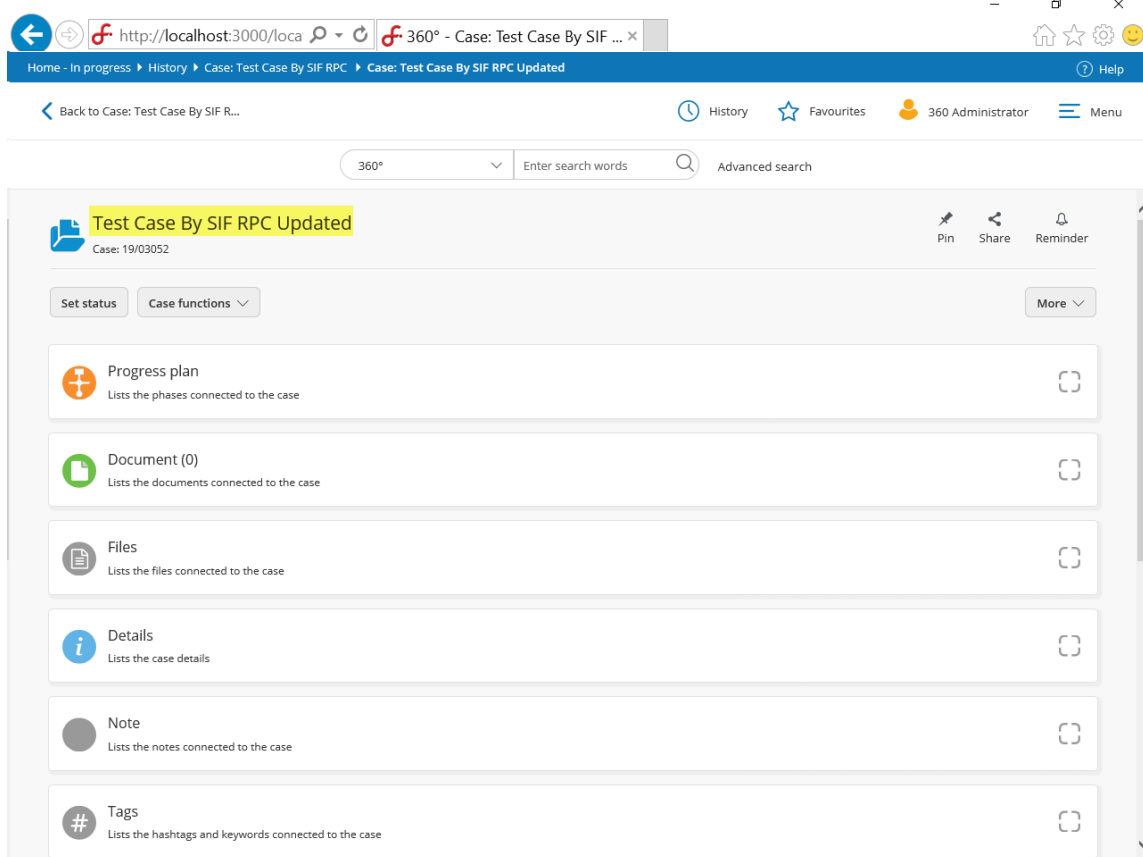

20.4 SIF SOAP Bridge (Deprecated v5.14)

To test this new SOAP bridge, it is the same as SIF SOAP, you can use SOAPUI tool to test it.

Get the URL from endpoint configuration created in chapter: [SOAP Bridge \(360 5.9 – 5.13\)](#)

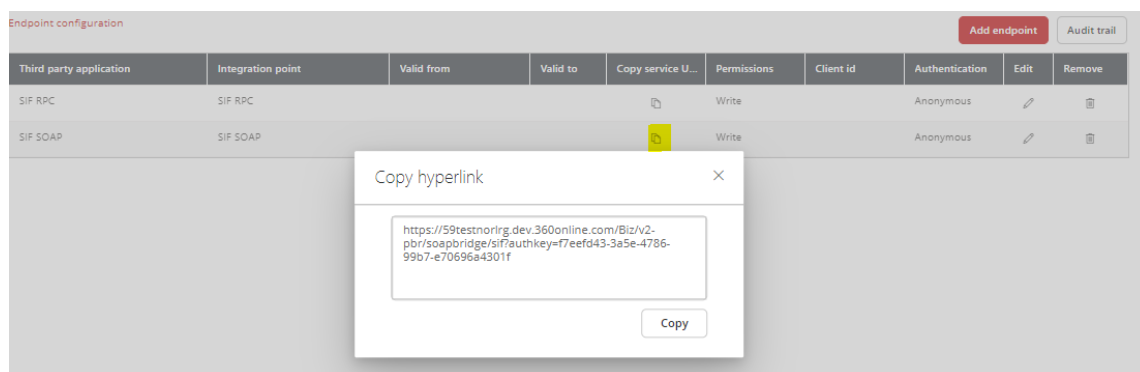

WsdI url:

[https://\[customer specific url\]/Biz/v2-pbr/soapbridge/sif/\[service\]?authkey=\[auth key\]&wsdl](https://[customer specific url]/Biz/v2-pbr/soapbridge/sif/[service]?authkey=[auth key]&wsdl)

20.4.1 Existing client modifications

You need to update the service url in client endpoint address.


```
<bindings>
  <basicHttpBinding>
    <binding name="BasicHttpBinding_IFileService" transferMode="Streamed" maxReceivedMessageSize="400000000" maxBufferSize="2147483647"
      <security mode="None" />
    </binding>
    <readerQuotas maxArrayLength="2147483647" maxStringLength="2147483647" />
  </binding>
  <binding name="Basic" maxReceivedMessageSize="500000000" maxBufferSize="500000000"
    <security mode="None" />
    <readerQuotas maxArrayLength="500000000" maxStringLength="500000000" />
  </binding>
</basicHttpBinding>
</bindings>

<client>
  <endpoint address="http://srv-sif-dev-02.360online.com/Biz/v2-pbr/soapbridge/sif/fileService?authkey=c9e8388-8208-42d6-8732-2782078c7a5f" binding=
    bindingConfiguration="BasicHttpBinding_IFileService" contract="FileService_IFileService"
    name="BasicHttpBinding_IFileService" />
  <endpoint address="http://SRV-SIF-001-02.360online.com/Biz/v2-pbr/soapbridge/sif/fileService?authkey=c9e8388-8208-42d6-8732-2782078c7a5f" binding=
    bindingConfiguration="BasicHttpBinding_IFileService" contract="FileService_IFileService"
    name="BasicHttpBinding_IFileService" />
  <endpoint address="http://SRV-SIF-001-02.360online.com/Biz/v2-pbr/soapbridge/sif/fileService?authkey=c9e8388-8208-42d6-8732-2782078c7a5f" binding=
    bindingConfiguration="BasicHttpBinding_IFileService" contract="FileService_IFileService"
    name="BasicHttpBinding_IFileService" />
</client>
```

20.4.2 SOAP bridge sample requests/response

Below are steps to verify SOAP bridge wrapper using SOAP UI tool.

1. Copy the endpoint/integration URL from Endpoint configuration.

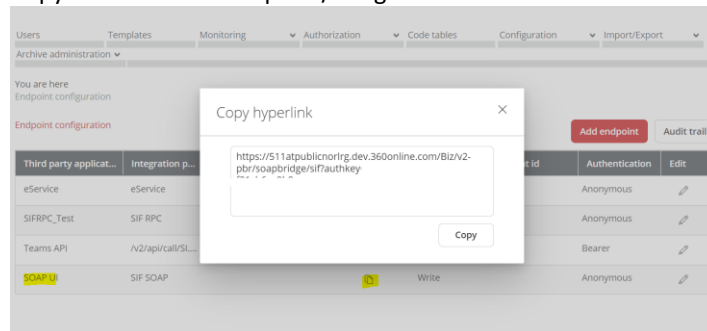

2. Add server name and append &wsdl after authkey.

New SOAP Project
Creates a WSDL/SOAP based Project in this workspace

Project Name:

Initial WSDL:


Create Requests: ☒ Create sample requests for all operations?

Create TestSuite: ☐ Creates a TestSuite for the imported WSDL


Relative Paths: ☐ Stores all file paths in project relatively to project file (requires save)

[https://\[customer specific url\]/Biz/v2-pbr/soapbridge/sif/\[service\]?authkey=\[auth key\]](https://[customer specific url]/Biz/v2-pbr/soapbridge/sif/[service]?authkey=[auth key])

3. You will get something like this.

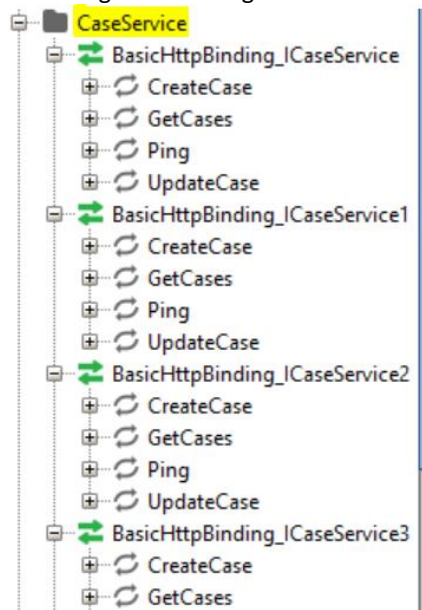

4. Open anyone binding, expand the method and double click on Request.

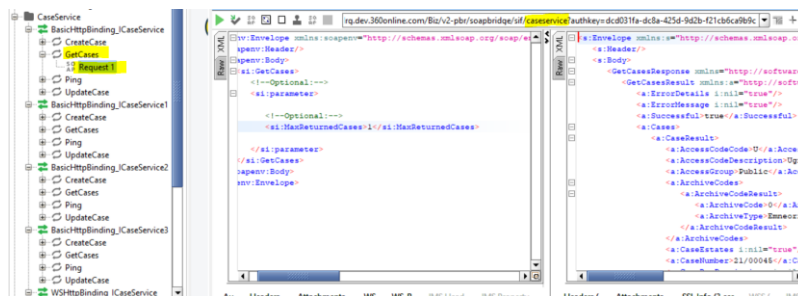

5. You don't have give any authentication, authkey will be used to authenticate request.
6. Same way you can verify other services as well. Generating proxy classes is also same as WCF client using wsdl or service URL.

21 eArchive support

SIF RPC, which can be used on eArchive to import Cases, Documents and Files. The SIF RPC consists of several services but not all are applicable for eArchive.


This chapter will mainly focus on Case, Document and File service, as all other services can be use like today.

For other services refer the above respective chapter.

Note: With 360 v5.11, added support for inserting/updating XML fragment through SIF.

21.1 Overview model

This model is a quick overview over the different services and methods that are available in the SIF RPC for eArchive.

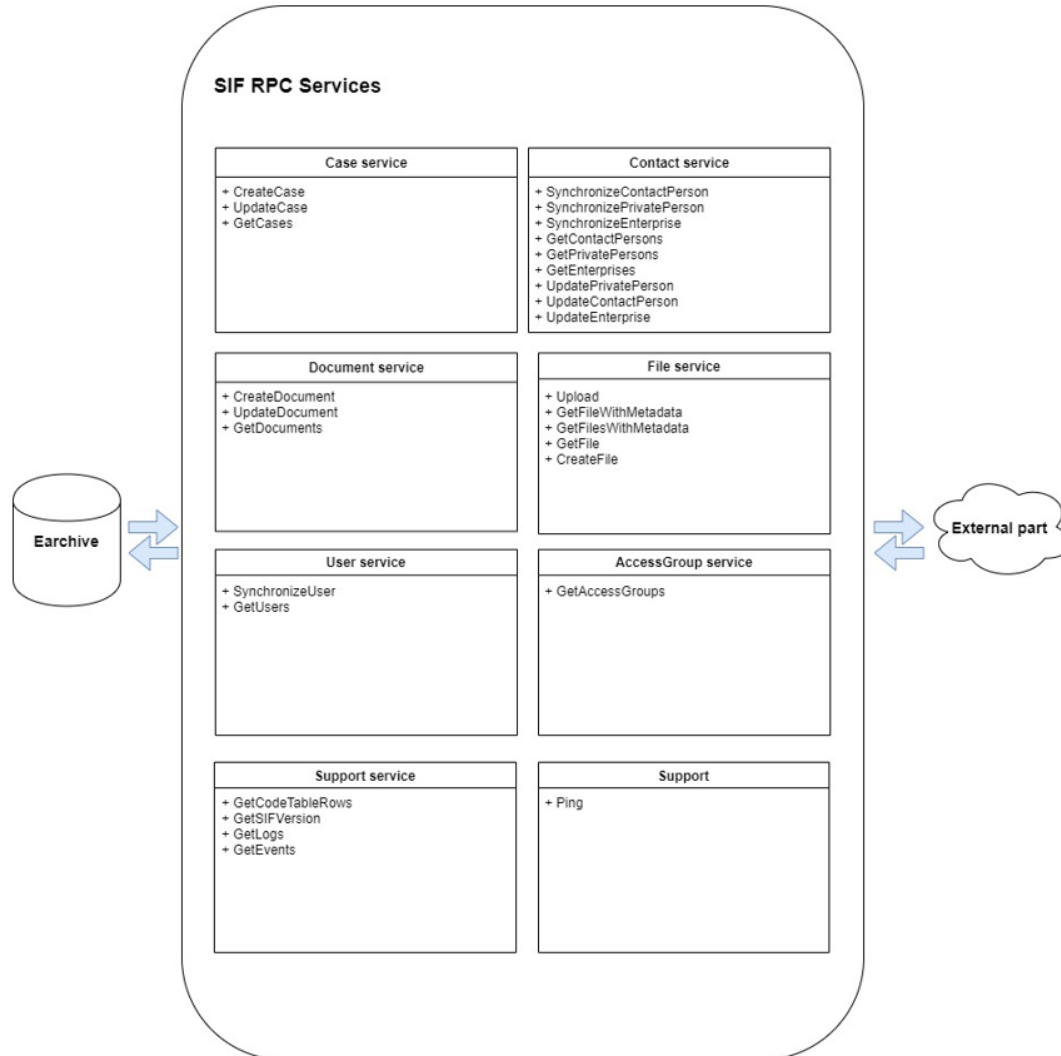

21.2 Update Noark-5 XML Job

This job will run pending updates for Noark5 xml updates.

You can find this job under "open 360 admin -> Monitoring -> Jobs"



21.3 JSON sample requests

21.3.1 Archiving case

For archiving a case, make use of CaseService/CreateCase. The parameters in the data contracts accept either code value of the respective code or recno if nothing else is specified.

For more detail about data contract, refer [CreateCase](#)

Correct CaseType, CaseStatus are mandatory to pass in request parameter.

By default, it will take CaseType: recno:2 "Sak/Case", so it's mandatory to pass correct type and status.

```
{
  "parameter": {
    "CaseType": "recno:18",
    "Title": "Import Case using SIF",
    "Status": "recno:6",
    "ResponsiblePersonRecno": 1,
    "Contacts": [
      {
        "Role": "recno:17",
        "ExternalId": "recno:506"
      },
      {
        "Role": "recno:18",
        "ExternalId": "recno:1"
      }
    ],
    "AdditionalFields": [
      {
        "Name": "ImportedCaseNumber",
        "Value": "12345"
      }
    ]
  }
}
```

You can put this sample JSON parameter in swagger (before executing do necessary changes like responsible person recno, imported case number etc.), refer [Case](#)

Once case has been imported, you can try to run the “Update Noark-5 xml” job, refer [Update Noark-5 XML Job](#)

21.3.2 Get archived case

Retrieves a list of all archived cases fulfilling the criteria of all the nonblank properties of the supplied parameter. At least one search criterion parameter must be supplied.

You can make use of CaseService/GetCases.

For contract related details, refer [GetCases](#)

Sample JSON GetCases request to get archived case on basis ImportedCaseNumber:

```
{
  "parameter": {
    "AdditionalFields": [
      {
        "Name": "ImportedCaseNumber",
        "Value": "XXXXX"
      }
    ],
  }
}
```

21.3.3 Update archived case

For updating already archived case, use CaseService/UpdateCase.

Refer [UpdateCase](#), to know more about the parameters for updating a case.

21.3.4 Archiving document

For archiving a document, make use of DocumentService/CreateDocument.

The parameters in the data contracts accept either code value of the respective code or recno if nothing else is specified.

Refer [CreateDocument](#) for more detailed explanation of data contracts.

For archiving document to Earchive, Archive, Status, Category are mandatory. So that it will be imported under correct document archive.

Sample JSON request for archiving document:

```
{
  "parameter": {
    "CaseNumber": "20-11",

    "Archive": "recno:17",

    "Title": "Test document for SIF case",

    "Category": "recno:111",
    "Status": "recno:6",

    "ResponsiblePersonRecno": 1,

    "Contacts": [
      {
        "Role": "recno:6",

        "ExternalId": "recno:1"
      }
    ],

    "Files": [
      {
        "Title": "SIF Document",
        "Format": "DOCX",

        "UploadedFileReference": "2ca031b4-51d2-4567-90be-ff502cc9b9a2",

      }
    ]
  }
}
```

You can put this sample JSON parameter in swagger refer [Document](#) (before executing do necessary changes like responsible person recno etc.)

Once document has been imported, you can try to run the “Update Noark-5 xml” job, refer [Update Noark-5 XML Job](#)

21.3.5 Get archived document

Retrieves a list of all archived documents fulfilling the criteria of all the nonblank properties of the supplied parameter. May also be used to get file meta data and the physical file(s) inside the document. At least one search criterion parameter must be supplied.

For contract details refer [GetDocuments](#)

Sample JSON GetDocuments request :

```
{
  "parameter": {
    "AdditionalFields": [
      {
        "Name": "ImportedDocumentNumber",
        "Value": "XXXXX"
      }
    ],
  }
}
```

21.3.6 Update archived document

For updating already archived case, use DocumentService/UpdateDocument.

Refer [UpdateDocument](#), to know more about the parameters for updating a document

21.3.7 Upload file reference

You can make use of FileService/Upload, to upload file while archiving document.

For more detail about data contract, refer [Upload](#)

Sample JSON request. You can put this swagger request block. Refer [File](#)

```
{
  "parameter": {
    "FileData": [
      84,104,105,115,32,105,115,32,97,32,116,101,115,116,32
    ],
    "FileName": "TestFile",
    "FileFormat": "TXT"
  }
}
```

21.4 Swagger samples

[https://\[customer-specific-domain\]/Biz/v2/api/swagger/Sl.Data.RPC](https://[customer-specific-domain]/Biz/v2/api/swagger/Sl.Data.RPC)

21.4.1 Case

1. [After entering above URL, you will land up on page something like below:](#)

SI.Data.RPC

[SI.Data.RPC/AccessGroupService](#)

[SI.Data.RPC/CaseService](#)

[SI.Data.RPC/ContactService](#)

[SI.Data.RPC/ContikiService](#)

[SI.Data.RPC/DataDispatcherService](#)

[SI.Data.RPC/DocumentService](#)

[SI.Data.RPC/EstateService](#)

[SI.Data.RPC/FileSyncService](#)

[SI.Data.RPC/KGVService](#)

[SI.Data.RPC/MyCasesService](#)

[SI.Data.RPC/ProjectService](#)

[SI.Data.RPC/RevisionService](#)

[SI.Data.RPC/SupportService](#)

[SI.Data.RPC/UserService](#)

2. Click on CaseService

CaseService

[Base URL: /812/v2/api/call/SI.Data.RPC/CaseService]

[http://10.4.1.10:812/v2/api/call/SI.Data.RPC/CaseService](#)

SI.Data.RPC CaseService

Authorize

Callable Functions

POST /Ping

POST /CreateCase

POST /GetCases

POST /UpdateCase

3. Put the authkey in “Authorize”
4. Click on /CreateCase and then on “try it out”.
5. Paste the sample JSON request mentioned in [Archiving case](#).

CreateCaseArgs

(body)

(See model for parameter info)

Example Value | Model

```
{
  "parameter": {
    "ClosedDate": "2020-04-01T14:32:56.459Z",
    "CaseType": "string",
    "DefaultValues": {
      "ExternalId": {
        "type": "string"
      }
    },
    "Title": "string",
    "UnofficialTitle": "string",
    "Status": "string",
    "StartDate": "2020-04-01T14:32:56.459Z",
    "JournalUnit": "string",
    "SubArchive": "string",
    "ArchiveCode": {
      "ArchiveCode": "string",
      "ArchiveCode": "string"
    }
  }
}
```

Cancel

Parameter content type

application/json

Execute

6. Press an execute.
7. You will get response in below response section.




21.4.2 Document


1. After entering above URL, click on /DocumentService



2. After clicking on service, you will see below window.

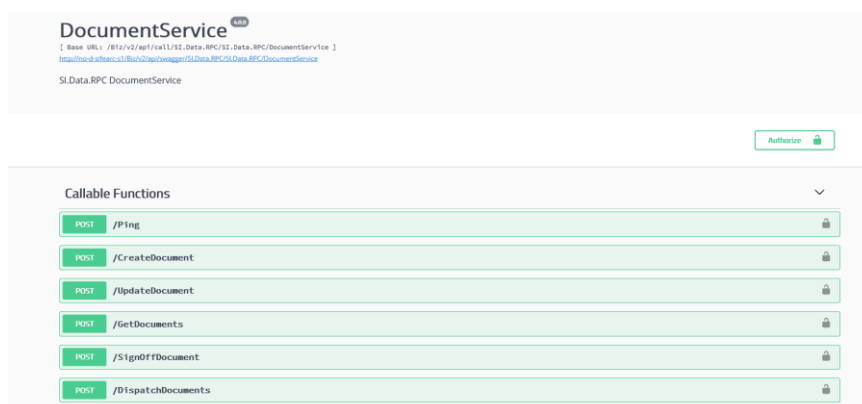

- Put authkey in “Authorize”.
- Click on /CreateDocument. And try it out.
- Put the sample JSON request and execute.

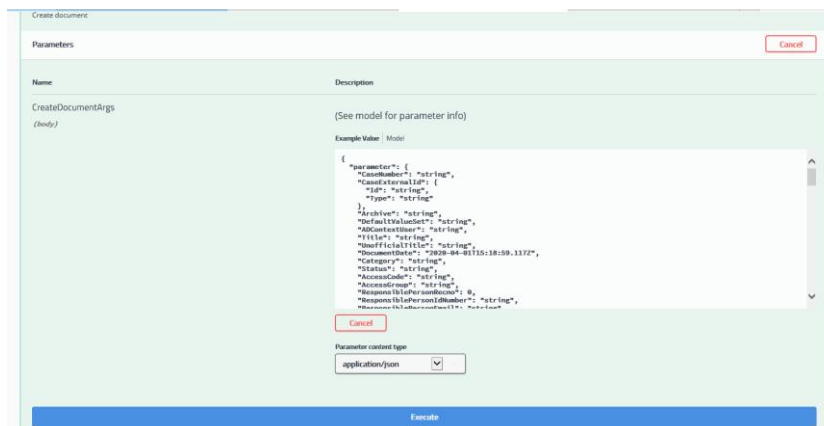

- You will receive response in response section.



21.4.3 File

- [After entering above URL, you will land up on page something like below:](#)

SI.Data.RPC

[SI.Data.RPC/AccessGroupService](#)

[SI.Data.RPC/CaseService](#)

[SI.Data.RPC/ContactService](#)

[SI.Data.RPC/ContikiService](#)

[SI.Data.RPC/DataDispatcherService](#)

[SI.Data.RPC/DocumentService](#)

[SI.Data.RPC/EstateService](#)

[SI.Data.RPC/FileService](#)

[SI.Data.RPC/KGVService](#)

[SI.Data.RPC/MyCasesService](#)


[SI.Data.RPC/ProjectService](#)

[SI.Data.RPC/RevisionService](#)


[SI.Data.RPC/SupportService](#)

[SI.Data.RPC/UserService](#)

2. Click on /FileService

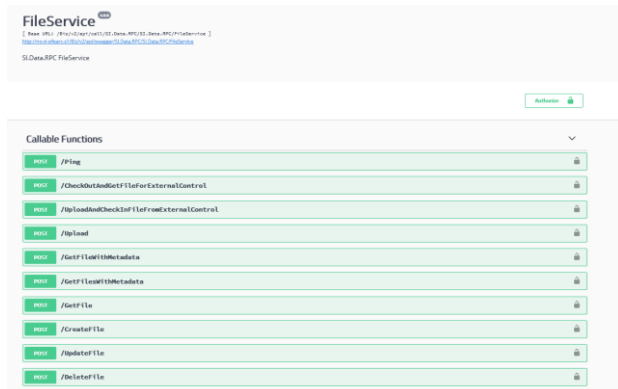

3. Click on /Upload method.
4. Put authkey in "Authorize" section.
5. And try it out.
6. Put the JSON request in swagger request block.
7. Upload reference will be return in result object.

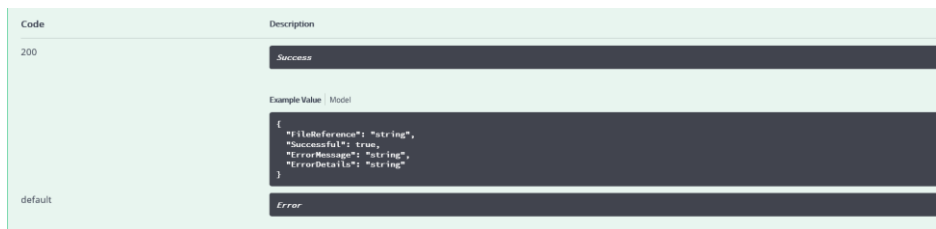


22 Advance endpoint configuration (v5.11 onwards.)

With version 5.12, we have added support for more advanced endpoint configuration for SIF APIs, to be able to provide limited rights, both on methods you invoke or data you retrieve from 360.

22.1 Filter sets

We have added two new default value templates/Filter set for CaseService/GetCases and DocumentService/GetDocuments.

You will find these templates under 360 web admin -> Configuration -> Default Values

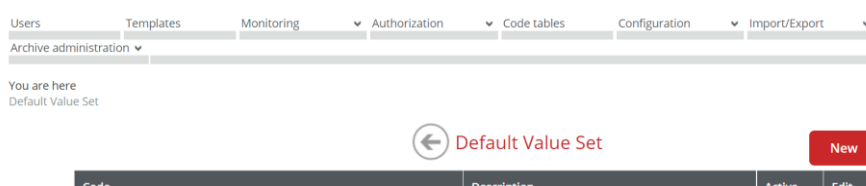

Add/Edit Template

Name : *

Title :

Entity : *

Property : *

SIF.AdvancedCase

SIF.AdvancedDocument

SIF.SimpleCase

SIF.SimpleDocument

SIF.GetCases

SIF.GetDocuments

Finish

Close


Once you select the required template, you will see some filters set properties like below,

Note: Creating filter set is exactly same as creating default value set for CaseService/CreateCase and DocumentService/CreateDocument

Configuration	
Case title	Orange
Unofficial case title	leaves
Case status	CC - Closed by Caseworker
Journal Unit	Central archive - Central archive
SubArchive	PBC
ArchiveCode	
AccessCode	KP - Keep from public access
Paragraph	Offl § 13
Case access group	Test
Case type	CaseTest
Project	acfg
Category	Bygge- og deleforbud
Include referring cases	True
Include referring documents	True
Include case contacts	True

Husbanken.startlan.InternNotat	Husbanken.startlan.InternNotat	✓
Husbanken.startlan.Klage	Husbanken.startlan.Klage	✓
Husbanken.startlan.Samlepост	Husbanken.startlan.Samlepост	✓
Husbanken.startlan.Seknad	Husbanken.startlan.Seknad	✓
Husbanken.startlan.Vedlegg	Husbanken.startlan.Vedlegg	✓
Husbanken.startlan.Vedtak	Husbanken.startlan.Vedtak	✓
NikitaandPCB	NikitaandPCB	✓
SIFCase	SIFCase	✓
SIFDocument	SIFDocument	✓
SIFGetCases	SIFGetCases	✓
SIFGetDocuments	SIFGetDocuments	✓
StartsKudd.CaseDefaultValueSet	StartsKudd.CaseDefaultValueSet	✓
TeamsIntegration.CaseDefaultValueSet	TeamsIntegration.CaseDefaultValueSet	✓

This filter sets you can later use it while configuring the SIF endpoint (as permission set).

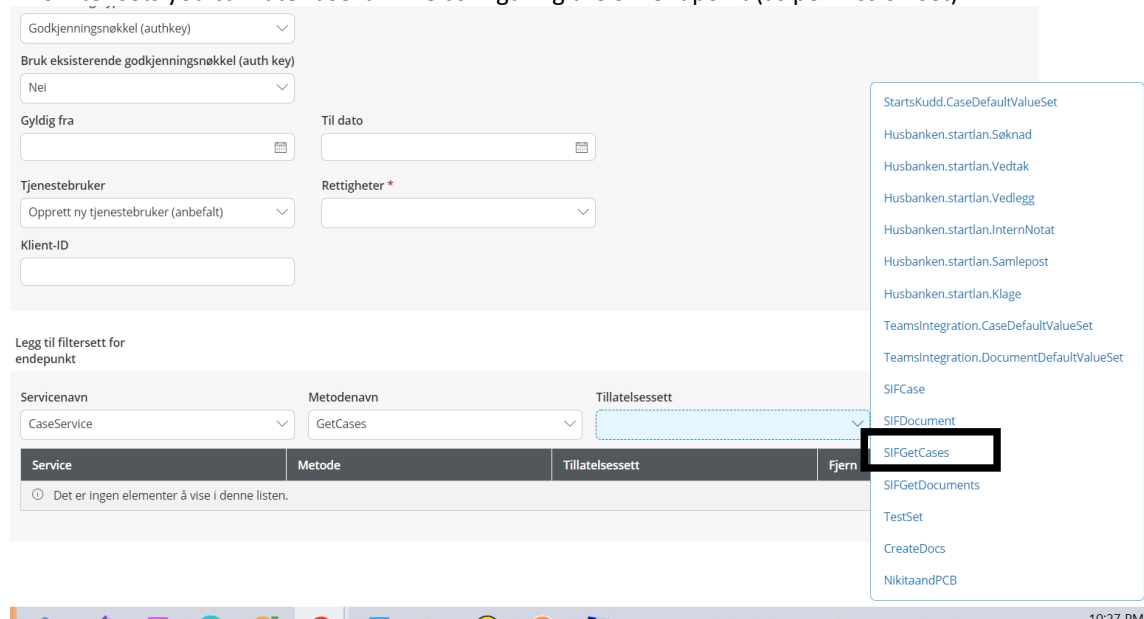


The screenshot shows a configuration window for SIF endpoints. It includes fields for authentication key, validity dates, and service user. A dropdown menu for 'Tillatelsessett' (Permission set) is open, showing a list of available sets. The 'SIFGetCases' option is highlighted with a black box.

Service	Metode	Tillatelsessett	Fjern
Det er ingen elementer å vise i denne listen.			

22.2 Add endpoint

We have redesigned the add endpoint config window to provide support for adding filter sets/ default values. We have added two sections, one for common properties and other is specially for SIF RPC integration point. As soon as you select the SIF RPC as integration point, you will see the second section for adding filter/default value set.

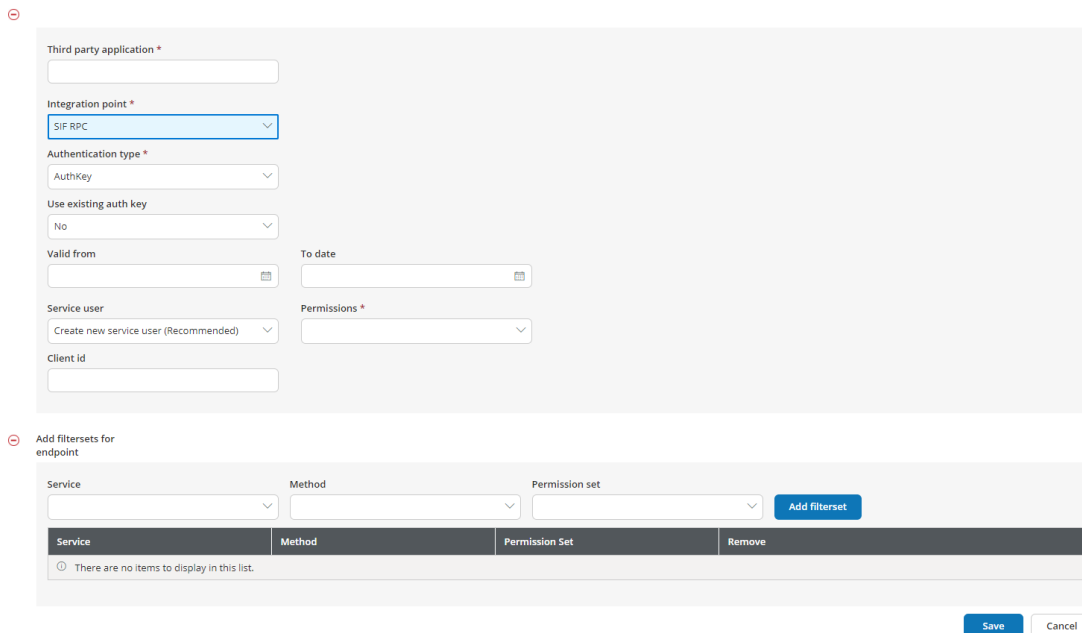

The screenshot shows the 'Add endpoint' configuration window. It has two main sections. The first section contains fields for 'Third party application', 'Integration point' (set to 'SIF RPC'), 'Authentication type' (set to 'AuthKey'), 'Use existing auth key' (set to 'No'), 'Valid from', 'To date', 'Service user' (set to 'Create new service user (Recommended)'), 'Permissions', and 'Client id'. The second section, titled 'Add filtersets for endpoint', contains fields for 'Service', 'Method', and 'Permission set', along with an 'Add filterset' button. Below these fields is a table with columns 'Service', 'Method', 'Permission Set', and 'Remove'. At the bottom right are 'Save' and 'Cancel' buttons.

22.2.1 Common properties

Refer existing endpoint config document. (Admin guide.) or refer chapter: [Endpoint configuration](#)



Third party application *

Integration point *

SIF RPC

Authentication type *

AuthKey

Use existing auth key

No

Valid from

To date

Service user

Create new service user (Recommended)

Permissions *

Client id

22.2.2 Add filter set

Add filtersets for endpoint

Service

Method

Permission set

Add filterset


Service	Method	Permission Set	Remove
There are no items to display in this list.			

Save

Cancel


Service:

This will contain list of all services offered by SIF endpoint.

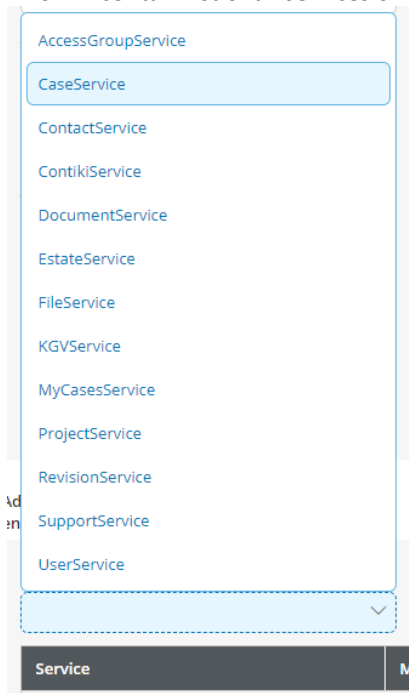


Method:

This will contain list of all methods of service, which is selected in Service control.

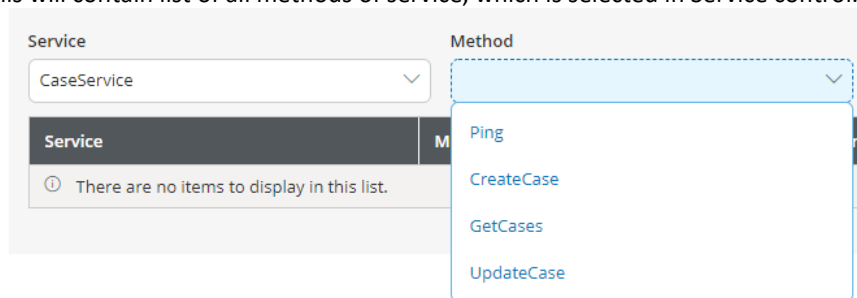

Permission set:

Once you select the Service and Method, you can set filter sets/default values against that configuration.

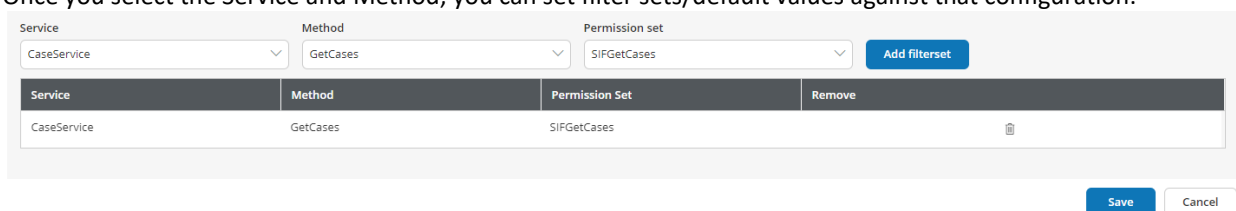

Service	Method	Permission Set	Remove
CaseService	GetCases	SIFGetCases	

After saving endpoint with above configurations, you will only be allowed to do CaseService/GetCases with this endpoint. Other services or methods won't be accessible.

22.3 Edit endpoint

With edit support, you can modify the filter set configuration. You can add more services and methods. You can also remove existing configuration.

To edit, go to endpoint config. Click on edit icon.

SIFRPC

SIF RPC

Write

Anonymous





Teams App

/v2/api/call/SI.Client.Api.Custo...

Read

Bearer





Back to endpoints

Access group

Third party application *

SIFRPC

Client id

Valid from

To date

Add filtersets for endpoint

Service

Method

Permission Set

Add filterset

Service	Method	Permission Set	Remove
FileService			
CaseService	CreateCase	SIF Sahke2	
DocumentService	GetDocuments	Filterset2	
ContactService	GetContactPersons		

Save

Cancel

22.4 Delete endpoint

With delete, along with endpoint, all the filters set configuration will also get deleted.

22.5 Endpoint information

Now you can see some more properties of endpoints by hovering over each endpoint.

Users

Templates

Monitoring

Authorization

Code tables

Configuration

Import/Export

Archive administration

You are here

Endpoint configuration

Endpoint configuration

Add endpoint

Audit trail

Third party application	Integration point	Valid from	Valid to	Copy service URL	Permissions	Client id	Authentication	Edit	Remove
TeamsAPI	/v2/api/call/SI.Client.Api.Custo...				Write		Anonymous		
SIFRPC1234	SIFRPC1234				Write		Anonymous		

Authentication type

Anonymous

Service user

allaccess_serviceaccount

Client id

Filtersets

Service	Method	Permission Set
CaseService	GetCases	Husbanken.startlan.Seknad
CaseService	Ping	Husbanken.startlan.Klage
DocumentService	GetDocuments	Teamsintegration.CaseDefaultValueSet
DocumentService	CreateDocument	Teamsintegration.DocumentDefaultValueSet
ContactService	GetEnterprises	StartsKudd.CaseDefaultValueSet
ContikiService	Ping	Husbanken.startlan.InternNotat
ContikiService	Archive	Husbanken.startlan.InternNotat
UserService	SynchronizeUser	Teamsintegration.CaseDefaultValueSet
AccessGroupService	GetAccessGroups	StartsKudd.CaseDefaultValueSet

22.6 Important points to remember

1. Service, method, and permission set are not mandatory.

- Endpoint can have only service configured.

Service	Method	Permission Set	
FileService			

This means that, this endpoint will have access to all the methods under FileService but not others.

- Service and Method can also be configured without any permission set/default value.

Service	Method	Permission Set	
ContactService	GetContactPersons		

- Only methods and filter sets are not allowed.
- This feature not only support filter set but also default value set while creating case and document through SIF API.

Service	Method	Permission Set	
CaseService	CreateCase	SIF Sahke2	
DocumentService	GetDocuments	Filterset2	

This means when there is CreateCase request, SIF API will pick this configuration and use this default value set to create case in P360, you don't have to pass explicitly into the request.

22.7 Update method filter sets. (v5.14 onwards)

With version 5.14, we have added support for adding extra layer of security while updating cases and documents. Two new filter set templates has been introduced.

SIF.UpdateCaseFilter

SIFUpdateFilter

Edit

Configuration	
Case status	CL - Closed, IP - In progress
Case type	Case
AccessCode	
Paragraph	
Case access group	
Category	
Journal Unit	
SubArchive	Case archive
ArchiveCode	00 - Organization and administration in general - Hierarchic filing plan
Responsible Unit	SI Products

SIF.UpdateDocumentFilter

You are here

[Default Value Set](#)
> Default values Details

SIFUpdateDocumentFilter

Edit

Configuration	
DocumentArchive	Case document
DocumentCategory	Incoming document, Internal memo without follow-up
DocumentStatus	Off - Officially recorded
Access Code	
Paragraph	
Access Group	
ArchiveCode	
Responsible Unit	
SubArchive	

Add/Edit Template

Name : *

Title :

Entity : *

Property : *

- SIF.SimpleCase
- SIF.SimpleDocument
- SIF.GetCases
- SIF.GetDocuments
- SIF.UpdateCaseFilter
- SIF.UpdateDocumentFilter

SIF.GetDocuments

If any endpoint has been configured with these filters set for UpdateCase or UpdateDocument, API will first verify the update request payload with that filter set, if request payload satisfying all the required filters, then only API will allow end system to do update on entity.

To configure endpoint with these new filter sets, follow the steps mentioned above.

You are here
Endpoint configuration

Back to endpoints

Third party application SIFUpdate

Client id

Valid from M/d/yyyy To date M/d/yyyy

Add filtersets for endpoint

Service name	Method name	Permission set	
CaseService	UpdateCase	SIFUpdateFilter	
CaseService	CreateCase		
DocumentService	UpdateDocument	SIFUpdateDocumentFilter	
DocumentService	CreateDocument		

Save Cancel

22.8 Configure result properties to endpoint. (Pilot functionality in SIF in 5.17: Security and performance)

To improve performance, security, and data privacy, configure the Get endpoints with only the necessary properties in the result set. In this way, you can restrict third parties to having limited data from P360.

Customers should be able to configure the properties which they want to expose to third parties. With this, we make sure that we provide a secured API that follows the privacy by design. Along with security, customers will also experience improved performance.

Improved performance - how? In the new GET implementation, we have got rid of big static queries with almost all the joins you can imagine. Now instead we are making queries dynamically depending on the filter set and configured properties in the result set.

This will release in 5.17 with a feature toggle. If any customer wants to try out this cool feature, contact SIF team, and we will make it happen! This will be only available for CaseService/GetCases and DocumentService/GetDocuments in v5.17

You are here
Endpoint configuration

[← Back to endpoints](#)

Endpoint configuration

Third party application *

Integration point *

Authentication type *

Use existing auth key

Valid from

To date

Service user

Permissions *

Client id

You can configure GET endpoints result object

Recommended. To improve performance, security, and data privacy, you should configure the GET endpoints with only the necessary properties in the result set. This will ensure limited access to data in P360 for third parties.

[Configure](#)

Add filtersets for endpoint

Service name	Method name	Permission set	
DocumentService	GetDocuments	SIFGetDocuments	Add filterset

Service	Method	Permission set	View proper...	Remove
---------	--------	----------------	----------------	--------

Users

Templates

Monitoring

Authorization

Code tables

Configuration

Import/Export

Archive administration

You are here
Endpoint configuration

Back to endpoints

Endpoint configuration

Third party application *

SIFRestrictedEP

Integration point *

SIF RPC

Authentication type *

AuthKey

Use existing auth key

No

Valid from

dd/MM/yyyy

To date

dd/MM/yyyy

Service user

Create new service user (Recommended)

Permissions *

Read

Client id

Add filtersets for endpoint

Service name

DocumentService

Method name

GetDocuments

Permission set

SIFGetDocuments

Add filter

Service	Method	Permission set	View proper...	Remove
DocumentService	GetDocuments	SIFGetDocuments		

Configure object

☐ Recno

☐ DocumentNumber

☐ CaseNumber

CaseExternalId

☐ Title

☐ DocumentDate

☐ JournalDate

Category

Type

☐ StatusCode

☐ StatusDescription

☐ AccessCodeDescription

☐ AccessCodeCode

☐ AccessCodeRecno

☐ Paragraph

ResponsibleEnterprise

☐ ResponsibleEnterpriseName

ResponsiblePerson

☐ ResponsiblePersonName

Add configuration

Endpoint configuration

Third party application *

SIFRestrictedEP

Integration point *

SIF RPC

Authentication type *

AuthKey

Use existing auth key

No

Valid from

dd/MM/yyyy

To date

dd/MM/yyyy

Service user

Create new service user (Recommended)

Permissions *

Read

Client id

Add filtersets for endpoint

Service name

DocumentService

Method name

GetDocuments

Permission set


SIFGetDocuments

Add filterset

Service	Method	Permission set	View proper...	Remove
DocumentService	GetDocuments	SIFGetDocuments		

CaseNumber, DocumentNumber, Title, DocumentDate, JournalDate

Save Cancel

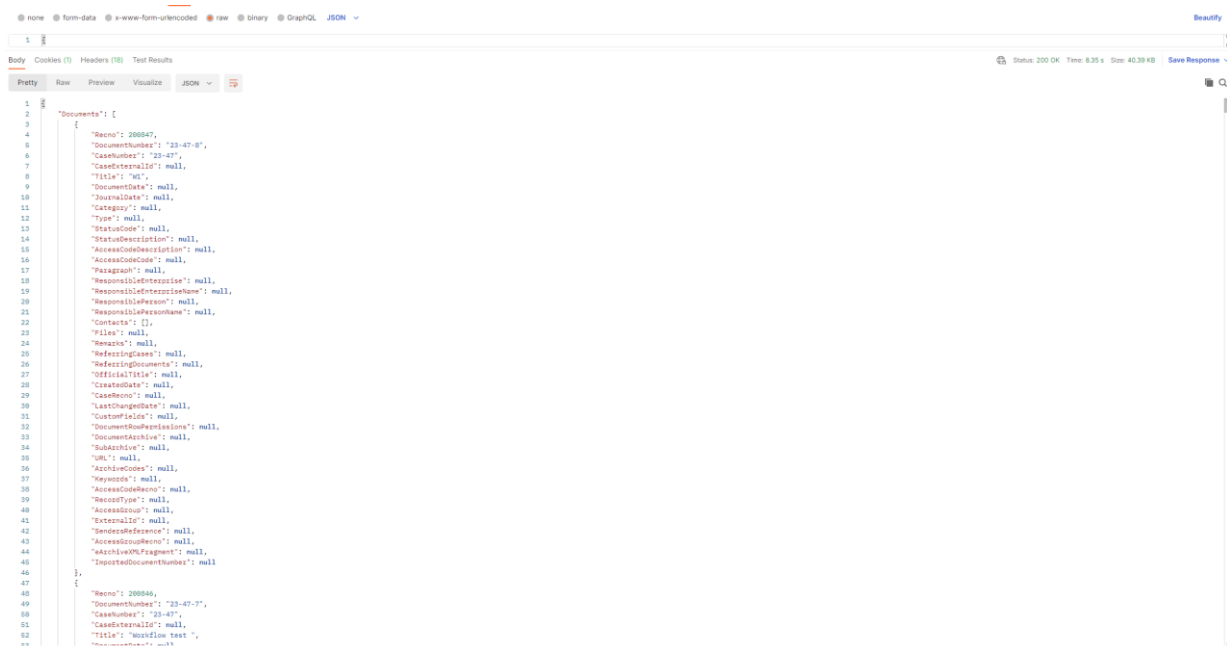


```

1  {
2    "Documents": [
3      {
4        "Recno": 20804,
5        "DocumentNumber": "23-47-8",
6        "CaseNumber": "23-47",
7        "CaseExternalId": null,
8        "Title": "M",
9        "DocumentData": null,
10       "JournalData": null,
11       "Category": null,
12       "Type": null,
13       "StatusCode": null,
14       "StatusDescription": null,
15       "AccessCodeDescription": null,
16       "AccessCode": null,
17       "Paragraph": null,
18       "ResponsibleInterviewee": null,
19       "ResponsibleIntervieweeName": null,
20       "ResponsiblePerson": null,
21       "ResponsiblePersonName": null,
22       "Contacts": [],
23       "Files": null,
24       "Remarks": null,
25       "ReferringCases": null,
26       "ReferringDocuments": null,
27       "OfficialTitle": null,
28       "CreateDate": null,
29       "CaseRecno": null,
30       "LastChangeDate": null,
31       "CustomFields": null,
32       "DocumentPermissions": null,
33       "DocumentArchive": null,
34       "Subarchive": null,
35       "URL": null,
36       "ArchiveCode": null,
37       "Keywords": null,
38       "AccessCodeRecno": null,
39       "RecnoType": null,
40       "AccessGroup": null,
41       "ExternalId": null,
42       "SourceReference": null,
43       "AccessGroupRecno": null,
44       "ArchiveXMLFragment": null,
45       "ImportedDocumentNumber": null
46     },
47     {
48       "Recno": 208046,
49       "DocumentNumber": "23-47-7",
50       "CaseNumber": "23-47",
51       "CaseExternalId": null,
52       "Title": "Mundflow test ",
53       "DocumentData": null
54     }
55   ]
56 }

```

22.8.1 FileService/GetFilesWithMetadata support (5.18 or 6.0 and above)

With version 5.18 and 6.0 we have added support for GetFilesWithMetadata method when restricting the column in result object.

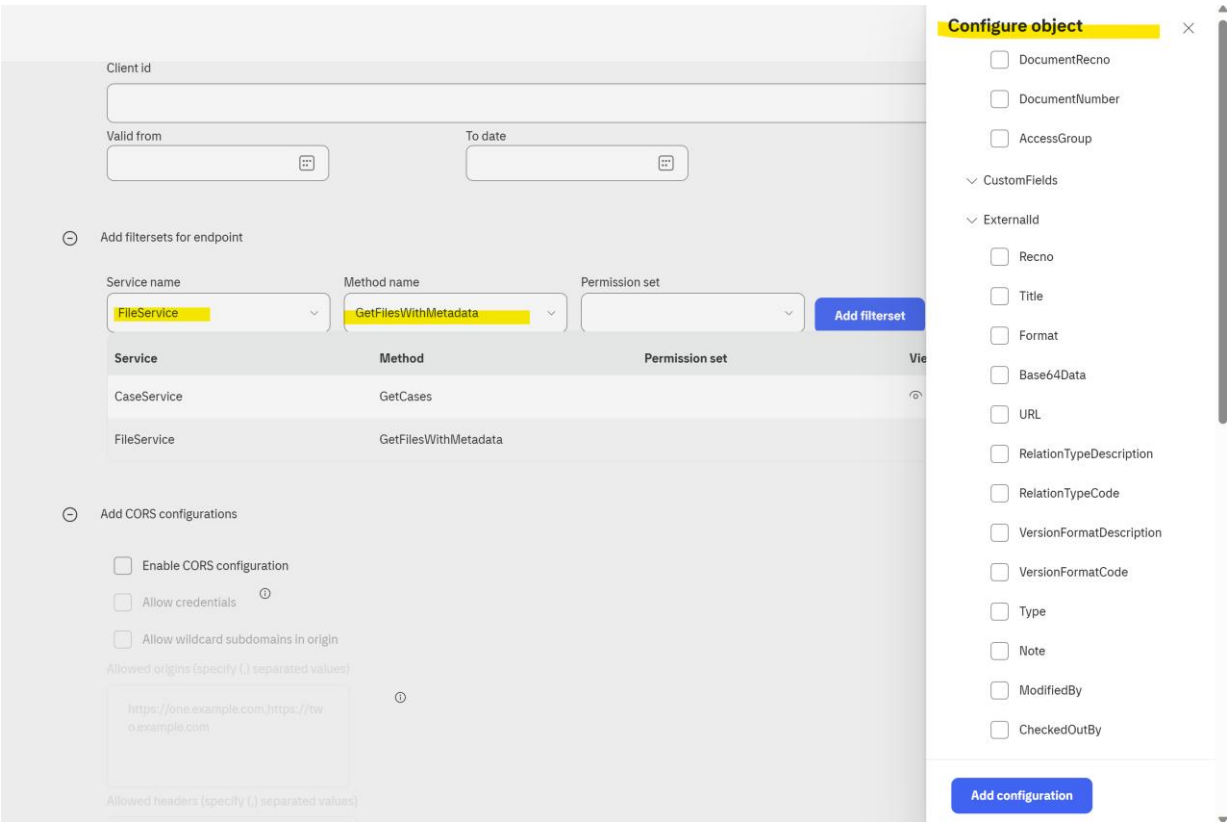

Configure object

- ☐ DocumentRecno
- ☐ DocumentNumber
- ☐ AccessGroup
- ☒ CustomFields
- ☒ ExternalId
- ☐ Recno
- ☐ Title
- ☐ Format
- ☐ Base64Data
- ☐ URL
- ☐ RelationTypeDescription
- ☐ RelationTypeCode
- ☐ VersionFormatDescription
- ☐ VersionFormatCode
- ☐ Type
- ☐ Note
- ☐ ModifiedBy
- ☐ CheckedOutBy

Add filterset

Service	Method	Permission set
CaseService	GetCases	
FileService	GetFilesWithMetadata	

Add CORS configurations

☐ Enable CORS configuration

☐ Allow credentials

☐ Allow wildcard subdomains in origin

Allowed origins (specify (,) separated values)

https://one.example.com,https://two.example.com

Allowed headers (specify (,) separated values)

Add configuration