BIRLANU · PRODUCT MAPPING EVAL OCTOBER 2026

Mapping, *measured.*

SKU-based, brand-based, plain title, MRP-based — each mapping logic run on its own set of 100 product titles.



100 / 100	90 / 100	94 / 100	95 / 100
SKU-BASED	BRAND-BASED	PLAIN TITLE	MRP-BASED

One dataset per mapping logic, each built to *exercise that logic*.


Each logic was run on its own set of 100 product titles, so the four results read lane by lane.

SKU-based	Titles that carry an embedded product code — the code path on its own.
Brand-based	Titles carrying the brand token and no code — the brand path on its own.
Plain title	No code and no brand token — matching on the words alone.
MRP-based	Title plus price — the price-led path, with MRP in the picture.

One run per logic, searching live, every title scored against its *recorded result*.

01	The sets	Four datasets, one per mapping logic, each holding 100 product titles exactly as the agent receives them — no codes or hints added.
02	The runs	One run per logic against the live catalogue, same revision and the same conditions throughout; nothing adjusted afterwards.
03	The scoring	Each title carries its expected SKU and status, fixed before the run; a title counts only when the SKU chosen matches, equivalents included.

How each mapping logic *performed*.

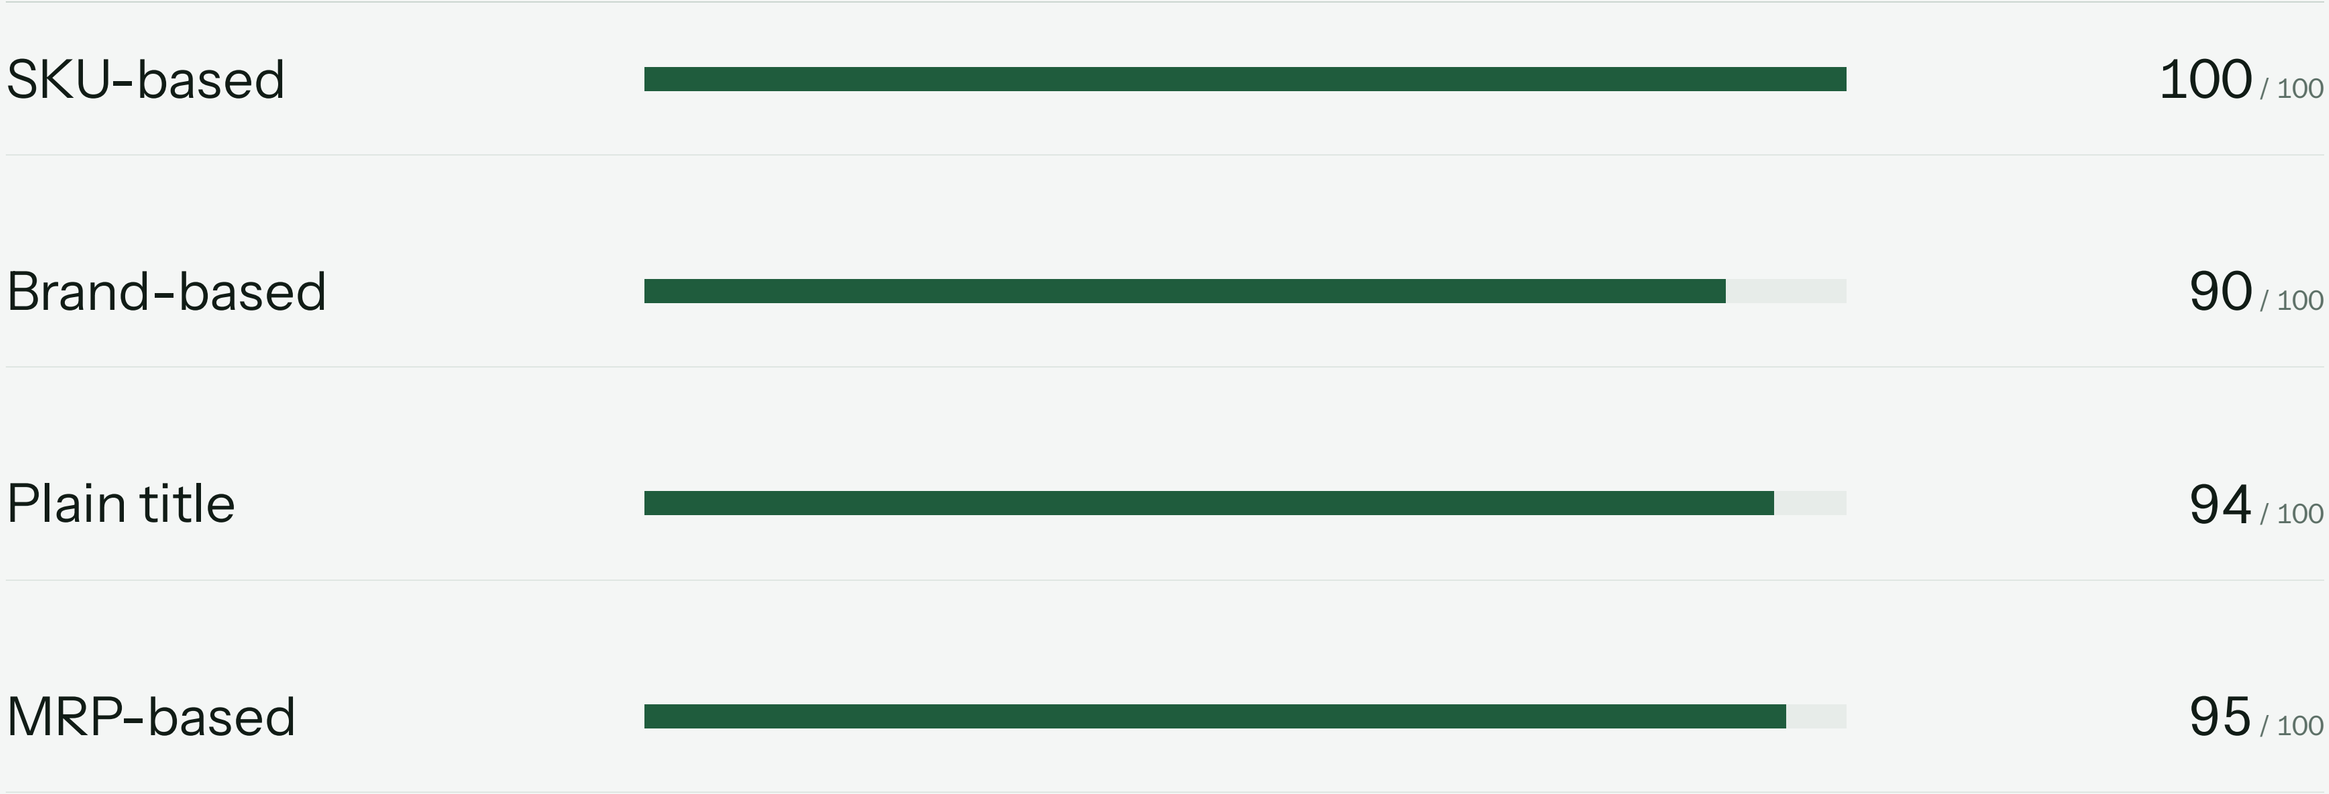

Every logic scored against the expected SKU recorded in its own set; equivalents counted as correct. The MRP lane ran on the live search chain against the product set loaded for that test; the other lanes ran against the full production catalogue.