BIRLANU · PRODUCT MAPPING EVAL OCTOBER 2026

Mapping, *measured.*

SKU-based, brand-based, plain title, MRP-based — each mapping logic run on its own set of 100 product titles.



100 / 100	90 / 100	94 / 100	95 / 100
SKU-BASED	BRAND-BASED	PLAIN TITLE	MRP-BASED

One dataset per mapping logic, each built to *exercise that logic*.

Each logic was run on its own set of 100 product titles, so the four results read lane by lane.

SKU-based

Titles that carry an embedded product code — the code path on its own.

`“96000007 Cpvc Sdr 13.5 3m 3/4"” · “UPVC PIPES SCH 40 (3 MTR) - 1 1/2'' Birlanu (96000016)”`

Brand-based

Titles carrying the brand token and no code — the brand path on its own.

`“1 1/2" UPVC TEE BIRLA” · “1 1/4" cpvc Socket Birla”`

Plain title

No code and no brand token — matching on the words alone.

`“110MM 45 ELBOW” · “CPVC SOCKET 1"”`

MRP-based


Title plus price — the price-led path, with MRP in the picture.

`“CPVC PIPE SDR 13.5 (3 Mtr) 1"” · “PRESSURE ELBOW 90 4KG 63MM” · matched on the invoice rate against the catalogue MRP`

One run per logic, searching live, every title scored against its *recorded result*.

01	The sets	Four datasets, one per mapping logic, each holding 100 product titles exactly as the agent receives them — no codes or hints added.
02	The runs	One run per logic against the live catalogue, same revision and the same conditions throughout; nothing adjusted afterwards.
03	The scoring	Each title carries its expected SKU and status, fixed before the run; a title counts only when the SKU chosen matches, equivalents included.

How each mapping logic *performed*.

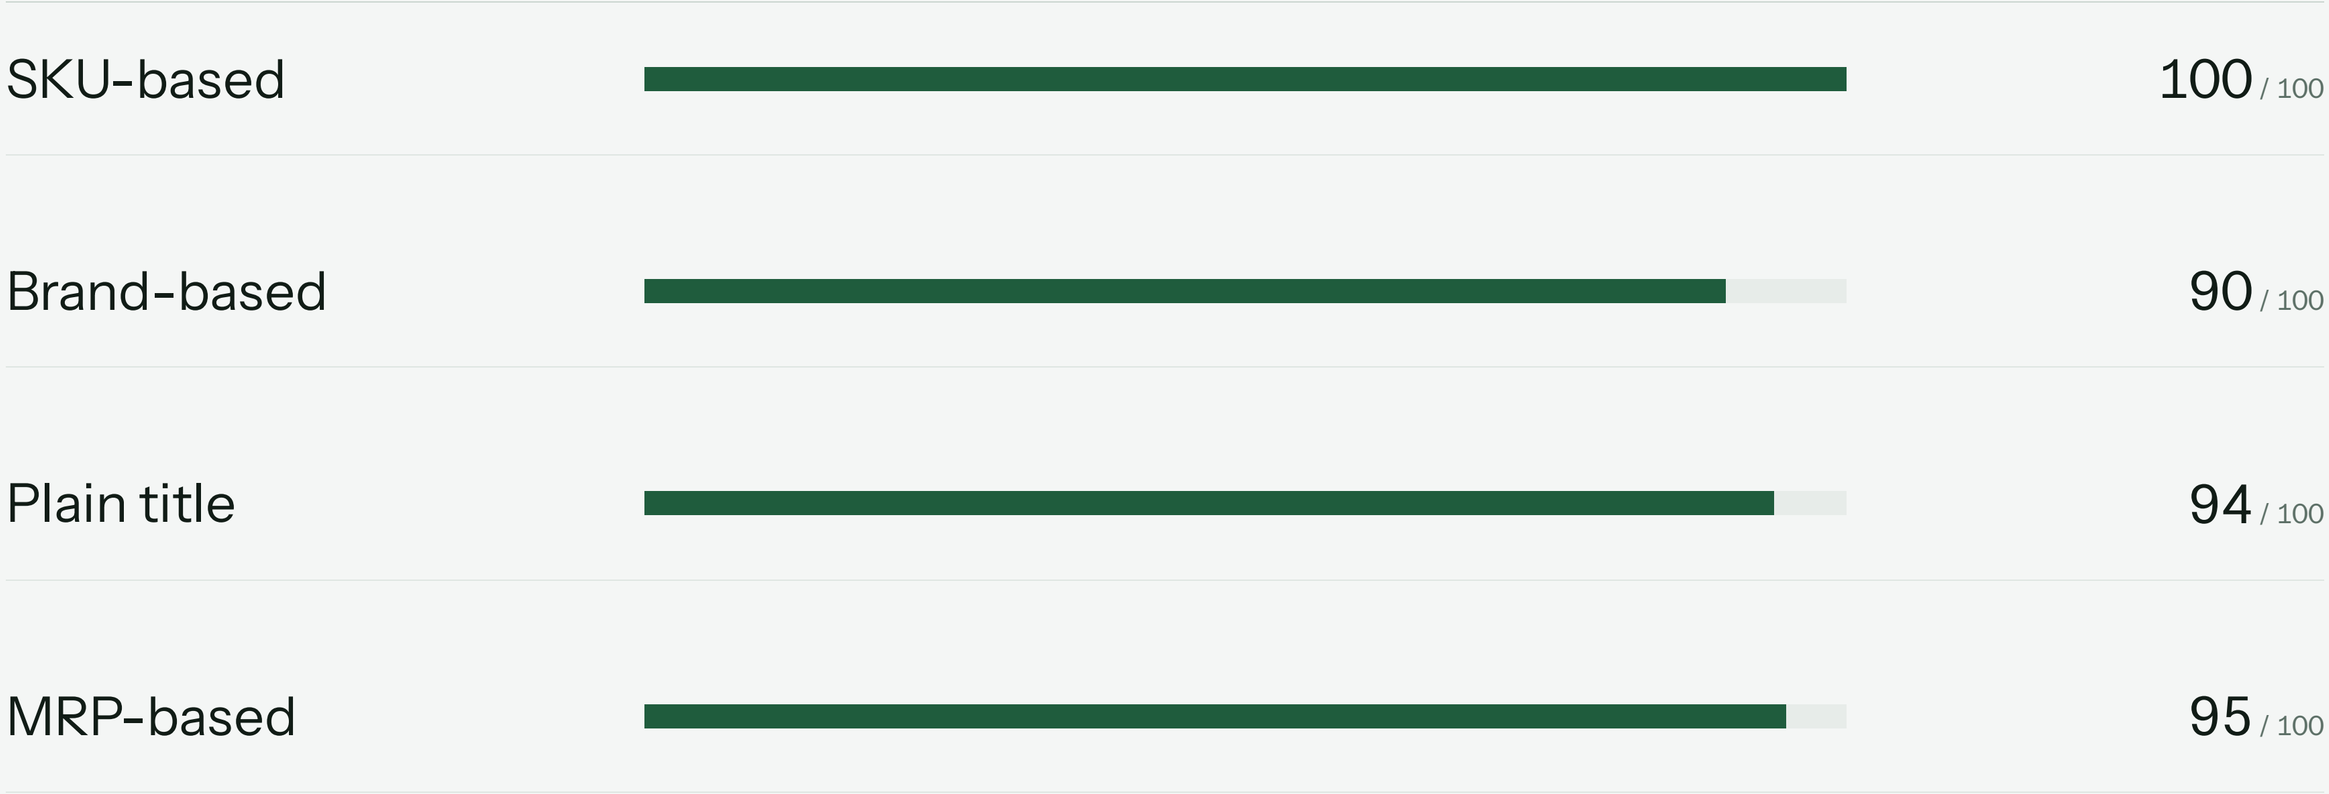

Every logic scored against the expected SKU recorded in its own set; equivalents counted as correct. The MRP lane ran on the live search chain against the product set loaded for that test; the other lanes ran against the full production catalogue.