BIRLANU · PRODUCT MAPPING EVAL OCTOBER 2026

Mapping, *measured.*

SKU-based, brand-based, plain title, MRP-based — each mapping logic run on its own set of 100 product titles.



100 / 100	90 / 100	94 / 100	95 / 100
SKU-BASED	BRAND-BASED	PLAIN TITLE	MRP-BASED

One dataset per mapping logic, each built to *exercise that logic*.

Each logic was run on its own set of 100 product titles, so the four results read lane by lane.

SKU-based

Titles that carry an embedded product code — the code path on its own.

`“96000007 Cpvc Sdr 13.5 3m 3/4"” · “UPVC PIPES SCH 40 (3 MTR) - 1 1/2'' Birlanu (96000016)”`

Brand-based

Titles carrying the brand token and no code — the brand path on its own.

`“1 1/2" UPVC TEE BIRLA” · “1 1/4" cpvc Socket Birla”`

Plain title

No code and no brand token — matching on the words alone.

`“110MM 45 ELBOW” · “CPVC SOCKET 1"”`

MRP-based

Title plus price — the price-led path, with MRP in the picture.

`“CPVC PIPE SDR 13.5 (3 Mtr) 1"” · “PRESSURE ELBOW 90 4KG 63MM” · matched on the invoice rate against the catalogue MRP`

Every title came from a real invoice line — then the pool was cut to *100 per logic*.

BUCKET	TITLES IN THE POOL	WHAT THE TITLE CARRIES
SKU-BASED	176	An embedded product code in the title text.
BRAND-BASED	495	A Birla / BirlaNu / HIL token, no code.
PLAIN TITLE	405	Neither a code nor a brand token.
ALL THREE	1,076	Distinct titles across the pool, cut to 100 cases per logic.


One case per distinct title, then a stratified cut to exactly 100 per logic by its recorded result. Rebuilds are byte-identical, and every case traces back to the invoice line it came from.

Two questions per title: was the *status* right, and was the SKU right.

01	Status	Mapped, mapped-but-brand-not-found, or unmapped — compared with the result recorded for that title before the run.
02	SKU	The product chosen against the expected product; equivalent catalogue items count as correct. Confidence is recorded but never counted.
03	Errors	A wrong map is a title mapped where the record says unmapped; a miss is a title left unmapped where the record wants a mapping.

Status accuracy = (titles - wrong maps - misses) ÷ titles · SKU accuracy = (titles - wrong maps - misses - wrong SKU) ÷ titles. Every title is scored the same way; each set was run once against the live catalogue under the same conditions.

How each mapping logic *performed*.

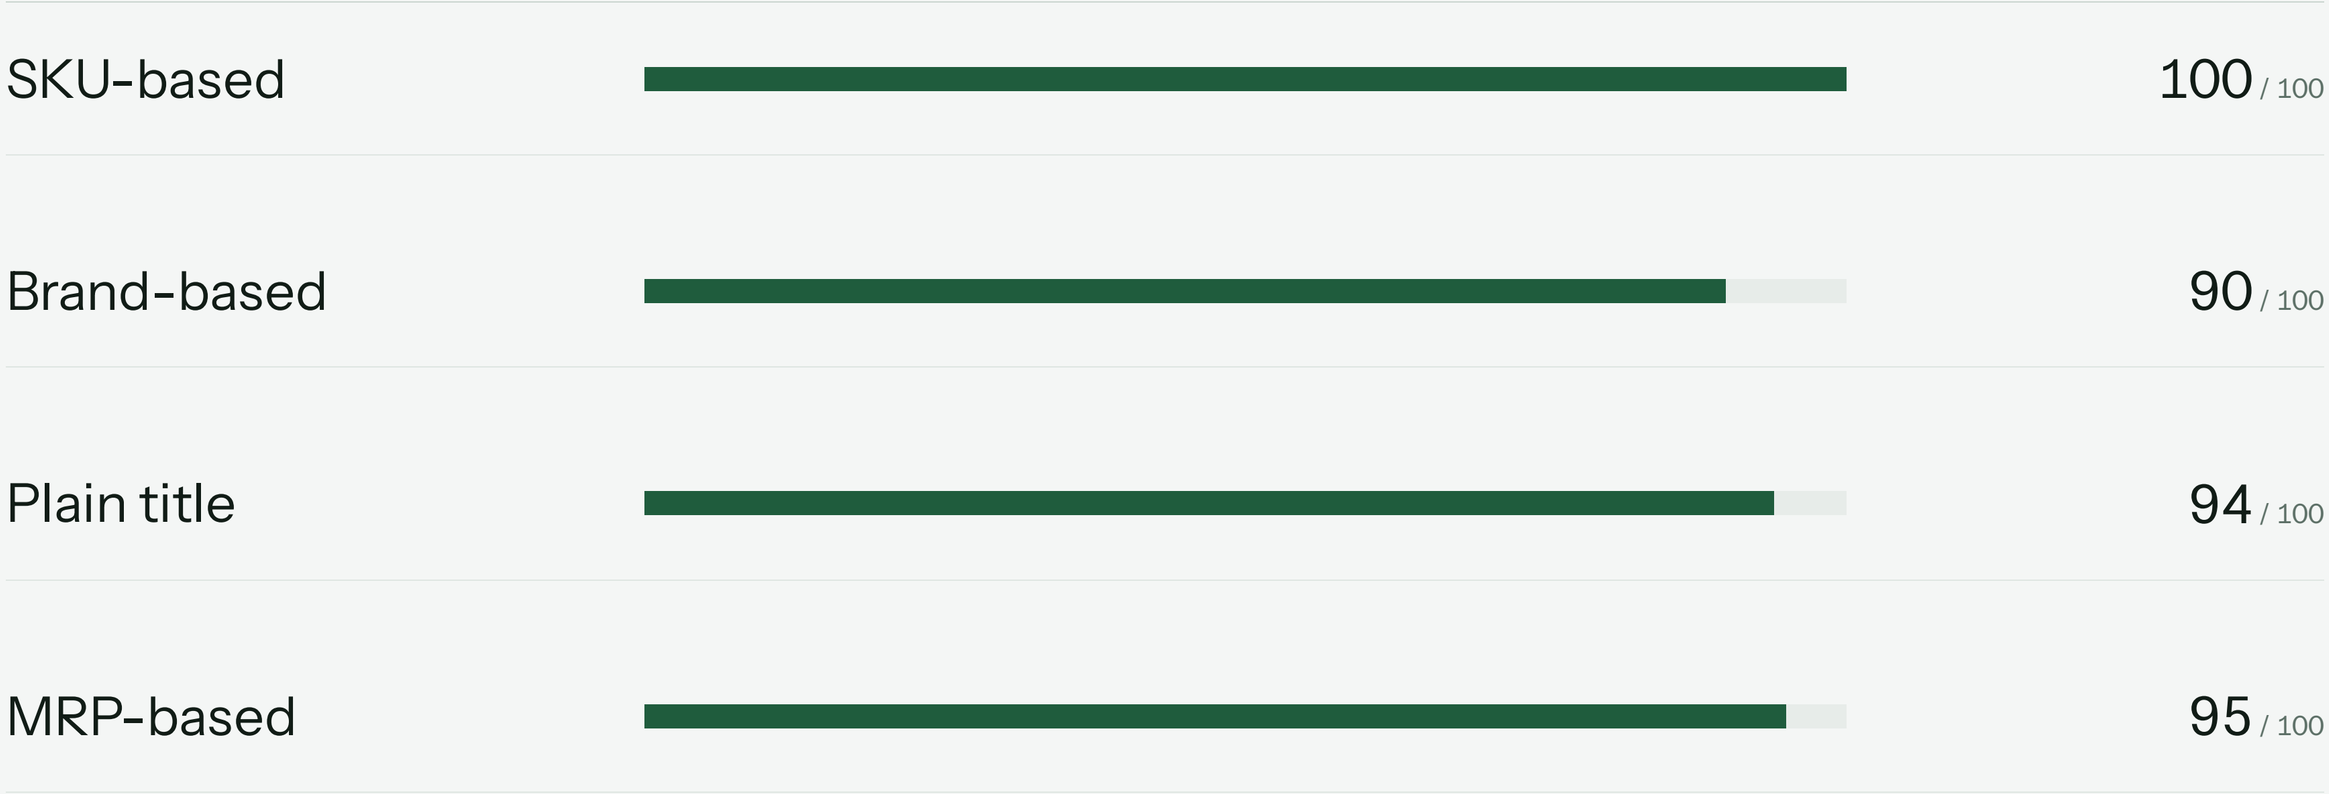

Every logic scored against the expected SKU recorded in its own set; equivalents counted as correct. The MRP lane ran on the live search chain against the product set loaded for that test; the other lanes ran against the full production catalogue.