



SELECT basics

quiz

SELECT from world

quiz

SELECT from nobel

quiz

SELECT in SELECT

quiz

SUM and COUNT

quiz

JOIN

quiz

More JOIN

quiz

Using NULL

quiz

Self JOIN

quiz

Reference

NoSQL zoo

SELECT

Functions

SELECT .. WHERE

SELECT .. GROUP BY

SELECT .. JOIN

SELECT .. SELECT

INSERT .. VALUES

INSERT .. SELECT

UPDATE

DELETE

CREATE TABLE

CREATE VIEW

CREATE INDEX

DROP

ALTER


UNION

LEFT JOIN

NULL

The JOIN operation

Language: English • 日本語 • 中文

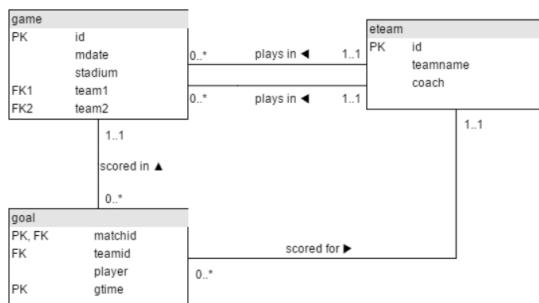

game				
id	mdate	stadium	team1	team2
1001	8 June 2012	National Stadium, Warsaw	POL	GRE
1002	8 June 2012	Stadion Miejski (Wroclaw)	RUS	CZE
1003	12 June 2012	Stadion Miejski (Wroclaw)	GRE	CZE
1004	12 June 2012	National Stadium, Warsaw	POL	RUS
...				

goal			
matchid	teamid	player	gtime
1001	POL	Robert Lewandowski	17
1001	GRE	Dimitris Salpingidis	51
1002	RUS	Alan Dzagoev	15
1002	RUS	Roman Pavlyuchenko	82
...			

eteam		
id	teamname	coach
POL	Poland	Franciszek Smuda
RUS	Russia	Dick Advocaat
CZE	Czech Republic	Michal Bilek
GRE	Greece	Fernando Santos
...		

JOIN and UEFA EURO 2012

This tutorial introduces `JOIN`, which allows you to use data from two or more tables. The tables contain all matches and goals from UEFA EURO 2012 Football Championship in Poland and Ukraine.

The data is available (mysql format) at <http://sqlzoo.net/euro2012.sql>

Summary

1.



The first example shows the goal scored by a player with the last name 'Bender'. The `*` says to list all the columns in the table - a shorter way of saying `matchid, teamid, player, gtime`.

Modify it to show the `matchid` and `player` name for all goals scored by Germany. To identify German players, check for:

`teamid = 'GER'`

```
SELECT g.matchid , g.player FROM goal as g WHERE teamid = 'GER';
```

Submit SQL

restore default

Correct answer

matchid	player
1008	Mario Gómez
1010	Mario Gómez
1010	Mario Gómez
1012	Lukas Podolski
1012	Lars Bender
1026	Philipp Lahm
1026	Sami Khedira

2. 😊

From the previous query you can see that Lars Bender's scored a goal in game 1012. Now we want to know what teams were playing in that match.

Notice in the that the column `matchid` in the `goal` table corresponds to the `id` column in the `game` table. We can look up information about game 1012 by finding that row in the `game` table.

Show id, stadium, team1, team2 for just game 1012

```
SELECT id,stadium,team1,team2  
FROM game where id = 1012;
```

Submit SQL

restore default

Correct answer

id	stadium	team1	team2
1012	Arena Lviv	DEN	GER

3. 😊

You can combine the two steps into a single query with a `JOIN`.

```
SELECT *  
FROM game JOIN goal ON (id=matchid)
```

The `FROM` clause says to merge data from the `goal` table with that from the `game` table. The `ON` says how to figure out which rows in `game` go with which rows in `goal` - the `matchid` from `goal` must match `id` from `game`. (If we wanted to be more clear/specific we could say
`ON (game.id=goal.matchid)`)

The code below shows the player (from the `goal`) and stadium name (from the `game` table) for every goal scored.

Modify it to show the player, teamid, stadium and mdate for every German goal.

```
SELECT g.player,g.teamid,game.stadium,game.mdate from game  
join goal as g  
where game.id = g.matchid and g.teamid = 'GER';
```

Submit SQL

restore default

Correct answer

player	teamid	stadium	mdate
Mario Gómez	GER	Arena Lviv	9 June 2012
Mario Gómez	GER	Metalist Stadium	13 June 2012
Mario Gómez	GER	Metalist Stadium	13 June 2012
Lukas Podolski	GER	Arena Lviv	17 June 2012

4. 😊

Use the same `JOIN` as in the previous question.

Show the team1, team2 and player for every goal scored by a player called Mario player LIKE 'Mario%'

```
select game.team1, game.team2 , goal.player from game  
join goal  
where game.id = goal.matchid  
and  
goal.player like 'Mario%';
```

Submit SQL

restore default

Correct answer

team1	team2	player
GER	POR	Mario Gómez
NED	GER	Mario Gómez
NED	GER	Mario Gómez
IRL	CRO	Mario Mandžukic
IRL	CRO	Mario Mandžukic
ITA	CRO	Mario Mandžukic
ITA	IRL	Mario Balotelli

5. 😊

5.

The table `eteam` gives details of every national team including the coach. You can `JOIN goal` to `eteam` using the phrase `goal JOIN eteam on teamid=id`

Show `player`, `teamid`, `coach`, `gtime` for all goals scored in the first 10 minutes `gtime<=10`

```
SELECT goal.player, goal.teamid, e.coach , goal.gtime
FROM goal
join eteam as e
where goal.teamid = e.id and goal.gtime<=10
```

Submit SQL**restore default**

Correct answer

player	teamid	coach	gtime
Petr Jirácek	CZE	Michal Bílek	3
Václav Pilar	CZE	Michal Bílek	6
Mario Mandžukic	CRO	Slaven Bilic	3
Fernando Torres	ESP	Vicente del Bosque	4

6. 😊

To `JOIN game` with `eteam` you could use either
`game JOIN eteam ON (team1=eteam.id)` or `game JOIN eteam ON (team2=eteam.id)`

Notice that because `id` is a column name in both `game` and `eteam` you must specify `eteam.id` instead of just `id`

List the dates of the matches and the name of the team in which 'Fernando Santos' was the team1 coach.

```
Select mdate , teamname from game
join
eteam
where game.team1 = eteam.id
and eteam.coach = 'Fernando Santos' ;
```

Submit SQL**restore default**

Correct answer

mdate	teamname
12 June 2012	Greece
16 June 2012	Greece

7. 😊

List the player for every goal scored in a game where the stadium was 'National Stadium, Warsaw'

```
Select player from goal join game on matchid = id
where stadium = 'National Stadium, Warsaw'
```

Submit SQL**restore default**

Correct answer

player
Robert Lewandowski
Dimitris Salpingidis
Alan Dzagoev
Jakub Blaszczykowski
Giorgos Karagounis
Cristiano Ronaldo
Mario Balotelli

More difficult questions

8. 😊

The example query shows all goals scored in the Germany-Greece quarterfinal.

Instead show the name of all players who scored a goal against Germany.

HINT

Correct answer

player
Robin van Persie
Michael Krohn-Dehli
Georgios Samaras

Select goals scored only by non-German players in matches where GER was the id of either **team1** or **team2**.

You can use `teamid != 'GER'` to prevent listing German players.

You can use `DISTINCT` to stop players being listed twice.

Dimitris Salpingidis
Mario Balotelli

```
SELECT DISTINCT(player)
  FROM game JOIN goal ON matchid = id
 WHERE (team1='GER' OR team2='GER') AND teamid != 'GER'
```

[Submit SQL](#)

[restore default](#)

9. 😊

Show **teamname** and the total number of goals scored.

COUNT and **GROUP BY**

```
SELECT teamname, COUNT(matchid)
  FROM eteam JOIN goal ON id=teamid
 GROUP BY teamname;
```

[Submit SQL](#)

[restore default](#)

Correct answer

teamname	count(matchid)
Croatia	4
Czech Republic	4
Denmark	4
England	5
France	3
Germany	10
Greece	5

10. 😊

Show the stadium and the number of goals scored in each stadium.

```
SELECT stadium, COUNT(matchid) FROM game JOIN goal
ON matchid = id GROUP BY stadium;
```

[Submit SQL](#)

[restore default](#)

Correct answer

stadium	count(matchid)
Arena Lviv	9
Donbass Arena	7
Metalist Stadium	7
National Stadium, Warsaw	9
Olimpiyskiy National Sports Complex	14
PGE Arena Gdansk	13
Stadion Miejski (Poznan)	8

11. 😊

For every match involving 'POL', show the **matchid**, **date** and the **number of goals scored**.

```
SELECT g.matchid, game.mdate, COUNT(teamid)
  FROM game JOIN goal AS g ON g.matchid = game.id
 WHERE (team1 = 'POL' OR team2 = 'POL') GROUP BY
g.matchid, game.mdate;
```

[Submit SQL](#)

[restore default](#)

Correct answer

matchid	mdate	count(teamid)
1001	8 June 2012	2
1004	12 June 2012	2
1005	16 June 2012	1

12. 😊

Correct answer

For every match where 'GER' scored, show matchid, match date and the number of goals scored by 'GER'

```
Select matchid,game.mdate,count(teamid) from goal join game on  
matchid = id where teamid = 'GER' group by matchid, mdate;
```

[Submit SQL](#)

[restore default](#)

Correct answer

matchid	mdate	count(teamid)
1008	9 June 2012	1
1010	13 June 2012	2
1012	17 June 2012	2
1026	22 June 2012	4
1030	28 June 2012	1

13. 😊

List every match with the goals scored by each team as shown.
This will use "**CASE WHEN**" which has not been explained in
any previous exercises.

mdate	team1	score1	team2	score2
1 July 2012	ESP	4	ITA	0
10 June 2012	ESP	1	ITA	1
10 June 2012	IRL	1	CRO	3
...				

Notice in the query given every goal is listed. If it was a team1 goal
then a 1 appears in score1, otherwise there is a 0. You could SUM
this column to get a count of the goals scored by team1. **Sort your
result by mdate, matchid, team1 and team2.**

```
SELECT mdate,team1,  
sum(case when team1 = teamid then 1 else 0 end) as score1,  
team2,  
sum(case when team2 = teamid then 1 else 0 end) as score2  
FROM game  
left JOIN goal  
ON id = matchid  
group by mdate,team1,team2  
order by mdate,matchid,team1,team2;
```

[Submit SQL](#)

[restore default](#)

Correct answer

mdate	team1	score1	team2	score2
1 July 2012	ESP	4	ITA	0
10 June 2012	ESP	1	ITA	1
10 June 2012	IRL	1	CRO	3
11 June 2012	FRA	1	ENG	1
11 June 2012	UKR	2	SWE	1
12 June 2012	GRE	1	CZE	2
12 June 2012	POL	1	RUS	1

What next?

[JOIN Quiz](#)

[Old JOIN Tutorial](#)

[More JOIN operations:](#) The next tutorial about the Movie database involves some slightly more complicated joins from the movie database.