


**dnaorg\_build.pl:**  
 Build homology models of reference genome features.  
 Run once per reference genome. (Repeat if reference is updated.)



**dnaorg\_annotate.pl:**  
 Annotate non-reference genomes.  
 Repeat as necessary.

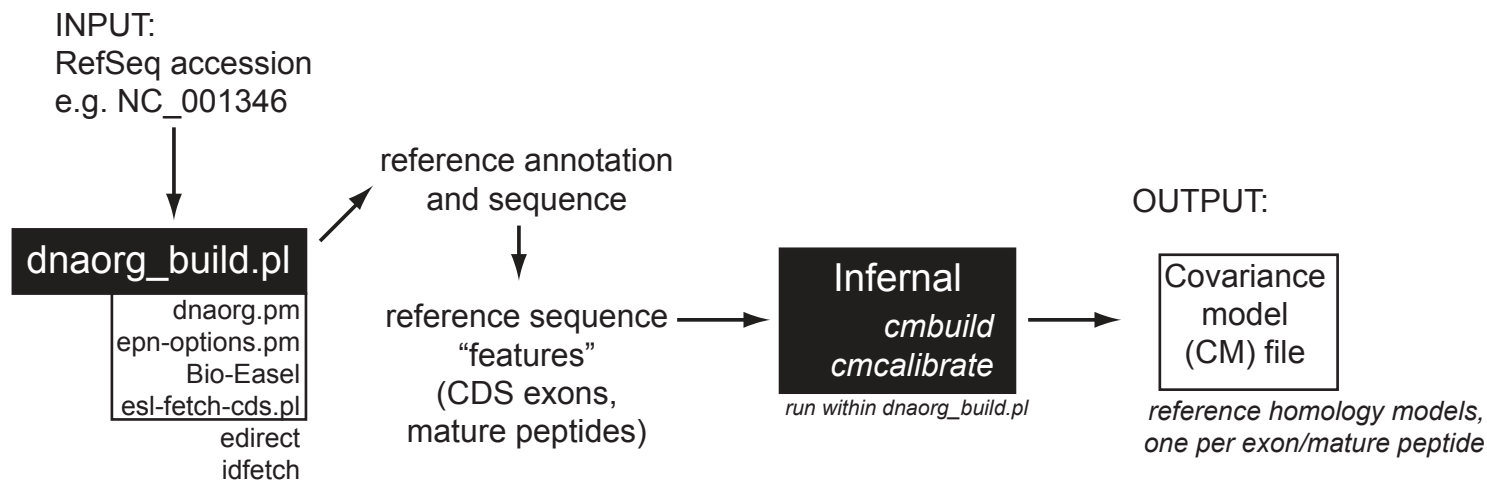