


**dnaorg\_build.pl:**  
Build homology models of reference genome features.  
Run once per reference genome. (Repeat if reference is updated.)



**dnaorg\_annotate.pl:**  
Annotate non-reference genomes.  
Repeat as necessary.

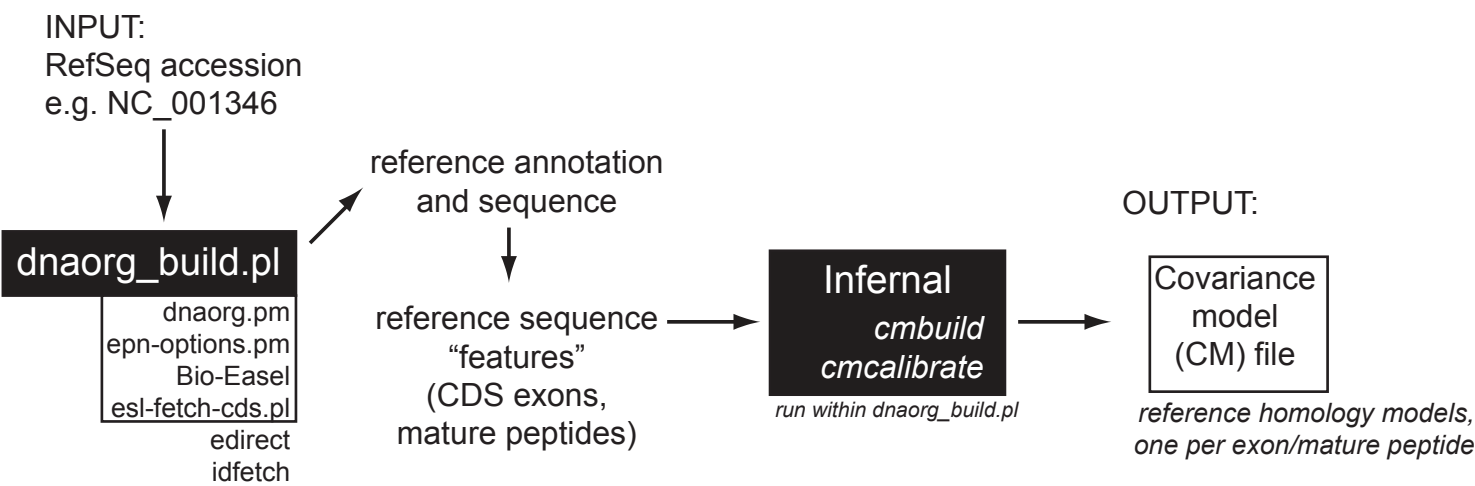