


dnaorg_build.pl:
Build homology models of reference genome features.
Run once per reference genome. (Repeat if reference is updated.)



dnaorg_annotate.pl:
Annotate non-reference genomes.
Repeat as necessary.

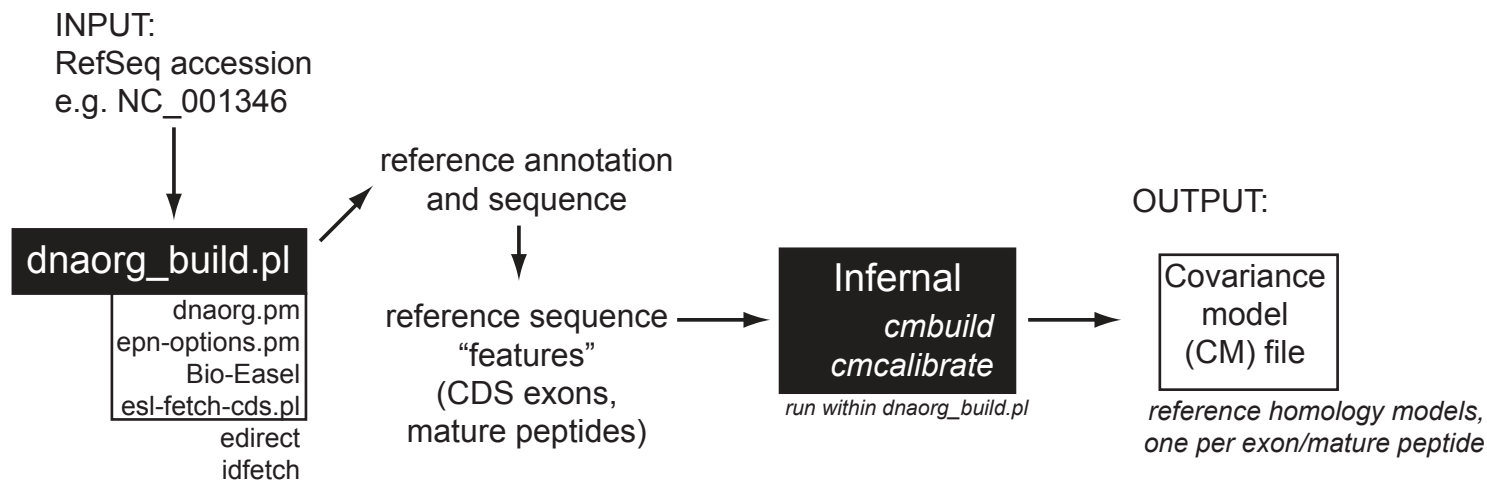