


Problem 1 leet code

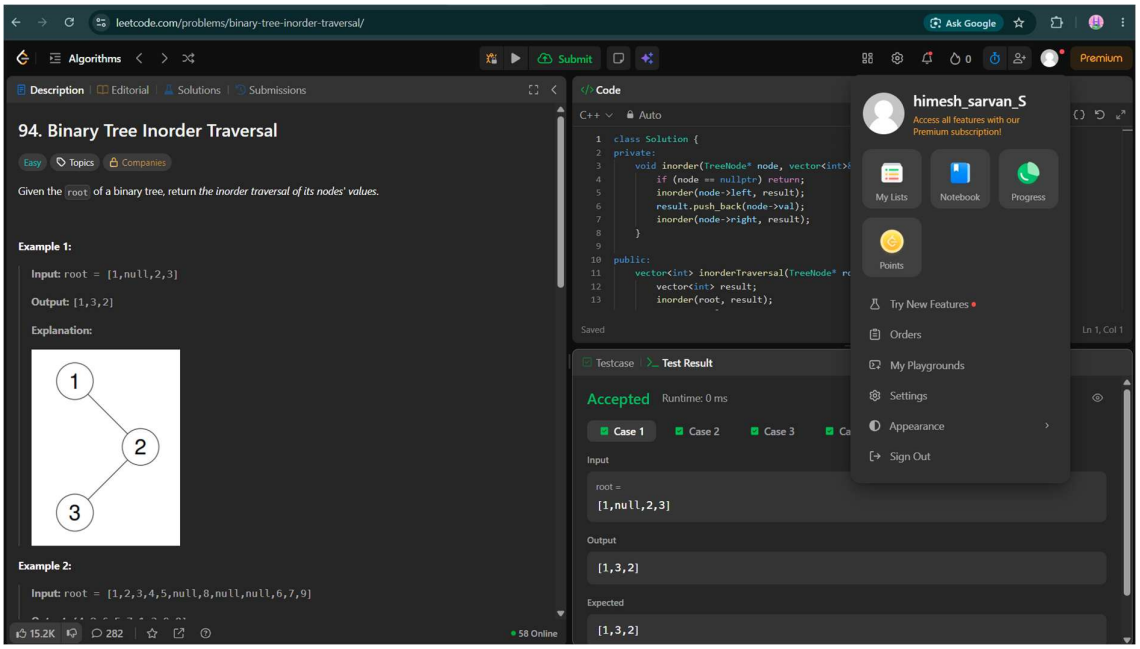


Peoblem 2

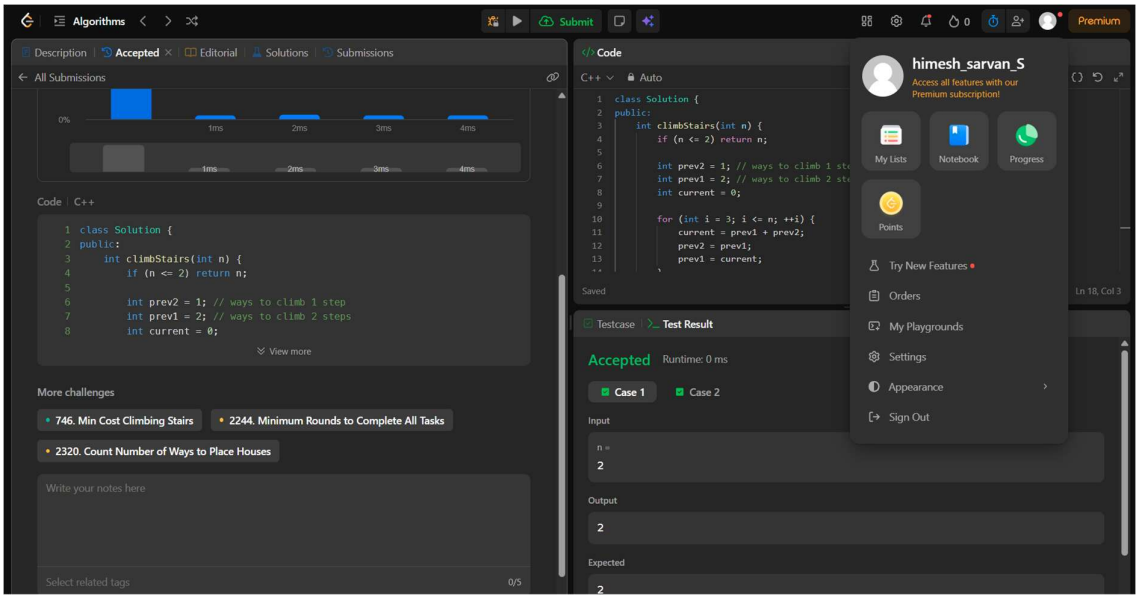


Problem 3

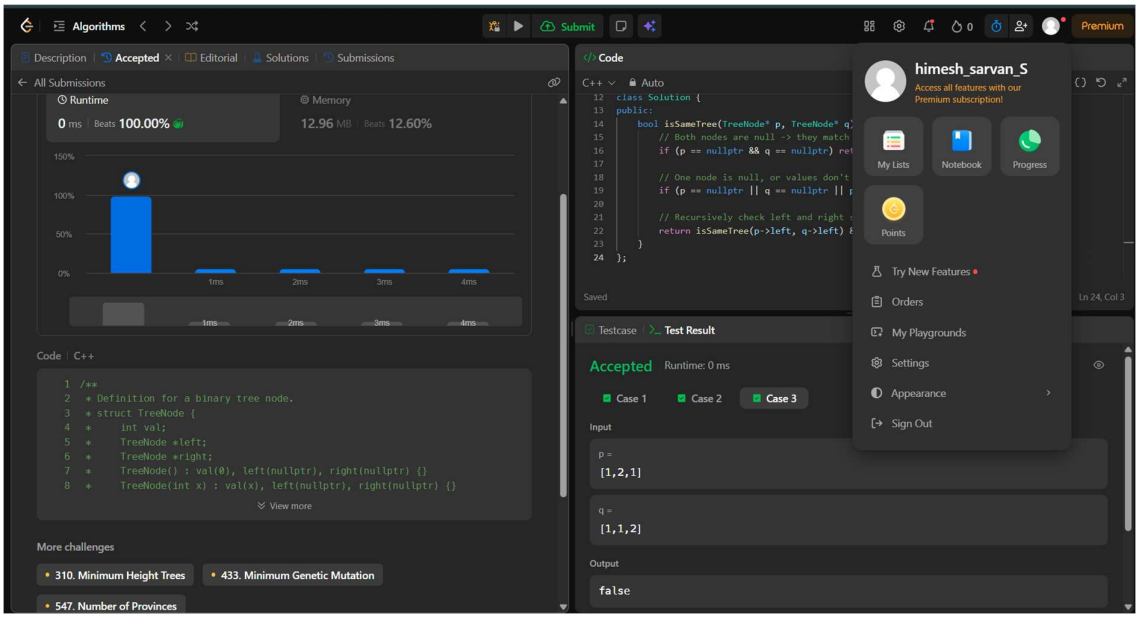

Problem 4

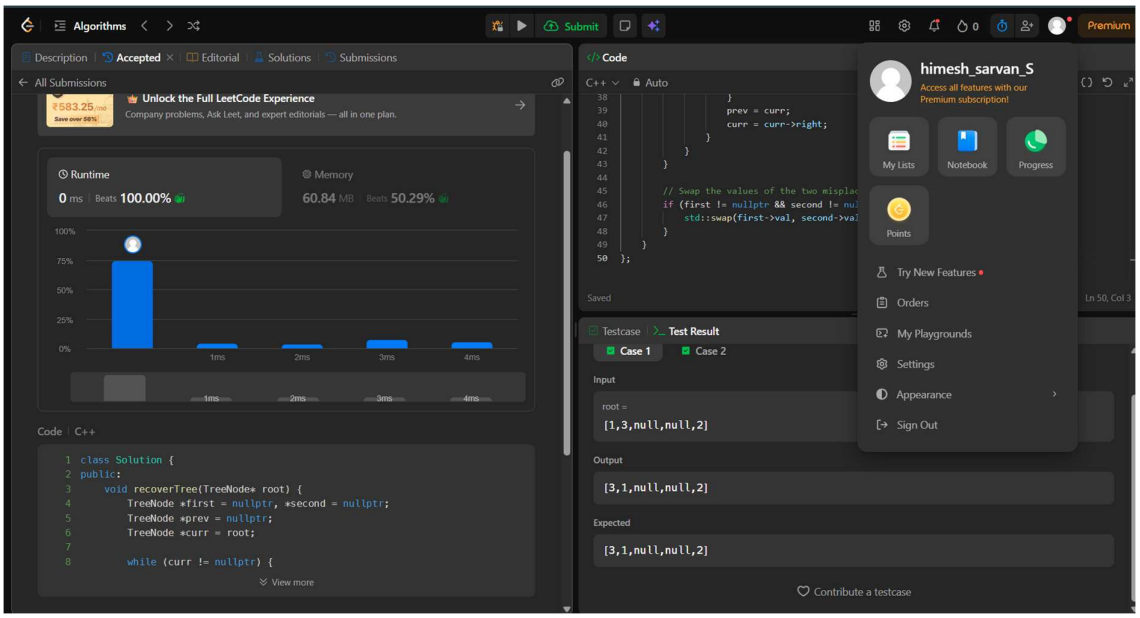

Problem 5

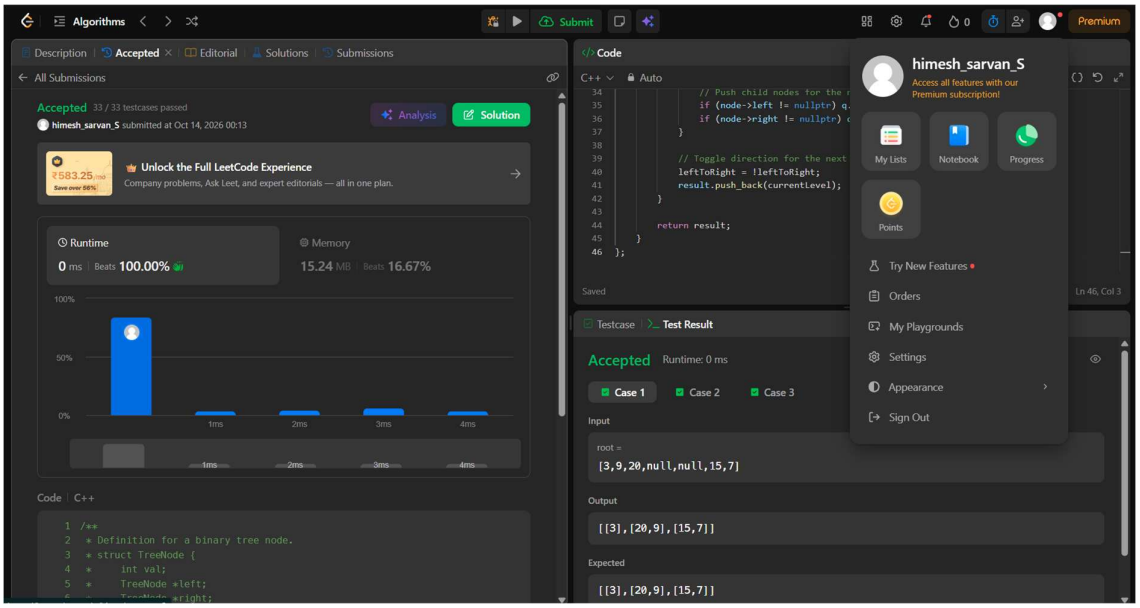
Algorithms
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 33 / 33 testcases passed
himesh_sarvan_S submitted at Oct 14, 2026 00:13
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
0 ms | Beats 100.00%
Memory
15.24 MB | Beats 16.67%
100%
50%
0%
1ms
2ms
3ms
4ms
Code | C++
/**
* Definition for a binary tree node.
* struct TreeNode {
*   int val;
*   TreeNode *left;
Code
C++
Auto
if (node->left != nullptr) q.
if (node->right != nullptr) q
// Toggle direction for the next
leftToRight = !leftToRight;
result.push_back(currentLevel);
return result;
Saved
Ln 46, Col 3
himesh_sarvan_S
Access all features with our Premium subscription!
My Lists
Notebook
Progress
Points
Try New Features
Orders
My Playgrounds
Settings
Appearance
Sign Out
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
root =
[3,9,20,null,null,15,7]
Output
[[3],[20,9],[15,7]]
Expected
[[3],[20,9],[15,7]]