


RIP 3 routers 6 switches and hosts

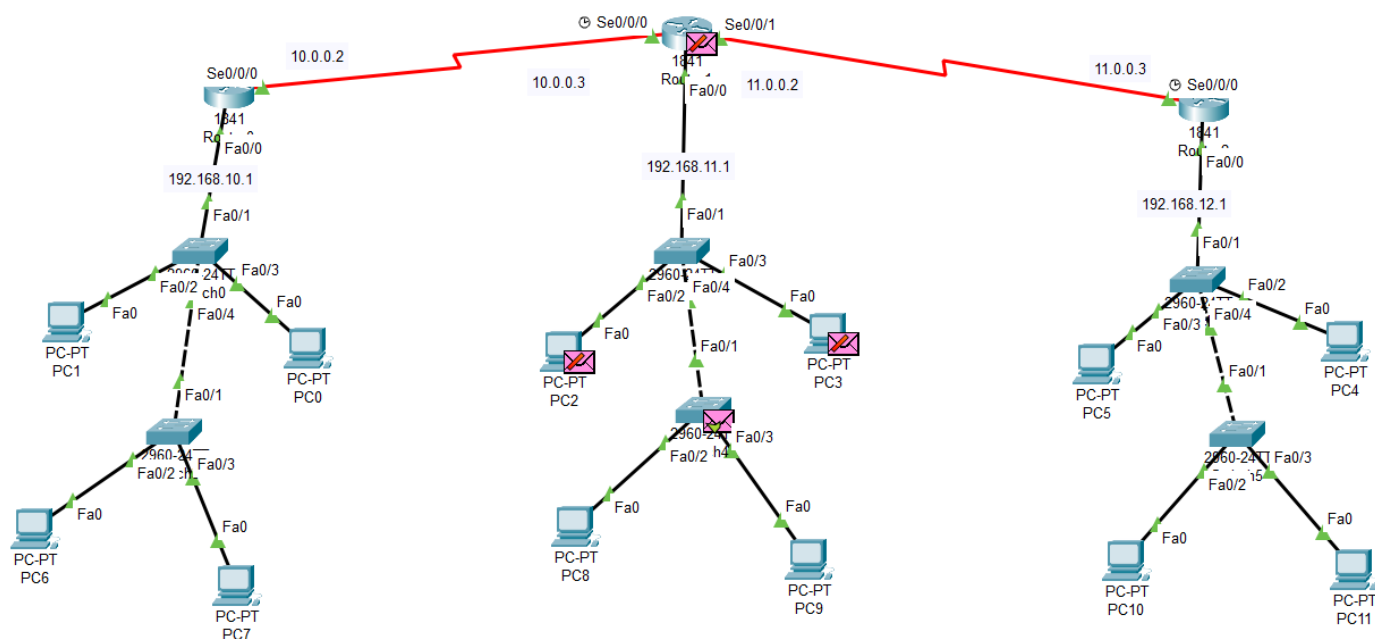

Router 1st

```

Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#int serial 0/0/0
Router(config-if)#ip address 10.0.0.2 255.0.0.0
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial0/0/0, changed state to down
Router(config-if)#router rip
Router(config-router)#version 2
Router(config-router)#network 192.168.10.0
Router(config-router)#network 10.0.0.0
Router(config-router)#exit
Router(config)#ex
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#wr
Building configuration...
[OK]
Router#
%LINK-5-CHANGED: Interface Serial0/0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/0/0, changed state to up

```

Router 2nd

```
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip address 192.168.11.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#int serial 0/0/0
Router(config-if)#ip address 10.0.0.3 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial0/0/0, changed state to up

Router(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/0/0, changed state to up

Router(config-if)#int serial 0/0/1
Router(config-if)#ip address 11.0.0.2 255.0.0.0
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial0/0/1, changed state to down
Router(config-if)#router rip
Router(config-router)#version 2
Router(config-router)#network 192.168.11.0
Router(config-router)#network 10.0.0.0
Router(config-router)#network 11.0.0.0
Router(config-router)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#wr
Building configuration...
[OK]
Router#
%LINK-5-CHANGED: Interface Serial0/0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/0/1, changed state to up
```

Routers 3rd

```
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip address 192.168.11.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
```

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

```
Router(config-if)#int serial 0/0/0
Router(config-if)#ip address 10.0.0.3 255.0.0.0
Router(config-if)#no shutdown
```

```
Router(config-if)#
%LINK-5-CHANGED: Interface Serial0/0/0, changed state to up
```

```
Router(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/0/0, changed state to up
```

```
Router(config-if)#int serial 0/0/1
Router(config-if)#ip address 11.0.0.2 255.0.0.0
Router(config-if)#no shutdown
```

%LINK-5-CHANGED: Interface Serial0/0/1, changed state to down

```
Router(config-if)#router rip
Router(config-router)#version 2
Router(config-router)#network 192.168.11.0
Router(config-router)#network 10.0.0.0
Router(config-router)#network 11.0.0.0
Router(config-router)#exit
Router(config)#exit
Router#
```

%SYS-5-CONFIG_I: Configured from console by console

```
Router#wr
Building configuration...
[OK]
```

```
Router#
%LINK-5-CHANGED: Interface Serial0/0/1, changed state to up
```

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/0/1, changed state to up