
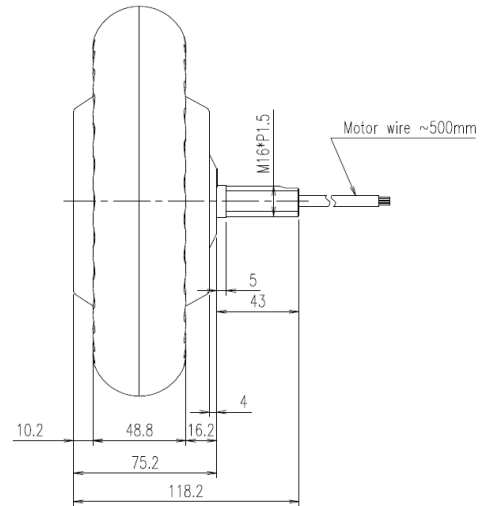


인휠모터

MDH250

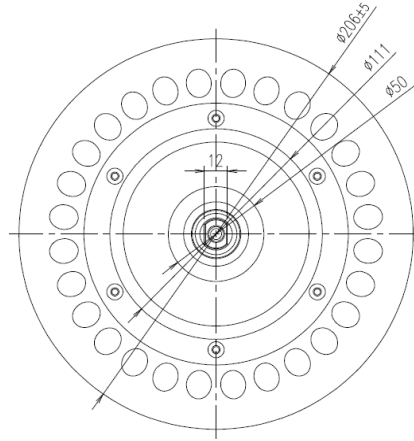

모터타입 (Types of motor)		HBSL2D02E0200-D206
정격전압 (Rated voltage)		24~48VDC
극수 (Poles)		30poles
정격파워 (Rated power)		100~350W
정격전류 (Rated current)		8A
정격토크 (Rated Torque)		8N.m(78kg-cm)
최대토크 (Max. Torque)		16N.m(157kg-cm)
바퀴크기 (Wheel size)		Ø206
Encoder resolution		4,096PPR(Pulse/revolution)
무게 (Weight)		4kg
Payload		< 150kg
Rated speed (rpm)		200rpm
Max. speed (rpm)		300rpm
방호등급 (Protection)		IP65
선속도 (at 200rpm) (Rated linear velocity)	m/s	2m/s
	km/h	7.2km/h

■ 단자(Connector)

Hall sensor

PIN	1	2	3	4	5
Name	Hu	Hv	Hw	Gnd	Vcc
Color	Blue	Green	Yellow	Black	Red

Encoder


PIN	1	2	3	4	5
Name	-	B	A	-	-
Color		White	Purple		

Motor(U, V, W)

PIN	1	2	3
Name	U	V	W
Color	Green	Yellow	Blue

■ 성능곡선

Performance curve-24V

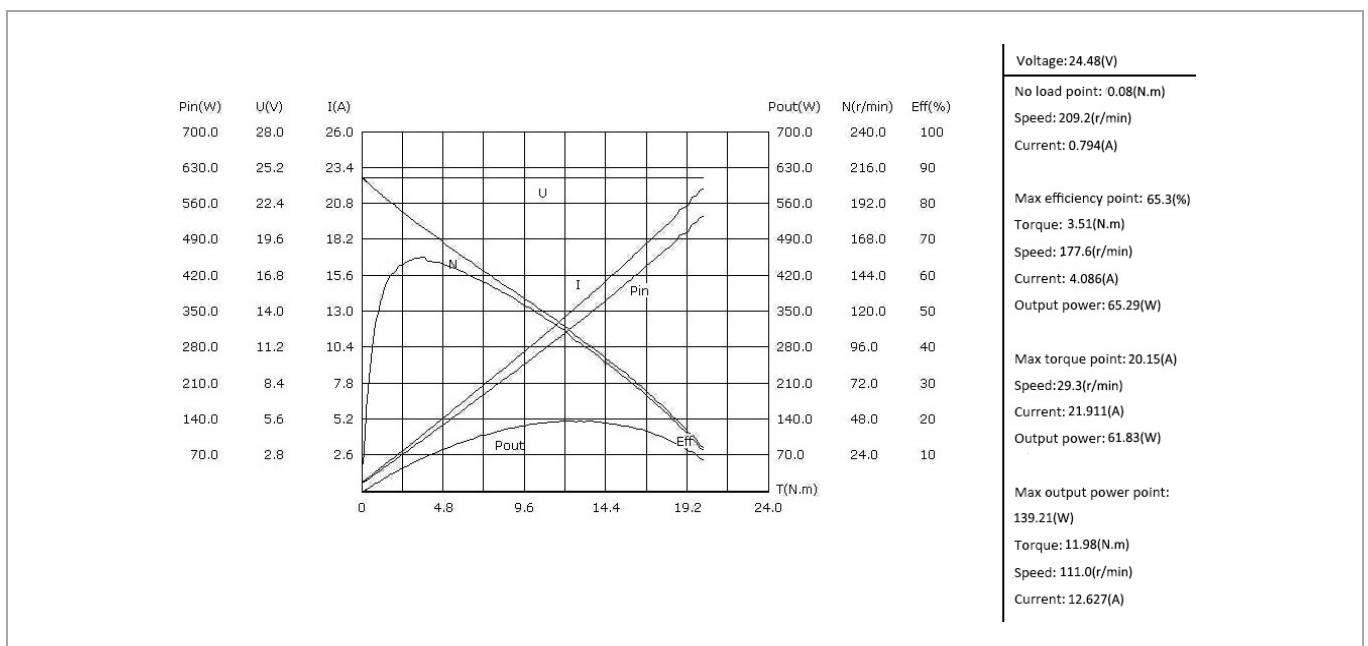

Performance curve-48V

