NAPIX SUBSCRIBER MANUAL

Contents

1. API Subscription 2
1.1 Subscriber Form 2
1.2 Create app 4
1.3 Subscribe API 6
1.4 Reset Secret 8
2 API Testing 9
2.1 Access Postman 9
2.2 Token Generation 9
2.3 Test Response 15
3 Possible errors 19
3.1 Error message will be generated if input value is incorrect or changed 19
3.2 Error message will be generated if token has expired 21
Annexure A: Fixed Key and Inputs 22
Annexure B: Key and Inputs Unique to each user(s) 22

1. API Subscription

This section covers the steps involved in subscribing eCourts API through NAPIX platform

1.1 Subscriber Form


Step 1: All Users - Submit Application (via email) to CPC of respective High Court

- All users must complete a paper-based application, scan and mail to CPC
- The application form can be obtained by writing a mail to CPC or eCommittee
- CPC mail ids are available on [Contact Us - eCourt India Services]
- Fill the form along with seal, stamp, scan and email to CPC or eCommittee
- On approval, subscriber will receive a mail with Subscriber credentials, Department ID and Encryption Key from eCommittee and activation link from NAPIX over email.
- The subscriber user name would be created by eCommittee as Department ID.

Paper-based Application From

Fill the form along with seal/stamp, scan and email to CPC/ e-committee
mpm-ecommittee@aij.gov.in
Form has been circulated to all via mail by e-committee and if required, can be obtained by writing a mail to CPC/ e-committee

Subscriber User name = Department ID = Username

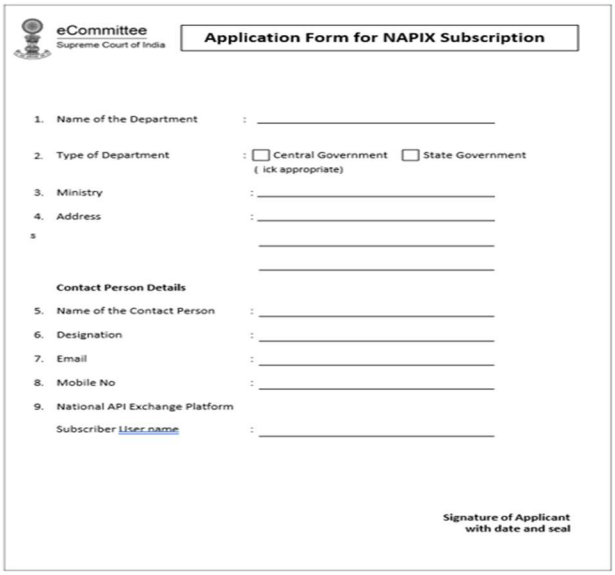

eCommittee
Supreme Court of India

Application Form for NAPIX Subscription

1. Name of the Department :
2. Type of Department : ☐ Central Government ☐ State Government (Tick appropriate)
3. Ministry :
4. Address :

Contact Person Details

5. Name of the Contact Person :
6. Designation :
7. Email :
8. Mobile No :
9. National API Exchange Platform Subscriber User name :

Signature of Applicant with date and seal



Account Creation for All Users
Write an email to CPC with paper-based application for creation of new login credentials
After verification/ approval of e-Committee, receive an email with Department ID & Key from e-Committee
Receive an email with 'Activation Link', from noreply-napix@gov.in
Use Activation link to initiate your account

1.2 Create app


Users must create at least one app in NAPIX to subscribe API. Any number of APIs can be added to a single app.

Step 1: Sign in


Step 2: Select API products to view available API products for e Courts

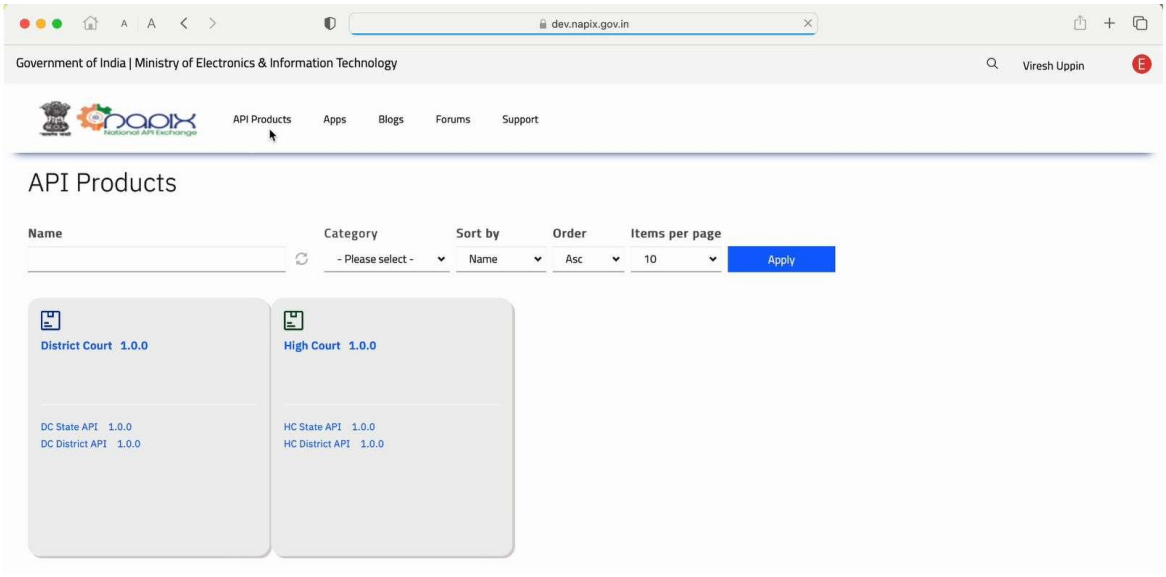

Step 3: Select Apps and click on create new app

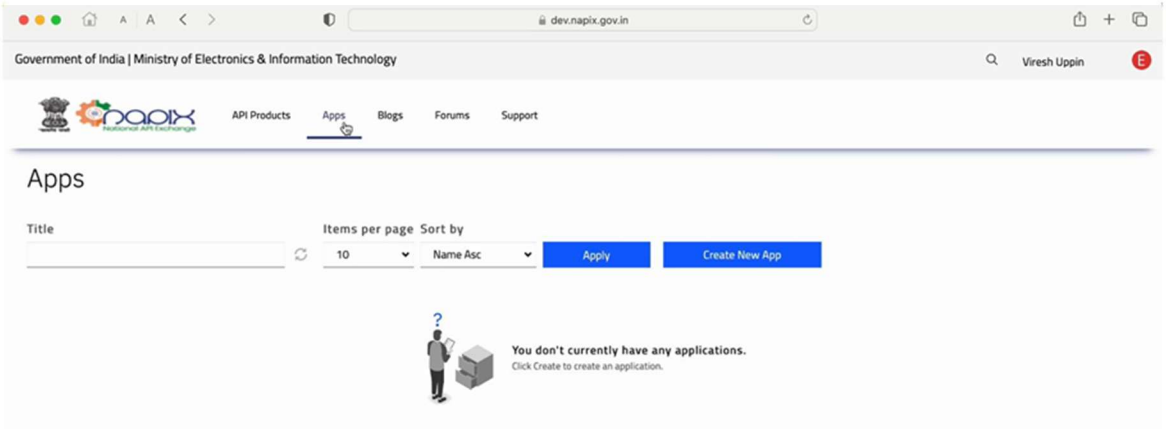


Step 4: Fill in the required details and save

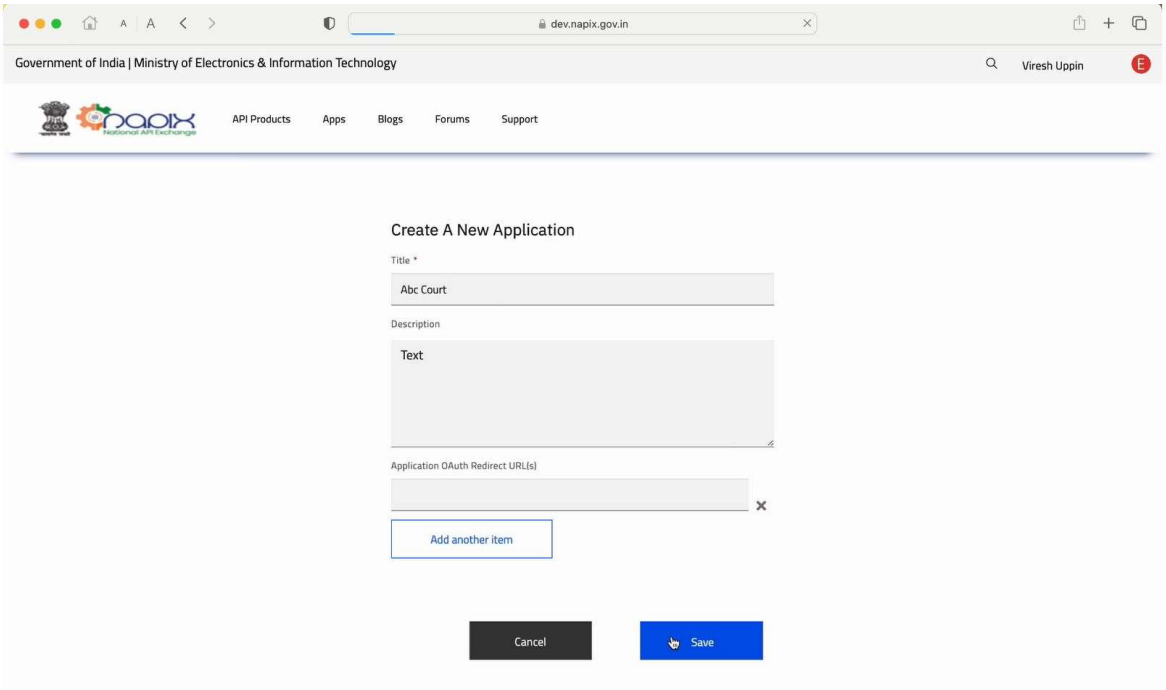


Step 5: Key and Secret for the application created will be displayed

Copy and store both Key and Secret separately as it will required during testing and consuming

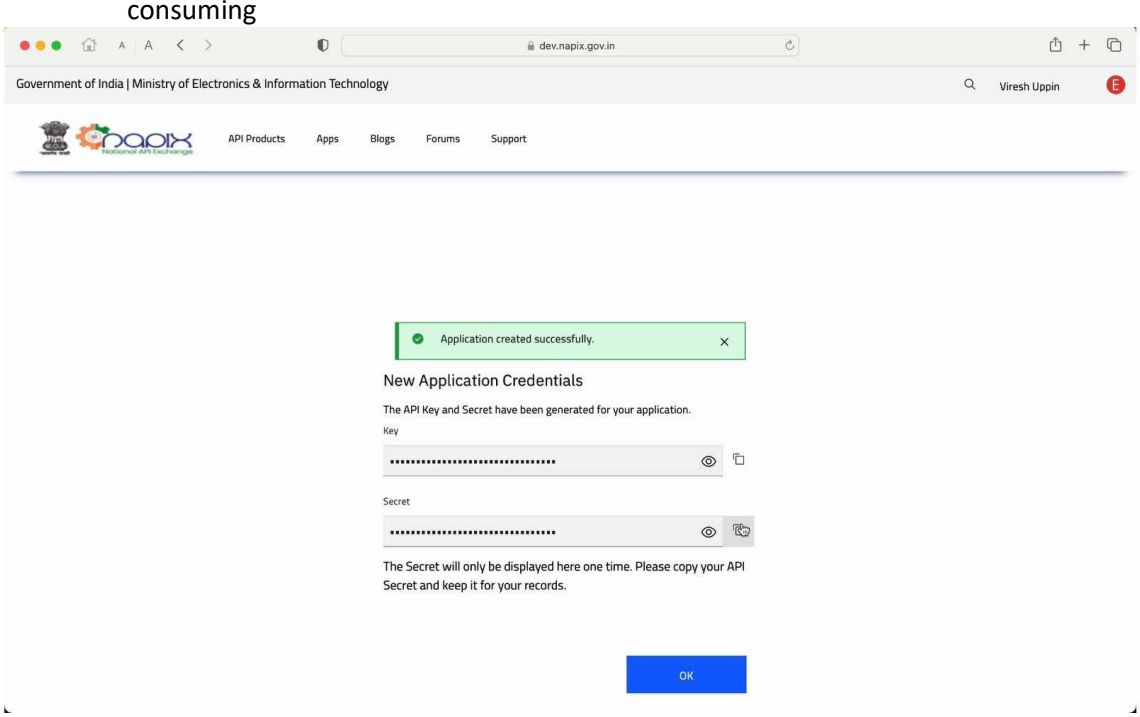

Step 6: Verify app using the Key

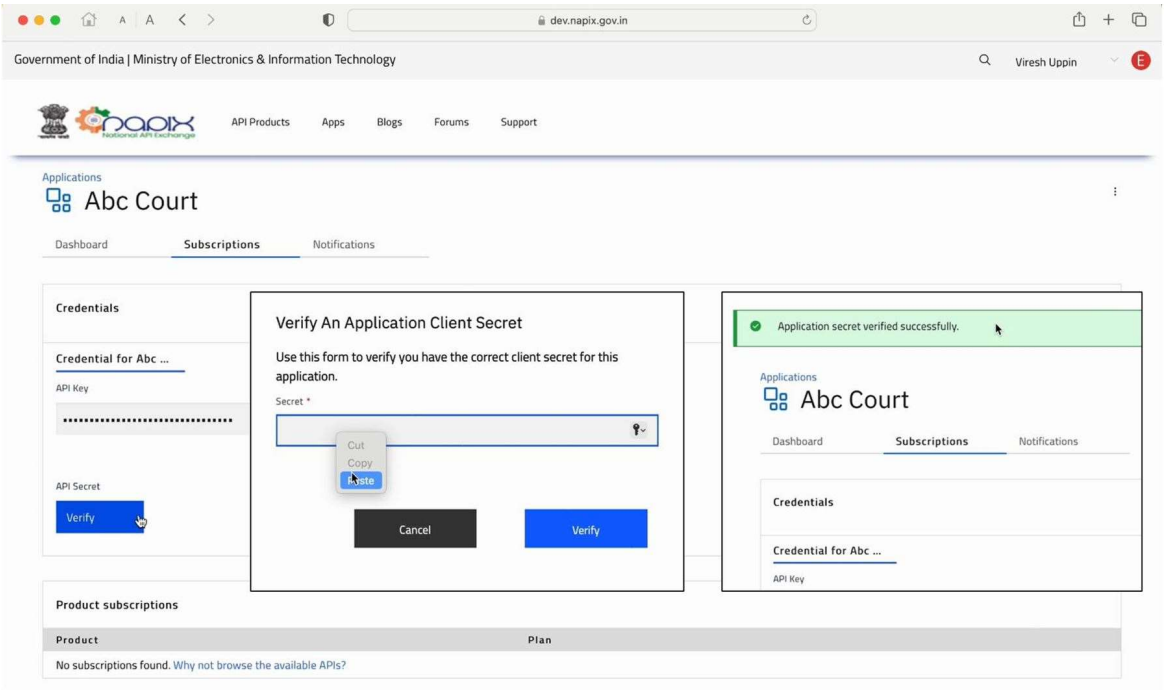

1.3 Subscribe API

Users can subscribe API through app.


Step 1: Select subscription tab and click on available API link


Step 2: Select required API and click on get access button


Step 3: Select default Plan, select created application, and proceed


Note: When an API is subscribed from a product, all other available APIs from the same product gets subscribed automatically.

To view the subscribed API select application and subscriptions tab and another option to subscribe API can be done through API product tab

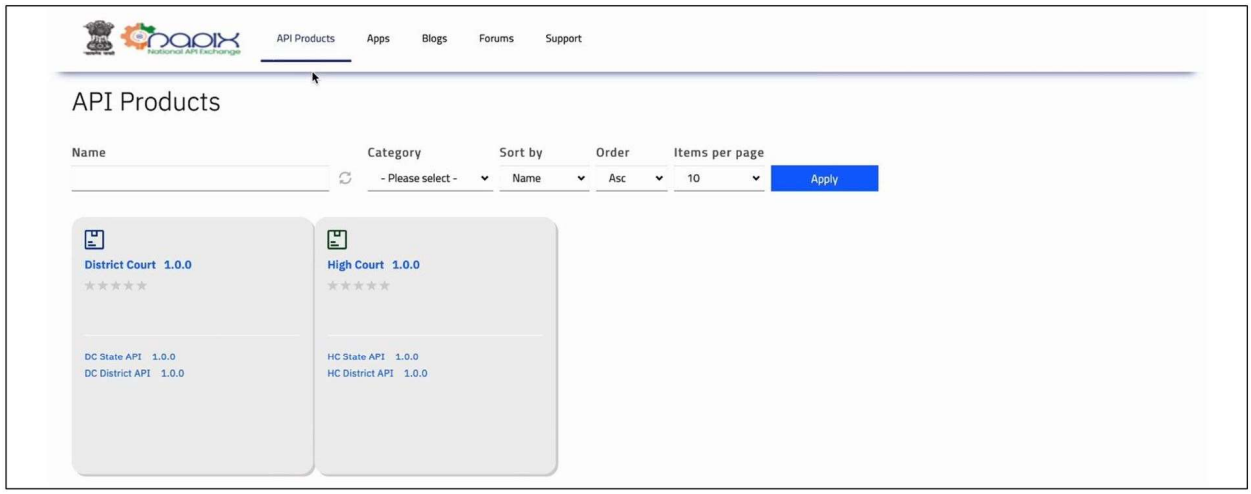
API Products
Apps
Blogs
Forums
Support
API Products
Name
Category
Sort by
Order
Items per page
- Please select -
Name
Asc
10
Apply
District Court 1.0.0
DC State API 1.0.0
DC District API 1.0.0
High Court 1.0.0
HC State API 1.0.0
HC District API 1.0.0

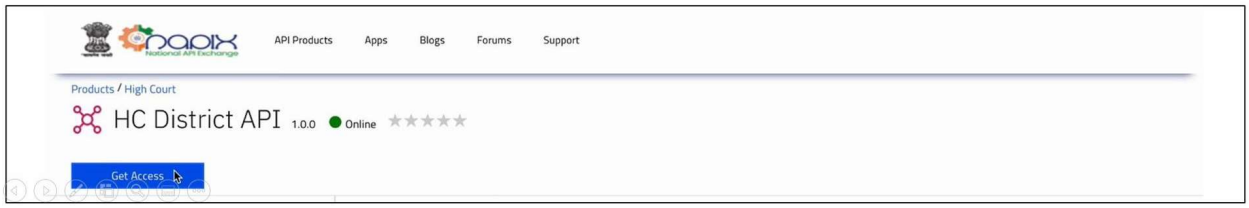
API Products
Apps
Blogs
Forums
Support
Products / High Court
HC District API 1.0.0
Online
Get Access

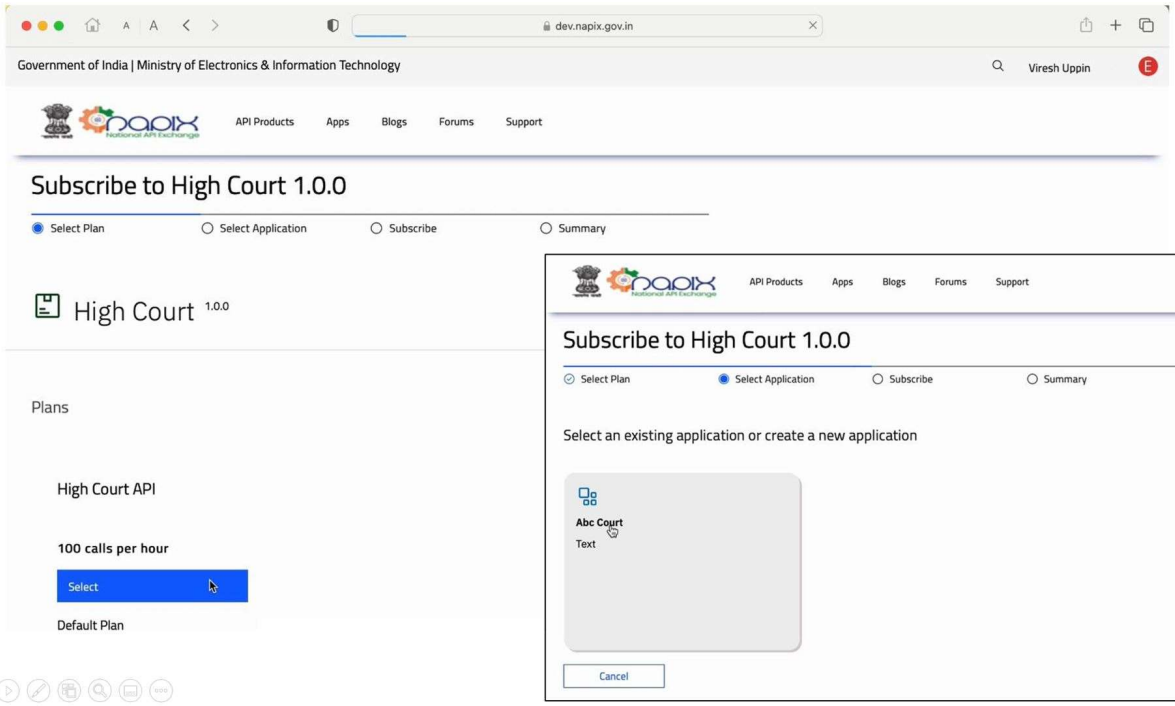
dev.napix.gov.in
Government of India | Ministry of Electronics & Information Technology
Viresh Uppin
API Products
Apps
Blogs
Forums
Support
Subscribe to High Court 1.0.0
Select Plan
Select Application
Subscribe
Summary
High Court 1.0.0
Plans
High Court API
100 calls per hour
Select
Default Plan
Subscribe to High Court 1.0.0
Select an existing application or create a new application
Abc Court
Text
Cancel

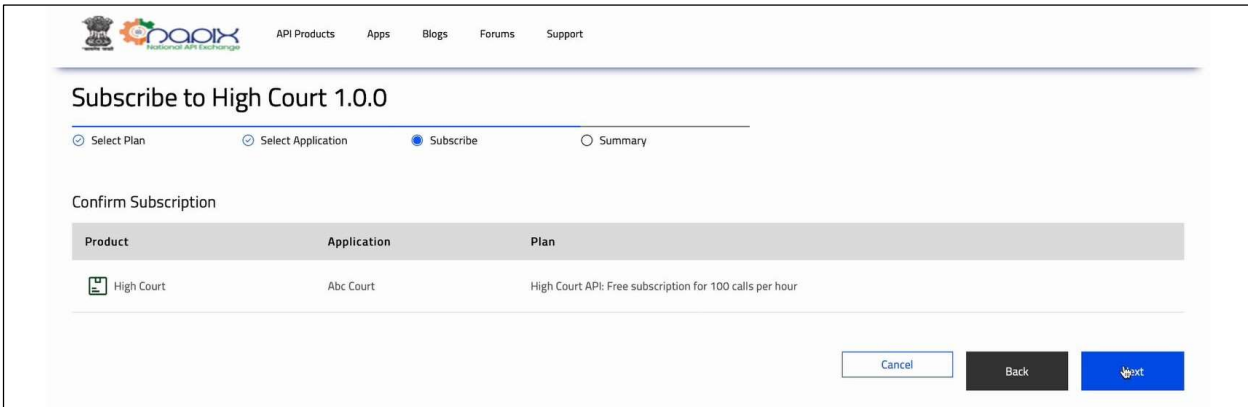

1.4 Reset Secret


In the event of loss of Secret saved at the time of app creation, reset secret can be used.

Step 1: Access app and Select subscription tab

Step 2: Access additional menu to select reset A P I secret

Do not forget to Copy and store both Key and Secret separately as it will required during testing and consuming

Step 3: Once completed, verify app using the key generated

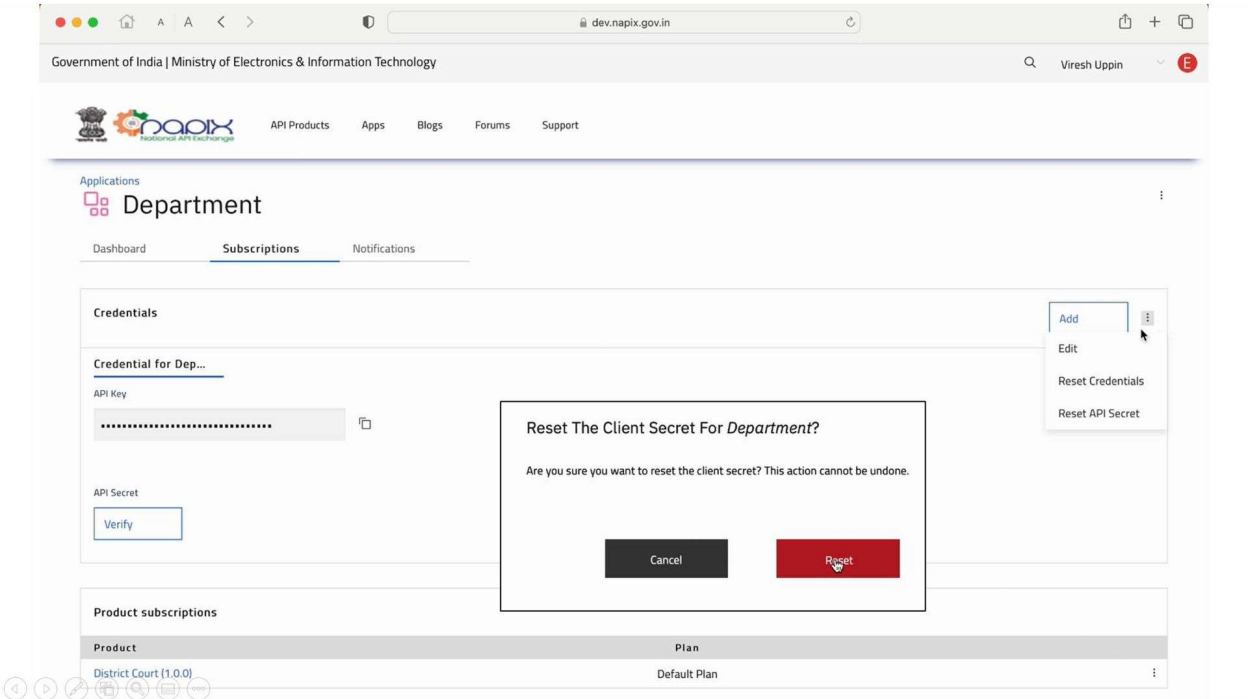


2 API Testing

This Section Covers the steps involved in Testing eCourts API through NAPIX platform. Inputs for Key and value, which are fixed for all users is presented in 'Annexure A', Inputs for Key and value, that are unique for each user is presented in 'Annexure B' along with the source for inputs.

2.1 Access Postman

Postman Platform for API testing is recommended, and users can signup for free

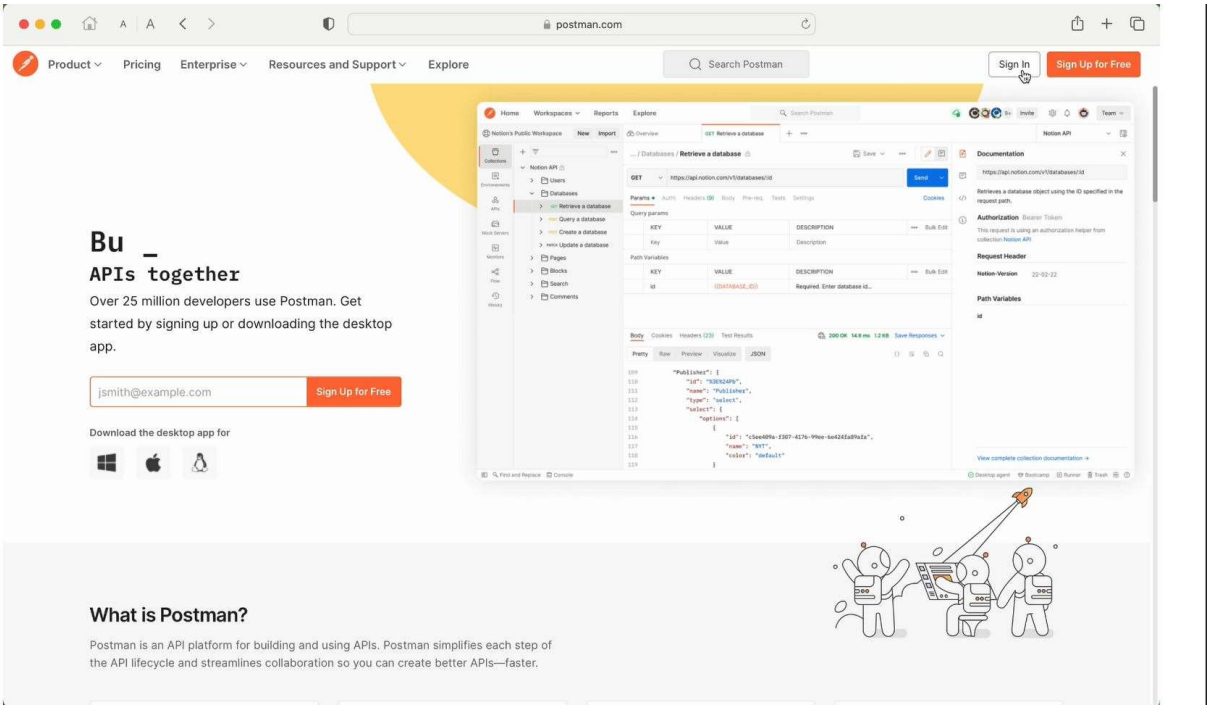


2.2 Token Generation


The first step of the API testing is to generate Token. Please note that this token will be only valid for 1 hour.

Step 1: First time users can create new workspace while Others may open their saved workspace.


To create workspace, select workspace tab, click create workspace and hit next. Enter details, select personal and hit create.

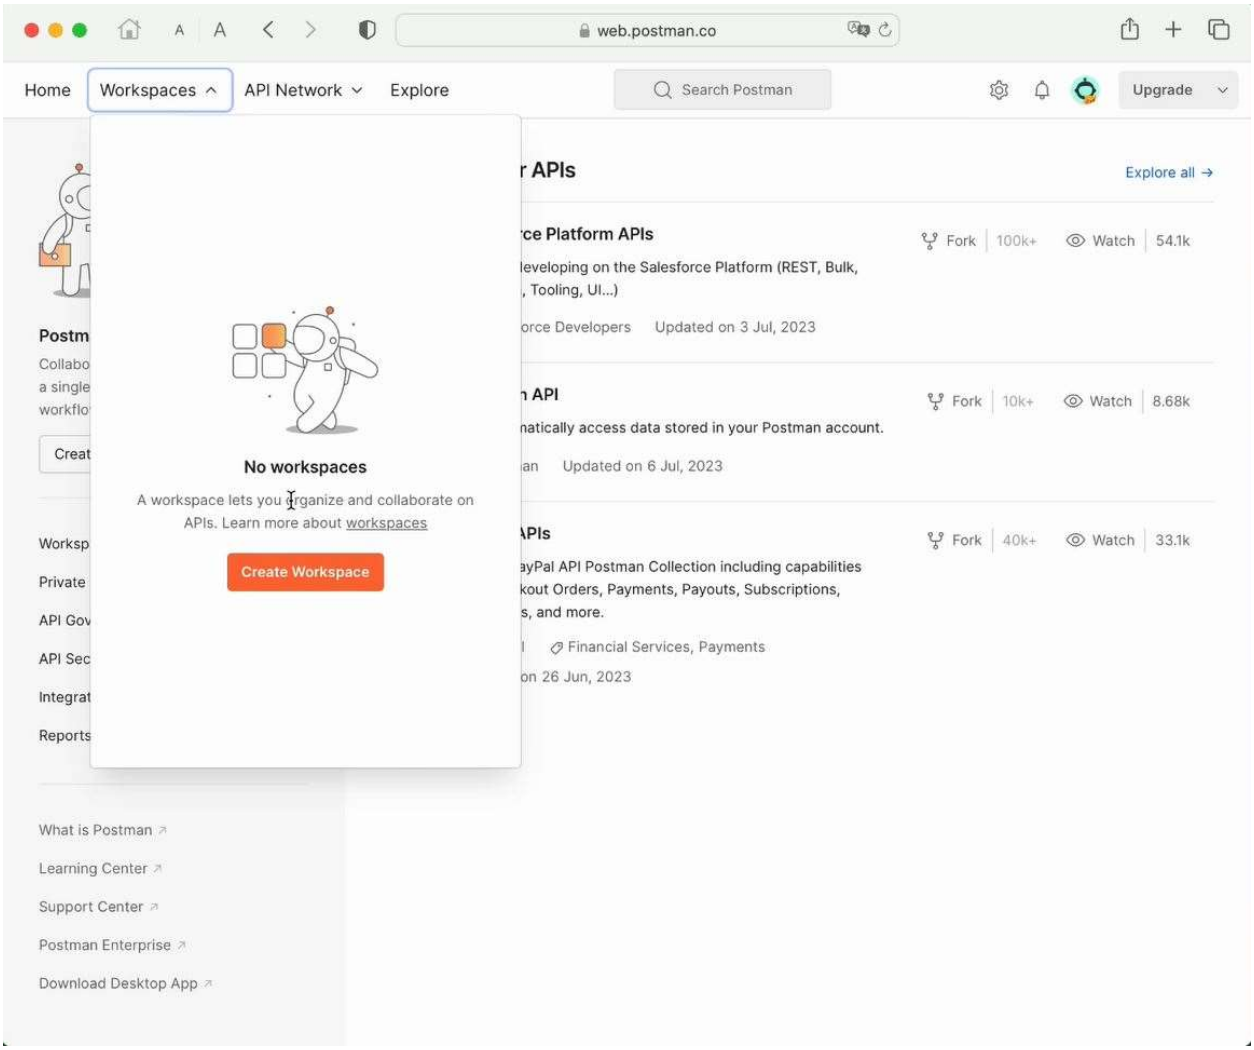
web.postman.co
Home
Workspaces
API Network
Explore
Search Postman
Upgrade
No workspaces
A workspace lets you organize and collaborate on APIs. Learn more about workspaces
Create Workspace
Explore all →
Fork
Watch
What is Postman
Learning Center
Support Center
Postman Enterprise
Download Desktop App


All users must click on create collection button in the workspace and give a name to the collection

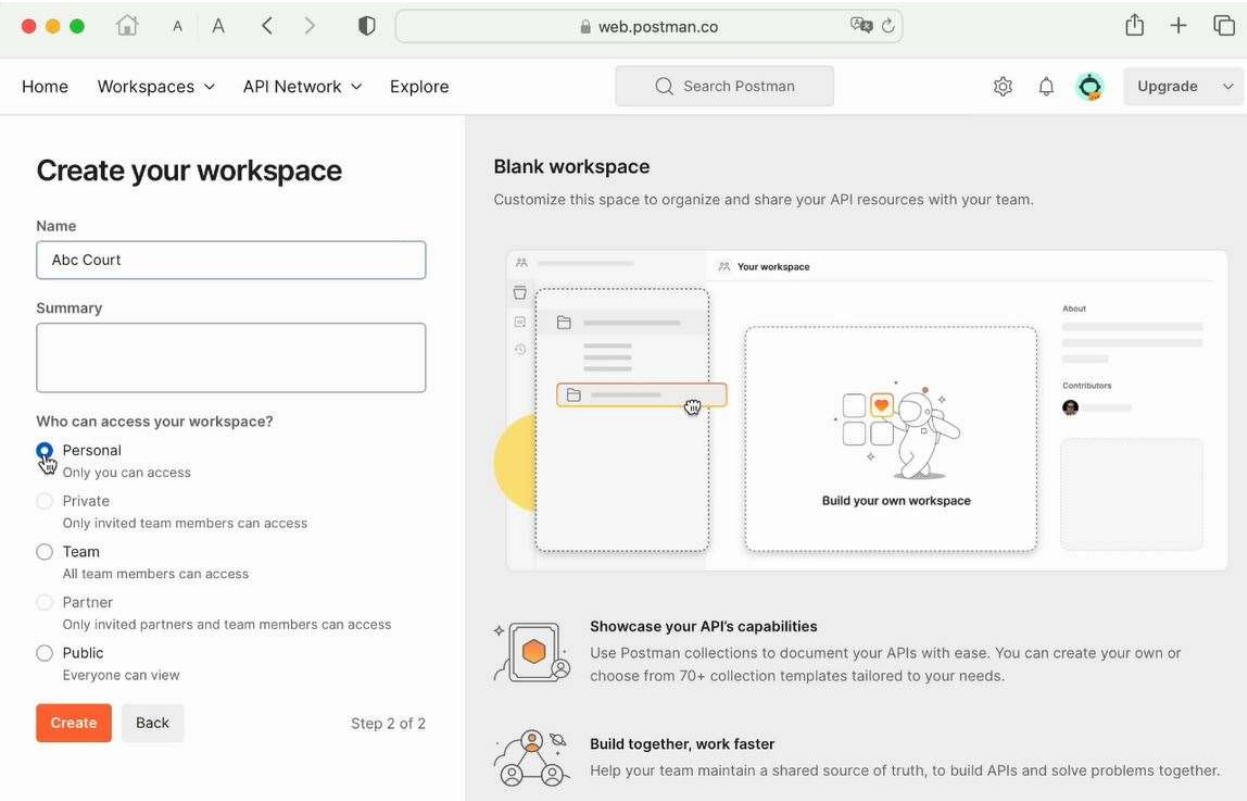

Step 2: Click on add a request link

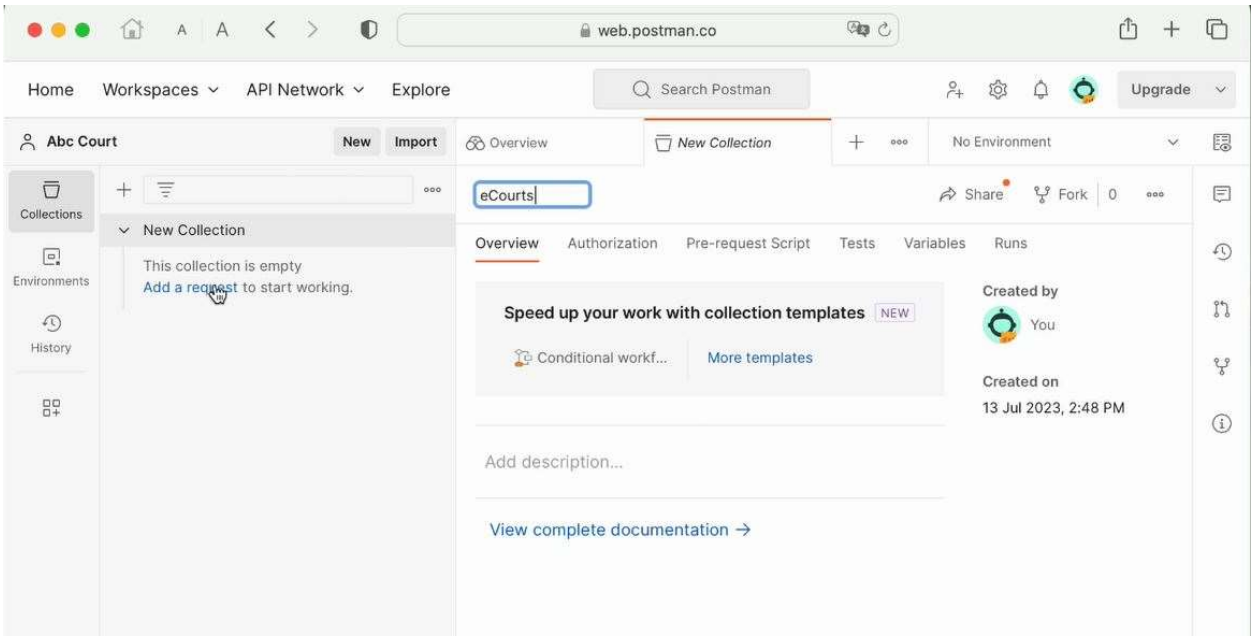

Step 3: Once request is created, check settings to make sure enable SSL certificate verification is turned off

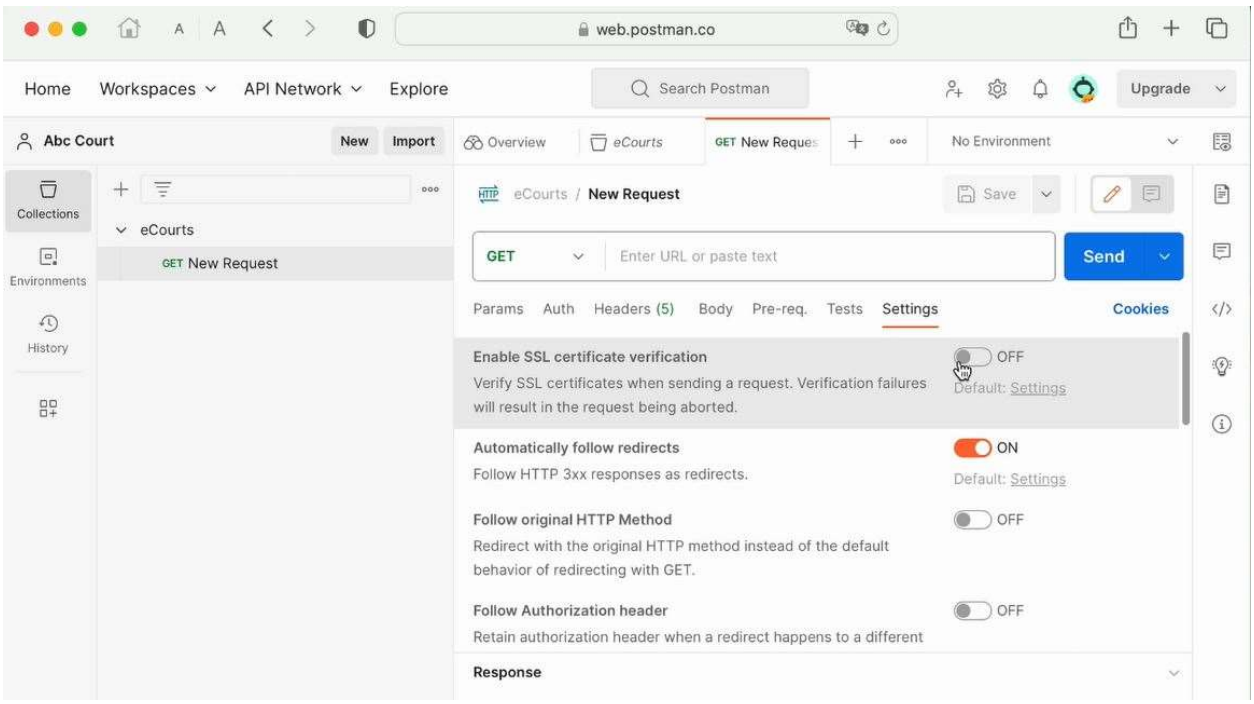


Step 4: Set the method as post

Step 5: Enter the URL

Step 6: Select AUTH tab and select basic auth


Step 7: Enter Username and password

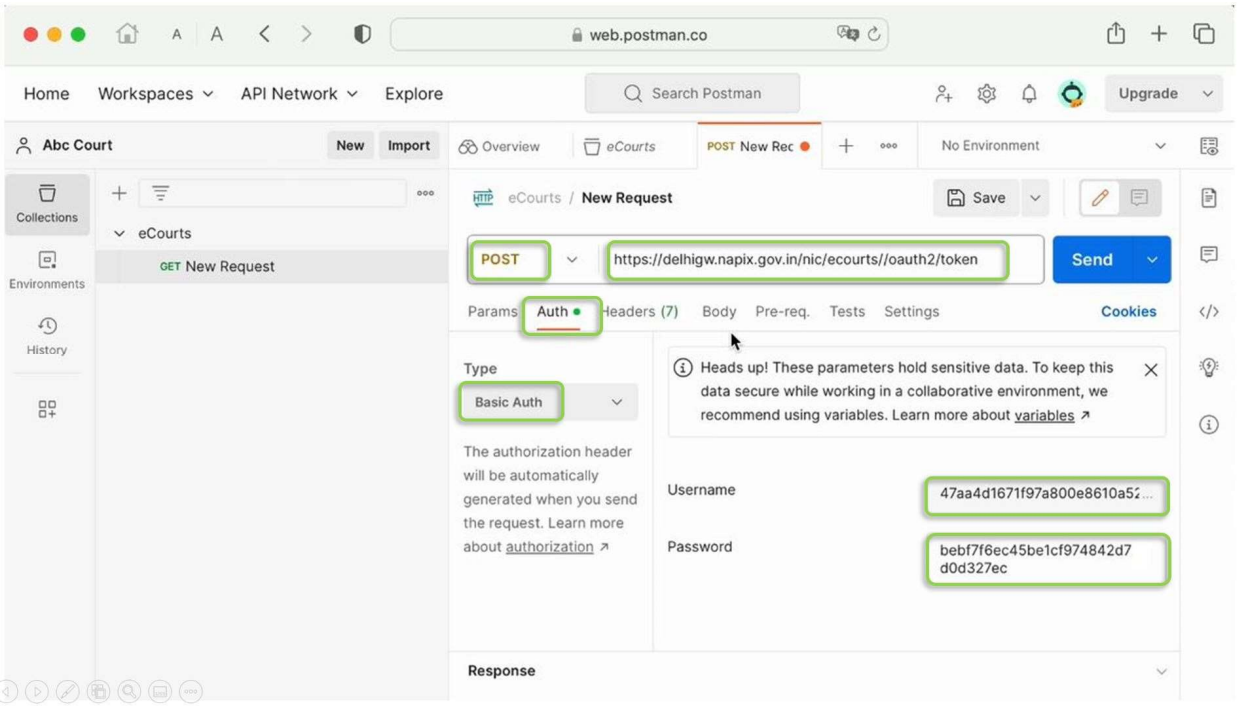

Step 8: Select body tab

Step 9: Select URL encoded

Step 10: Enter keys and corresponding values

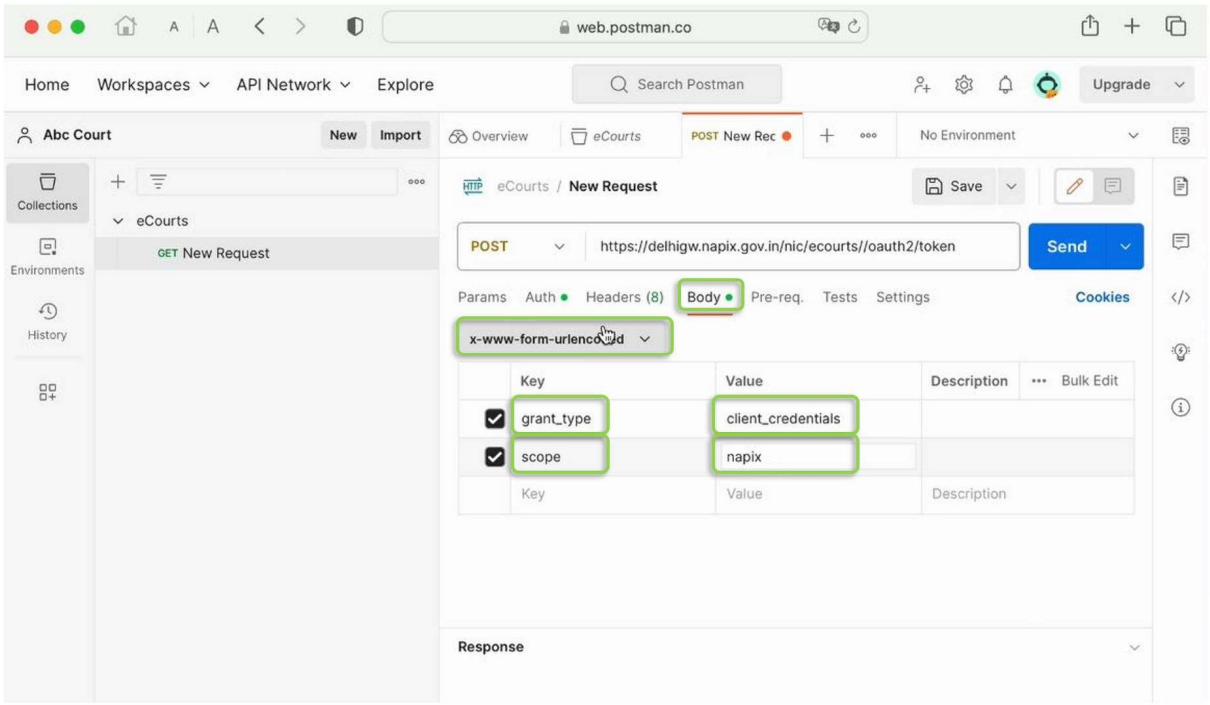



Step 11: Select headers tab

Step 12: Enter keys and corresponding values as shown and hit send

Copy and save token received

Save request

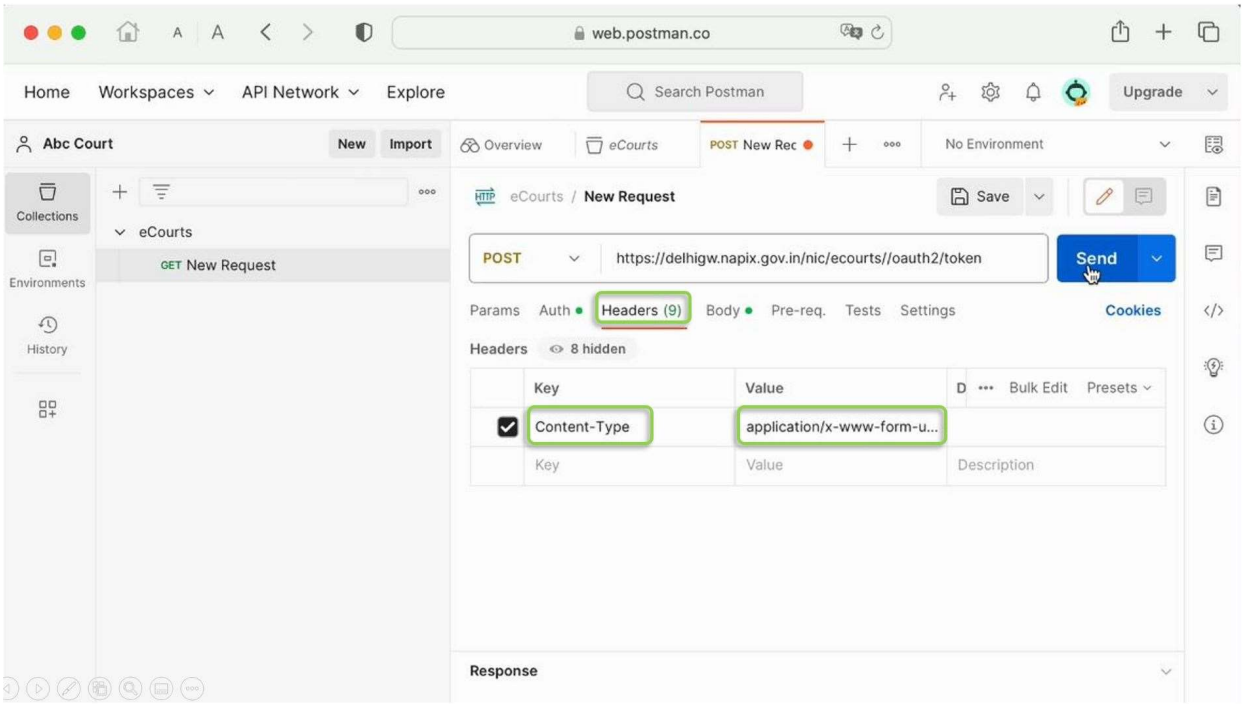

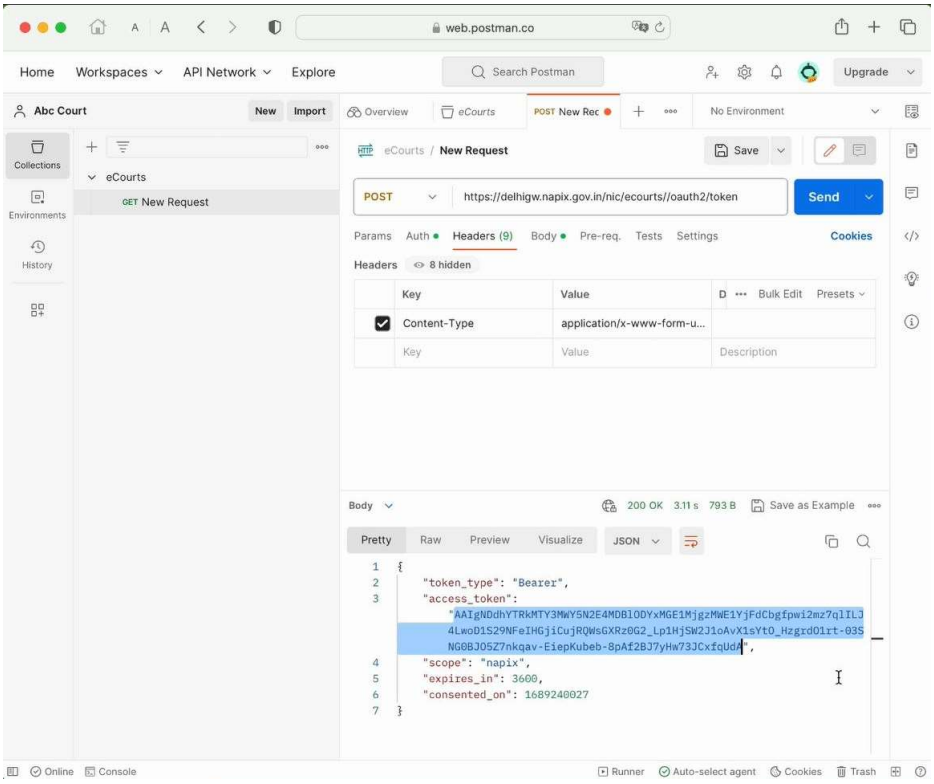


2.3 Test Response

Keep a valid token ready before initiating Testing response.

Step 1: Select workspace and add new request


Step 2: Keep method GET and enter direct API URL

Step 3: Select PARAMS tab, enter keys and corresponding values

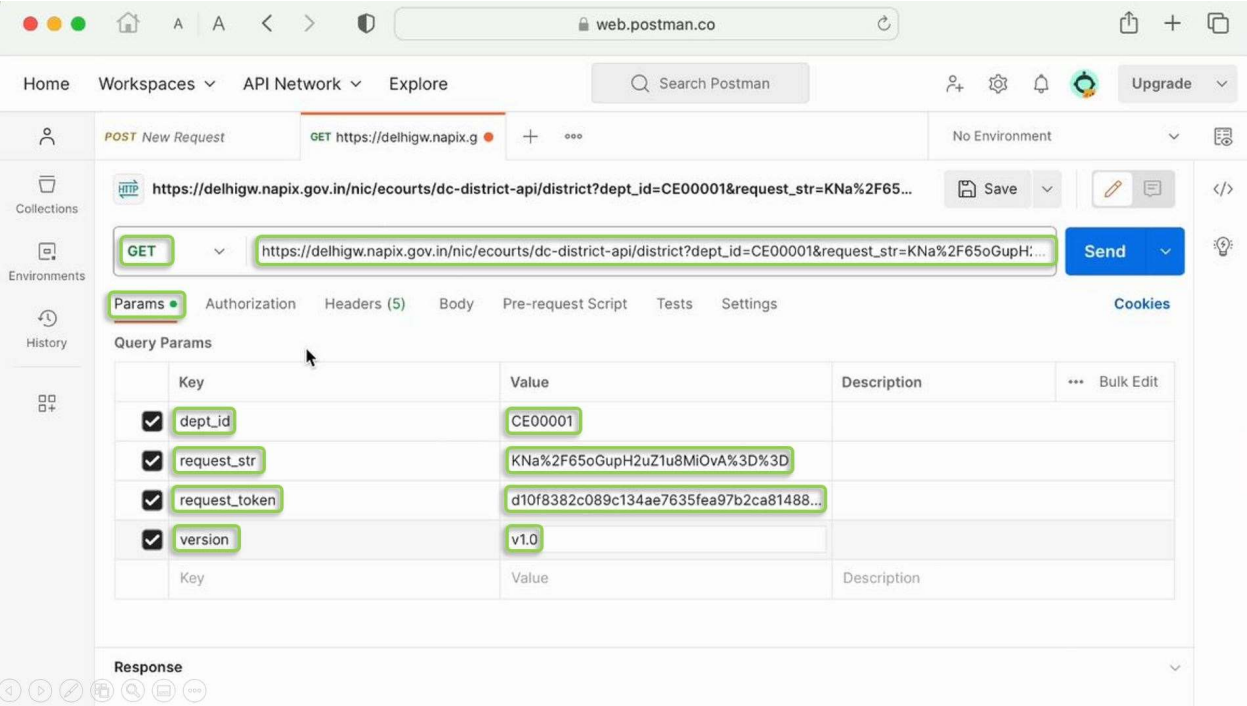


Step 4: Select Headers tab and enter keys and corresponding values

It is to be noted that value must start with bearer followed by space and token generated

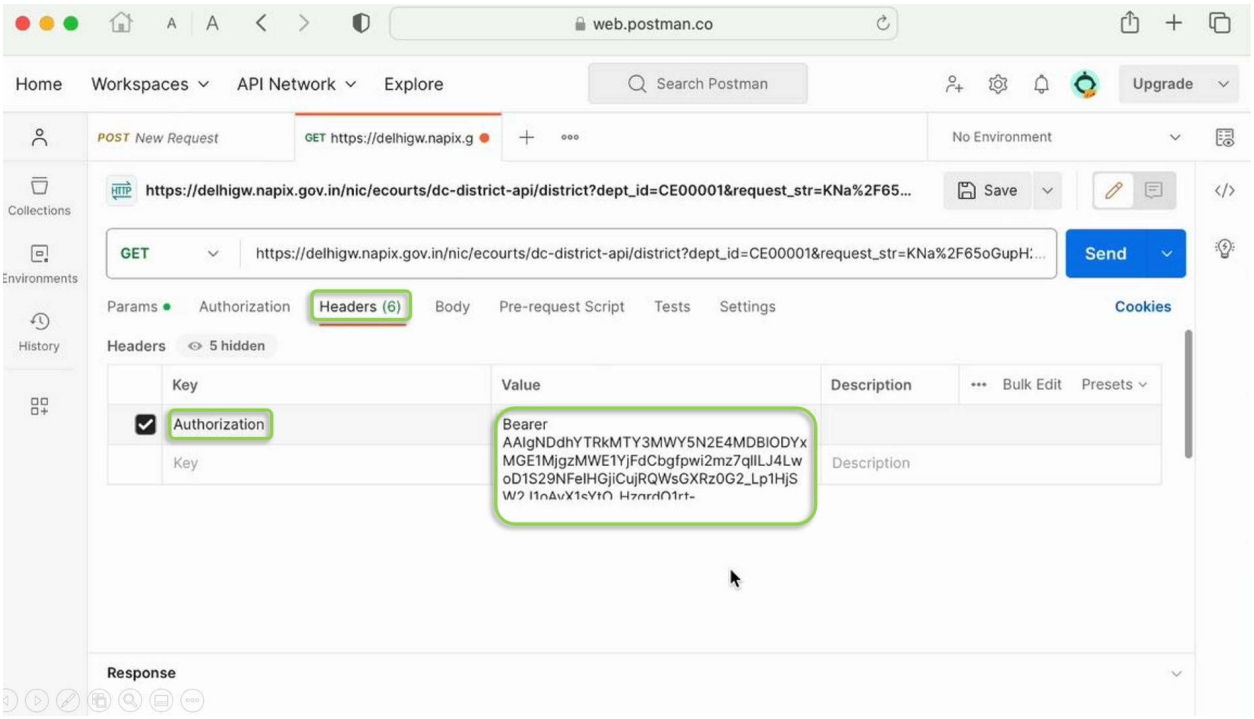
web.postman.co
Home
Workspaces
API Network
Explore
Search Postman
Upgrade
POST New Request
GET https://delhigw.napix.g
No Environment
Collections
Environments
History
https://delhigw.napix.gov.in/nic/ecourts/dc-district-api/district?dept_id=CE00001&request_str=KNa%2F65...
Save
GET
https://delhigw.napix.gov.in/nic/ecourts/dc-district-api/district?dept_id=CE00001&request_str=KNa%2F65oGupH:...
Send
Params
Authorization
Headers (6)
Body
Pre-request Script
Tests
Settings
Cookies
Headers
5 hidden
Key
Value
Description
Bulk Edit
Presets
Authorization
Bearer
AAlgNDdhYTRkMTY3MWY5N2E4MDBlODYx
MGE1MjgzMWE1YjFdCbgfpwi2mz7qIlLJ4Lw
oD1S29NFeIHGjiCujRQWsGXRz0G2_Lp1HjS
Key
Description
Response


Step 5: Hit send and receive response

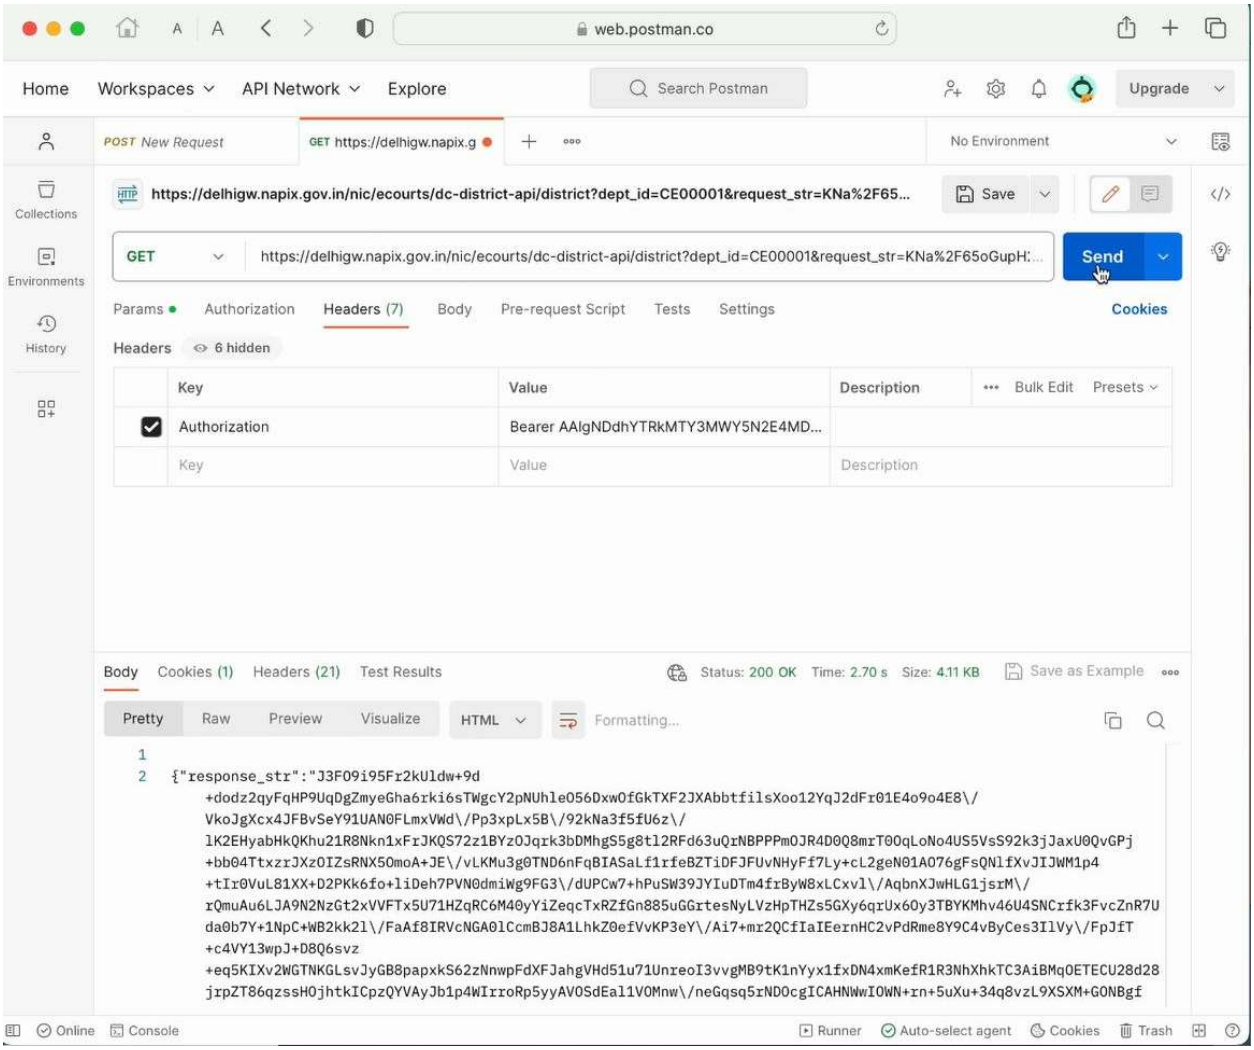


3 Possible errors

3.1 Error message will be generated if input value is incorrect or changed


For example, here bearer word is not included in the value

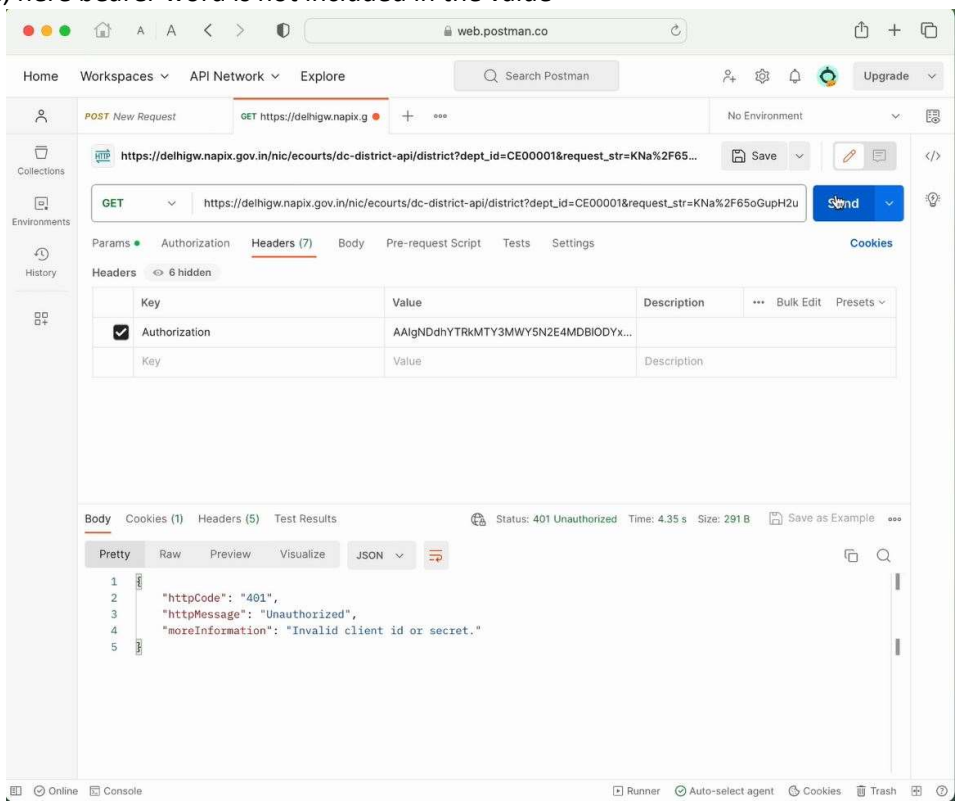

For example, here new line character or enter is added after the word bearer

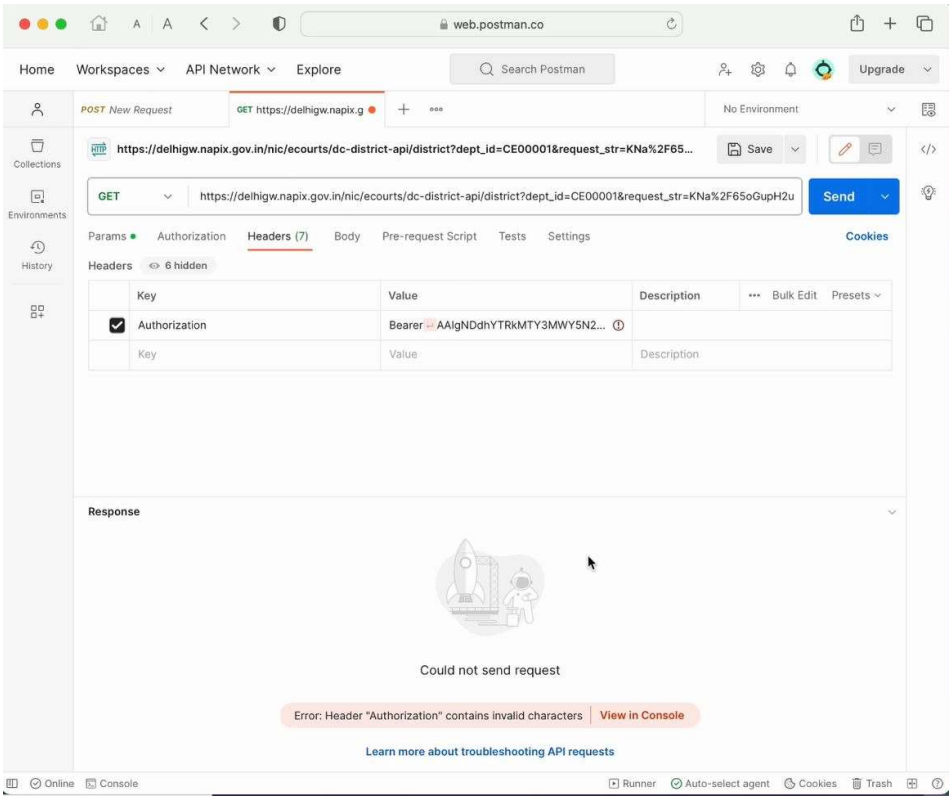

3.2 Error message will be generated if token has expired

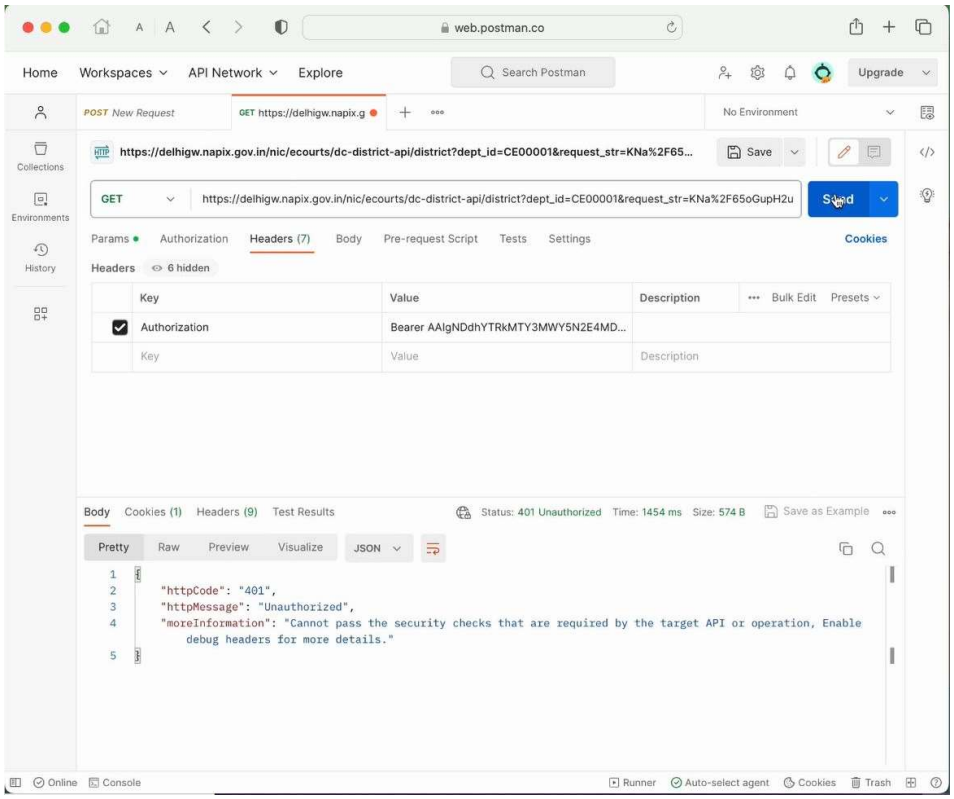

Annexure A: Fixed Key and Inputs

1	https://delhigw.napix.gov.in/nic/ecourts//oauth2/token	(token URL)
2	https://delhigw.napix.gov.in/nic/ecourts/dc-district-api/district	(district API URL)
3	grant_type	client_credentials
4	scope	napix
5	Content-type	application/x-www-form-urlencoded
6	version	v1.0

Annexure B: Key and Inputs Unique to each user(s)

1	Username	47aa4d1671f97a800e8610a52831a5b1 (available as 'key' in NAPIX)
2	Password	bebf7f6ec45be1cf974842d7d0d327ec (available as 'secret' in NAPIX)
3	dept_id	CE00001 (provided by eCommittee)
4	request_str	KNa%2F65oGupH2uZ1u8MiOvA%3D%3D (encryption key provided by eCommittee)
5	request_token	d10f8382c089c134ae7635fea97b2ca81488b25f3db23c9d578146599b7679c7 (hash generated using key - eg hash_hmac('sha256',$req_string, "15081947"))
6	Authorization	Bearer AAIgNDdhYTRkMTY3MWY5N2E4MDBlODYxMGE1MjgzMWE1YjGyEA8euUi6bjn9UQvSQgYw4vv3 akxESOCibsZbqglHjNfngKjm5Hm0iXFt9HcasiIaaSN9mfwiWUZwxRqPFJZVGeZAE9jChIgRx1FNeSO0 O8KGc2NXil-hj-kWUU1syFc (token generated through postman)