Technical Document

“POSe Link”

Version Update

Version	Date	Author	Description
V0.0.1	30 September 2022	Vanesha Asyariza	ECR Link Document
V0.0.2	24 January 2023	Vanesha Asyariza	- Update Required Parameters Sale & Brizzi - Update Response Parameter Sale & Brizzi - Added request and response for QRIS transactions.
V2.1.0	03 Februari 2023	Vanesha Asyariza	- Added the batch_number parameter to all response payloads. - Update response Settlement.
V2.2.0	14 Februari 2023	Vanesha Asyariza	- Added the WSS application protocol. - Added the method field to the request payload.
V3.0.0	30 March 2023	Vanesha Asyariza	- Add bluetooth connection - Update UI ECR Link - Added PAN and card_name fields to the response payloads.
V4.0.0	04 May 2023	Vanesha Asyariza	- Add USB connection
V4.1.0	15 September 2023	Marchella Anrisya	- Added data encryption methods. - Add action contactless - Added the fields is_off_us, is_credit, and card_category to the response payload. - Added notifications for sale and void transactions when the EDC screen is locked.

			- Automatic transmission of successful responses to the POS after a 5-second delay.
4.1.1	16 October 2023	Marchella Anrisya	- Added an example of data encryption for ECR Link.
4.2.4	17 January 2024	Marchella Anrisya	- Auto connect - Send Log data POS and EDC
4.2.6	20 March 2024	Marchella Anrisya	- Enhanced the ECRLink service to remain active during prolonged EDC idle periods.
4.3.0	03 May 2024	Marchella Anrisya	- Added the Purchase - Card Verification feature. - Added the Purchase - Sale Completion feature. - Added the Purchase - Installment feature. - Added the plan and period fields to the response payload
4.8.0	11 March 2025	Nila Humairah	- Added the transaction check feature.
4.9.0	16 April 2025	Nila Humairah	- Added the Purchase Void Check feature. - Added the Brizzi Void Check feature. - Added the insufficient balance check feature. - Added the QRIS refund check feature. - Added the ACK feature. - Added the EDC busy status feature.
4.10.0	12 May 2025	Nila Humairah	- Added the QRIS TAP feature.

			- Added the Refund QRIS TAP feature.
4.10.1	30 September 2025	Nila Humairah	- Added the Release Card Verification feature.
4.11.1	30 September 202	Nila Humairah	- Added version_code and version_name parameters to all responses.
4.12.0	5 January 2026	Nila Humairah	- SSL certificate renewal to enhance the security of system connections. - Addition of version logging as part of application change recording and traceability. - Adjustment and optimization of the timestamp processing workflow to reduce latency and ensure more precise time validation across the system. - Implementation of an ACK response mechanism for Bluetooth and USB connections to ensure reliable data communication. - Addition of transaction ID validation supporting alphanumeric characters and permitted symbols (dot (.), equals sign (=), hyphen (-), and underscore (_)).
4.13.0	17 March 2026	M Arif Yudhistira	- Add new protocol (API) also the explanation, url dev and postman collection

POSe Link Merchant

1. Overview

The POSe Link application connects external device applications with the EDC. It connects via the same internet connection, such as Wi-Fi, Bluetooth, or USB. The application installed on the EDC is the FMS BRI Merchant application.

2. Signature / Data Encryption

Data transmitted from the external device to the EDC will be encrypted using the AES/ECB/PKCS5Padding algorithm. The encryption functionality is developed by the POS merchant using the Java programming language, utilizing a secret key provided by PCS Indonesia.

```
public class EncryptAes {

    private static SecretKeySpec secretKey;
    private static byte[] key;
    private final String secret = "ECR2022secretKey";

    private void setKey(final String myKey) {
        MessageDigest sha = null;
        try {
            key = myKey.getBytes("UTF-8");
            sha = MessageDigest.getInstance("SHA-1");
```

```
        key = sha.digest(key);
        key = Arrays.copyOf(key, 16);
        secretKey = new SecretKeySpec(key, "AES");
        System.out.println("");
    } catch (NoSuchAlgorithmException | UnsupportedEncodingException e) {
        e.printStackTrace();
    }
}

public String encrypt(final String strToEncrypt) {
    try {
        setKey(secret);
        Cipher cipher = Cipher.getInstance("AES/ECB/PKCS5Padding");
        cipher.init(Cipher.ENCRYPT_MODE, secretKey);
        return Base64.getEncoder().encodeToString(cipher.doFinal(strToEncrypt.getBytes("UTF-8")));
    } catch (Exception e) {
        System.out.println("Error while encrypting: " + e.toString());
    }
    return null;
}
```

The secret key used for the development mode is: **ECR2022secretKey**.

An example of data encryption can be found at the link below, in the file named ecr_encrypt. Additionally, connection methods for Bluetooth and USB in Java are also available at the following link: *Link File*.

3. Architecture Diagram POSe Link

The architecture diagram for the POSe Link application, which connects the external application (POS) with the EDC, is as follows:

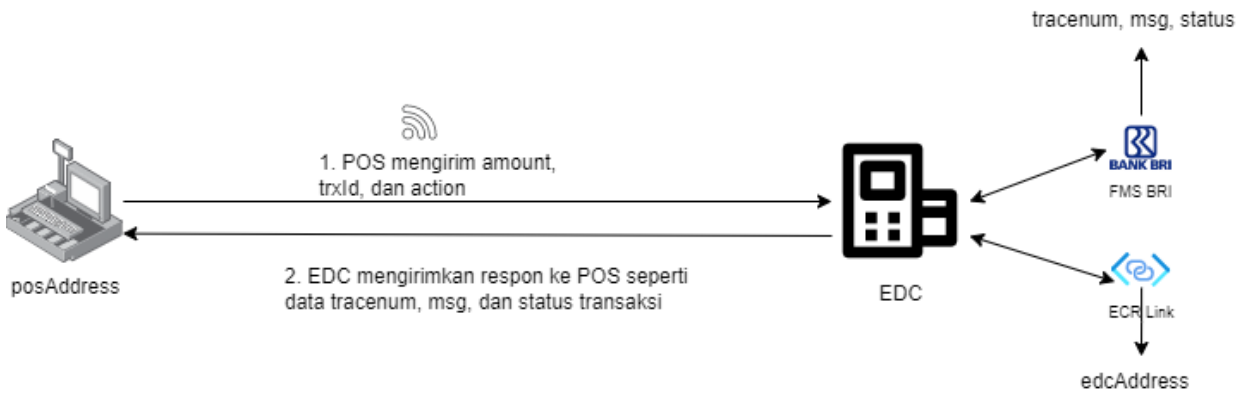

Explanation of POSe Link with Wi-Fi Connection:

1. The application uses the WSS (WebSocket Secure) protocol.
2. The external application has an IP address identified as pos_address.
3. Both the external application and the EDC share the same Wi-Fi connection.
4. The POSe Link application carries the EDC's IP address, referred to as edc_address.
5. The EDC runs two applications: POSe Link and FMS BRI.
6. The external application sends data, which is then directly displayed on the FMS BRI application via POSe Link.
7. Transactions are processed on the EDC within the FMS BRI application, and the responses are sent back and displayed on the external application.

Explanation of POSe Link with Bluetooth Connection:

1. The external application connects to the EDC via Bluetooth, indicated by a "connected" status on the external application.
2. The external application sends data, which is directly displayed on the FMS BRI application via POSe Link.
3. Transactions are processed on the EDC within the FMS BRI application, and the responses are sent back and displayed on the external application.

Explanation of POSe Link with USB Connection

1. The external application connects to the EDC via USB using a USB serial port RS-232 converter and a USB Type-C OTG Adapter 2-in-1 connected to the POS as the external device.
2. The external application sends data, which is directly displayed on the FMS BRI application via POSe Link.
3. Transactions are processed on the EDC within the FMS BRI application, and the responses are sent back and displayed on the external application.

Explanation of POSe Link with API Connection

1. The external application connects to the EDC via API through the POSeLink Middleware, without requiring a direct network connection between the POS and the EDC.
2. The external application sends encrypted transaction data to the middleware endpoint using HTTPS.
3. The middleware forwards the transaction to the EDC via Ably (real-time messaging service) based on the registered MID/TID mapping.
4. The external application sends data, which is directly displayed on the FMS BRI application via POSe Link.
5. Transactions are processed on the EDC within the FMS BRI application, and the responses are sent back through the middleware and displayed on the external application.

4. POSe Link Specification

The specifications used to run the POSe Link application on the EDC FMS BRI are as follows:

Device	- EDC Sunmi P1-4G / P2 - Merchant external application

Application	- FMS BRI Phase >= 3 - Respon dengan value N/A akan update jika menggunakan aplikasi FMS BRI Phase >= 3.2 - POSe Link App
Koneksi 1 **edc_address/Port**	Wi-Fi wss://edc_address:6746 wss://edc_address:6747
Koneksi 2	Bluetooth
Koneksi 3	USB
Koneksi 4 **url_dev** **Postman collection**	API https://development-ecrlink.pcsindonesia.com POSeLink_API_Client.postman_collection.json

4.1. Sale

Name	Sale
Format	JSON
Description	Executing the Sale Menu in the BRI FMS Application Triggered by an External Application via POSe Link. The Sale menu in the BRI FMS application can be triggered directly by an external application through the POSe Link interface. The Sale function supports multiple payment methods, including Purchase, Brizzi, and QRIS. After initiating the request, users can select the desired payment method.

Required Body Parameters

Required Body Parameters			
List Parameter	Data Type	Mandatory	Description
amount	int	yes	The transaction amount is automatically displayed on the EDC screen during payment.
action	String	no	The transaction menu is “Sale”.
trx_id	Alphanumeric	yes	The transaction ID is obtained from the external application.
pos_address	String	no	The IP address of the external application.
time_stamp	Datetime	no	The date and time the request is sent from the POS. Timestamp format: yyyy-mm-dd HH:MM:SS
method	String	no	The available transaction types include three options: purchase, brizzi, and QRIS.

Required Body Sample

```
{
  "action": "Sale",
  "trx_id": "icacobabelanja_1sale",
  "amount": "1",
  "pos_address": "{{ecr_pos_address}}",
  "time_stamp": "{{current_timestamp}}",
  "method": "purchase"
}
```

Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Description
pos_address	String	no	The IP address of the external application.
trace_number	int	yes	The transaction ID from the transaction receipt.
action	String	no	The transaction menu is “Sale”.
edc_address	String	no	The EDC IP address obtained from the POSe Link application.
trx_id	Alphanumeric	yes	The transaction ID is obtained from the external application.

msg	String	no	Displays transaction status information on the EDC.
method	String	no	The transaction types available are: purchase, brizzi, and QRIS.
status	String	no	Transaction status information: Success for purchase and brizzi transactions. Paid for QRIS transactions.
reff_id	String	no	The transaction ID used for refunds in the QRIS method.
acq_tid	String	no	The terminal ID of the EDC merchant.
acq_mid	String	no	The merchant ID of the EDC merchant.
card_type	String	no	The card type involved in the transaction.
transaction_date	String	no	The transaction time recorded on the EDC.

amount	String	no	The transaction amount sent from the POS.
reference_number	String	no	The transaction number obtained from the BRI host during a transaction. For QR transactions, this is used to check the transaction status.
approval	String	no	The transaction approval code.
rc	String	no	Transaction status response code.
batch_number	String	no	Transaction group from the trace_number.
card_name	String	no	Transaction card type: NSICCS, Visa, Mastercard, or JCB.
pan	String	no	Masked card number used in the transaction.
card_category	String	no	The card category used in the transaction, for example: Debit, Visa, Mastercard, JCB.

is_credit	String	no	Card type classification used in the transaction: - Yes indicates a Credit card. - No indicates a Debit card.
is_off_us	String	no	The bank classification for the card used in the transaction, where Yes means the card belongs to a non-BRI bank, and No means it is a BRI card.
periode	String	no	The installment period selected during the installment transaction.
plan	String	no	Installment plan selected during an installment transaction.
version_code	String	no	Application version code currently in use.
version_name	String	no	Application version in use.

Success Response Code	success
Respond Sample (Success)	**Purchase - Sale** { "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Sale", "amount": "1", "approval": "503798", "batch_number": "00003", "card_category": "VISA BRI", "card_name": "VISA", "card_type": "CHIP", "edc_address": "192.168.10.145", "is_credit": "true", "is_off_us": "false", "method": "purchase", "msg": "Transaction Success A", "pan": "4365 0299 **** 1702", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "00", "reference_number": "600507964591", "status": "success", "trace_number": "000033", "transaction_date": "2026-01-05 14:13:02", "trx_id": "icacobabelanja_1sale", "version_code": "43", "version_name": "4.12.0"

}

Brizzi - Payment

{
"acq_mid": "000001999115921",
"acq_tid": "10747686",
"action": "Sale",
"amount": "1",
"approval": "3E13F4B7",
"batch_number": "00001",
"card_category": "N/A",
"card_name": "N/A",
"card_type": "Tap",
"edc_address": "192.168.10.145",
"is_credit": "N/A",
"is_off_us": "N/A",
"method": "brizzi",
"msg": "Transaction Success",
"pan": "N/A",
"periode": "N/A",
"plan": "N/A",
"pos_address": "172.0.0.1",
"rc": "00",
"reference_number": "000038",
"status": "success",
"trace_number": "38",
"transaction_date": "2026-01-05 14:25:25",
"trx_id": "icacobabelanja_2brizzi",
"version_code": "43",
"version_name": "4.12.0"

}

QRIS - Generate QR

{
"acq_mid": "000001999115921",
"acq_tid": "10747686",
"action": "Sale",
"amount": "1",
"approval": "N/A",
"batch_number": "00003",
"card_category": "N/A",
"card_name": "N/A",
"card_type": "SCAN",
"edc_address": "192.168.10.145",
"is_credit": "N/A",
"is_off_us": "N/A",
"method": "QRIS",
"msg": "transaksi berhasil",
"pan": "**********5255",
"periode": "N/A",
"plan": "N/A",
"pos_address": "172.0.0.1",
"rc": "00",
"reference_number": "000937677230",
"reff_id": "2349708316",
"status": "paid",
"trace_number": "47",
"transaction_date": "2026-01-05 15:17:53",

	"trx_id": "icacobabelanja_2qris", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	failed (RC 50 - Incorrect Pin)
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Sale", "amount": "1", "approval": "N/A", "batch_number": "00003", "card_category": "VISA BRI", "card_name": "VISA", "card_type": "CHIP", "edc_address": "192.168.10.145", "is_credit": "true", "is_off_us": "false", "method": "purchase", "msg": "Transaction Failed", "pan": "4365 0299 **** 1702", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "-01 TC - 50 - Pin Salah (transactionErrorResult isResultEnd: true, code : -50024)", "reference_number": "600507963755", "status": "failed",

	"trace_number": "000031", "transaction_date": "2026-01-05 14:11:43", "trx_id": "icacobabelanja_1sale", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	failed (QR unpaid)
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Sale", "amount": "1", "approval": "N/A", "batch_number": "00003", "card_category": "N/A", "card_name": "N/A", "card_type": "SCAN", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "N/A", "method": "QRIS", "msg": "Transaksi Unpaid", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "074768602880", "reff_id": "N/A",

	"status": "unpaid", "trace_number": "41", "transaction_date": "2026-01-05 15:11:26", "trx_id": "icacobabelanja_2qris", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	Transaction cancelled.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Sale", "amount": "1", "approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "N/A", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "false", "method": "purchase", "msg": "Transaction Failed", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A",

	"status": "failed", "trace_number": "000030", "transaction_date": "2026-01-05 14:10:20", "trx_id": "icacobabelanja_1sale", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	The transaction is executed with an identical trx_id.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Sale", "amount": "1", "approval": "503798", "batch_number": "00003", "card_category": "VISA BRI", "card_name": "VISA", "card_type": "CHIP", "edc_address": "192.168.10.145", "is_credit": "true", "is_off_us": "false", "method": "purchase", "msg": "Transaksi telah berhasil dilakukan dengan trxID ini", "pan": "4365 0299 **** 1702", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "00", "reference_number": "600507964591",

	"status": "success", "trace_number": "000033", "transaction_date": "2026-01-05 14:13:02", "trx_id": "icacobabelanja_1sale", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	Insufficient balance.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Cicilan", "amount": "1", "approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "N/A", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "false", "method": "purchase", "msg": "Transaction Failed", "pan": "N/A", "periode": "06", "plan": "003", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A",

	"status": "failed", "trace_number": "000061", "transaction_date": "2026-01-06 09:41:53", "trx_id": "icacobabelanja_1cicilan", "version_code": "43", "version_name": "4.12.0" }

4.2. Contactless

Name	Contactless
Format	JSON
Description	Executing the Sale Contactless Menu in the BRI FMS Application via POSe Link. The Sale Contactless menu in the BRI FMS application can be triggered directly by an external application through the POSe Link interface. The Contactless option is available only for the Purchase payment method. It supports contactless payments using Visa and Mastercard cards via the tap method.
Required Body Parameters	

Required Body Parameters			
List Parameter	Data Type	Mandatory	Description
amount	int	yes	The transaction amount is automatically displayed on the EDC screen during payment.

	action	String	no	The transaction menu is Contactless.
	trx_id	Alphanumeric	yes	The transaction ID is obtained from the external application.
	pos_address	String	no	The IP address of the external application.
	time_stamp	Datetime	no	The date and time the request is sent from the POS. Timestamp format: yyyy-mm-dd HH:MM:SS
	method	String	no	The transaction type that can be selected is Purchase.

Required Body Sample	{
	"action": "Contactless",
	"trx_id": "icacobabelanja_1contactless",
	"amount": "1",
	"pos_address": "172.0.0.1",
	"time_stamp": "2026-01-06 09:25:08",
	"method": "purchase"
	}			

Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Description
pos_address	String	no	The IP address of the external application.
trace_number	int	yes	The transaction ID from the transaction receipt.
action	String	no	The transaction menu is Contactless.
edc_address	String	no	The EDC IP address obtained from the POSe Link application.
trx_id	Alphanumeric	yes	The transaction ID is obtained from the external application.
msg	String	no	Displays transaction status information on the EDC.
method	String	no	The transaction type that can be selected is Purchase.

	status	String	no	The transaction status indicates success for Purchase transactions.
	acq_tid	String	no	The terminal ID of the EDC merchant.
	acq_mid	String	no	The merchant ID of the EDC merchant.
	card_type	String	no	The card type involved in the transaction.
	transaction_date	String	no	The transaction time recorded on the EDC.
	amount	String	no	The transaction amount sent from the POS.
	reference_number	String	no	The transaction number obtained from the BRI host during a transaction. For QR transactions, this is used to check the transaction status.
	approval	String	no	The transaction approval code.
	rc	String	no	Transaction status response code.

batch_number	String	no	Transaction group from the trace_number.
card_name	String	no	Transaction card type: NSICCS, Visa, Mastercard, or JCB.
pan	String	no	Masked card number used in the transaction.
card_category	String	no	The card category used in the transaction, for example: Debit, Visa, Mastercard, JCB.
is_credit	String	no	Card type classification used in the transaction: - Yes indicates a Credit card. - No indicates a Debit card.
is_off_us	String	no	The bank classification for the card used in the transaction, where Yes means the card belongs to a non-BRI bank, and No means it is a BRI card.

	periode	String	no	The installment period selected during the installment transaction.
	plan	String	no	Installment plan selected during an installment transaction.
	version_code	String	no	Application version code currently in use.
	version_name	String	no	Application version in use.
Success Response Code	success			
Respond Sample (Success)	**Purchase - Contactless** { "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Contactless", "amount": "1", "approval": "240390", "batch_number": "00001", "card_category": "MASTER CARD", "card_name": "MASTERCARD", "card_type": "TAP", "edc_address": "192.168.10.145", "is_credit": "true",			

	"is_off_us": "false", "method": "purchase", "msg": "Transaction Success", "pan": "5188 5621 **** 9709", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "00", "reference_number": "536309586648", "status": "success", "trace_number": "000008", "transaction_date": "2025-12-29 16:04:32", "trx_id": "cobabelanja_1contactless", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	failed (Time Out)
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Contactless", "amount": "1", "approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "N/A", "edc_address": "192.168.10.145", "is_credit": "N/A",

	"is_off_us": "false", "method": "purchase", "msg": "Transaction Failed", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "status": "failed", "trace_number": "000097", "transaction_date": "2026-01-07 11:32:17", "trx_id": "icacobabelanja_2contactless", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	Transaction cancelled.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Contactless", "amount": "N/A", "approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "N/A", "edc_address": "192.168.10.145", "is_credit": "N/A",

	"is_off_us": "false", "method": "purchase", "msg": "Transaction Failed", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "status": "failed", "trace_number": "000010", "transaction_date": "2025-12-29 16:06:54", "trx_id": "cobabelanja_3contactless", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	The transaction is executed with an identical trx_id.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Contactless", "amount": "1", "approval": "240390", "batch_number": "00001", "card_category": "MASTER CARD", "card_name": "MASTERCARD", "card_type": "TAP", "edc_address": "192.168.10.145", "is_credit": "true",

	"is_off_us": "false", "method": "purchase", "msg": "Transaksi telah berhasil dilakukan dengan trxID ini", "pan": "5188 5621 **** 9709", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "00", "reference_number": "536309586648", "status": "success", "trace_number": "000008", "transaction_date": "2025-12-29 16:04:32", "trx_id": "cobabelanja_1contactless", "version_code": "43", "version_name": "4.12.0" }

4.3. Card Verification

Name	Card Verification
Format	JSON
Description	Executing the Card Verification Menu in the BRI FMS Application via POSe Link. The Card Verification menu in the BRI FMS application can be triggered directly by an external application through the POSe Link interface. Card Verification is available only for the Purchase payment method and supports credit card payments.
Required Body Parameters	Required Body Parameters

List Parameter	Data Type	Mandatory	Description
amount	int	yes	The transaction amount is automatically displayed on the EDC screen during payment.
action	String	no	The transaction menu is Card Verification
trx_id	Alphanumeric	yes	The transaction ID is obtained from the external application.
pos_address	String	no	The IP address of the external application.
time_stamp	Datetime	no	The date and time the request is sent from the POS. Timestamp format: yyyy-mm-dd HH:MM:SS
method	String	no	The transaction type that can be selected is Purchase.

Required Body Sample

```
{
  "action": "Card Verification",
  "trx_id": "icacobabelanja_1cardver",
  "amount": "1",
```

```
  "pos_address": "172.0.0.1",
  "time_stamp": "2026-01-06 09:25:08",
  "method": "purchase"
}
```


Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Description
pos_address	String	no	The IP address of the external application.
trace_number	int	yes	The transaction ID from the transaction receipt.
action	String	no	The transaction menu is Card Verification.
edc_address	String	no	The EDC IP address obtained from the POSe Link application.
trx_id	Alphanumeric	yes	The transaction ID is obtained from the external application.
msg	String	no	Displays transaction status information on the EDC.

method	String	no	The transaction type that can be selected is Purchase.
status	String	no	The transaction status indicates success for Purchase transactions.
acq_tid	String	no	The terminal ID of the EDC merchant.
acq_mid	String	no	The merchant ID of the EDC merchant.
card_type	String	no	The card type involved in the transaction.
transaction_date	String	no	The transaction time recorded on the EDC.
amount	String	no	The transaction amount sent from the POS.
reference_number	String	no	The transaction number obtained from the BRI host during a transaction. For QR transactions, this is used to check the transaction status.

approval	String	no	The transaction approval code.
rc	String	no	Transaction status response code.
batch_number	String	no	Transaction group from the trace_number.
card_name	String	no	Transaction card type: NSICCS, Visa, Mastercard, or JCB.
pan	String	no	Masked card number used in the transaction.
card_category	String	no	The card category used in the transaction, for example: Debit, Visa, Mastercard, JCB.
is_credit	String	no	Card type classification used in the transaction: - Yes indicates a Credit card. - No indicates a Debit card.
is_off_us	String	no	The bank classification for the card used in the transaction, where Yes

				means the card belongs to a non-BRI bank, and No means it is a BRI card.
	periode	String	no	The installment period selected during the installment transaction.
	plan	String	no	Installment plan selected during an installment transaction.
	version_code	String	no	Application version code currently in use.
	version_name	String	no	Application version in use.
Success Response Code	success			
Respond Sample (Success)	**Purchase - Card Verification** { "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Card Verification", "amount": "1", "approval": "240402", "batch_number": "00004", "card_category": "MASTER CARD", "card_name": "MASTERCARD",			

	"card_type": "CHIP", "edc_address": "192.168.10.145", "is_credit": "true", "is_off_us": "false", "method": "purchase", "msg": "Transaction Success A", "pan": "5188 5621 **** 9709", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "00", "reference_number": "600602381346", "status": "success", "trace_number": "000056", "transaction_date": "2026-01-06 09:28:28", "trx_id": "icacobabelanja_1cardver", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	failed (Time Out)
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Card Verification", "amount": "1", "approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A",

	"card_type": "N/A", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "false", "method": "purchase", "msg": "Transaction Failed", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "status": "failed", "trace_number": "000054", "transaction_date": "2026-01-06 09:25:39", "trx_id": "icacobabelanja_1cardver", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	Transaction cancelled.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Card Verification", "amount": "1", "approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A",

	"card_type": "N/A", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "false", "method": "purchase", "msg": "Transaction Failed", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "status": "failed", "trace_number": "000053", "transaction_date": "2026-01-06 09:25:14", "trx_id": "icacobabelanja_1cardver", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	The transaction was performed using the same trx_id.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Card Verification", "amount": "1", "approval": "240402", "batch_number": "00004", "card_category": "MASTER CARD", "card_name": "MASTERCARD",

	"card_type": "CHIP", "edc_address": "192.168.10.145", "is_credit": "true", "is_off_us": "false", "method": "purchase", "msg": "Transaksi telah berhasil dilakukan dengan trxID ini", "pan": "5188 5621 **** 9709", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "00", "reference_number": "600602381346", "status": "success", "trace_number": "000056", "transaction_date": "2026-01-06 09:28:28", "trx_id": "icacobabelanja_1cardver", "version_code": "43", "version_name": "4.12.0" }

4.4. Sale Completion

Name	Sale Completion
Format	JSON
Description	Executing the Sale Completion Menu in the BRI FMS Application via POSe Link. The Sale Completion menu in the BRI FMS application can be triggered directly by an external application through the POSe Link interface. Sale Completion is available only for the Purchase payment method. Its function is to authorize a previously performed Card

	Verification transaction. Sale Completion uses the same card and the approval code obtained from the Card Verification receipt.
Required Body Parameters	

Required Body Parameters			
List Parameter	Data Type	Mandatory	Description
amount	int	yes	The transaction amount is automatically displayed on the EDC screen during payment.
action	String	no	The transaction menu is Sale Completion.
trx_id	Alphanumeric	yes	The transaction ID is obtained from the external application.
pos_address	String	no	The IP address of the external application.
time_stamp	Datetime	no	The date and time the request is sent from the POS. Timestamp format: yyyy-mm-dd HH:MM:SS
method	String	no	The transaction type that can be selected is Purchase.

	approval	String	yes	Approval code from the Card Verification transaction.

Required Body Sample


```
{
  "action": "Sale Completion",
  "trx_id": "icacobabelanja_1salecomp",
  "amount": "1",
  "approval": "240402",
  "pos_address": "172.0.0.1",
  "time_stamp": "2026-01-06 09:32:57",
  "method": "purchase"
}
```


Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Description
pos_address	String	no	The IP address of the external application.
trace_number	int	yes	The transaction ID from the transaction receipt.
action	String	no	The transaction menu is Sale Competition.

	edc_address	String	no	The EDC IP address obtained from the POSe Link application.
	trx_id	Alphanumeric	yes	The transaction ID is obtained from the external application.
	msg	String	no	Displays transaction status information on the EDC.
	method	String	no	The transaction type that can be selected is Purchase.
	status	String	no	The transaction status indicates success for Purchase transactions.
	acq_tid	String	no	The terminal ID of the EDC merchant.
	acq_mid	String	no	The merchant ID of the EDC merchant.
	card_type	String	no	The card type involved in the transaction.
	transaction_date	String	no	The transaction time recorded on the EDC.

amount	String	no	The transaction amount sent from the POS.
reference_number	String	no	The transaction number obtained from the BRI host during a transaction. For QR transactions, this is used to check the transaction status.
approval	String	no	The transaction approval code.
rc	String	no	Transaction status response code.
batch_number	String	no	Transaction group from the trace_number.
card_name	String	no	Transaction card type: NSICCS, Visa, Mastercard, or JCB.
pan	String	no	Masked card number used in the transaction.
card_category	String	no	The card category used in the transaction, for example: Debit, Visa, Mastercard, JCB.

is_credit	String	no	Card type classification used in the transaction: - Yes indicates a Credit card. - No indicates a Debit card.
is_off_us	String	no	The bank classification for the card used in the transaction, where Yes means the card belongs to a non-BRI bank, and No means it is a BRI card.
periode	String	no	The installment period selected during the installment transaction.
plan	String	no	Installment plan selected during an installment transaction.
version_code	String	no	Application version code currently in use.
version_name	String	no	Application version in use.

Success Response Code	success
Respond Sample (Success)	**Purchase - Sale Completion** { "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Sale Completion", "amount": "1", "approval": "240402", "batch_number": "00004", "card_category": "MASTER CARD", "card_name": "MASTERCARD", "card_type": "CHIP", "edc_address": "192.168.10.145", "is_credit": "true", "is_off_us": "false", "method": "purchase", "msg": "Transaction Success", "pan": "5188 5621 **** 9709", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "00", "reference_number": "600602381346", "status": "success", "trace_number": "000060", "transaction_date": "2026-01-06 09:37:08", "trx_id": "icacobabelanja_1salecomp", "version_code": "43", "version_name": "4.12.0"

	}
Error Response Code	failed (Time Out)
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Sale Completion", "amount": "1", "approval": "240402", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "N/A", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "false", "method": "purchase", "msg": "Transaction Failed", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "status": "failed", "trace_number": "000057", "transaction_date": "2026-01-06 09:33:01", "trx_id": "icacobabelanja_1salecomp", "version_code": "43", "version_name": "4.12.0"

	}
Error Response Code	Transaction cancelled.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Sale Completion", "amount": "1", "approval": "240402", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "N/A", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "false", "method": "purchase", "msg": "Transaction Failed", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "status": "failed", "trace_number": "000059", "transaction_date": "2026-01-06 09:36:43", "trx_id": "icacobabelanja_1salecomp", "version_code": "43", "version_name": "4.12.0"

	}
Error Response Code	The transaction was performed using the same trx_id.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Sale Completion", "amount": "1", "approval": "240402", "batch_number": "00004", "card_category": "MASTER CARD", "card_name": "MASTERCARD", "card_type": "CHIP", "edc_address": "192.168.10.145", "is_credit": "true", "is_off_us": "false", "method": "purchase", "msg": "Transaksi telah berhasil dilakukan dengan trxID ini", "pan": "5188 5621 **** 9709", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "00", "reference_number": "600602381346", "status": "success", "trace_number": "000060", "transaction_date": "2026-01-06 09:37:08", "trx_id": "icacobabelanja_1salecomp", "version_code": "43", "version_name": "4.12.0"

	}

4.5. Release Card Verification

Name	Release Card Verification
Format	JSON
Description	Executing the Release Card Verification Menu in the BRI FMS Application via POSe Link. The Release Card Verification menu in the BRI FMS application can be triggered directly by an external application through the POSe Link interface. This feature is used to cancel a Card Verification transaction and restore the credit card limit.
Required Body Parameters	

Required Body Parameters			
List Parameter	Data Type	Mandatory	Description
amount	int	yes	The transaction amount is automatically displayed on the EDC screen during payment.
action	String	no	The transaction menu is Release Card Verification.
trx_id	Alphanumeric	yes	The transaction ID is obtained from the external application.

	pos_address	String	no	The IP address of the external application.
	time_stamp	Datetime	no	The date and time the request is sent from the POS. Timestamp format: yyyy-mm-dd HH:MM:SS
	method	String	no	The transaction type that can be selected is Purchase.
	Approval	String	no	The transaction approval code.

Required Body Sample	{
	"action": "Release Card Verification",
	"trx_id": "icacobabelanja_1releasecardver",
	"amount": "1",
	"approval": "503808",
	"pos_address": "172.0.0.1",
	"time_stamp": "2026-01-07 10:07:28",
	"method": "purchase"
	}			

Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Description
pos_address	String	no	The IP address of the external application.
trace_number	int	yes	The transaction ID from the transaction receipt.
action	String	no	The transaction menu is Contactless
edc_address	String	no	The EDC IP address obtained from the POSe Link application.
trx_id	Alphanumeric	yes	The transaction ID is obtained from the external application.
msg	String	no	Displays transaction status information on the EDC.
method	String	no	The transaction type that can be selected is Purchase.

	status	String	no	The transaction status indicates success for Purchase transactions.
	acq_tid	String	no	The terminal ID of the EDC merchant.
	acq_mid	String	no	The merchant ID of the EDC merchant.
	card_type	String	no	The card type involved in the transaction.
	transaction_date	String	no	The transaction time recorded on the EDC.
	amount	String	no	The transaction amount sent from the POS.
	reference_number	String	no	The transaction number obtained from the BRI host during a transaction. For QR transactions, this is used to check the transaction status.
	approval	String	no	The transaction approval code.
	rc	String	no	Transaction status response code.

batch_number	String	no	Transaction group from the trace_number.
card_name	String	no	Transaction card type: NSICCS, Visa, Mastercard, or JCB.
pan	String	no	Masked card number used in the transaction.
card_category	String	no	The card category used in the transaction, for example: Debit, Visa, Mastercard, JCB.
is_credit	String	no	Card type classification used in the transaction: - Yes indicates a Credit card. - No indicates a Debit card.
is_off_us	String	no	The bank classification for the card used in the transaction, where Yes means the card belongs to a non-BRI bank, and No means it is a BRI card.

	version_code	String	no	Application version code currently in use.
	version_name	String	no	Application version in use.
Success Response Code	success			
Respond Sample (Success)	**Purchase - Release Card Verification** { "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Release Card Verification", "amount": "1", "approval": "503808", "batch_number": "00005", "card_category": "VISA BRI", "card_name": "VISA", "card_type": "CHIP", "edc_address": "192.168.10.145", "is_credit": "true", "is_off_us": "false", "method": "purchase", "msg": "Transaction Success", "pan": "4365 0299 **** 1702", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "00",			

	"reference_number": "600703979535", "status": "success", "trace_number": "000084", "transaction_date": "2026-01-07 10:08:55", "trx_id": "icacobabelanja_1releasecardver", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	Approval number does not match.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Release Card Verification", "amount": "1", "approval": "503800", "batch_number": "00005", "card_category": "VISA BRI", "card_name": "VISA", "card_type": "CHIP", "edc_address": "192.168.10.145", "is_credit": "true", "is_off_us": "false", "method": "purchase", "msg": "Transaction Failed", "pan": "4365 0299 **** 1702", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1",

	"rc": "-01 TC - 12 - Hubungi penerbit kartu Anda (transactionErrorResult isResultEnd: true, code : -50024)", "reference_number": "N/A", "status": "failed", "trace_number": "000082", "transaction_date": "2026-01-07 10:06:03", "trx_id": "icacobabelanja_1releasecardver", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	Card Verification release has been cancelled.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Release Card Verification", "amount": "1", "approval": "503800", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "N/A", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "false", "method": "purchase", "msg": "Transaction Failed", "pan": "N/A", "periode": "N/A", "plan": "N/A",

	"pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "status": "failed", "trace_number": "000080", "transaction_date": "2026-01-07 10:02:56", "trx_id": "icacobabelanja_1releasecardver", "version_code": "43", "version_name": "4.12.0" }

4.6. Installment

Name	Installment
Format	JSON
Description	Executing the Installment Menu in the BRI FMS Application via POSe Link. The Installment menu in the BRI FMS application can be triggered directly by an external application through the POSe Link interface. The Installment feature is available only for the Purchase payment method using credit cards.
Required Body Parameters	

Required Body Parameters			
List Parameter	Data Type	Mandatory	Description
amount	int	yes	The transaction amount is automatically displayed on

				the EDC screen during payment.
	action	String	no	The transaction menu is Installment.
	trx_id	Alphanumeric	yes	The transaction ID is obtained from the external application.
	pos_address	String	no	The IP address of the external application.
	time_stamp	Datetime	no	The date and time the request is sent from the POS. Timestamp format: yyyy-mm-dd HH:MM:SS
	method	String	no	The transaction type that can be selected is Purchase.
	plan	String	yes	Available interest plans.
	periode	String	yes	Available installment periods.
Required Body Sample	{ "action": "Cicilan", "trx_id": "icacobabelanja_1cicilan", "amount": "1", "approval": "240402",			

```
  "pos_address": "172.0.0.1",
  "time_stamp": "2026-01-06 09:41:48",
  "method": "purchase",
  "plan": "003",
  "periode": "06"
}
```


Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Description
pos_address	String	no	The IP address of the external application.
trace_number	int	yes	The transaction ID from the transaction receipt.
action	String	no	The transaction menu is Installment.
edc_address	String	no	The EDC IP address obtained from the POSe Link application.
trx_id	String	yes	The transaction ID is obtained from the external application.

	msg	String	no	Displays transaction status information on the EDC.
	method	String	no	The transaction type that can be selected is Purchase.
	status	String	no	The transaction status indicates success for Purchase transactions.
	acq_tid	String	no	The terminal ID of the EDC merchant.
	acq_mid	String	no	The merchant ID of the EDC merchant.
	card_type	String	no	The card type involved in the transaction.
	transaction_date	String	no	The transaction time recorded on the EDC.
	amount	String	no	The transaction amount sent from the POS.
	reference_number	String	no	The transaction number obtained from the BRI host during a transaction. For QR transactions, this

			is used to check the transaction status.
approval	String	no	The transaction approval code.
rc	String	no	Transaction status response code.
batch_number	String	no	Transaction group from the trace_number.
card_name	String	no	Transaction card type: NSICCS, Visa, Mastercard, or JCB.
pan	String	no	Masked card number used in the transaction.
card_category	String	no	The card category used in the transaction, for example: Debit, Visa, Mastercard, JCB.
is_credit	String	no	Card type classification used in the transaction: - Yes indicates a Credit card. - No indicates a Debit card.

	is_off_us	String	no	The bank classification for the card used in the transaction, where Yes means the card belongs to a non-BRI bank, and No means it is a BRI card.
	periode	String	no	The installment period selected during the installment transaction.
	plan	String	no	Installment plan selected during an installment transaction.
	version_code	String	no	Application version code currently in use.
	version_name	String	no	Application version in use.
Success Response Code	success			
Respond Sample (Success)	**Purchase - Installment** { "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Cicilan", "amount": "1",			

	"approval": "240402", "batch_number": "00004", "card_category": "MASTER CARD", "card_name": "MASTERCARD", "card_type": "CHIP", "edc_address": "192.168.10.145", "is_credit": "true", "is_off_us": "false", "method": "purchase", "msg": "Transaction Success", "pan": "5188 5621 **** 9709", "periode": "06", "plan": "003", "pos_address": "172.0.0.1", "rc": "00", "reference_number": "600602381346", "status": "success", "trace_number": "000060", "transaction_date": "2026-01-06 09:37:08", "trx_id": "icacobabelanja_1cicilan", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	failed (Time Out)
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Cicilan", "amount": "1",

	"approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "N/A", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "false", "method": "purchase", "msg": "Transaction Failed", "pan": "N/A", "periode": "06", "plan": "003", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "status": "failed", "trace_number": "000062", "transaction_date": "2026-01-06 09:42:49", "trx_id": "icacobabelanja_1cicilan", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	Transaction cancelled.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Cicilan", "amount": "1",

	"approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "N/A", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "false", "method": "purchase", "msg": "Transaction Failed", "pan": "N/A", "periode": "06", "plan": "003", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "status": "failed", "trace_number": "000061", "transaction_date": "2026-01-06 09:41:53", "trx_id": "icacobabelanja_1cicilan", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	The transaction was performed using the same trx_id.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Cicilan", "amount": "1",

```
  "approval": "240402",
  "batch_number": "00004",
  "card_category": "MASTER CARD",
  "card_name": "MASTERCARD",
  "card_type": "CHIP",
  "edc_address": "192.168.10.145",
  "is_credit": "true",
  "is_off_us": "false",
  "method": "purchase",
  "msg": "Transaksi telah berhasil dilakukan dengan trxID ini",
  "pan": "5188 5621 **** 9709",
  "periode": "06",
  "plan": "003",
  "pos_address": "172.0.0.1",
  "rc": "00",
  "reference_number": "600602381346",
  "status": "success",
  "trace_number": "000060",
  "transaction_date": "2026-01-06 09:37:08",
  "trx_id": "icacobabelanja_1cicilan",
  "version_code": "43",
  "version_name": "4.12.0"
}
```


4.7. Void

Name	Void
Format	JSON

Description	Executing the Void Menu in the BRI FMS Application via POSe Link. The Void menu in the BRI FMS application is used to cancel transactions. It can be triggered directly by an external application through the POSe Link interface. The Void function supports Purchase and Brizzi payment methods. After initiating the request, the user can select the desired payment method.
Required Body Parameters	

Required Body Parameters

List Parameter	Data Type	Mandatory	Description
action	String	no	The transaction menu is Void
trace_number	int	yes	The transaction ID from the transaction receipt.
pos_address	String	no	The IP address of the external application.
time_stamp	Datetime	no	The date and time the request is sent from the POS. Timestamp format: yyyy-mm-dd HH:MM:SS
method	String	no	The transaction types that can be selected are Purchase or Brizzi.

Required Body Sample

```
{
  "action": "Void",
  "trx_id": "icacobabelanja_1voidpurchase",
  "trace_number": "85",
  "pos_address": "{{ecr_pos_address}}",
  "time_stamp": "{{current_timestamp}}",
  "method": "purchase"
}
```

Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Description
pos_address	String	no	The IP address of the external application.
trace_number	int	yes	The transaction ID from the transaction receipt.
action	String	no	The transaction menu is “Sale”.
edc_address	String	no	The EDC IP address obtained from the POSe Link application.
msg	String	no	Displays transaction status information on the EDC.

method	String	no	The transaction types that can be selected are Purchase or Brizzi.
status	String	no	The transaction status indicates success for Purchase transactions. dan brizzi
acq_tid	String	no	The terminal ID of the EDC merchant.
acq_mid	String	no	The merchant ID of the EDC merchant.
card_type	String	no	The card type involved in the transaction.
transaction_date	String	no	The transaction time recorded on the EDC.
amount	String	no	The transaction amount sent from the POS.
reference_number	String	no	The transaction number obtained from the BRI host during a transaction. For QR transactions, this is used to check the transaction status.

approval	String	no	The transaction approval code.
rc	String	no	Transaction status response code.
batch_number	String	no	Transaction group from the trace_number.
card_name	String	no	Transaction card type: NSICCS, Visa, Mastercard, or JCB.
pan	String	no	Masked card number used in the transaction.
card_category	String	no	The card category used in the transaction, for example: Debit, Visa, Mastercard, JCB.
is_credit	String	no	Card type classification used in the transaction: Yes indicates a Credit card. - No indicates a Debit card.
is_off_us	String	no	The bank classification for the card used in the transaction, where Yes

				means the card belongs to a non-BRI bank, and No means it is a BRI card.
	periode	String	no	The installment period selected during the installment transaction.
	plan	String	no	Installment plan selected during an installment transaction.
	version_code	String	no	Application version code currently in use.
	version_name	String	no	Application version in use.
Success Response Code	success			
Respond Sample (Success)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Void", "amount": "1", "approval": "503809", "batch_number": "00005", "card_category": "VISA BRI", "card_name": "VISA", "card_type": "CHIP",			

	"edc_address": "192.168.10.145", "is_credit": "true", "is_off_us": "false", "method": "purchase", "msg": "Transaction Success", "pan": "4365 0299 **** 1702", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "00", "reference_number": "600703981547", "status": "success", "trace_number": "000090", "transaction_date": "2026-01-07 10:45:50", "trx_id": "N/A", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	Failed if the trace number is incorrect.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Void", "amount": "N/A", "approval": "N/A", "batch_number": "N/A", "card_category": "N/A",

	"card_name": "N/A", "card_type": "N/A", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "false", "method": "purchase", "msg": "Data Tidak Ada", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "status": "failed", "trace_number": "N/A", "transaction_date": "N/A", "trx_id": "N/A", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	Failed if the transaction has already been voided.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Void",

```
  "amount": "1",
  "approval": "503809",
  "batch_number": "00005",
  "card_category": "VISA BRI",
  "card_name": "VISA",
  "card_type": "CHIP",
  "edc_address": "192.168.10.145",
  "is_credit": "true",
  "is_off_us": "false",
  "method": "purchase",
  "msg": "Transaksi telah divoid",
  "pan": "4365 0299 **** 1702",
  "periode": "N/A",
  "plan": "N/A",
  "pos_address": "172.0.0.1",
  "rc": "N/A",
  "reference_number": "600703981547",
  "status": "failed",
  "trace_number": "000085",
  "transaction_date": "2026-01-07 10:45:50",
  "trx_id": "N/A",
  "version_code": "43",
  "version_name": "4.12.0"
}
```

4.8. Check QR Status

Name	Check QR Status
Format	JSON
Description	Executing the **Generate QR Transaction Status Check** Menu in the BRI FMS Application via POSe Link. The Generate QR Transaction Status Check menu in the BRI FMS application can be triggered directly by an external application through the POSe Link interface. Upon request execution, the process will automatically be directed to the QRIS method.
Required Body Parameters	

Required Body Parameters

List Parameter	Data Type	Mandatory	Description
action	String	no	The transaction menu is Check Status
reference_number	String	yes	Transaction number obtained from BRI host during QR generation. The reference number is included on the QR receipt.
pos_address	String	no	The IP address of the external application.

	time_stamp	Datetime	no	The date and time the request is sent from the POS. Timestamp format: yyyy-mm-dd HH:MM:SS
	method	String	no	The selected transaction type is QRIS.

Required Body Sample


```
{
  "action": "Check Trx",
  "trx_id": "icacobabelanja_1salecomp",
  "pos_address": "172.0.0.1",
  "time_stamp": "2026-01-07 11:20:02"
}
```


Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Description
pos_address	String	no	The IP address of the external application.
action	String	no	The transaction menu is Check Status
edc_address	String	no	The EDC IP address obtained from the POSe Link application.

msg	String	no	Displays transaction status information on the EDC.
method	String	no	The selected transaction type is QRIS.
status	String	no	Transaction status information: ● Paid ● Unpaid ● Refund
trace_number	int	yes	The transaction ID from the transaction receipt.
reff_id	String	no	Transaction ID used for the refund.
reference_number	String	no	The transaction number obtained from the BRI host during a transaction. For QR transactions, this is used to check the transaction status.
acq_tid	String	no	The terminal ID of the EDC merchant.
acq_mid	String	no	The merchant ID of the EDC merchant.

card_type	String	no	The card type involved in the transaction.
transaction_date	String	no	The transaction time recorded on the EDC.
amount	String	no	The transaction amount sent from the POS.
approval	String	no	The transaction approval code.
rc	String	no	Transaction status response code.
batch_number	String	no	Transaction group from the trace_number.
card_category	String	no	The card category used in the transaction, for example: Debit, Visa, Mastercard, JCB.
is_credit	String	no	Card type classification used in the transaction: - Yes indicates a Credit card. - No indicates a Debit card.

	is_off_us	String	no	The bank classification for the card used in the transaction, where Yes means the card belongs to a non-BRI bank, and No means it is a BRI card.
	periode	String	no	The installment period selected during the installment transaction.
	plan	String	no	Installment plan selected during an installment transaction.
	version_code	String	no	Application version code currently in use.
	version_name	String	no	Application version in use.
Success Response Code	success			
Respond Sample (Success)	**Check Status Qris Pay** { "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Check Trx", "amount": "1",			

	"approval": "N/A", "batch_number": "00003", "card_category": "N/A", "card_name": "N/A", "card_type": "SCAN", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "N/A", "method": "QRIS", "msg": "Transaksi ini sudah dilakukan dengan status paid", "pan": "**********5255", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "reff_id": "2349679124", "status": "paid", "trace_number": "39", "transaction_date": "2026-01-05 15:07:41", "trx_id": "icacobabelanja_1qris", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	failed (QR unpaid)
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Sale",

	"amount": "1", "approval": "N/A", "batch_number": "00003", "card_category": "N/A", "card_name": "N/A", "card_type": "SCAN", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "N/A", "method": "QRIS", "msg": "Transaksi Unpaid", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "074768602880", "reff_id": "N/A", "status": "unpaid", "trace_number": "41", "transaction_date": "2026-01-05 15:11:26", "trx_id": "icacobabelanja_2qris", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	failed (incorrect reference_number)
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10362515",

	"action": "Check Status", "amount": "N/A", "approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "SCAN", "edc_address": "192.168.10.30", "is_credit": "N/A", "is_off_us": "N/A", "method": "QRIS", "msg": "Transaksi tidak ditemukan", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "reff_id": "N/A", "status": "unpaid", "trace_number": "N/A", "transaction_date": "N/A", "trx_id": "N/A", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	Transaction not found.

Respond Sample (Error)	{
	"acq_mid": "000001999115921",
	"acq_tid": "10747686",
	"action": "Check Trx",
	"amount": "N/A",
	"approval": "N/A",
	"batch_number": "N/A",
	"card_category": "N/A",
	"card_name": "N/A",
	"card_type": "N/A",
	"edc_address": "192.168.10.145",
	"is_credit": "N/A",
	"is_off_us": "N/A",
	"method": "N/A",
	"msg": "Trx dengan trx id icacobabelanja_3qris tidak ditemukan",
	"pan": "N/A",
	"periode": "N/A",
	"plan": "N/A",
	"pos_address": "172.0.0.1",
	"rc": "N/A",
	"reference_number": "N/A",
	"status": "Not Found",
	"trace_number": "N/A",
	"transaction_date": "N/A",
	"trx_id": "N/A",
	"version_code": "43",
	"version_name": "4.12.0"
	}

4.9. Refund QR

Name	Refund QRIS Transaction
Format	JSON
Description	Executing the **Refund QR Menu in the BRI FMS** Application via POSe Link. The Refund QR menu in the BRI FMS application can be triggered directly by an external application through the POSe Link interface. Upon request execution, the process will automatically be directed to the QRIS method.
Required Body Parameters	

Required Body Parameters

List Parameter	Data Type	Mandatory	Description
action	String	no	The transaction menu is Refund Qris
reff_id	String	yes	Transaction number obtained from the BRI host during QR payment. The Reference ID is included on the QR Pay receipt.
pos_address	String	no	The IP address of the external application.
time_stamp	Datetime	no	The date and time the request is sent from the

				POS. Timestamp format: yyyy-mm-dd HH:MM:SS
	method	String	no	The selected transaction type is QRIS.

Required Body Sample


```
{
  "action": "Refund Qris",
  "reff_id": "2378571437",
  "pos_address": "172.0.0.1",
  "time_stamp": "2026-01-07 10:07:28",
  "method": "qris"
}
```


Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Description
pos_address	String	no	The IP address of the external application.
action	String	no	The transaction menu is Refund Qris
edc_address	String	no	The EDC IP address obtained from the POSe Link application.

msg	String	no	Displays transaction status information on the EDC.
method	String	no	The selected transaction type is QRIS.
status	String	no	Transaction status information: ● Refund ● Unpaid
trace_number	int	yes	The transaction ID from the transaction receipt.
reff_id	String	no	Transaction ID used for the refund.
reference_number	String	no	The transaction number obtained from the BRI host during a transaction. For QR transactions, this is used to check the transaction status.
acq_tid	String	no	The terminal ID of the EDC merchant.
acq_mid	String	no	The merchant ID of the EDC merchant.

card_type	String	no	The card type involved in the transaction.
transaction_date	String	no	The transaction time recorded on the EDC.
amount	String	no	The transaction amount sent from the POS.
approval	String	no	The transaction approval code.
rc	String	no	Transaction status response code.
batch_number	String	no	Transaction group from the trace_number.
card_category	String	no	The card category used in the transaction, for example: Debit, Visa, Mastercard, JCB.
is_credit	String	no	Card type classification used in the transaction: - Yes indicates a Credit card. - No indicates a Debit card.

	is_off_us	String	no	The bank classification for the card used in the transaction, where Yes means the card belongs to a non-BRI bank, and No means it is a BRI card.
	periode	String	no	The installment period selected during the installment transaction.
	plan	String	no	Installment plan selected during an installment transaction.
	version_code	String	no	Application version code currently in use.
	version_name	String	no	Application version in use.
Success Response Code	success			
Respond Sample (Success)	{ "acq_mid": "000001999115921", "acq_tid": "10362516", "action": "Refund Qris", "amount": "1", "approval": "N/A",			

	"batch_number": "00002", "card_category": "N/A", "card_name": "N/A", "card_type": "SCAN", "edc_address": "10.84.205.227", "is_credit": "N/A", "is_off_us": "N/A", "method": "QRIS", "msg": "refund berhasil", "pan": "**********5255", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "00", "reference_number": "036251600518", "reff_id": "2378571437", "status": "refund", "trace_number": "18", "transaction_date": "2026-01-15 15:51:02", "trx_id": "alvincobabelanja_1qris", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	failed (incorrect reff_id)
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10362516", "action": "Refund Qris", "amount": "N/A",

	"approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "SCAN", "edc_address": "10.84.205.227", "is_credit": "N/A", "is_off_us": "N/A", "method": "QRIS", "msg": "Transaksi tidak ditemukan", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "reff_id": "N/A", "status": "failed", "trace_number": "N/A", "transaction_date": "N/A", "trx_id": "N/A", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	failed (The transaction has been refunded.)
	{ "acq_mid": "000001999115921", "acq_tid": "10362516", "action": "Refund Qris",

```
  "amount": "N/A",
  "approval": "N/A",
  "batch_number": "N/A",
  "card_category": "N/A",
  "card_name": "N/A",
  "card_type": "SCAN",
  "edc_address": "10.84.205.227",
  "is_credit": "N/A",
  "is_off_us": "N/A",
  "method": "QRIS",
  "msg": "Transaksi sudah direfund",
  "pan": "N/A",
  "periode": "N/A",
  "plan": "N/A",
  "pos_address": "172.0.0.1",
  "rc": "N/A",
  "reference_number": "N/A",
  "reff_id": "N/A",
  "status": "paid",
  "trace_number": "N/A",
  "transaction_date": "N/A",
  "trx_id": "alvincobabelanja_1qris",
  "version_code": "43",
  "version_name": "4.12.0"
}
```


4.10. Reprint Last Transaction

Name	Reprint Last.
Format	JSON

Description	Executing the Reprint Last Transaction Menu in the BRI FMS Application. The Reprint Last Transaction menu in the BRI FMS application allows reprinting the receipt of the most recent transaction processed by the EDC. This feature supports Purchase and Brizzi payment methods. After initiating the request, the user can select the desired payment method.
Required Body Parameters	

Required Body Parameters			
List Parameter	Data Type	Mandatory	Description
action	String	no	The transaction menu is reprint last.
pos_address	String	no	The IP address of the external application.
time_stamp	Datetime	no	The date and time the request is sent from the POS. Timestamp format: yyyy-mm-dd HH:MM:SS
method	String	no	The selectable transaction types are Purchase or Brizzi.

Required Body Sample	{ "action" : "Reprint Last",

```
  "pos_address" : "172.0.0.1",
  "time_stamp" : "2023-01-24 18:01:10",
  "method" : "purchase"
}
```


Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Description
pos_address	String	no	The IP address of the external application.
action	String	no	The transaction menu is Reprint Last
edc_address	String	no	The EDC IP address obtained from the POSe Link application.
msg	String	no	Displays transaction status information on the EDC.
status	String	no	Information status reprint, success and failed.
trace_number	int	yes	The transaction ID from the transaction receipt.

	method	String	no	The transaction types are Purchase or Brizzi.
	acq_tid	String	no	The terminal ID of the EDC merchant.
	acq_mid	String	no	The merchant ID of the EDC merchant.
	card_type	String	no	The card type involved in the transaction.
	transaction_date	String	no	The transaction time recorded on the EDC.
	amount	String	no	The transaction amount sent from the POS.
	reference_number	String	no	The transaction number obtained from the BRI host during a transaction. For QR transactions, this is used to check the transaction status.
	approval	String	no	The transaction approval code.
	rc	String	no	Transaction status response code.

batch_number	String	no	Transaction group from the trace_number.
card_category	String	no	The card category used in the transaction, for example: Debit, Visa, Mastercard, JCB.
is_credit	String	no	Card type classification used in the transaction: - Yes indicates a Credit card. - No indicates a Debit card.
is_off_us	String	no	The bank classification for the card used in the transaction, where Yes means the card belongs to a non-BRI bank, and No means it is a BRI card.
periode	String	no	The installment period selected during the installment transaction.
plan	String	no	Installment plan selected during an installment transaction.

	version_code	String	no	Application version code currently in use.
	version_name	String	no	Application version in use.
Success Response Code	success			
Respond Sample (Success)	{ "acq_mid": "000001999115921", "acq_tid": "10362517", "action": "Reprint Last", "amount": "1", "approval": "787352", "batch_number": "00001", "card_category": "DEBIT BANK LAIN", "card_name": "NSICCS", "card_type": "CHIP", "edc_address": "172.20.10.2", "is_credit": "false", "is_off_us": "N/A", "method": "purchase", "msg": "Transaction Found", "pan": "4889 5030 **** 8049", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "00", "reference_number": "000047000015",			

	"status": "success", "trace_number": "000015", "transaction_date": "2023-11-07 05:12:59" "version_code": "42", "version_name": "4.11.1" }
Error Response Code	Failed if data is not found.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10362515", "action": "Reprint Last", "amount": "N/A", "approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "N/A", "edc_address": "192.168.5.104", "is_credit": "N/A", "is_off_us": "N/A", "method": "N/A", "msg": "No Transaction Found", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "status": "failed",

	"trace_number": "N/A", "transaction_date": "N/A" "version_code": "42", "version_name": "4.11.1" }

4.11. Reprint Any Transaction

Name	Reprint Any
Format	JSON
Description	Executing the Reprint Any Transaction Menu in the BRI FMS Application. The Reprint Any Transaction menu in the BRI FMS application is used to reprint a transaction receipt based on the trace number printed on the original receipt. This feature supports Purchase and Brizzi payment methods. After the request is initiated, the user can select the desired payment method.
Required Body Parameters	

Required Body Parameters			
List Parameter	Data Type	Mandatory	Description
action	String	no	The transaction menu is Reprint Any.
trace_number	int	yes	The transaction ID from the transaction receipt.

	pos_address	String	no	The IP address of the external application.
	time_stamp	Datetime	no	The date and time the request is sent from the POS. Timestamp format: yyyy-mm-dd HH:MM:SS
	method	String	no	The transaction types are Purchase or Brizzi.

Required Body Sample

```
{
  "action" : "Reprint Any",
  "trace_number": 11,
  "pos_address" : "172.0.0.1",
  "time_stamp" : "2023-01-24 18:01:10",
  "method" : "brizzi"
}
```

Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Description
pos_address	String	no	The IP address of the external application.
trace_number	int	yes	The transaction ID from the transaction receipt.

action	String	no	The transaction menu is Reprint Any.
edc_address	String	no	The EDC IP address obtained from the POSe Link application.
msg	String	no	Displays transaction status information on the EDC.
status	String	no	Information status: reprint, success and failed.
method	String	no	The transaction types are Purchase or Brizzi.
acq_tid	String	no	The terminal ID of the EDC merchant.
acq_mid	String	no	The merchant ID of the EDC merchant.
card_type	String	no	The card type involved in the transaction.
transaction_date	String	no	The transaction time recorded on the EDC.
amount	String	no	The transaction amount sent from the POS.

reference_number	String	no	The transaction number obtained from the BRI host during a transaction. For QR transactions, this is used to check the transaction status.
approval	String	no	The transaction approval code.
rc	String	no	Transaction status response code.
batch_number	String	no	Transaction group from the trace_number.
card_category	String	no	The card category used in the transaction, for example: Debit, Visa, Mastercard, JCB.
is_credit	String	no	Card type classification used in the transaction: - Yes indicates a Credit card. - No indicates a Debit card.
is_off_us	String	no	The bank classification for the card used in the

				transaction, where Yes means the card belongs to a non-BRI bank, and No means it is a BRI card.
	periode	String	no	The installment period selected during the installment transaction.
	plan	String	no	Installment plan selected during an installment transaction.
	version_code	String	no	Application version code currently in use.
	version_name	String	no	Application version in use.
Success Response Code	success			
Respond Sample (Success)	{ "acq_mid": "000001999115921", "acq_tid": "10362515", "action": "Reprint Any", "amount": "1", "approval": "E488663A", "batch_number": "00001", "card_category": "N/A", "card_name": "N/A",			

	"card_type": "Tap", "edc_address": "192.168.5.104", "is_credit": "N/A", "is_off_us": "N/A", "method": "brizzi", "msg": "transaksi berhasil dicetak", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "000002", "status": "success", "trace_number": "2", "transaction_date": "2023-09-11 15:21:25" "version_code": "42", "version_name": "4.11.1" }
Error Response Code	Failed if data is not found.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10362515", "action": "Reprint Any", "amount": "N/A", "approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "N/A",

	"edc_address": "192.168.5.104", "is_credit": "N/A", "is_off_us": "N/A", "method": "N/A", "msg": "Transaction Not Found", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "status": "failed", "trace_number": "N/A", "transaction_date": "N/A" "version_code": "42", "version_name": "4.11.1" }

4.12. Settlement

Name	Settlement
Format	JSON
Description	Executing the Settlement Menu in the BRI FMS Application. The Settlement menu in the BRI FMS application is used to close and lock a batch of transactions previously processed by the EDC. This feature supports Purchase and Brizzi payment methods. After initiating the request, the user can select the desired payment method.

Required Body Parameters

Required Body Parameters			
List Parameter	Data Type	Mandatory	Description
action	String	no	The transaction menu is Settlement
pos_address	String	no	The IP address of the external application.
time_stamp	Datetime	no	The date and time the request is sent from the POS. Timestamp format: yyyy-mm-dd HH:MM:SS
method	String	no	The transaction types are Purchase or Brizzi.

Required Body Sample

```
{
  "action" : "Settlement",
  "pos_address" : "172.0.0.1",
  "time_stamp" : "2023-01-24 18:01:10",
  "method" : "purchase"
}
```

Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Description
pos_address	String	no	The IP address of the external application.
action	String	no	The transaction menu is Settlement
edc_address	String	no	The EDC IP address obtained from the POSe Link application.
msg	String	no	Displays transaction status information on the EDC.
status	String	no	Information status: reprint, success and failed.
acq_tid	String	no	The terminal ID of the EDC merchant.
acq_mid	String	no	The merchant ID of the EDC merchant.
transaction_date	String	no	The transaction time recorded on the EDC.

	batch_number	String	no	Transaction group from the trace_number.
	version_code	String	no	Application version code currently in use.
	version_name	String	no	Application version in use.
Success Response Code	success			

Respond Sample (Success)	{
	"acq_mid": "000001999115921",
	"acq_tid": "10362515",
	"action": "Settlement",
	"batch_number": "000003",
	"edc_address": "192.168.5.104",
	"msg": "Settlement Success",
	"pos_address": "172.0.0.1",
	"status": "success",
	"transaction_date": "2023-09-11 14:25:36"
	"version_code": "42",
	"version_name": "4.11.1"
	}			

Error Response Code	Failed if data is not found.			
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10362515",			

	"action": "Settlement", "batch_number": "N/A", "edc_address": "192.168.88.158", "msg": "Tidak ada data", "pos_address": "172.0.0.1", "status": "failed", "transaction_date": "N/A" "version_code": "42", "version_name": "4.11.1" }

4.13. Check Transaction Status

Name	Check Transaction
Format	JSON
Description	Executing the Check Transaction Status Menu in the BRI FMS Application. The Check Transaction Status menu in the BRI FMS application is used to verify whether a transaction was successful or not. This feature supports Purchase and Brizzi payment methods. After the request is initiated, the user can select the desired payment method.
Required Body Parameters	

Required Body Parameters			
List Parameter	Data Type	Mandatory	Description
action	String	no	The transaction menu is Check Transaction Status.

	pos_address	String	no	The IP address of the external application.
	trx_id	Alphanumeric	no	Requested transaction ID.
	time_stamp	Datetime	no	The date and time the request is sent from the POS. Timestamp format: yyyy-mm-dd HH:MM:SS

Required Body Sample


```
{
  "action": "Check Trx",
  "trx_id": "nazar1",
  "pos_address": "172.0.0.1",
  "time_stamp": "2023-01-29 18:01:10"
}
```


Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Description
pos_address	String	no	The IP address of the external application.
action	String	no	The transaction menu is Settlement

edc_address	String	no	The EDC IP address obtained from the POSe Link application.
msg	String	no	Displays transaction status information on the EDC.
status	String	no	Reprint status information: Success and Failed.
acq_tid	String	no	The terminal ID of the EDC merchant.
acq_mid	String	no	The merchant ID of the EDC merchant.
transaction_date	String	no	The transaction time recorded on the EDC.
batch_number	String	no	Transaction group from the trace_number.
version_code	String	no	Application version code currently in use.
version_name	String	no	Application version in use.

Success Response Code	success

Respond Sample (Success)	{
	"acq_mid": "000001999115921",
	"acq_tid": "10362516",
	"action": "Check Trx",
	"amount": "1",
	"approval": "R17454",
	"batch_number": "00001",
	"card_category": "MASTERCARD BRI",
	"card_name": "MASTERCARD",
	"card_type": "CHIP",
	"edc_address": "192.168.2.130",
	"is_credit": "N/A",
	"is_off_us": "false",
	"method": "purchase",
	"msg": "Transaksi ini sudah dilakukan dengan status paid",
	"pan": "5188 5621 **** 9808",
	"periode": "N/A",
	"plan": "N/A",
	"pos_address": "172.0.0.1",
	"rc": "00",
	"reference_number": "000011000002",
	"status": "paid",
	"trace_number": "000002",
	"transaction_date": "2025-03-11 11:04:56",
	"trx_id": "nazar1"
	"version_code": "42",
	"version_name": "4.11.1"
	}

Error Response Code	Failed if data is not found.

Respond Sample (Error)	{
	"acq_mid": "000001999115921",
	"acq_tid": "10362516",
	"action": "Check Trx",
	"amount": "N/A",
	"approval": "N/A",
	"batch_number": "N/A",
	"card_category": "N/A",
	"card_name": "N/A",
	"card_type": "N/A",
	"edc_address": "192.168.2.130",
	"is_credit": "N/A",
	"is_off_us": "N/A",
	"method": "N/A",
	"msg": "Trx dengan trx id 7djdsaa21sbfs23jsdawev91 tidak ditemukan",
	"pan": "N/A",
	"periode": "N/A",
	"plan": "N/A",
	"pos_address": "172.0.0.1",
	"rc": "N/A",
	"reference_number": "N/A",
	"status": "Not Found",
	"trace_number": "N/A",
	"transaction_date": "N/A",
	"trx_id": "N/A"
	"version_code": "42",
	"version_name": "4.11.1"
	}

4.14. Check Transaction Status QRIS Alipay

Nama	Check Transaction Status QRIS Alipay
Format	JSON
Deskripsi	Use the Check Status Transaction menu in the FMS BRI application to verify whether a transaction is successful or failed for the QRIS Alipay payment method.
Required Body Parameters	

Required Body Parameters

List Parameter	Data Type	Mandatory	Keterangan
action	String	no	Transaction menu.
reference_number	String	no	Reference number.
pos_address	String	no	The IP address of the external application.
time_stamp	Datetime	no	The date and time the request is sent from the POS. Timestamp format: yyyy-mm-dd HH:MM:SS
method	String	no	Payment method used.

Required Body Sample


```
{
  "action": "Check Status",
  "reference_number": "036251600518",
  "pos_address": "172.0.0.1",
  "time_stamp": "2026-01-07 10:07:28",
  "method": "qris"
}
```


Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Keterangan
pos_address	String	no	The IP address of the external application.
action	String	no	The transaction menu is Check Status
edc_address	String	no	The EDC IP address obtained from the POSe Link application.
msg	String	no	Displays transaction status information on the EDC.
method	String	no	The selected transaction type is QRIS.

	status	String	no	Transaction status information: ● Paid ● Unpaid ● Refund
	trace_number	int	yes	The transaction ID from the transaction receipt.
	reff_id	String	no	Transaction ID used for the refund.
	reference_number	String	no	The transaction number obtained from the BRI host during a transaction. For QR transactions, this is used to check the transaction status.
	acq_tid	String	no	The terminal ID of the EDC merchant.
	acq_mid	String	no	The merchant ID of the EDC merchant.
	card_type	String	no	The card type involved in the transaction.
	transaction_date	String	no	The transaction time recorded on the EDC.

amount	String	no	The transaction amount sent from the POS.
approval	String	no	The transaction approval code.
rc	String	no	Transaction status response code.
batch_number	String	no	Transaction group from the trace_number.
card_category	String	no	The card category used in the transaction, for example: Debit, Visa, Mastercard, JCB.
is_credit	String	no	Card type classification used in the transaction: - Yes indicates a Credit card. - No indicates a Debit card.
is_off_us	String	no	The bank classification for the card used in the transaction, where Yes means the card belongs to a non-BRI bank, and No means it is a BRI card.

	periode	String	no	The installment period selected during the installment transaction.
	plan	String	no	Installment plan selected during an installment transaction.
	version_code	String	no	Application version code currently in use.
	version_name	String	no	Application version in use.
Success Response Code	success			
Respond Sample (Success)	{ "acq_mid": "000001999115921", "acq_tid": "10362516", "action": "Check Status", "amount": "1", "approval": "N/A", "batch_number": "00002", "card_category": "N/A", "card_name": "N/A", "card_type": "SCAN", "edc_address": "10.84.205.227", "is_credit": "N/A", "is_off_us": "N/A",			

	"method": "QRIS", "msg": "transaksi berhasil", "pan": "**********5255", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "036251600518", "reff_id": "2378571437", "status": "paid", "trace_number": "18", "transaction_date": "2026-01-15 15:51:02", "trx_id": "alvincobabelanja_1qris", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	error failed QRIS unpaid
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10362516", "action": "Check Status", "amount": "1", "approval": "N/A", "batch_number": "00002", "card_category": "N/A", "card_name": "N/A", "card_type": "SCAN", "edc_address": "10.84.205.227", "is_credit": "N/A",

	"is_off_us": "N/A", "method": "QRIS", "msg": "Transaksi Unpaid", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "036251600520", "reff_id": "N/A", "status": "unpaid", "trace_number": "21", "transaction_date": "2026-01-15 16:27:05", "trx_id": "alvincobabelanja_2qris", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	Failed: incorrect reference number.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10362516", "action": "Check Status", "amount": "N/A", "approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "SCAN", "edc_address": "10.84.205.227",

	"is_credit": "N/A", "is_off_us": "N/A", "method": "QRIS", "msg": "Transaksi tidak ditemukan", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "reff_id": "N/A", "status": "unpaid", "trace_number": "N/A", "transaction_date": "N/A", "trx_id": "N/A", "version_code": "43", "version_name": "4.12.0" }

4.15. Check Batch Transaction

Nama	Check Batch Transaction
Format	JSON
Deskripsi	Use the **Check Status Batch Transaction** feature in the FMS BRI application to verify the success or failure status of transactions in batch. The batch transaction status check is available for the Purchase Payment method.
Required Body Parameters	Required Body Parameters

List Parameter	Data Type	Mandatory	Keterangan
action	String	no	Transaction menu: check transaction.
transactions	Array	no	Used to contain a list of transactions to be processed or checked within a single request. In version 4.12.0, a maximum of **5 requests** is supported.
id	String	no	The transaction ID to be checked.
isCheckAllTrx	Boolean	no	Used as a marker for the scope of the check: - **True**, Perform a full update or check starting from the initial installation of the application. - **False**, Perform the check only for the current settlement period.
pos_address	String	no	IP address of the external application.

	time_stamp	Datetime	no	Date and time when the request is sent from the POS. Time stamp format: yyyy-mm-dd HH:MM:SS

Required Body Sample

```
{
  "action": "Check Batch Trx",
  "transactions": [
    {
      "id": "icacobabelanja_1cardver",
      "isCheckAllTrx": false
    },
    {
      "id": "icacobabelanja_1salecomp",
      "isCheckAllTrx": false
    }
  ],
  "pos_address": "{{ecr_pos_address}}",
  "time_stamp": "{{current_timestamp}}"
}
```

Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Keterangan
pos_address	String	no	The IP address of the external application.

trace_number	int	yes	The transaction ID from the transaction receipt.
action	String	no	The transaction menu is “Sale”.
edc_address	String	no	The EDC IP address obtained from the POSe Link application.
trx_id	Alphanumeric	yes	The transaction ID is obtained from the external application.
msg	String	no	Displays transaction status information on the EDC.
method	String	no	The transaction types available are: purchase, brizzi, and QRIS.
status	String	no	Transaction status information: Success for purchase and brizzi transactions. Paid for QRIS transactions.

	reff_id	String	no	The transaction ID used for refunds in the QRIS method.
	acq_tid	String	no	The terminal ID of the EDC merchant.
	acq_mid	String	no	The merchant ID of the EDC merchant.
	card_type	String	no	The card type involved in the transaction.
	transaction_date	String	no	The transaction time recorded on the EDC.
	amount	String	no	The transaction amount sent from the POS.
	reference_number	String	no	The transaction number obtained from the BRI host during a transaction. For QR transactions, this is used to check the transaction status.
	approval	String	no	The transaction approval code.
	rc	String	no	Transaction status response code.

batch_number	String	no	Transaction group from the trace_number.
card_name	String	no	Transaction card type: NSICCS, Visa, Mastercard, or JCB.
pan	String	no	Masked card number used in the transaction.
card_category	String	no	The card category used in the transaction, for example: Debit, Visa, Mastercard, JCB.
is_credit	String	no	Card type classification used in the transaction: - Yes indicates a Credit card. - No indicates a Debit card.
is_off_us	String	no	The bank classification for the card used in the transaction, where Yes means the card belongs to a non-BRI bank, and No means it is a BRI card.

	periode	String	no	The installment period selected during the installment transaction.
	plan	String	no	Installment plan selected during an installment transaction.
	version_code	String	no	Application version code currently in use.
	version_name	String	no	Application version in use.
Success Response Code	success			
Respond Sample (Success)	[{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Check Batch Trx", "amount": "1", "approval": "503806", "batch_number": "00004", "card_category": "VISA BRI", "card_name": "VISA", "card_type": "CHIP", "edc_address": "192.168.10.145", "is_credit": "true",			

```
    "is_off_us": "false",
    "method": "purchase",
    "msg": "Transaksi ini sudah dilakukan dengan status paid",
    "pan": "4365 0299 **** 1702",
    "periode": "N/A",
    "plan": "N/A",
    "pos_address": "172.0.0.1",
    "rc": "00",
    "reference_number": "600604434915",
    "reff_id": "N/A",
    "status": "success",
    "trace_number": "000073",
    "transaction_date": "2026-01-06 11:04:31",
    "trx_id": "icacobabelanja_2sale",
    "version_code": "43",
    "version_name": "4.12.0"
  },
  {
    "acq_mid": "000001999115921",
    "acq_tid": "10747686",
    "action": "Check Batch Trx",
    "amount": "1",
    "approval": "240402",
    "batch_number": "00004",
    "card_category": "MASTER CARD",
    "card_name": "MASTERCARD",
    "card_type": "CHIP",
    "edc_address": "192.168.10.145",
    "is_credit": "true",
    "is_off_us": "false",
```

	"method": "purchase", "msg": "Transaksi ini sudah dilakukan dengan status paid", "pan": "5188 5621 **** 9709", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "00", "reference_number": "600602381346", "reff_id": "N/A", "status": "success", "trace_number": "000060", "transaction_date": "2026-01-06 09:37:08", "trx_id": "icacobabelanja_1salecomp", "version_code": "43", "version_name": "4.12.0" }]
Error Response Code	failed jika data tidak ditemukan
Respond Sample (Error)	[{ "acq_mid": "N/A", "acq_tid": "N/A", "action": "Check Batch Trx", "amount": "N/A", "approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "N/A",

```
    "edc_address": "192.168.10.145",
    "is_credit": "N/A",
    "is_off_us": "N/A",
    "method": "N/A",
    "msg": "Trx dengan trx id icacobabelanja_21sale tidak ditemukan",
    "pan": "N/A",
    "periode": "N/A",
    "plan": "N/A",
    "pos_address": "172.0.0.1",
    "rc": "N/A",
    "reference_number": "N/A",
    "reff_id": "N/A",
    "status": "Not Found",
    "trace_number": "N/A",
    "transaction_date": "N/A",
    "trx_id": "N/A",
    "version_code": "43",
    "version_name": "4.12.0"
  },
  {
    "acq_mid": "N/A",
    "acq_tid": "N/A",
    "action": "Check Batch Trx",
    "amount": "N/A",
    "approval": "N/A",
    "batch_number": "N/A",
    "card_category": "N/A",
    "card_name": "N/A",
    "card_type": "N/A",
    "edc_address": "192.168.10.145",
```

```
        "is_credit": "N/A",
        "is_off_us": "N/A",
        "method": "N/A",
        "msg": "Trx dengan trx id icacobabelanja_22sale tidak ditemukan",
        "pan": "N/A",
        "periode": "N/A",
        "plan": "N/A",
        "pos_address": "172.0.0.1",
        "rc": "N/A",
        "reference_number": "N/A",
        "reff_id": "N/A",
        "status": "Not Found",
        "trace_number": "N/A",
        "transaction_date": "N/A",
        "trx_id": "N/A",
        "version_code": "43",
        "version_name": "4.12.0"
    }
]
```


4.16. Check Transaction Void Purchase

Name	Void Purchase
Format	JSON
Description	Executing the **Void Purchase Transaction Status Check** in the BRI FMS Application. The Void Purchase Transaction Status Check feature in the BRI FMS application is used to verify whether a voided Purchase transaction was successfully processed or not. This feature is available exclusively for the Purchase payment method.

Required Body Parameters

Required Body Parameters			
List Parameter	Data Type	Mandatory	Description
action	String	no	The transaction menu is Void Purchase.
pos_address	String	no	The IP address of the external application.
trx_id	Alphanumeric	no	Requested transaction ID.
time_stamp	Datetime	no	The date and time the request is sent from the POS. Timestamp format: yyyy-mm-dd HH:MM:SS

Required Body Sample


```
{
  "action": "Check Trx",
  "trx_id": "icacobabelanja_1salecomp",
  "pos_address": "172.0.0.1",
  "time_stamp": "2026-01-07 11:20:02"
}
```

Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Description
pos_address	String	no	The IP address of the external application.
action	String	no	The transaction menu is Settlement
edc_address	String	no	The EDC IP address obtained from the POSe Link application.
msg	String	no	Displays transaction status information on the EDC.
status	String	no	Reprint status information: Success and Failed.
acq_tid	String	no	The terminal ID of the EDC merchant.
acq_mid	String	no	The merchant ID of the EDC merchant.
transaction_date	String	no	The transaction time recorded on the EDC.

batch_number	String	no	Transaction group from the trace_number.
amount	String	no	Transaction amount.
approval	String	no	Approval code.
card_category	String	no	Card category.
card_name	String	no	Card name.
card_type	String	no	Card type.
is_credit	String	no	Validate that the card used is a credit card.
is_off_us	String	no	Card type: On-us or Off-us.
method	String	no	Payment method.
pan	String	no	Card PAN number.
periode	String	no	Installment period.
plan	String	no	Installment plan.
rc	String	no	response code.
reference_number	String	no	Reference number.
trace_number	String	no	trace number.

	trx_id	Alphanumeric	no	transaction id.
	version_code	String	no	Application version code currently in use.
	version_name	String	no	Application version in use.
Success Response Code	success			
Respond Sample (Success)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Check Trx", "amount": "1", "approval": "240402", "batch_number": "00004", "card_category": "MASTER CARD", "card_name": "MASTERCARD", "card_type": "CHIP", "edc_address": "192.168.10.145", "is_credit": "true", "is_off_us": "false", "method": "purchase", "msg": "Transaksi ini sudah dilakukan dengan status paid", "pan": "5188 5621 **** 9709", "periode": "N/A", "plan": "N/A",			

	"pos_address": "172.0.0.1", "rc": "00", "reference_number": "600602381346", "status": "paid", "trace_number": "000060", "transaction_date": "2026-01-06 09:37:08", "trx_id": "icacobabelanja_1salecomp", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	Failed if data is not found.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Check Trx", "amount": "N/A", "approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "N/A", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "N/A", "method": "N/A", "msg": "Trx dengan trx id icacobabelanja_1sale tidak ditemukan", "pan": "N/A", "periode": "N/A", "plan": "N/A",

	"pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "status": "Not Found", "trace_number": "N/A", "transaction_date": "N/A", "trx_id": "N/A", "version_code": "43", "version_name": "4.12.0" }

4.17. Check Transaction Void Brizzi

Name	Void Brizzi
Format	JSON
Description	Executing the Void Brizzi Transaction Status Check Feature in the BRI FMS Application. The Void Brizzi Transaction Status Check feature in the BRI FMS application is used to verify whether a voided Brizzi transaction was successful or not. This feature is available only for the Brizzi payment method.
Required Body Parameters	

Required Body Parameters			
List Parameter	Data Type	Mandatory	Description
action	String	no	The transaction menu is Void Brizzi.

	pos_address	String	no	The IP address of the external application.
	trx_id	Alphanumeric	no	Requested transaction ID.
	time_stamp	Datetime	no	The date and time the request is sent from the POS. Timestamp format: yyyy-mm-dd HH:MM:SS

Required Body Sample


```
{
  "action": "Check Trx",
  "trx_id": "icacobabelanja_1salecomp",
  "pos_address": "172.0.0.1",
  "time_stamp": "2026-01-07 11:20:02"
}
```


Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Description
pos_address	String	no	The IP address of the external application.
action	String	no	The transaction menu is Settlement

edc_address	String	no	The EDC IP address obtained from the POSe Link application.
msg	String	no	Displays transaction status information on the EDC.
status	String	no	Reprint status information: Success and Failed.
acq_tid	String	no	The terminal ID of the EDC merchant.
acq_mid	String	no	The merchant ID of the EDC merchant.
transaction_date	String	no	The transaction time recorded on the EDC.
batch_number	String	no	Transaction group from the trace_number.
amount	String	no	Transaction amount.
approval	String	no	Approval code.
card_category	String	no	Card category.
card_name	String	no	Card name.
card_type	String	no	Card type.

	is_credit	String	no	Validate that the card used is a credit card.
	is_off_us	String	no	Card type: On-us or Off-us.
	method	String	no	Payment method.
	pan	String	no	Card PAN number.
	periode	String	no	Installment period.
	plan	String	no	Installment plan.
	rc	String	no	response code
	reference_number	String	no	Reference number.
	trace_number	String	no	trace number.
	trx_id	Alphanumeric	no	transaction id.
	version_code	String	no	Application version code currently in use.
	version_name	String	no	Application version in use.
Success Response Code	success			

Respond Sample (Success)	{
	"acq_mid": "000001999115921",
	"acq_tid": "10747686",
	"action": "Check Trx",
	"amount": "1",
	"approval": "BEFA2ED1",
	"batch_number": "00002",
	"card_category": "N/A",
	"card_name": "N/A",
	"card_type": "Tap",
	"edc_address": "192.168.10.145",
	"is_credit": "N/A",
	"is_off_us": "N/A",
	"method": "brizzi",
	"msg": "Transaksi ini sudah dilakukan dengan status paid",
	"pan": "N/A",
	"periode": "N/A",
	"plan": "N/A",
	"pos_address": "172.0.0.1",
	"rc": "00",
	"reference_number": "000096",
	"status": "paid",
	"trace_number": "96",
	"transaction_date": "2026-01-07 11:18:50",
	"trx_id": "icacobabelanja_1brizzi",
	"version_code": "43",
	"version_name": "4.12.0"
	}

Error Response Code	Failed if data is not found.

Respond Sample (Error)	{
	"acq_mid": "000001999115921",
	"acq_tid": "10747686",
	"action": "Check Trx",
	"amount": "N/A",
	"approval": "N/A",
	"batch_number": "N/A",
	"card_category": "N/A",
	"card_name": "N/A",
	"card_type": "N/A",
	"edc_address": "192.168.10.145",
	"is_credit": "N/A",
	"is_off_us": "N/A",
	"method": "N/A",
	"msg": "Trx dengan trx id icacobabelanja_2brizzi tidak ditemukan",
	"pan": "N/A",
	"periode": "N/A",
	"plan": "N/A",
	"pos_address": "172.0.0.1",
	"rc": "N/A",
	"reference_number": "N/A",
	"status": "Not Found",
	"trace_number": "N/A",
	"transaction_date": "N/A",
	"trx_id": "N/A",
	"version_code": "43",
	"version_name": "4.12.0"
	}

4.18. Check Transaction QRIS Refund

Name	QRIS Refund
Format	JSON
Description	Executing the **QRIS Refund Transaction Check** Feature in the BRI FMS Application. The QRIS Refund Transaction Check feature in the BRI FMS application is used for checking refund transactions for QR payment methods. This feature is applicable only for QR payment methods.
Required Body Parameters	

Required Body Parameters

List Parameter	Data Type	Mandatory	Description
action	String	no	The transaction menu is cek status transaksi
pos_address	String	no	The IP address of the external application.
trx_id	Alphanumeric	no	Requested transaction ID.
time_stamp	Datetime	no	The date and time the request is sent from the POS. Timestamp format: yyyy-mm-dd HH:MM:SS

Required Body Sample


```
{
  "action": "Check Trx",
  "trx_id": "icacobabelanja_1salecomp",
  "pos_address": "172.0.0.1",
  "time_stamp": "2026-01-07 11:20:02"
}
```


Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Description
pos_address	String	no	The IP address of the external application.
action	String	no	The transaction menu is Settlement
edc_address	String	no	The EDC IP address obtained from the POSe Link application.
msg	String	no	Displays transaction status information on the EDC.
status	String	no	Reprint status information: Success and Failed.

acq_tid	String	no	The terminal ID of the EDC merchant.
acq_mid	String	no	The merchant ID of the EDC merchant.
transaction_date	String	no	The transaction time recorded on the EDC.
batch_number	String	no	Transaction group from the trace_number.
amount	String	no	Transaction amount.
approval	String	no	Approval code.
card_category	String	no	Card category.
card_name	String	no	Card name.
card_type	String	no	Card type.
is_credit	String	no	Validate that the card used is a credit card.
is_off_us	String	no	Card type: On-us or Off-us.
method	String	no	Payment method.
pan	String	no	Card PAN number.
periode	String	no	Installment period.

	plan	String	no	Installment plan.
	rc	String	no	response code.
	reference_number	String	no	Reference number.
	trace_number	String	no	trace number.
	trx_id	Alphanumeric	no	transaction id.
	version_code	String	no	Application version code currently in use.
	version_name	String	no	Application version in use.
Success Response Code	success			
Respond Sample (Success)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Check Trx", "amount": "1", "approval": "N/A", "batch_number": "00003", "card_category": "N/A", "card_name": "N/A", "card_type": "SCAN", "edc_address": "192.168.10.145",			

	"is_credit": "N/A", "is_off_us": "N/A", "method": "QRIS", "msg": "Transaksi ini sudah dilakukan dengan status paid", "pan": "**********5255", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "reff_id": "2349679124", "status": "paid", "trace_number": "39", "transaction_date": "2026-01-05 15:07:41", "trx_id": "icacobabelanja_1qris", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	Failed if data is not found.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Check Trx", "amount": "N/A", "approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "N/A",

```
  "edc_address": "192.168.10.145",
  "is_credit": "N/A",
  "is_off_us": "N/A",
  "method": "N/A",
  "msg": "Trx dengan trx id icacobabelanja_3qris tidak ditemukan",
  "pan": "N/A",
  "periode": "N/A",
  "plan": "N/A",
  "pos_address": "172.0.0.1",
  "rc": "N/A",
  "reference_number": "N/A",
  "status": "Not Found",
  "trace_number": "N/A",
  "transaction_date": "N/A",
  "trx_id": "N/A",
  "version_code": "43",
  "version_name": "4.12.0"
}
```


4.19. QRIS Alipay

Nama	QRIS Alipay
Format	JSON
Deskripsi	Execute the transaction feature using the QRIS scan via Alipay.
Required Body Parameters	

Required Body Parameters			
List Parameter	Data Type	Mandatory	Keterangan

	action	String	no	The transaction menu is Check Status
	reference_number	String	yes	Transaction number obtained from BRI host during QR generation. The reference number is included on the QR receipt.
	pos_address	String	no	The IP address of the external application.
	time_stamp	Datetime	no	The date and time the request is sent from the POS. Timestamp format: yyyy-mm-dd HH:MM:SS
	method	String	no	The selected transaction type is QRIS.
	action	String	no	The transaction menu is Check Status
Required Body Sample	{ "action": "Sale", "trx_id": "icacobabelanja_2qris", "amount": "1", "pos_address": "172.0.0.1", "time_stamp": "2026-01-06 09:25:08", "method": "qris"			

	}
Respond Parameters	

Respond Parameters			
List Parameter	Data Type	Mandatory	Keterangan
pos_address	String	no	The IP address of the external application.
trace_number	int	yes	The transaction ID from the transaction receipt.
action	String	no	The transaction menu is “Sale”.
edc_address	String	no	The EDC IP address obtained from the POSe Link application.
trx_id	Alphanumeric	yes	The transaction ID is obtained from the external application.
msg	String	no	Displays transaction status information on the EDC.
method	String	no	The transaction types available are: purchase, brizzi, and QRIS.

	status	String	no	Transaction status information: Success for purchase and brizzi transactions. Paid for QRIS transactions.
	reff_id	String	no	The transaction ID used for refunds in the QRIS method.
	acq_tid	String	no	The terminal ID of the EDC merchant.
	acq_mid	String	no	The merchant ID of the EDC merchant.
	card_type	String	no	The card type involved in the transaction.
	transaction_date	String	no	The transaction time recorded on the EDC.
	amount	String	no	The transaction amount sent from the POS.
	reference_number	String	no	The transaction number obtained from the BRI host during a transaction. For QR transactions, this

			is used to check the transaction status.
approval	String	no	The transaction approval code.
rc	String	no	Transaction status response code.
batch_number	String	no	Transaction group from the trace_number.
card_name	String	no	Transaction card type: NSICCS, Visa, Mastercard, or JCB.
pan	String	no	Masked card number used in the transaction.
card_category	String	no	The card category used in the transaction, for example: Debit, Visa, Mastercard, JCB.
is_credit	String	no	Card type classification used in the transaction: - Yes indicates a Credit card. - No indicates a Debit card.

	is_off_us	String	no	The bank classification for the card used in the transaction, where Yes means the card belongs to a non-BRI bank, and No means it is a BRI card.
	periode	String	no	The installment period selected during the installment transaction.
	plan	String	no	Installment plan selected during an installment transaction.
	version_code	String	no	Application version code currently in use.
	version_name	String	no	Application version in use.
Success Response Code	success			
Respond Sample (Success)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Sale", "amount": "1", "approval": "N/A",			

	"batch_number": "00003", "card_category": "N/A", "card_name": "N/A", "card_type": "SCAN", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "N/A", "method": "QRIS", "msg": "transaksi berhasil", "pan": "**********5255", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "00", "reference_number": "000937677230", "reff_id": "2349708316", "status": "paid", "trace_number": "47", "transaction_date": "2026-01-05 15:17:53", "trx_id": "icacobabelanja_2qris", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	Transaction unpaid.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Sale", "amount": "1",

	"approval": "N/A", "batch_number": "00003", "card_category": "N/A", "card_name": "N/A", "card_type": "SCAN", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "N/A", "method": "QRIS", "msg": "Transaksi Unpaid", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "21", "reference_number": "074768600203", "reff_id": "N/A", "status": "unpaid", "trace_number": "46", "transaction_date": "2026-01-05 15:17:09", "trx_id": "icacobabelanja_2qris", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	Transaction cancelled.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Sale",

	"amount": "1", "approval": "N/A", "batch_number": "00003", "card_category": "N/A", "card_name": "N/A", "card_type": "SCAN", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "N/A", "method": "QRIS", "msg": "Transaksi Failed", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "074768600202", "reff_id": "N/A", "status": "failed", "trace_number": "45", "transaction_date": "2026-01-05 15:16:09", "trx_id": "icacobabelanja_2qris", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	The transaction is performed using the same trx_id.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686",

```
  "action": "Sale",
  "amount": "1",
  "approval": "N/A",
  "batch_number": "00003",
  "card_category": "N/A",
  "card_name": "N/A",
  "card_type": "SCAN",
  "edc_address": "192.168.10.145",
  "is_credit": "N/A",
  "is_off_us": "N/A",
  "method": "QRIS",
  "msg": "Transaksi telah berhasil dilakukan dengan trxID ini",
  "pan": "***************5255",
  "periode": "N/A",
  "plan": "N/A",
  "pos_address": "172.0.0.1",
  "rc": "N/A",
  "reference_number": "000937677230",
  "reff_id": "2349708316",
  "status": "success",
  "trace_number": "47",
  "transaction_date": "2026-01-05 15:17:53",
  "trx_id": "icacobabelanja_2qris",
  "version_code": "43",
  "version_name": "4.12.0"
}
```


4.20. QRIS TAP

Name	QRIS TAP

Format	JSON
Description	Executing a Transaction Using the QRIS TAP Method. This feature enables performing a transaction using the QRIS TAP payment method.
Required Body Parameters	

Required Body Parameters			
List Parameter	Data Type	Mandatory	Description
amount	int	yes	The transaction amount is automatically displayed on the EDC screen during payment.
action	String	no	The transaction menu is QRIS TAP.
pos_address	String	no	The IP address of the external application.
trx_id	Alphanumeric	no	Requested transaction ID.
time_stamp	Datetime	no	The date and time the request is sent from the POS. Timestamp format: yyyy-mm-dd HH:MM:SS
method	String	no	The available transaction types include three

				options: purchase, brizzi, and QRIS.

Required Body Sample


```
{
  "action": "Sale",
  "trx_id": "icacobabelanja_1qristap",
  "amount": "1",
  "pos_address": "172.0.0.1",
  "time_stamp": "2026-01-06 09:25:08",
  "method": "qris_tap"
}
```


Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Description
pos_address	String	no	The IP address of the external application.
action	String	no	The transaction menu is QRIS TAP.
edc_address	String	no	The EDC IP address obtained from the POSe Link application.
msg	String	no	Displays transaction status information on the EDC.

status	String	no	Reprint status information: Success and Failed.
acq_tid	String	no	The terminal ID of the EDC merchant.
acq_mid	String	no	The merchant ID of the EDC merchant.
transaction_date	String	no	The transaction time recorded on the EDC.
batch_number	String	no	Transaction group from the trace_number.
amount	String	no	Transaction amount.
approval	String	no	Approval code.
card_category	String	no	Card category.
card_name	String	no	Card name.
card_type	String	no	Card type.
is_credit	String	no	Validate that the card used is a credit card.
is_off_us	String	no	Card type: On-us or Off-us.
method	String	no	Payment method.

	pan	String	no	Card PAN number.
	periode	String	no	Installment period.
	plan	String	no	Installment plan.
	rc	String	no	response code.
	reference_number	String	no	Reference number.
	reff_id	String	no	Reff number.
	trace_number	String	no	trace number.
	trx_id	Alphanumeric	no	transaction id.
	version_code	String	no	Application version code currently in use.
	version_name	String	no	Application version in use.
Success Response Code	success			
Respond Sample (Success)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Sale", "amount": "1", "approval": "N/A",			

	"batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "TAP", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "N/A", "method": "QRIS TAP", "msg": "transaksi berhasil", "pan": "**********5255", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "00", "reference_number": "074768600003", "reff_id": "2349733427", "status": "paid", "trace_number": "000050", "transaction_date": "2026-01-05 15:26:29", "trx_id": "icacobabelanja_1qristap", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	Card swiped too quickly > connection lost.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Sale", "amount": "N/A",

	"approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "N/A", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "N/A", "method": "N/A", "msg": "Koneksi perangkat terputus, silahkan coba lagi", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "status": "failed", "trace_number": "N/A", "transaction_date": "N/A", "trx_id": "icacobabelanja_1qristap", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	Transaction cancelled.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Sale", "amount": "N/A",

	"approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "N/A", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "N/A", "method": "QRIS TAP", "msg": "Transaksi dibatalkan", "pan": "N/A", "periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "status": "failed", "trace_number": "N/A", "transaction_date": "N/A", "trx_id": "icacobabelanja_1qristap", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	Transaction using the same transaction ID.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Sale", "amount": "1",

```
  "approval": "N/A",
  "batch_number": "N/A",
  "card_category": "N/A",
  "card_name": "N/A",
  "card_type": "TAP",
  "edc_address": "192.168.10.145",
  "is_credit": "N/A",
  "is_off_us": "N/A",
  "method": "QRIS TAP",
  "msg": "Transaksi telah berhasil dilakukan dengan trxID ini",
  "pan": "⚫⚫⚫⚫⚫⚫⚫⚫⚫⚫⚫⚫⚫⚫5255",
  "periode": "N/A",
  "plan": "N/A",
  "pos_address": "172.0.0.1",
  "rc": "N/A",
  "reference_number": "074768600003",
  "reff_id": "2349733427",
  "status": "success",
  "trace_number": "000050",
  "transaction_date": "2026-01-05 15:26:29",
  "trx_id": "icacobabelanja_1qristap",
  "version_code": "43",
  "version_name": "4.12.0"
}
```


4.21. QRIS TAP Refund

Name	QRIS TAP Refund
Format	JSON

Description	Executing the Refund Feature for Transactions Using the QRIS TAP Method. This feature enables processing a refund for transactions conducted via the QRIS TAP payment method.
Required Body Parameters	

Required Body Parameters			
List Parameter	Data Type	Mandatory	Description
action	String	no	The transaction menu is QRIS TAP Refund.
pos_address	String	no	The IP address of the external application.
trx_id	Alphanumeric	no	Requested transaction ID.
time_stamp	Datetime	no	The date and time the request is sent from the POS. Timestamp format: yyyy-mm-dd HH:MM:SS

Required Body Sample

```
{
  "action" : "Refund Qris Tap",
  "reff_id" : "1754207085",
  "pos_address" : "172.0.0.1",
  "time_stamp" : "{{ecr_timestamp}}",
  "method" : "qris"
}
```

Respond Parameters

Respond Parameters			
List Parameter	Data Type	Mandatory	Description
pos_address	String	no	The IP address of the external application.
action	String	no	The transaction menu is Settlement
edc_address	String	no	The EDC IP address obtained from the POSe Link application.
msg	String	no	Displays transaction status information on the EDC.
status	String	no	Reprint status information: Success and Failed.
acq_tid	String	no	The terminal ID of the EDC merchant.
acq_mid	String	no	The merchant ID of the EDC merchant.
transaction_date	String	no	The transaction time recorded on the EDC.

batch_number	String	no	Transaction group from the trace_number.
amount	String	no	Transaction amount.
approval	String	no	Approval code.
card_category	String	no	Card category.
card_name	String	no	Card name.
card_type	String	no	Card type.
is_credit	String	no	Validate that the card used is a credit card.
is_off_us	String	no	Card type: On-us or Off-us.
method	String	no	Payment method.
pan	String	no	Card PAN number.
periode	String	no	Installment period.
plan	String	no	Installment plan.
rc	String	no	response code.
reference_number	String	no	Reference number.
reff_id	String	no	Reff number.

	trace_number	String	no	trace number.
	trx_id	Alphanumeric	no	transaction id.
	version_code	String	no	Application version code currently in use.
	version_name	String	no	Application version in use.
Success Response Code	success			
Respond Sample (Success)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Check Trx", "amount": "1", "approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "TAP", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "N/A", "method": "QRIS TAP", "msg": "Transaksi ini sudah dilakukan dengan status cancel", "pan": "●●●●●●●●●●●●●●●●5255", "periode": "N/A",			

	"plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "074768600004", "reff_id": "2351956488", "status": "cancel", "trace_number": "000075", "transaction_date": "2026-01-06 12:00:07", "trx_id": "icacobabelanja_2qristap", "version_code": "43", "version_name": "4.12.0" }
Error Response Code	Refund of a transaction that has already been refunded.
Respond Sample (Error)	{ "acq_mid": "000001999115921", "acq_tid": "10747686", "action": "Check Trx", "amount": "N/A", "approval": "N/A", "batch_number": "N/A", "card_category": "N/A", "card_name": "N/A", "card_type": "N/A", "edc_address": "192.168.10.145", "is_credit": "N/A", "is_off_us": "N/A", "method": "N/A", "msg": "Trx dengan trx id icacobabelanja_3qristap tidak ditemukan", "pan": "N/A",

	"periode": "N/A", "plan": "N/A", "pos_address": "172.0.0.1", "rc": "N/A", "reference_number": "N/A", "status": "Not Found", "trace_number": "N/A", "transaction_date": "N/A", "trx_id": "N/A", "version_code": "43", "version_name": "4.12.0" }

4.22. ACK

Name	ACK
Format	JSON
Description	Executing the Feature for Sending Notes to Merchant During POS Transactions. This feature allows the EDC system to send a text note to the merchant while the POS system is processing a transaction.
Required Body Parameters	-
Required Body Sample	-
Respond Parameters	-

Success Response Code	-
Respond Sample (Success)	Connection via WiFi: 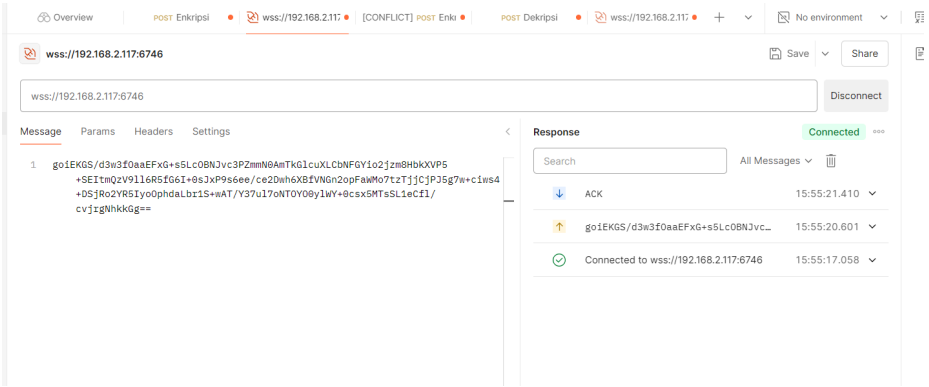 Connection via Bluetooth: Connection via USB:
Error Response Code	-
Respond Sample (Error)	-

4.23. Information “EDC is Busy”

Name	ACK
Format	JSON
Description	EDC Busy and Invalid Timestamp Handling in POSe. When two POS systems connect to the EDC simultaneously, the POSe will respond with "EDC is busy" to one of the requests, and the connection will be immediately terminated. Additionally, if there are two transactions and

	the second transaction's timestamp is earlier than the first, POSe will disconnect with the message "Invalid timestamp."
Required Body Parameters	-
Required Body Sample	-
Respond Parameters	-
Success Response Code	-
Respond Sample (Success)	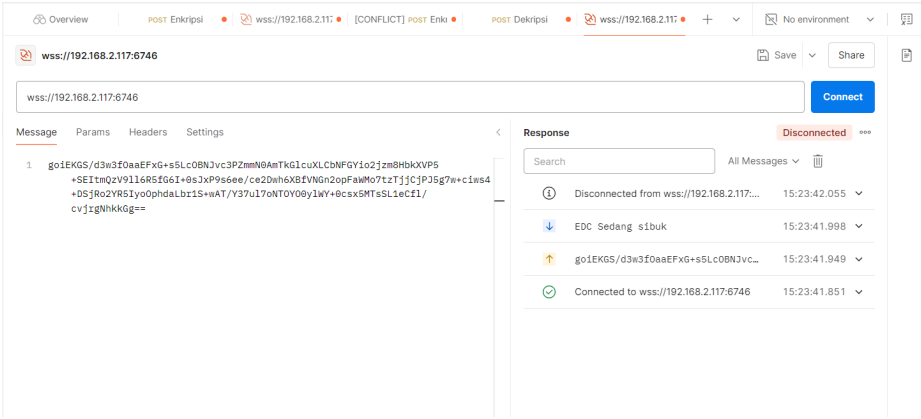
Error Response Code	-
Respond Sample (Error)	-