

**LAPORAN PRAKTIKUM MEMBUAT DESAIN BASIS DATA  
SEBAGAI MASTER (PENGGUNA II)**



**OLEH**

**AMELIA CANDRA DEWI**

**243307066/1C**


**DOSEN PENGAMPU : Pak Gus Nanang**

**JURUSAN TEKNIK**


**PROGRAM STUDI TEKNOLOGI INFORMASI**

**POLITEKNIK NEGERI MADIUN**

## 1. Masuk Xampp dan klik config dan setelah itu klik my.ini :

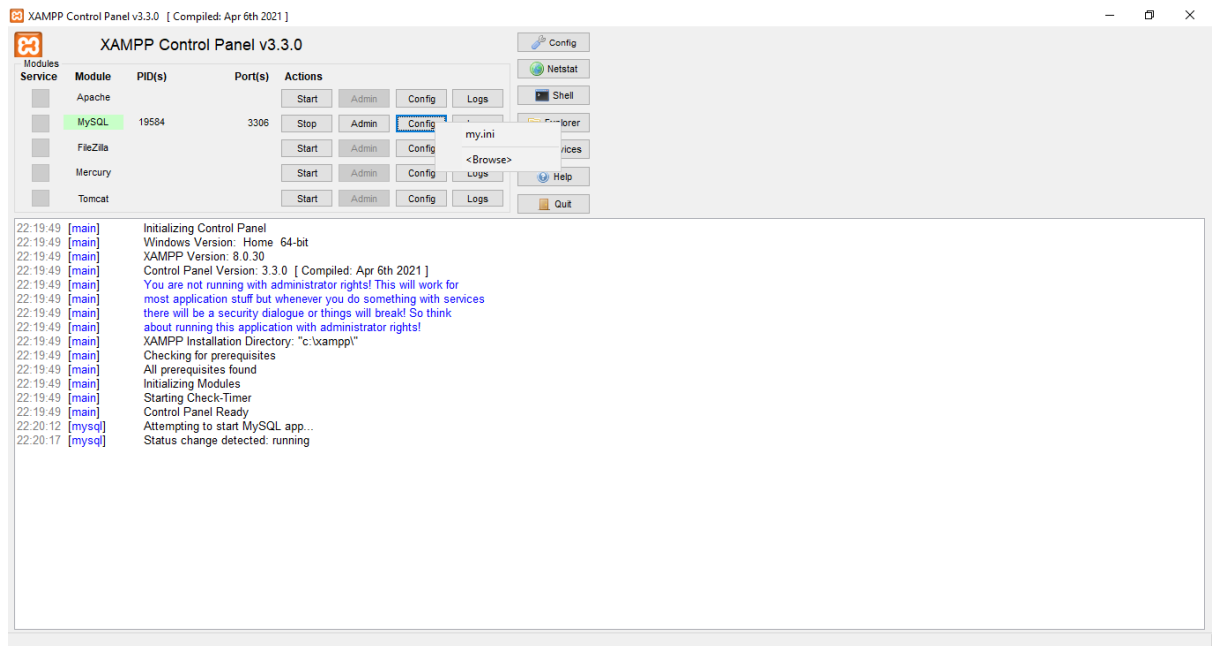

## 2. Hapus tanda # pada log-binmysql-bin :

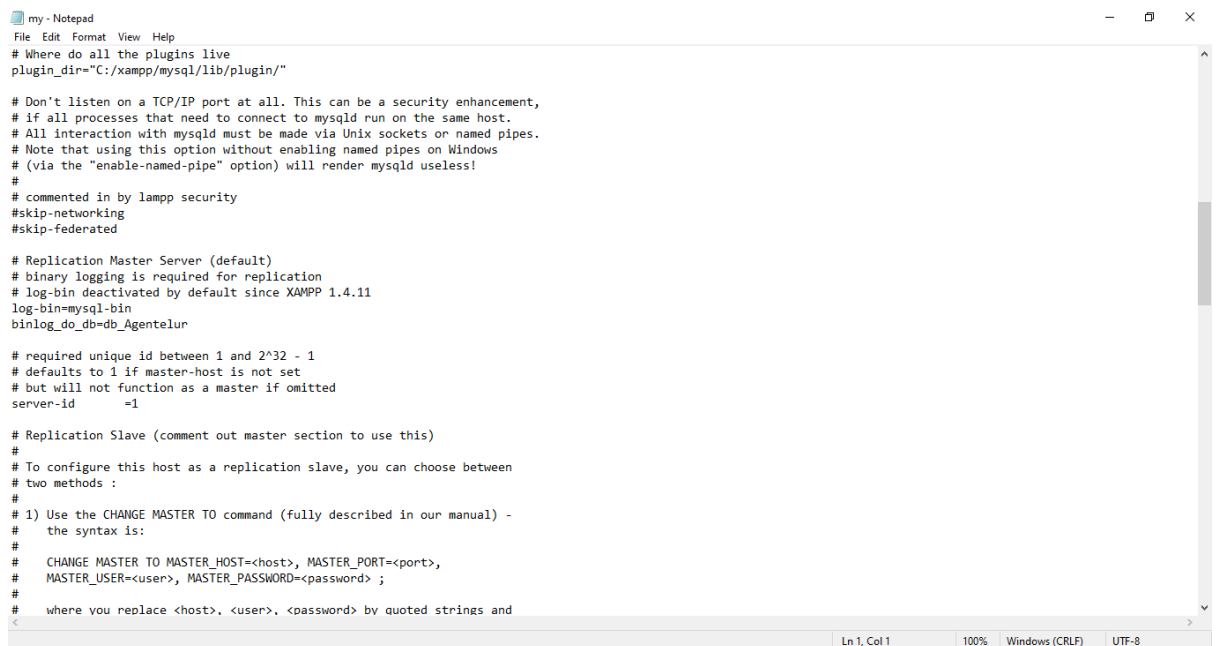

### 3. Mengecek ipconfig untuk pengguna 1

```
Command Prompt
Microsoft Windows [Version 10.0.19042.1526]
(c) Microsoft Corporation. All rights reserved.

C:\Users\user> ip config
'ip' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\user>ip config
'ip' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\user>ipconfig

Windows IP Configuration

Ethernet adapter Ethernet:

    Connection-specific DNS Suffix  . : 
    Link-local IPv6 Address . . . . . : fe80::a596:689d:1c4:e09f%11
    IPv4 Address. . . . . : 10.252.0.17
    Subnet Mask . . . . . : 255.255.254.0
    Default Gateway . . . . . : 10.252.0.1

Wireless LAN adapter Wi-Fi:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . : 

Wireless LAN adapter Local Area Connection* 10:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . : 

Wireless LAN adapter Local Area Connection* 11:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . : 

C:\Users\user>
```

### 4. Masuk pada mysql dan show master status untuk menampilkan bin\_log :

```
XAMPP for Windows - mysql -u root -h 127.0.0.1 -P 3306 -p
user@LAPTOP-00Q0U5HD C:\xampp
# mysql -u root -h 127.0.0.1 -P 3306 -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 9
Server version: 10.4.32-MariaDB-log mariadb.org binary distribution
Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> SHOW MASTER STATUS;
+-----+-----+-----+-----+
| File | Position | Binlog_Do_DB | Binlog_Ignore_DB |
+-----+-----+-----+-----+
| mysql-bin.000006 | 342 | db_Agentelur | |
+-----+-----+-----+-----+
1 row in set (0.001 sec)
```

### 5. Masuk ke database db\_Agentelur :

```
MariaDB [(none)]> SHOW MASTER STATUS;
+-----+-----+-----+-----+
| File | Position | Binlog_Do_DB | Binlog_Ignore_DB |
+-----+-----+-----+-----+
| mysql-bin.000006 | 342 | db_Agentelur | |
+-----+-----+-----+-----+
1 row in set (0.001 sec)

MariaDB [(none)]> use db_Agentelur;
Database changed
MariaDB [db_Agentelur]> show tables;
+-----+
| Tables_in_db_agentelur |
+-----+
| detail_transaksi |
| jabatan |
| pelanggan |
| pemasokan |
| pengguna |
| supplier |
| telun |
| transaksi |
+-----+
8 rows in set (0.001 sec)
```

## 6. Mengubah nama tabel detail\_transaksi :

```

MariaDB [db_Agentelur]> show tables;
+-----+
| Tables_in_db_agentelur |
+-----+
| detail_transaksi       |
| jabatan                |
| pelanggan              |
| pemasokan              |
| pengguna               |
| supplier                |
| telur                  |
| transaksi               |
+-----+
8 rows in set (0.001 sec)

MariaDB [db_Agentelur]> rename table detail_transaksi to detailtransaksi;
Query OK, 0 rows affected (0.497 sec)

MariaDB [db_Agentelur]>
```