


DDTA R25 - DermaTriage RC-001 BA-to-Mermaid working example R1

Repository baseline: fd8ffff4ad0edbb8e6c7e099b98d4129ad4e405c8

WORKING EXAMPLE / NON-AUTHORITY

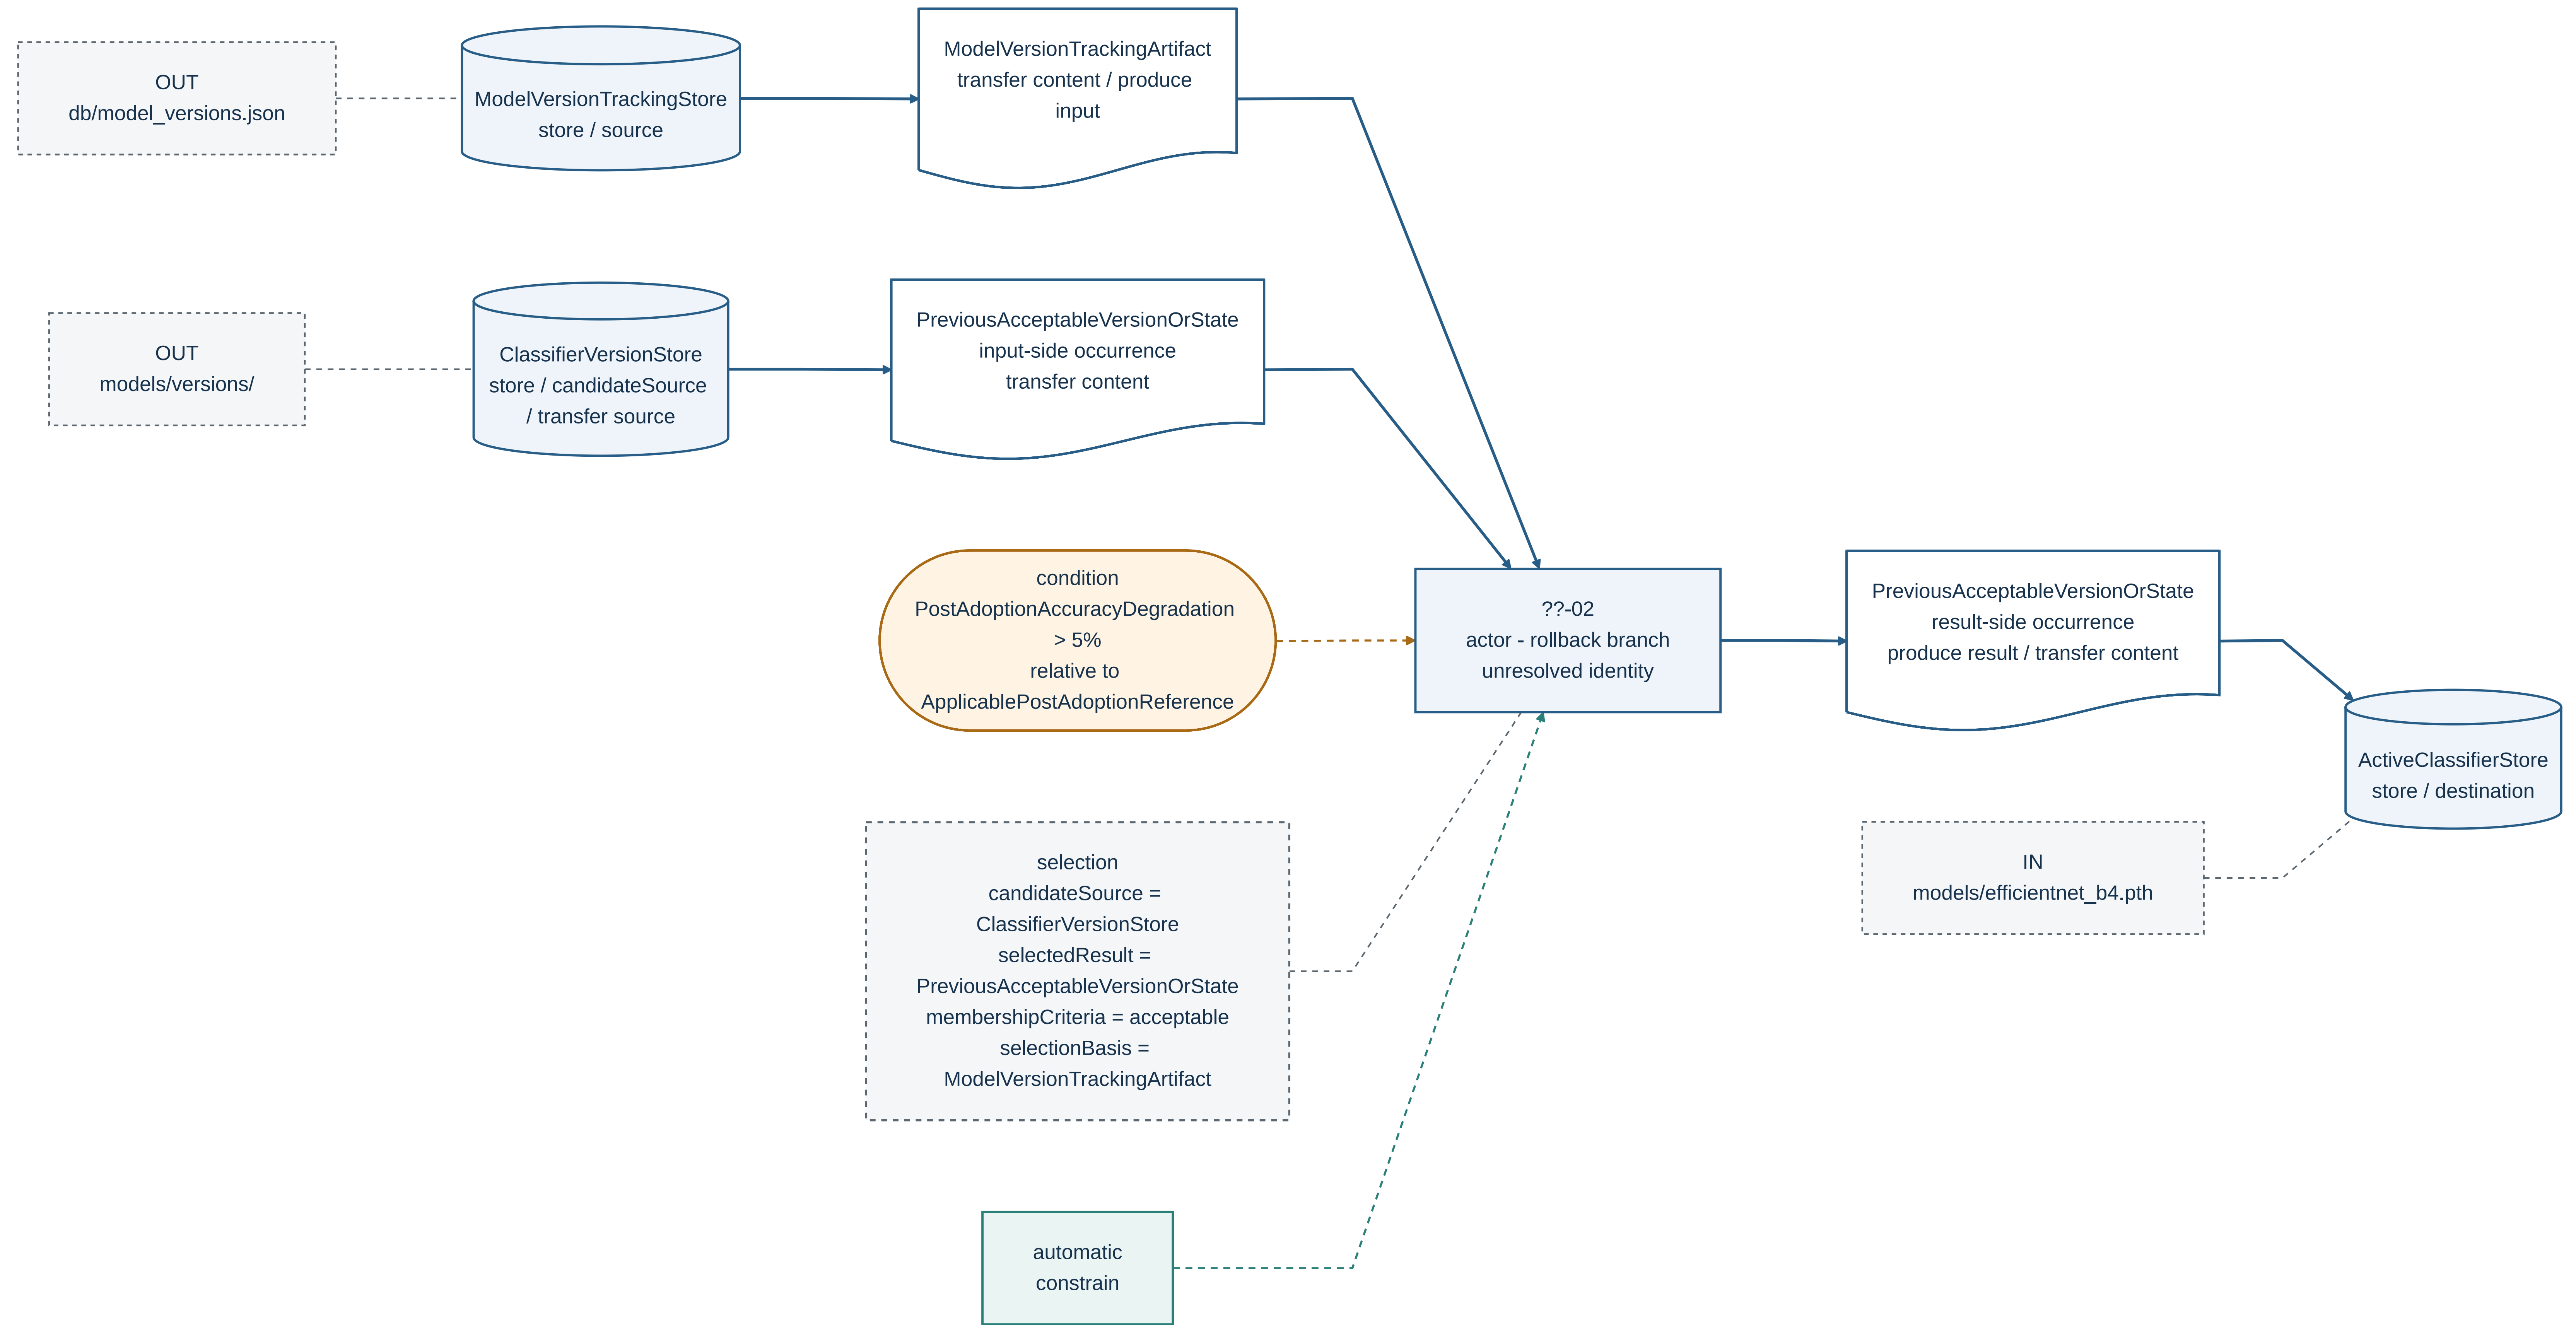

Selective view. The separate BAP-DEC98-01 producer (`ApplicablePostAdoptionReference -> ??-01 -> PostAdoptionAccuracyDegradation`) is intentionally omitted. Its governed meanings remain visible only in the condition statement used by the rollback branch.

Same BAReferent, two visual occurrences. PreviousAcceptableVersionOrState is drawn once on the input side (retrieved from ClassifierVersionStore) and once on the result side (emitted toward ActiveClassifierStore). These are visual aliases of one BAReferent identity, not two semantic identities.

No inferred modification. The two visual occurrences improve role readability only. The current BA does not state that rollback transforms the selected version into a semantically different artifact. If such a transformation becomes governed, it requires BA review rather than a projection convention.

Input composition. `ModelVersionTrackingStore` -> `ModelVersionTrackingArtifact` -> ??-02 composes BAP-FR10-03 with the `produce.input` participation of BAP-FR10-01. The edge into ??-02 is drawn once.

No Store-to-Store command semantics. The graph makes the rollback actor the explicit midpoint: selected/retrieved content enters ??-02; a result-side occurrence leaves ??-02 and is transferred to the active Store. No direct Store-to-Store transfer is asserted.

Projection rule evidence. This artifact is regression evidence for DDTA_BA_TO_MERMAID_PROJECTION_GUIDE_R1; it is never an upstream BA source.