

## Policies and Procedures

---

[WWW.ALLEGANCOUNTY.ORG/GIS](http://WWW.ALLEGANCOUNTY.ORG/GIS)

FEBRUARY 11, 2019



# Contents

<b>Contents</b>	<b>i</b>
<b>I Brand</b>	<b>1</b>
<b>1 Awards</b>	<b>3</b>
1.1 The GIS Champion Award . . . . .	3
<b>Contents</b>	<b>i</b>
GIS Champion . . . . .	1
<b>II Methods</b>	<b>3</b>
<b>2 Documentation</b>	<b>5</b>
2.1 About Documentation . . . . .	5
How Jalapeño Works . . . . .	5
2.2 Document Storage Concepts . . . . .	13
GIS File Standard . . . . .	13
<b>3 Team Concept</b>	<b>15</b>
3.1 Team Structure . . . . .	15
Paired Programming . . . . .	15
<b>III Service</b>	<b>17</b>
<b>4 Applications</b>	<b>19</b>
4.1 Applications for Treasurer Dept. . . . .	19
Forfeiture Data Collection . . . . .	19
<b>5 Tools</b>	<b>77</b>
5.1 BSA Support . . . . .	77
Adding a Layer to the BSA GIS . . . . .	77
5.2 Core Data . . . . .	82
Control Points . . . . .	82

5.3	Core Data Schema . . . . .	86
	Production Data . . . . .	88
5.4	ESRI Tools . . . . .	89
	COGO Tools in ArcGIS . . . . .	89
5.5	GIS Administration . . . . .	90
	New Connections in ArcCatalog . . . . .	90
	Create Query in ArcGIS to SQL Database . . . . .	94
	Enterprise Geodatabase Maintenance . . . . .	98
	Managing Map Services . . . . .	105
	Managing Geodatabase Replicas . . . . .	113
	Managing Geodatabase Versions . . . . .	114
	MXD Management . . . . .	118
5.6	L <sup>A</sup> T <sub>E</sub> X Packages . . . . .	119
	Common Errors . . . . .	119
	float Package . . . . .	129
	Graphics Examples and Notes . . . . .	130
	graphicx Package . . . . .	131
	hyperref Package . . . . .	132
	import Package . . . . .	134
	wrapfig Package . . . . .	135
5.7	L <sup>A</sup> T <sub>E</sub> X Templates . . . . .	137
	L <sup>A</sup> T <sub>E</sub> X Section Template . . . . .	137
	SUBSECTION TITLE . . . . .	137
5.8	PDF Tools . . . . .	141
	PDF Optimizer . . . . .	141
5.9	QGIS Tools . . . . .	144
	COGO Tools in QGIS . . . . .	144
<b>IVResources</b>		<b>157</b>
<b>Geography 101</b>		<b>159</b>
	Surveys and Plans . . . . .	159
	Northing And Easting . . . . .	159
	Coordinate Systems for Michigan . . . . .	160
<b>ESRI Information</b>		<b>161</b>
	ESRI Product Documentation . . . . .	161
<b>References</b>		<b>163</b>
<b>Glossary</b>		<b>165</b>
<b>Index</b>		<b>167</b>

Part I

**Brand**




# — 1 —

## Awards

### 1.1 THE GIS CHAMPION AWARD



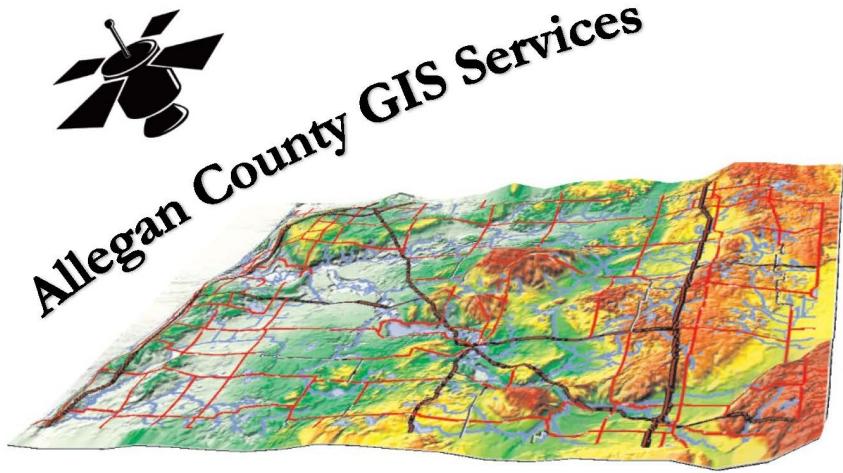

## GIS Champion Award

---

[WWW.ALLEGANCOUNTY.ORG/GIS](http://WWW.ALLEGANCOUNTY.ORG/GIS)

FEBRUARY 11, 2019



# *Contents*

<b>Contents</b>	<b>i</b>
<b>I Brand</b>	<b>1</b>
<b>1 Awards</b>	<b>3</b>
1.1 The GIS Champion Award . . . . .	3
<b>Contents</b>	<b>i</b>
GIS Champion . . . . .	1
<b>II Methods</b>	<b>3</b>
<b>2 Documentation</b>	<b>5</b>
2.1 About Documentation . . . . .	5
How Jalapeño Works . . . . .	5
2.2 Document Storage Concepts . . . . .	13
GIS File Standard . . . . .	13
<b>3 Team Concept</b>	<b>15</b>
3.1 Team Structure . . . . .	15
Paired Programming . . . . .	15
<b>III Service</b>	<b>17</b>
<b>4 Applications</b>	<b>19</b>
4.1 Applications for Treasurer Dept. . . . .	19
Forfeiture Data Collection . . . . .	19
<b>5 Tools</b>	<b>77</b>
5.1 BSA Support . . . . .	77
Adding a Layer to the BSA GIS . . . . .	77
5.2 Core Data . . . . .	82
Control Points . . . . .	82
5.3 Core Data Schema . . . . .	86
Production Data . . . . .	88

5.4	ESRI Tools . . . . .	89
	COGO Tools in ArcGIS . . . . .	89
5.5	GIS Administration . . . . .	90
	New Connections in ArcCatalog . . . . .	90
	Create Query in ArcGIS to SQL Database . . . . .	94
	Enterprise Geodatabase Maintenance . . . . .	98
	Managing Map Services . . . . .	105
	Managing Geodatabase Replicas . . . . .	113
	Managing Geodatabase Versions . . . . .	114
	MXD Management . . . . .	118
5.6	L <sup>A</sup> T <sub>E</sub> X Packages . . . . .	119
	Common Errors . . . . .	119
	float Package . . . . .	129
	Graphics Examples and Notes . . . . .	130
	graphicx Package . . . . .	131
	hyperref Package . . . . .	132
	import Package . . . . .	134
	wrapfig Package . . . . .	135
5.7	L <sup>A</sup> T <sub>E</sub> X Templates . . . . .	137
	L <sup>A</sup> T <sub>E</sub> X Section Template . . . . .	137
	SUBSECTION TITLE . . . . .	137
5.8	PDF Tools . . . . .	141
	PDF Optimizer . . . . .	141
5.9	QGIS Tools . . . . .	144
	COGO Tools in QGIS . . . . .	144
<b>IV</b>	<b>Resources</b>	<b>157</b>
<b>Geography 101</b>		<b>159</b>
	Surveys and Plans . . . . .	159
	Northing And Easting . . . . .	159
	Coordinate Systems for Michigan . . . . .	160
<b>ESRI Information</b>		<b>161</b>
	ESRI Product Documentation . . . . .	161
<b>References</b>		<b>163</b>
<b>Glossary</b>		<b>165</b>
<b>Index</b>		<b>167</b>

## GIS CHAMPION

An individual whose actions promote the use of GIS

# GIS CHAMPION AWARD



Figure 1.1: Example GIS Champion Award

## Background

Though Allegan County has had a formal GIS department for over 20 years, few people have learned to use it.

## Statement of Problem

GIS is underutilized in Allegan County government. The county would benefit from more GIS use in its government. Currently there is no formal recognition of individuals that promote GIS.

## Analysis

The GIS Champion Award is a simple method of recognizing those that promote GIS in the county.

## Past GIS Award Recipients

- Ian Hanes
- Karen
- Brian Redmon

## GIS Champion Award Code

## Part II

# Methods



# — 2 — Documentation

## 2.1 ABOUT DOCUMENTATION

### How JALAPEÑO WORKS

## PROBLEM AND ANALYSIS

### Background

GIS Services has complicated and evolving workflows and uses everchanging technologies

- version control
- finding the documentation
- disseminating the documentation

### Statement of Problem

GIS documentation has traditionally been done in different formats and stored in many different files and folders in the county network. This has resulted in problems with:

### Analysis

The Jalapeño folder along with some open-source software provides a robust documentation tool for GIS documentation.

# COLORS

## Blues

HeaderBlueA \_\_\_\_\_  
HeaderBlueB \_\_\_\_\_  
HeaderBlueC \_\_\_\_\_  
HeaderBlueD \_\_\_\_\_  
HeaderBlueE \_\_\_\_\_

## Golds

HeaderGoldA \_\_\_\_\_  
HeaderGoldB \_\_\_\_\_  
HeaderGoldC \_\_\_\_\_  
HeaderGoldD \_\_\_\_\_  
HeaderGoldE \_\_\_\_\_

## Oranges

HeaderOrangeA \_\_\_\_\_  
HeaderOrangeB \_\_\_\_\_  
HeaderOrangeC \_\_\_\_\_  
HeaderOrangeD \_\_\_\_\_  
HeaderOrangeE \_\_\_\_\_

## Greens

HeaderGreenA \_\_\_\_\_  
HeaderGreenB \_\_\_\_\_  
HeaderGreenC \_\_\_\_\_  
HeaderGreenD \_\_\_\_\_

---

HeaderGreenE 

## Others

HyperlinkBlue1   
graphicOrange 

## GENERAL NOTES:

- jalapeno folder is a git package. <https://github.com/nbesteman/jalapeno>
- Project is coded with relative paths and jalapeno can be located anywhere.

## PROJECT FILE STRUCTURE:

... \jalapeno\..

folder	description
documentation	resources used in Jalapeño
processing	.tex documents and build folders
source	common image files

... \jalapeno\documentation\..

folder or file	description
moduleTemplates	.tex templates
packageDocs	L <small>A</small> T <small>E</small> X documentation
references	reference and appendix resources
unsorted	catch all for unsorted documentation
BookStructureMM.mm	A mindmap of jalapeno

... \jalapeno\processing\..

folder or file	description
...Part	folders of book <i>parts</i>
build	L <small>A</small> T <small>E</small> X folder for .pdf output and temp files
build\referenceEntries.bib	entries that appear in references
commonTitle.tex	code for all title pages
fullCompile.sh	shell script to compile GISDocumentation.tex
GISDocumentation.tex	master document code
glossaryEntries.tex	entries that appear in glossary
indexEntries.tex	entries that appear in the index
preamble.tex	preamble code for all documents

### \*Note about referenceEntries.bib

Any reference entries built here can be cited in any .tex document in the project.

## USING THE GLOSSARY

### Glossary Requirements

Glossary commands require a Perl interpreter. Activeperl is a free Perl interpreter and can be downloaded from:

<https://www.activestate.com/activeperl/downloads> (A typical installation adds Perl to your path). Compiling the glossary requires running the makeglossaries command either in a L<sup>A</sup>T<sub>E</sub>X IDE or in command line as described here. PDFLatex must be run first to create a .aux file that is used by makeglossaries to create an .gls file. After the .gls file is created, PDFLatex must be run again to insert the glossary at the \printglossaries location.

### Creating a new glossary entry

To **create a new glossary entry**: Add an entry to glossaryEntries.tex. Save it there and then use the makeglossaries command to recompile the .gls file.

### Rebuilding the glossary

To Recompile the .gls. In the (main document)build folder:

- Launch command prompt
- enter command: **makeglossaries GISDocumentation\***

#### \*Note:

This command reads the .aux file and creates the .gls file. The .aux file is created by compiling with PDFLatex. If there is no .aux file the command will fail.

### Using glossary terms in a subdocument:

In the subdocument you must add code to input the glossaryEntries file. For example:

After the line:

```
\input{.../.../preamble}
```

Add the line:

```
\input{.../.../glossaryEntries}
```

---

## To use a glossary term in the subdocument:

In place of the term, use code referencing the key (in the glossaryEntries file):

- \gls{key}

## To add the glossary to the subdocument:

- Add the line \makeglossaries to the preamble of the subdocument.
- Add the line \printglossaries to the subdocument.
- Run makeglossaries in command line on the subdocument similar to how is described above.

# USING THE BIBLIOGRAPHY(REFERENCES)

## Bibliography requirements

Compiling the bibliography requires running bibtex either in a L<sup>A</sup>T<sub>E</sub>X IDE or in command line as described here. PDFLatex must be run first to create a .aux file that is used by bibtex to create a .bbl file. After the .bbl file is created, PDFLatex must be run again to insert the bibliography at the \bibliography location.

For example, the command:... \bibliography{referenceEntries}  
...places the bibliography called referenceEntries.bib which must be in the same folder as the project .aux file.

## Creating a new bibliography entry

**To create a new bibliography entry:** Add an entry to referenceEntries.bib. Save it there and then use bibtex to recompile the .bbl file.

## Rebuilding the bibliography

**To Recompile the .bbl.** In the (main document)build folder:

- Launch command prompt
  - enter command: **bibtex GISDocumentation**
-

### \*Note:

This command reads the .aux file and creates the .bbl file. The .aux file is created by compiling with PDFLatex. If there is no .aux file the command will fail.

## To cite a bibliography source in a subdocument:

In the place that you want the citation:

- `~\cite[pg.#]{key}`

### Adding the bibliography to the subdocument

- Similar to adding to the master document but not documented here.

## USING THE INDEX

### Index requirements:

Compiling the index requires running the makeindex command either in a L<sup>A</sup>T<sub>E</sub>X IDE or in command line as described here. PDFLatex must be run first to create a .aux file that is used by makeindex to create an .idx file. After the .idx file is created, PDFLatex must be run again to insert the index at the \printindex location.

### Creating a new index entry

To create a new index entry: Add an entry to indexEntries.tex. Save it there and then use the makeindex command to recompile the .idx file.

### Rebuilding the index

To Recompile the .idxIn the (main document)build folder:

- Launch command prompt
  - enter command: **makeindex GISDocumentation\***
-

**\*Note:**

This command reads the .aux file and creates the .idx file. The .aux file is created by compiling with PDFLatex. If there is no .aux file the command will fail. Run PDFLatex first

## Access the index from a subdocument

In the subdocument you must add code to input the indexEntries file. For example:  
After the line:

```
\input{../../../../../preamble}
```

Add the line:

```
\input{../../../../../indexEntries}
```

### To use a index term in the subdocument:

In place of the term, use code referencing the key (in the indexEntries file):

➤ \index {key}

### To add the index to the subdocument:

- Add the line \makeindex to the preamble of the subdocument.
- Add the line \printindex to the subdocument.
- Run makeindex in command line on the subdocument similar to how is described above.

## USING THE APPENDICES

---

## 2.2 DOCUMENT STORAGE CONCEPTS

### GIS FILE STANDARD

# FOLDERS INSIDE THE PROJECT FOLDER

Lets talk about map projection

- archive
- build
- delivered
- documentation
- processing
- source



# — 3 —

## *Team Concept*

---

### 3.1 TEAM STRUCTURE

#### PAIRED PROGRAMMING

A paragraph about pp from Joy Inc.



# Part III

# Service



# — 4 —

## Applications

### 4.1 APPLICATIONS FOR TREASURER DEPT.

#### FORFEITURE DATA COLLECTION

### PROBLEM AND ANALYSIS

#### Background

Treasurer department has an annual responsibility to properly document the tax forfeiture process. The LIS Department built an application in MS Access and MapInfo that consumed a daily export from BSA and was deployed to the field on a laptop. A digital camera was used for site photos and later imported into the laptop.

#### Statement of Problem

The current Tax Forfeiture workflow is built on MapInfo software and MS Access and executed on a laptop pc. Both MapInfo and MS Access are no longer supported in county workflows. ESRI software can be used to rebuild the workflow. *Forfeiture Data Collector Application, (Forfeiture App)* must be recreated in the ESRI framework.

#### Analysis

**Forfeiture App** will facilitate: *Mobile data collection on a handheld device,:* (**Mobile Interface**) and an *in office workflow to complete data processing,* (**Pre and PostProcessing**)

#### Mobile Interface

- Synchronize with data in the office (online)
- Collect data and photos of forfeiture sites (offline)
- Synchronize the collected data with data in the office (online)

#### Pre & Post Processing

- Produce and print a form for each site visited with required data and images

# DESIGN OVERVIEW

Forfeiture Parcels is used through the workflow

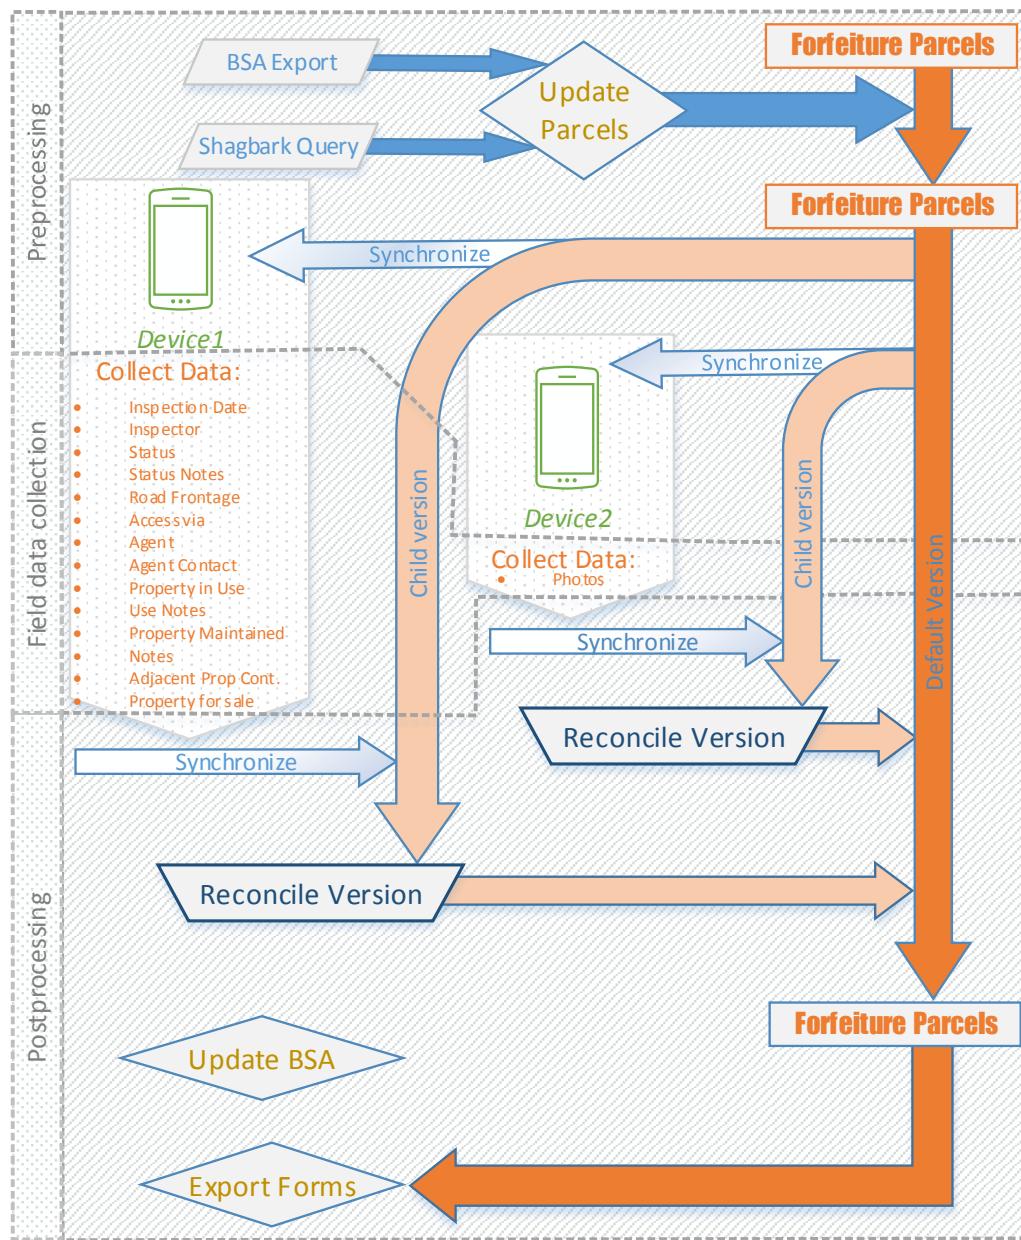


Figure 4.1: Project Design

## Forfeiture App Summary

There are three parts to the daily routine:

1. Preprocessing (in the office):

- Export current forfeiture list from BSA
- Update Forfeiture Parcels with BSA export
- Update Forfeiture Parcels with contaminated sites information
- Synchronize Forfeiture Parcels to Mobile Interface

2. Field data collection with Mobile Interface:

- Aids in navigation
- Provides a Checklist of data points for each site
- Attaches photos for each site
- Save results for synchronization in post-processing

3. Post-processing (in the office)

- Synchronize data and images collected in Mobile Interface to Forfeiture Parcels
- Export form for each site
- Print form for each site
- Update BSA data

## Technologies Used in The Forfeiture App

### BSA Data

Details of parcels in the forfeiture process are managed in BSA Delinquent Tax.net. The Treasurer office does a BSA export of the parcels in need of a site visit in the pre-processing.

### ArcGIS Desktop

Tools are designed to preprocess and post-process forfeiture parcel data for fieldwork. The user will execute a preprocess script tool that prepares the data for field deployment. After fieldwork, a post process script tool synchronizes data from the fieldwork with the live data on the Allegan County network.

### ArcGIS Collector

A free mobile application developed and tested on Android is deployed to the field for data collection. The application is con-

figured to work offline (without an internet or cellular connection) by synchronizing before and after fieldwork. The user collects the necessary information on each forfeiture parcel in the field disconnected, and then uploads the changes when reconnected.

### Enterprise Geodatabase

Live data from a publishing geodatabase (ACPub), running on SQL Server database server (acintsql01) provides access to Forfeiture Parcels

### ArcGIS Portal

Forfeiture Parcels is served as a feature service (REST service) named TaxReversionParcels. A webmap on Portal, called the Forfeiture Field Map consumes the TaxReversionParcels exposing the data to editing. The Forfeiture Field Map is configured to work in the ArcGIS Collector App.

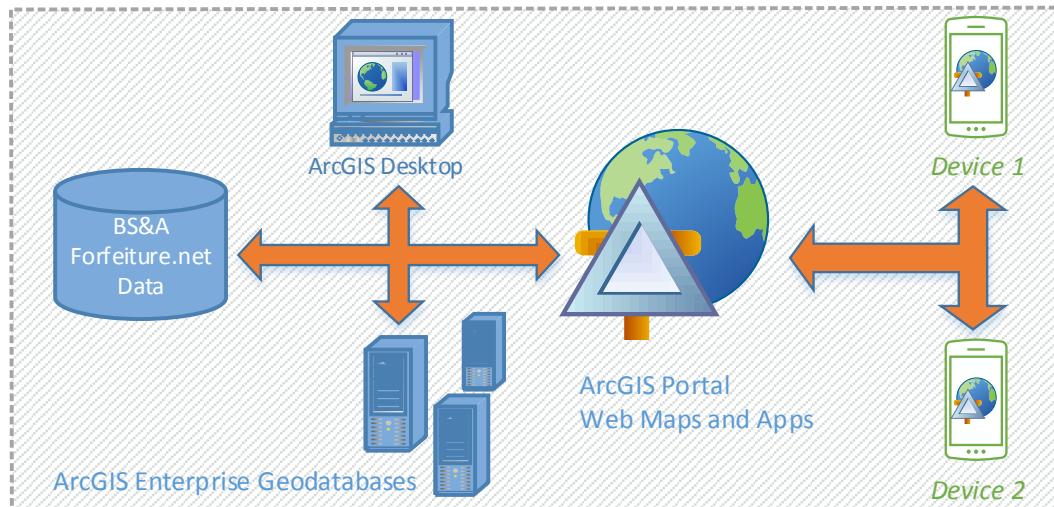


Figure 4.2: Technology Design

# DATA DETAILS

The data is located in a geodatabase called ACPUB. ACPUB is on SQL Server AC-INTSQL01.

Forfeiture Parcels Data

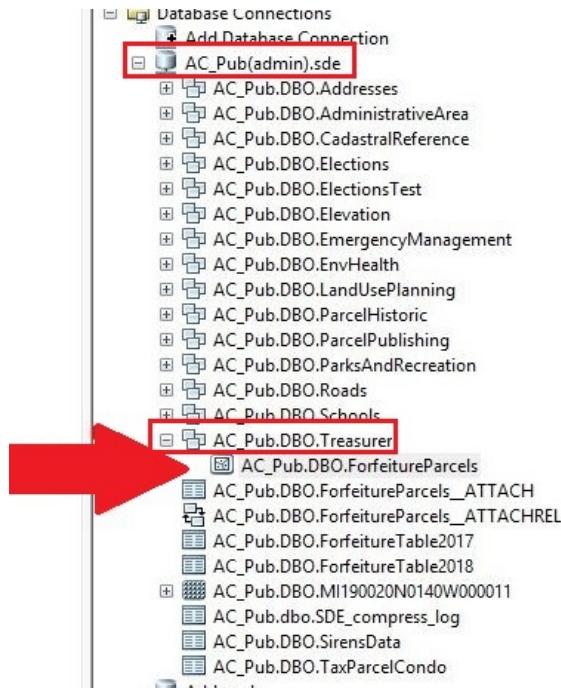


Figure 4.3: Live Data Location

Contamination Data

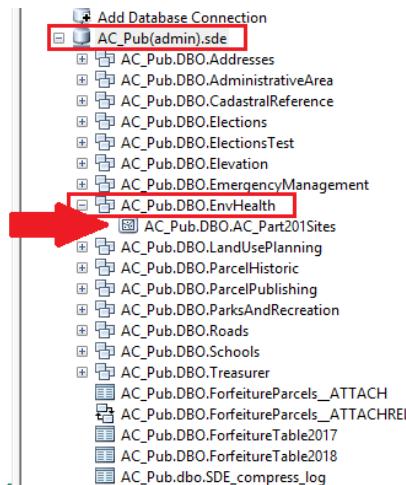


Figure 4.4: Contamination Feature Class

## ForfeitureParcels Feature Class

Attribute Details			
Field Name	Field Alias	Entry Type	Note
PropertyNumber	Property Number	Prefilled	NA
Need2Print	Print Today	Dropdown	Yes or No
InspectionDate	Inspection Date	Autofill or Dropdown	NA
Inspector	Inspector	Dropdown	NA
Address	Address	Prefilled	NA
Status	Status	Dropdown	NA
StatusNotes	Status Notes	Open Entry	120Char
Roadfrontage	Road Frontage	Dropdown	Yes or No
AccessVia	Access Via	Open Entry	30Char
Agent	Agent	Open Entry	30Char
AgentContact	Agent Contact	Open Entry	30Char
PictureComments	Picture Comments	Open Entry	50Char
PropertyInUse	Property In Use	Dropdown	Yes or No
UseNotes	Use Notes	Open Entry	120Char
PropertyMaintained	Property Maintained	Dropdown	Yes or No
PropMaintNotes	Property Maintained Notes	Open Entry	120Char
PropertyContaminated	Property Contaminated	Prefilled	Preprocessing
PropertyContaminatedNotes	PropertyContaminatedNotes	Prefilled	Preprocessing
AdjacentPropertyContaminated	Adjacent Property Contaminated	Prefilled	Preprocessing
AdjPropertyContaminatedNotes	Adj Property Contaminated Notes	Prefilled	Preprocessing
PropertyForSale	Property For Sale	Dropdown	Yes or No
GlobalID	GlobalID	NA	NA
PostedDate	Posted Date	Dropdown	Date
Posted	Posted	Prefilled	NA
InList	In List	Prefilled	Preprocessing
PostedInList	Posted In List	Prefilled	Preprocessing
Acres	Acres	Prefilled	NA
Class	Class	Prefilled	NA

Table 4.1: Dataset Details

## Webmap Details

The Forfeiture Field Map is made up of a basemap and a feature layer.

The screenshot shows the 'Forfeiture Field Map' details page. At the top, there's a blue header bar with the map title and navigation links for Overview, Settings, and Edit. Below the header is a thumbnail image of the map, which features a circular logo for Allegan County, Michigan, with a bird in flight. To the right of the thumbnail, the map's description is provided: 'Map for field data collection in annual tax forfeiture processing' by 'bmey531', last modified on 'August 21, 2018'. A 'Web Map' link is also present. Below the thumbnail is a 'Description' section with a placeholder 'Add an in-depth description of the item.' Under the 'Layers' section, two layers are listed: 'TaxReversionParcels' and 'World\_Street\_Map'. The 'Access and Use Constraints' section contains a placeholder 'Add any special restrictions, disclaimers, terms and conditions, or limitations on using the item's content.'

Figure 4.5: Web Map Details

## Feature Layer Details

TaxReversionParcels has been configured for offline use.


The screenshot shows the 'TaxReversionParcels' details page. It follows a similar structure to Figure 4.5. The top header bar includes the map title and navigation links for Overview, Data, Visualization, and Settings. Below the header is a thumbnail image showing a red and green patterned map. To the right of the thumbnail, the map's description is provided: 'Map service exposing treasurer forfeiture data for edits' by 'bmey531', last modified on 'August 20, 2018'. A 'Feature Layer' link is also present. Below the thumbnail is a 'Description' section with a placeholder 'Add an in-depth description of the item.' Under the 'Layers' section, a single layer 'Tax Reversion Parcels' is listed with options to 'Open In' or view the 'Service URL'. The 'Access and Use Constraints' section contains a placeholder 'Add any special restrictions, disclaimers, terms and conditions, or limitations on using the item's content.'

Figure 4.6: Feature Layer Details

## Basemap Details

- A tiled basemap service is used
  
  
  
  
  
- The infoserv user credentials are used for sharing
  
  
  
  
  
- The url for the shared service is:

[https://tiledbasemaps.arcgis.com/arcgis/rest/  
services/World\\_Street\\_Map/MapServer](https://tiledbasemaps.arcgis.com/arcgis/rest/services/World_Street_Map/MapServer)

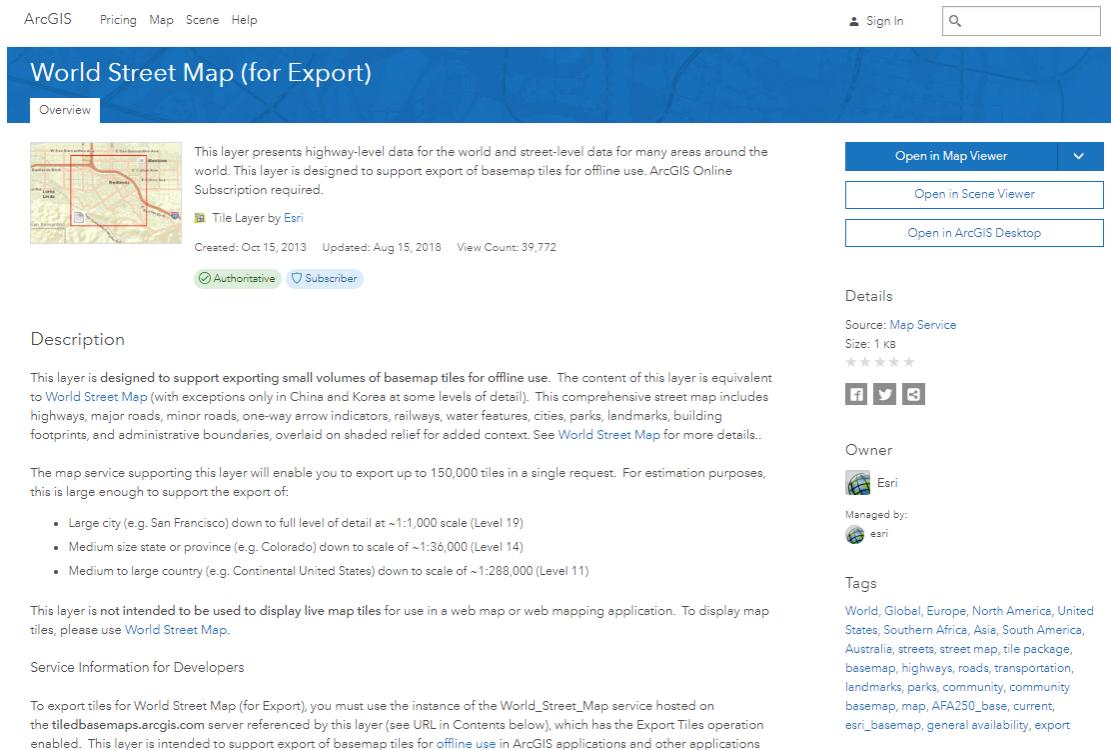

The screenshot shows the ArcGIS Online page for the "World Street Map (for Export)" layer. At the top, there's a navigation bar with links for ArcGIS, Pricing, Map, Scene, and Help. On the right, there are sign-in options and a search bar. Below the header, the title "World Street Map (for Export)" is displayed, along with a "Overview" button.

The main content area features a thumbnail image of a map showing a red bounding box around a specific geographic area. To the right of the thumbnail, a description text states: "This layer presents highway-level data for the world and street-level data for many areas around the world. This layer is designed to support export of basemap tiles for offline use. ArcGIS Online Subscription required." Below the description, there are buttons for "Tile Layer by Esri" and "View Count: 39,772".

On the right side of the page, there are three buttons under the heading "Open in": "Open in Map Viewer", "Open in Scene Viewer", and "Open in ArcGIS Desktop".

Below these buttons, there's a "Details" section with information about the source being a "Map Service", a size of "1 kb", and a rating of "★★★★★". It also includes social sharing icons for Facebook, Twitter, and LinkedIn.

The "Owner" section shows the layer is managed by "Esri".

The "Tags" section lists various geographical and thematic terms such as "World", "Global", "Europe", "North America", "United States", "Southern Africa", "Asia", "South America", "Australia", "streets", "street map", "tile package", "basemap", "highways", "roads", "transportation", "landmarks", "parks", "community", "community basemap", "map", "AFA250\_base", "current", "esri\_basemap", and "general availability, export".

Figure 4.7: Basemap Source Description

## HARD COPY RECORD

screenshots: arcmap map arcmap tools portal screenshots sql server mgt screenshots phone screenshots

# ArcGIS Server

# ADMINISTRATIVE MANUAL

## Annual Setup

A new dataset for forfeiture parcels must be created each year. The forfeiture information comes from BSA Forfeitures.net and the parcel geometry and other attributes comes from ACParcelsCombined.

To get the BSA Forfeiture data, create a table query for a certain year.

First, clear the features from the existing ForfeitureParcels dataset

- Use the Delete Feature Tools
- In the tool:
  - Select AC\_Pub.DBO.ForfeitureParcels

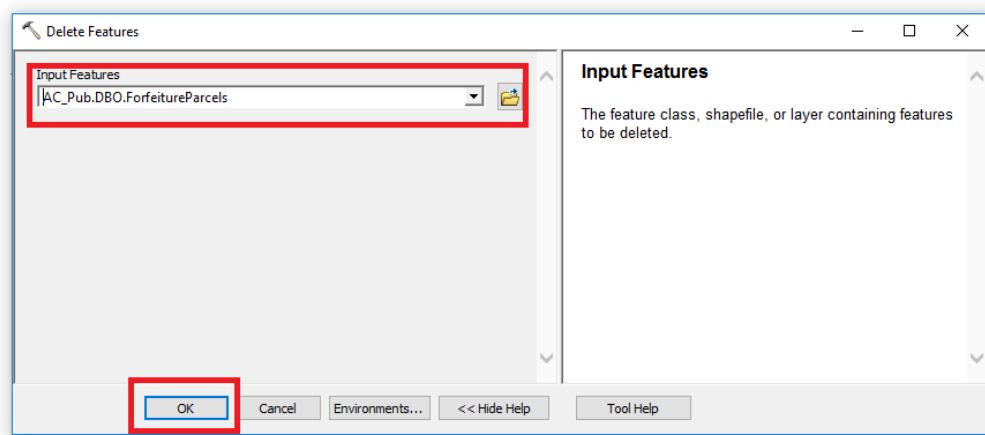


Figure 4.8: Delete Features

---

Press OK

## Add Query Layer

- In ArcMap ⇒ Open the New Query Layer Dialog
- File ⇒ Add Data ⇒ Add Query Layer
- Select your connection

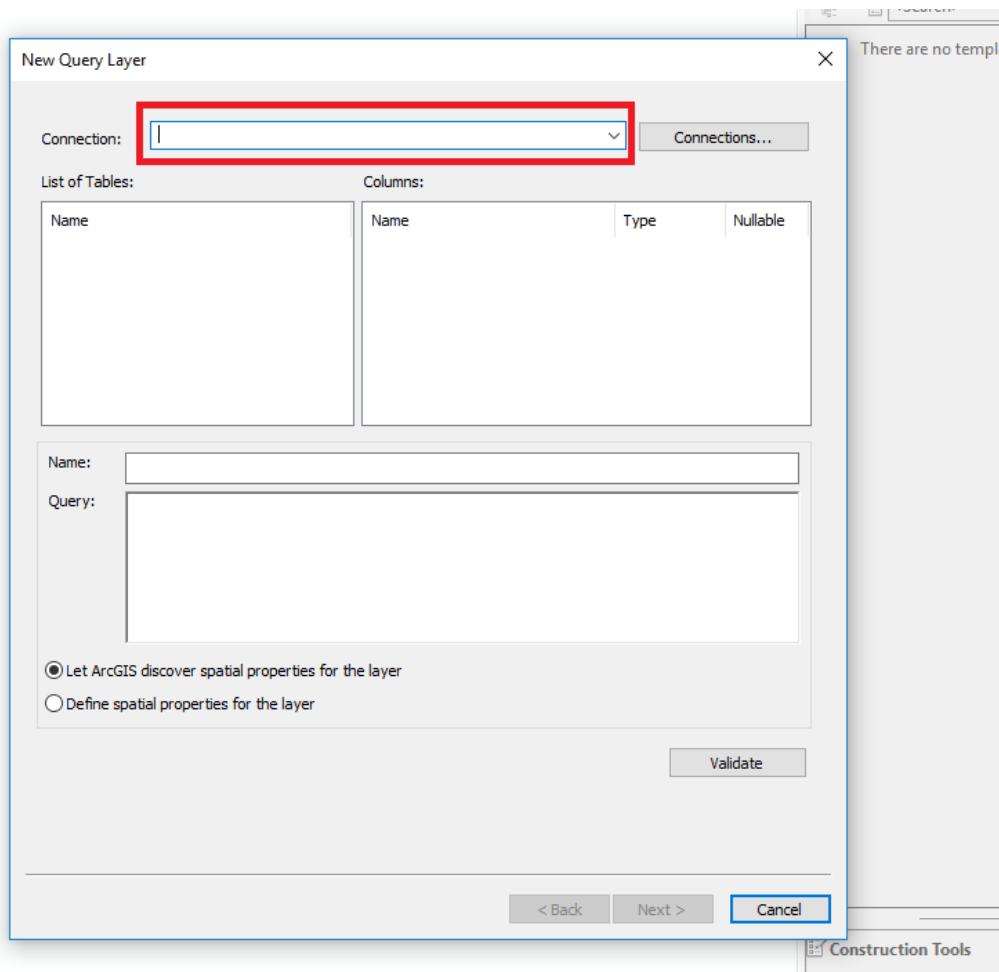


Figure 4.9: New Query Layer Dialog

### Query Text:

```
SELECT [parcelnumber] FROM [D005ALLEGAN].[dbo].[Forfeitures]
WHERE forf_year = 2019
```

## Details of the Query Layer

- Choose connection
- Name the query
- Enter SQL query

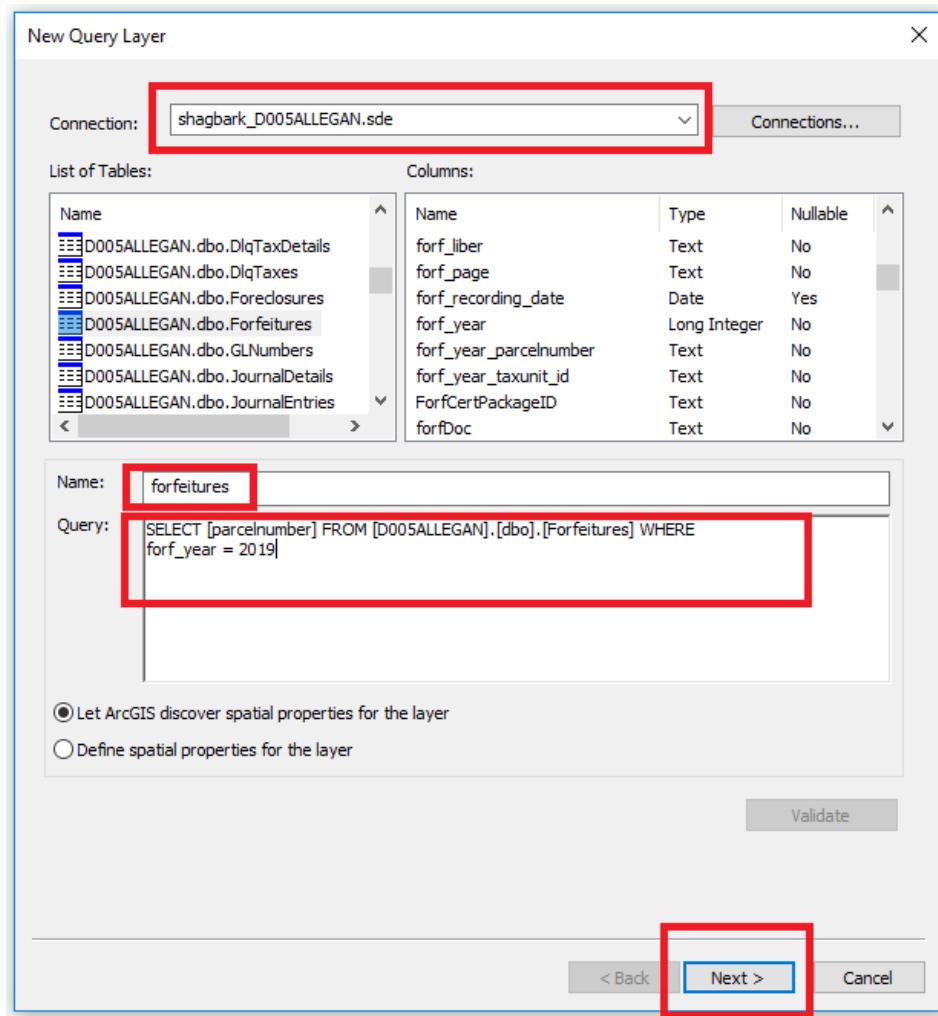


Figure 4.10: Forfeiture Query Layer Details

- Press Next

## Select a Unique Identifier

- Press Finish

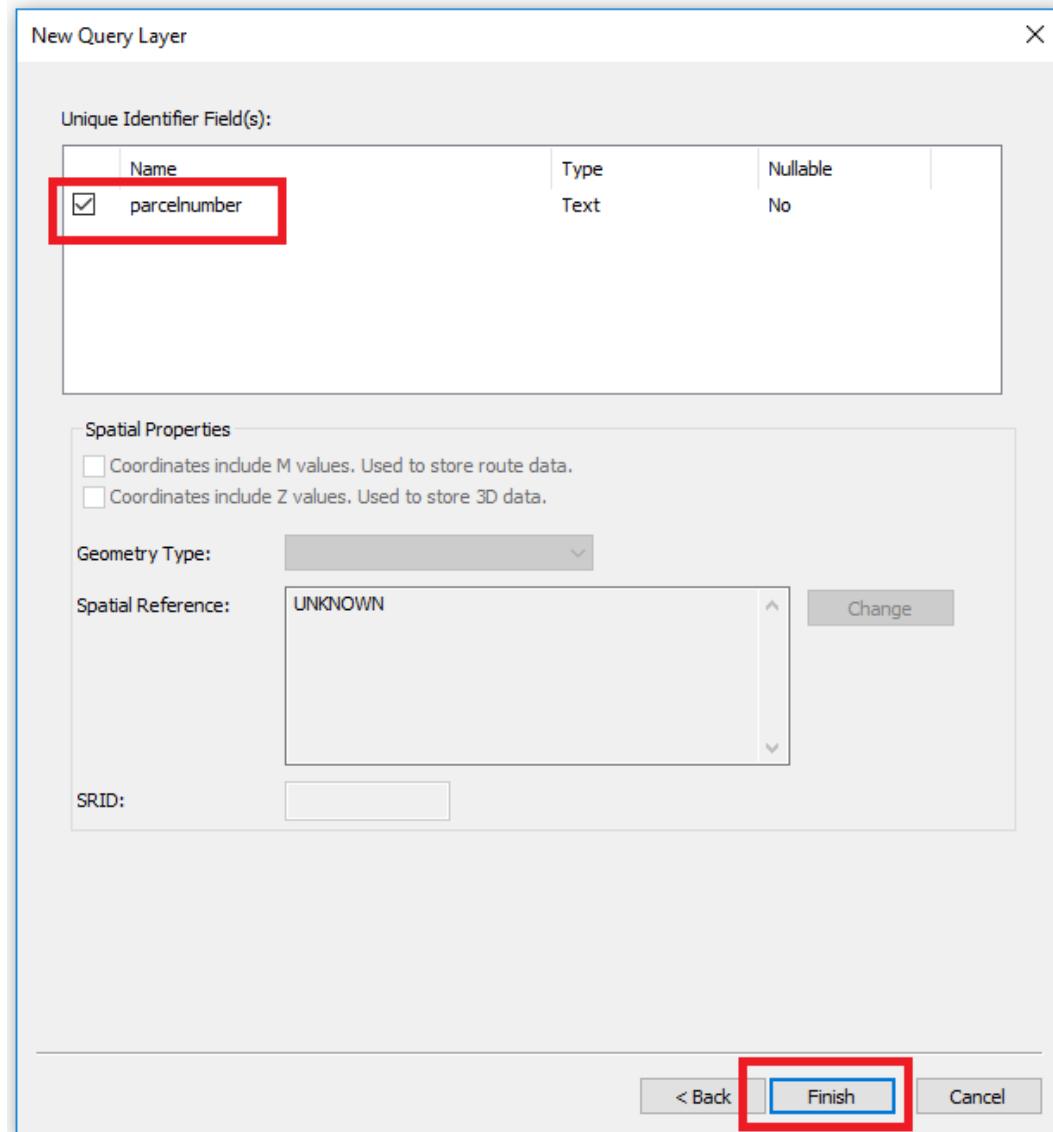


Figure 4.11: Query Layer Unique ID

## Table is added to the map

The screenshot shows the ArcGIS Pro interface with two main windows. On the left is the 'Table Of Contents' window, which lists layers under 'Layers'. It includes 'dbo.DEFAULT (ac-intsql01)', 'AC\_Pub.DBO.Treasurer' (with 'AC\_Pub.DBO.ForfeitureParcels' checked), and 'D005ALLEGAN' (with 'D005ALLEGAN.DBO.forfeitures' selected). A red box highlights the 'D005ALLEGAN' layer and its sub-table. On the right is the 'Table' viewer window, titled 'D005ALLEGAN.DBO.forfeitures'. It displays a table with two columns: 'parcelnumber' and 'ESRI\_OID'. The table contains 836 rows of data, starting with '01-007-012-00' and ending with '02-007-025-00'. The bottom status bar of the Table viewer indicates '(0 out of 836 Selected)'.

parcelnumber	ESRI_OID
01-007-012-00	1
01-008-005-00	2
01-016-031-10	3
01-019-001-13	4
01-019-005-97	5
01-025-017-00	6
01-026-020-00	7
01-030-014-10	8
01-030-019-00	9
01-031-031-00	10
01-034-009-00	11
01-034-014-10	12
01-034-055-00	13
01-034-067-00	14
01-034-087-00	15
01-034-108-00	16
01-035-015-00	17
01-035-020-20	18
01-035-030-00	19
01-035-044-00	20
01-035-044-10	21
01-120-004-00	22
01-120-010-00	23
01-120-031-00	24
01-120-032-00	25
01-220-010-00	26
01-250-001-00	27
01-300-004-00	28
01-320-020-00	29
01-320-021-00	30
01-370-016-00	31
01-740-009-00	32
02-001-012-31	33
02-003-018-00	34
02-005-004-20	35
02-007-025-00	36

Figure 4.12: Forfeiture Table Added

---

## Add Parcels Layer to the map

Add ACParcelsCombined to the map to provide parcel geometry and attributes

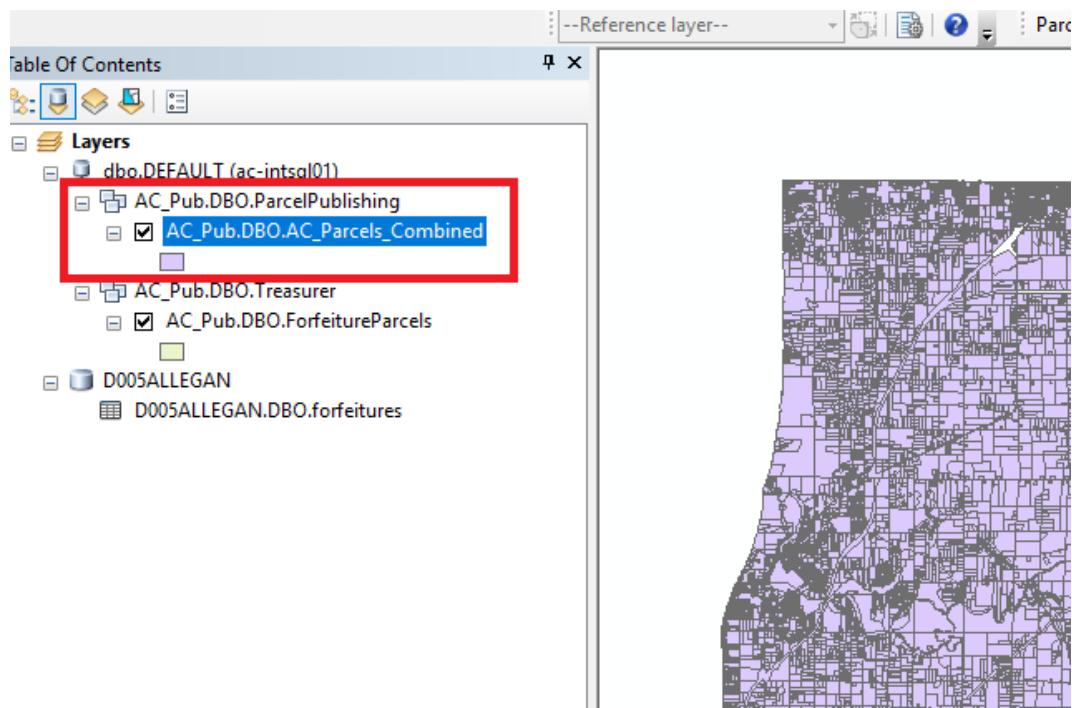


Figure 4.13: Parcels Layer Added

## Create Join

Create new join to ACParcelsCombined of forfeitures based on parcel numbers

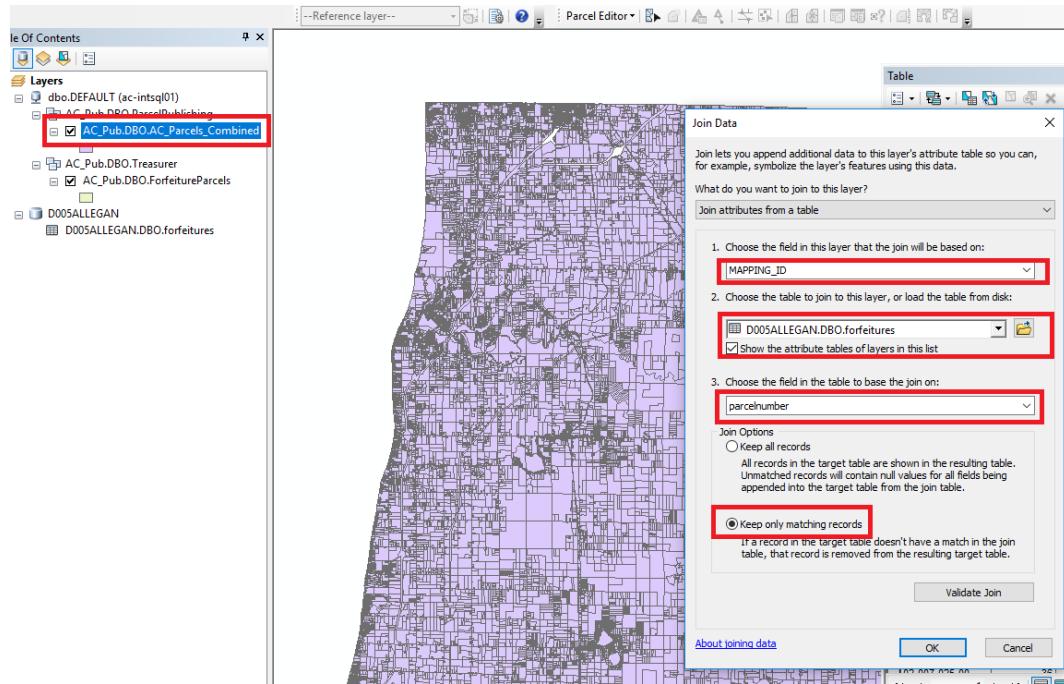


Figure 4.14: Join Parcels

## Export Joined Features to a temp location

- Right click ➔ on joined feature class in TOC and choose export

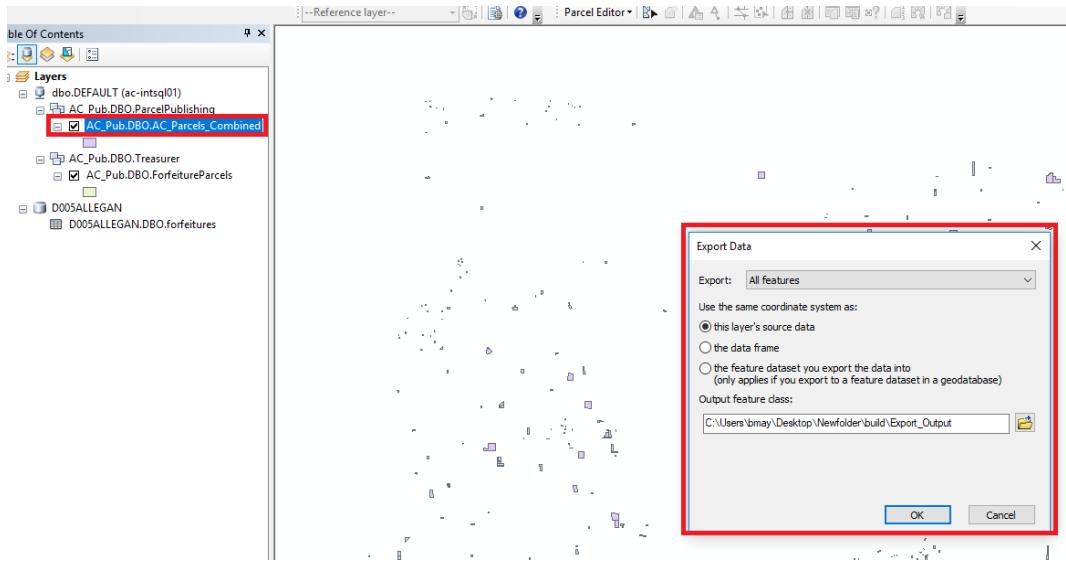


Figure 4.15: Export Joined Features

- choose location and press OK

## Load data from temp location to forfeitureParcels

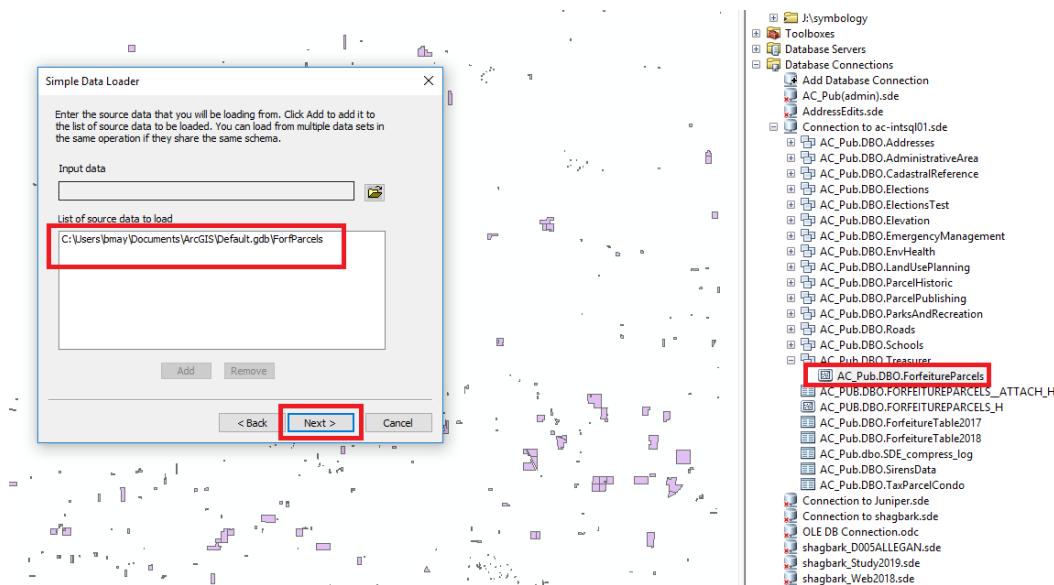


Figure 4.16: Load Data 1

## push next

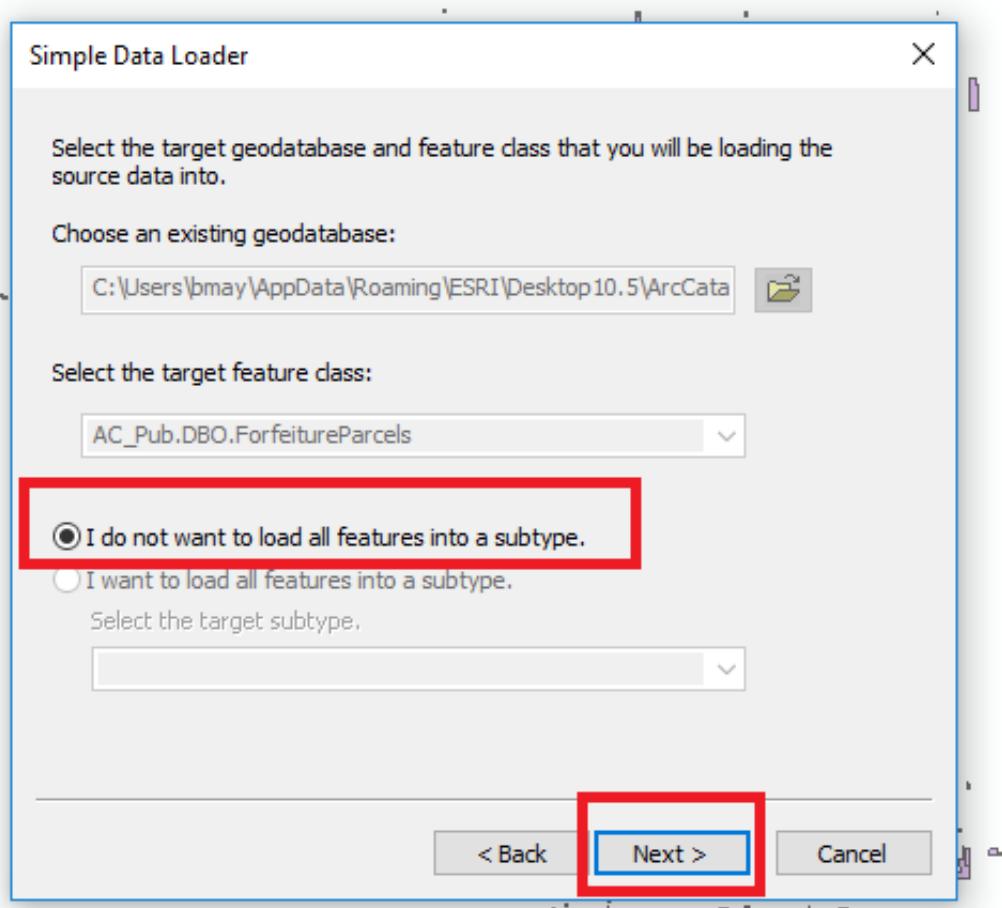


Figure 4.17: Load Data 2

## Match these fields

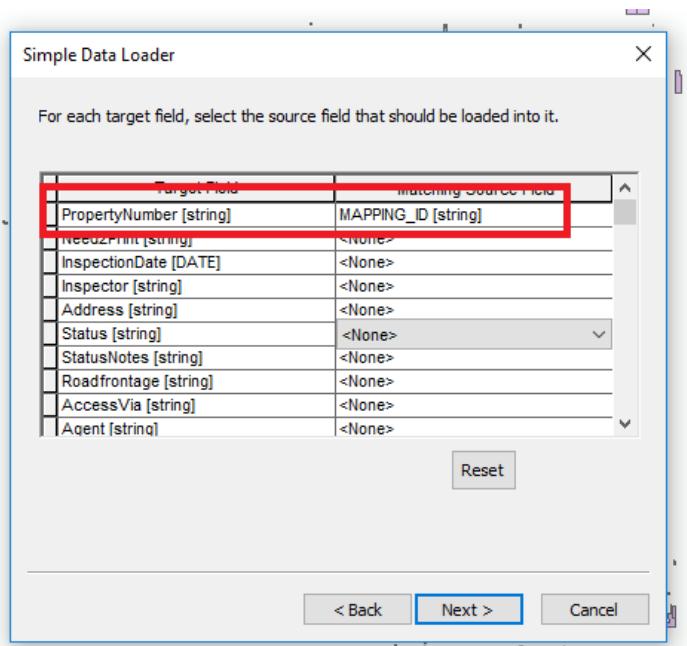


Figure 4.18: Match Fields 1

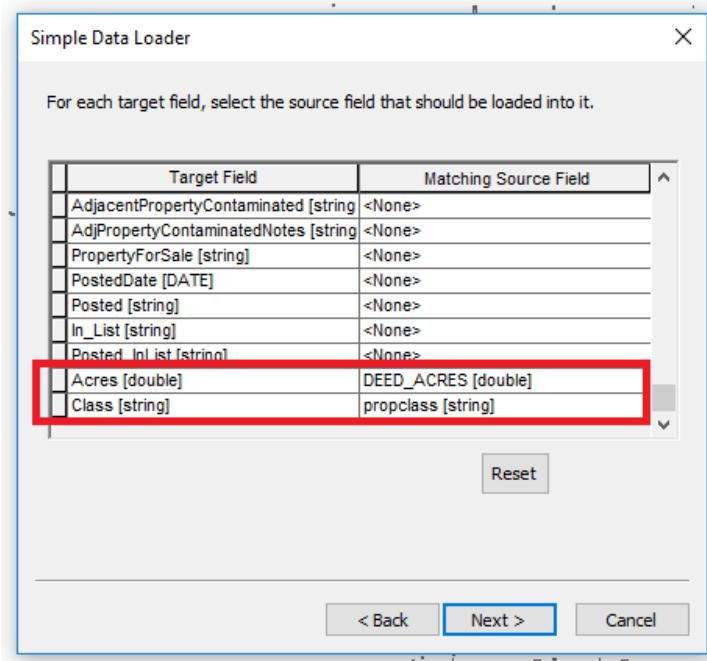


Figure 4.19: Match Fields 2

**push next**

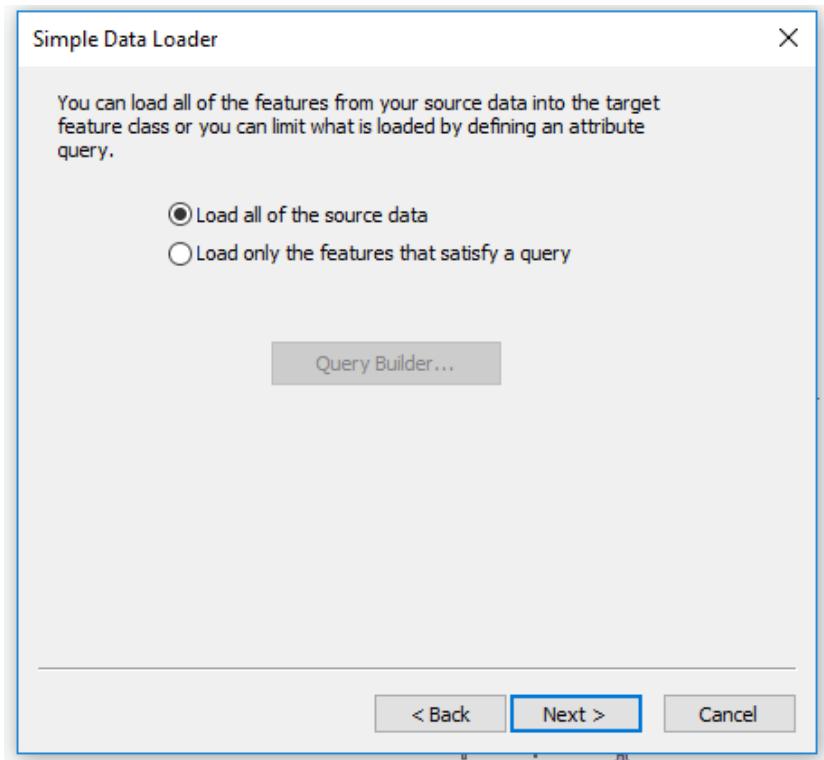


Figure 4.20: Load Data 3

**Push Finish**

## Data Setup

Register as versioned and Add Global IDs

Right Click ⇒ Manage ⇒ Register as Versioned

and

Right Click ⇒ Manage ⇒ Add Global IDs

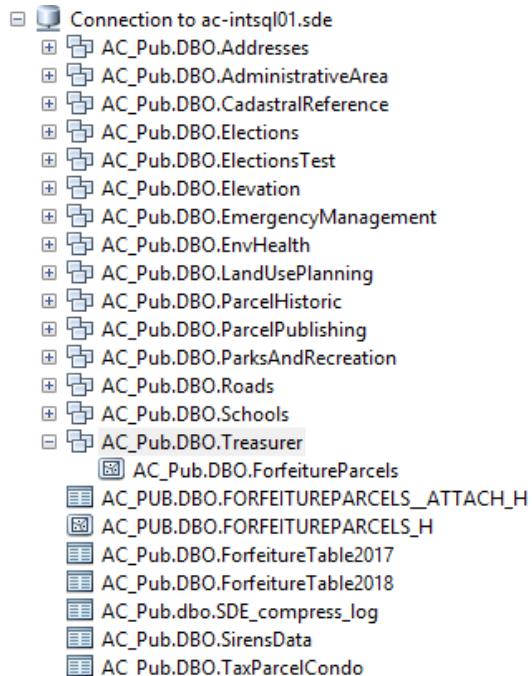


Figure 4.21: Setup Data

## Create Attachments

Right Click ⇒ Manage ⇒ Add Attachments

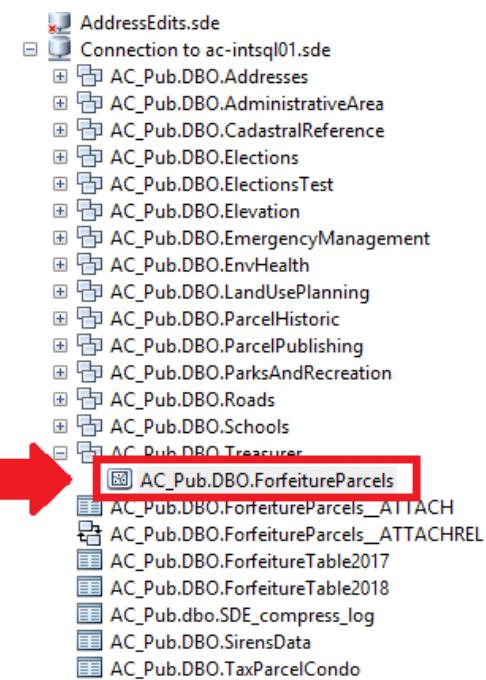


Figure 4.22: Create Attachments

## Setup Users in ArcGIS

Users that will run Pre and Post processing scripts must be created and given privileges on ACPub Treasurer Feature Data Set.

For any new users of the geoprocessing tools, use the create Database User tool or

In Catalog ⇒ Right click on ACpub ⇒ Administration ⇒ Add User

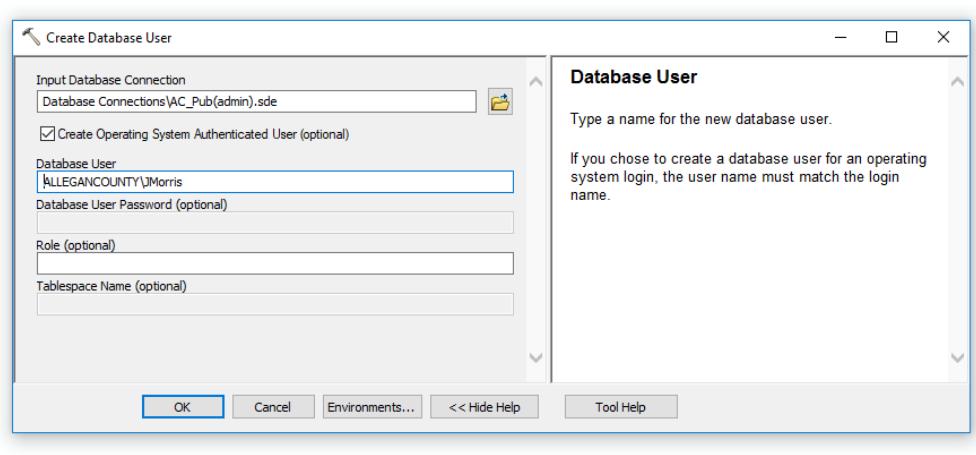


Figure 4.23: Add Db User

## Add New User to Feature Dataset

In Catalog, ⇒ right click on Treasurer Feature Data Set ⇒ Manage ⇒ Privileges  
⇒ Add ⇒ Type new user ⇒ ok

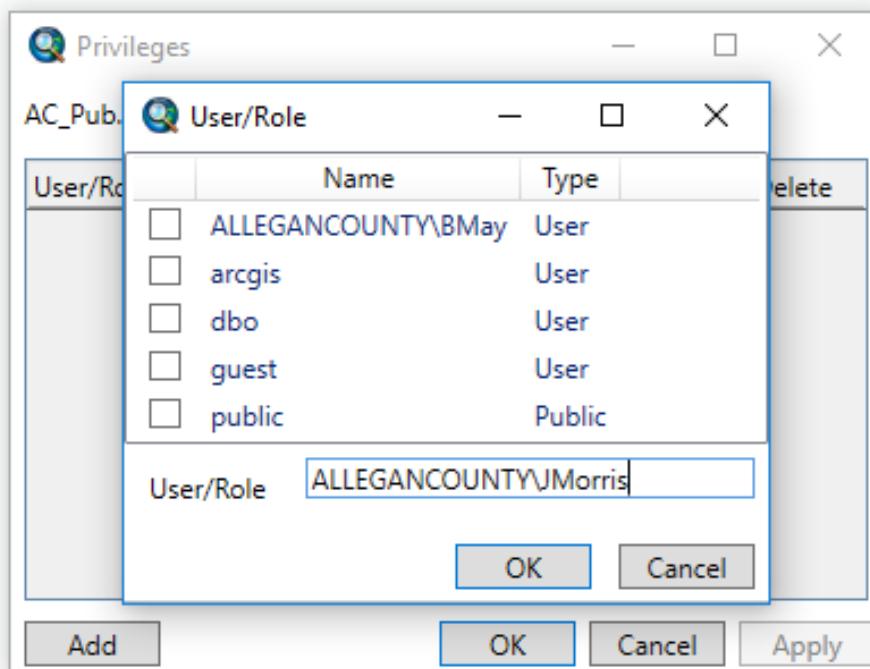


Figure 4.24: Add Feature Dataset User

## Extend Privileges for New User

In Catalog ⇒ right click on Treasurer FDS ⇒ Manage ⇒ Privileges ⇒ check boxes

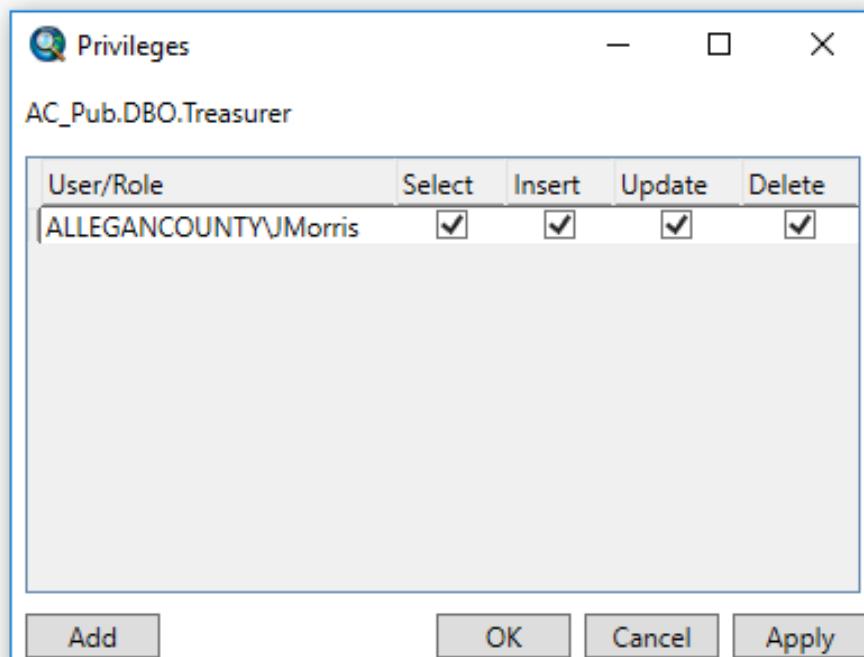


Figure 4.25: Extend Feature Dataset Privileges

---

## Setup Users in Portal for ArcGIS

Users that will use the Collector for ArcGIS must have profiles added to and managed in the Allegan County GIS Portal site.

In Portal go to My Organization

The screenshot shows the 'My Organization' page of the Allegan County GIS Services portal. At the top, there's a navigation bar with links like Home, Gallery, Map, Scene, Groups, My Content, and My Organization. Below that is a search bar. The main content area has a blue header with the portal's logo and name. It displays a table of current members:

Name	Username	Last Login	Level	Role	Action
Bryan May	bmay531	Nov 2, 2018	2	Administrator	[Edit]
Christina Andress	CAndress	Sep 19, 2018	2	Administrator	[Edit]
Jennifer Morris	JMorris	Oct 18, 2018	2	Administrator	[Edit]
Neil Besteman	nbesteman	Oct 29, 2018	2	Administrator	[Edit]
Paula Reed	preed6	Feb 7, 2017	1	Viewer	[Edit]

To the right of the table is a sidebar titled 'Membership' which includes:

- Members per level:
  - 1 of 30
  - 2 of 5
- Total Members: 5 of 35
- Find...
- The most viewed items
- The last items added
- Groups
- The organization's registered apps

Figure 4.26: Portal Add User 1

## Add Members to Portal

Push add members ⇒ built in member

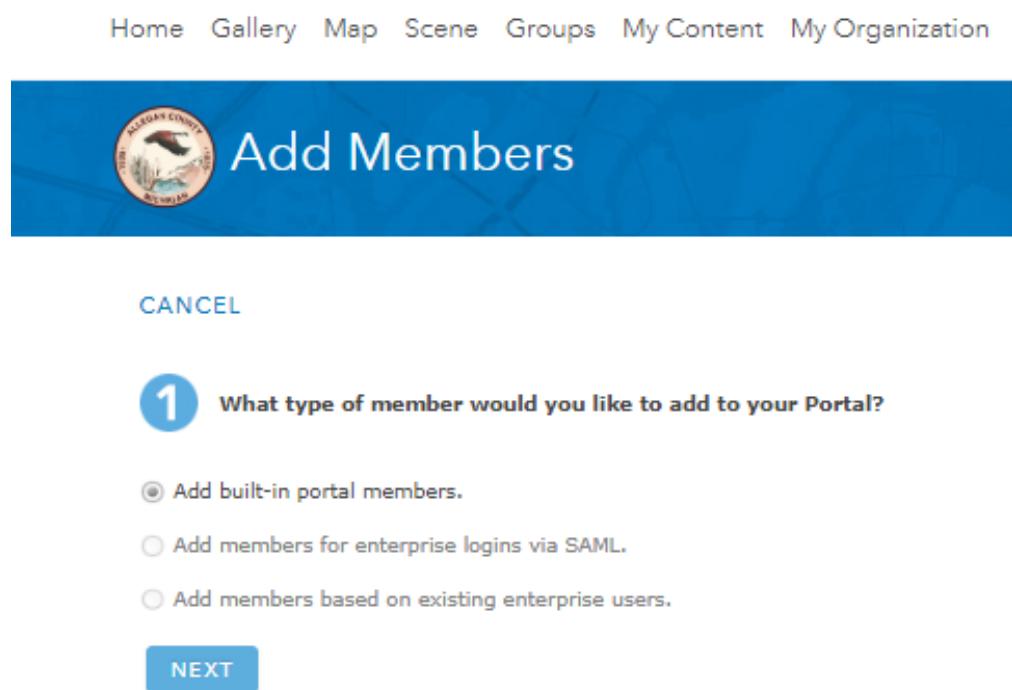


Figure 4.27: Portal Add User 2

## Enter required info

The screenshot shows a web-based application titled "Add Members". At the top left is the Allegan County GIS Services logo. To its right, the title "Add Members" is displayed in large white font on a blue header bar. Below the header, there is a "CANCEL" link on the left. A large blue circular icon containing the number "2" is positioned on the left side of the main content area. The main content area contains instructions: "Create new Allegan County GIS Services logins one at a time or in batch from a file. Select any role for the member to be a part of. You must inform the member of their user name and password. If you do not have an email address for a particular user, use the administrator's email address." A red error message "Password may not be less than 8 characters." is visible above the password input field. There are two tabs at the top of the form: "One at a time" (selected) and "From a file". The form fields include: Email (text input), First Name (text input), Last Name (text input), Username (text input), Password (text input), Level (radio buttons 1 and 2, with 2 selected), and Role (dropdown menu set to "Publisher"). At the bottom are three buttons: "BACK", "ADD ANOTHER" (highlighted in green), and "REVIEW ADDITIONS".

Figure 4.28: Portal Add User 3

## Manage Treasurer Group

In Portal ⇒ Go to groups ⇒ Invite new user to the group

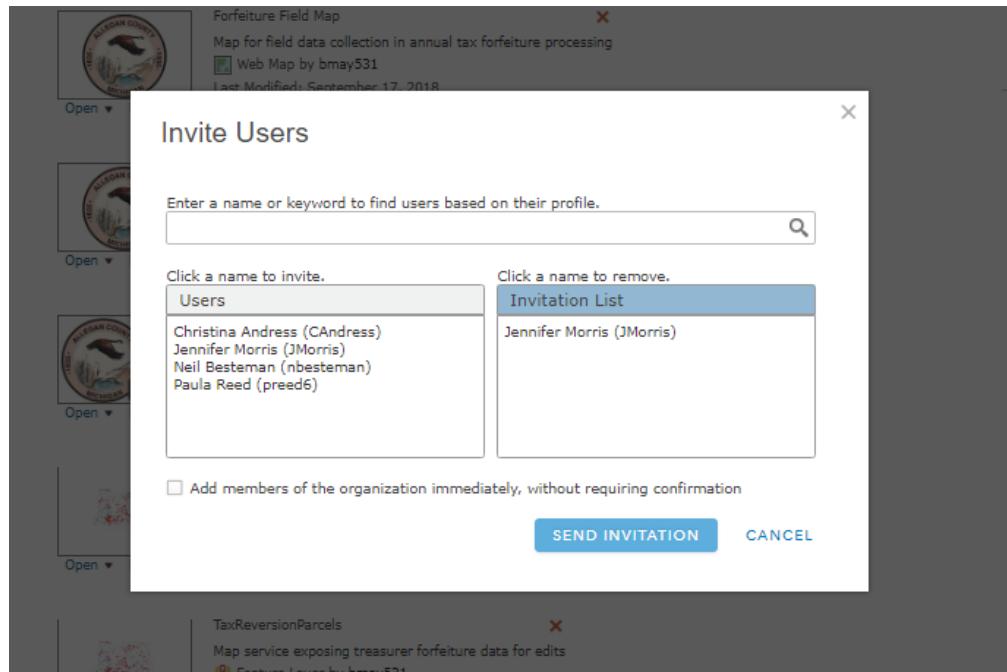


Figure 4.29: Portal Add User 4

## Share Content To The Group

Any content used by the group needs to be shared to the group

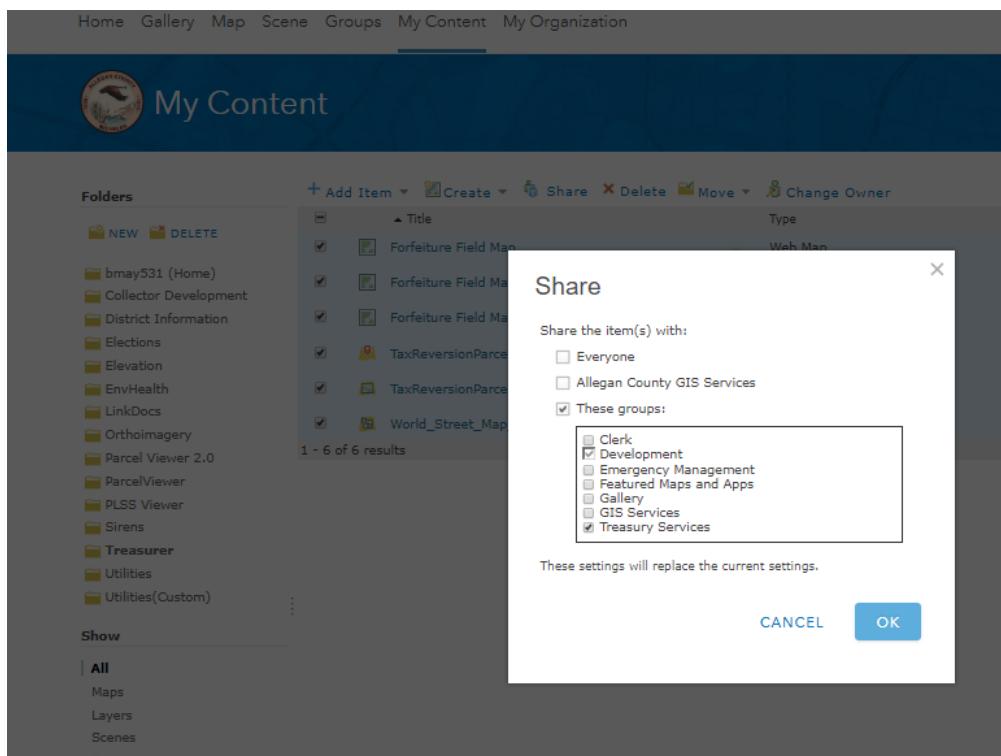


Figure 4.30: Portal AddUser 5

## Schema Change Procedure



## Form Edits Procedure

## USER MANUAL

### Collection Device Setup

#### Install Collector for ArcGIS

- Available from the Google Play Store

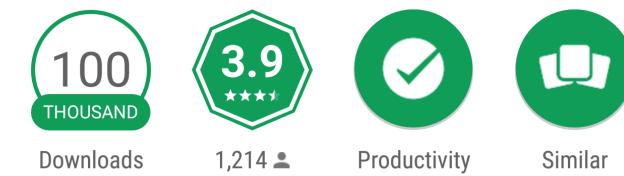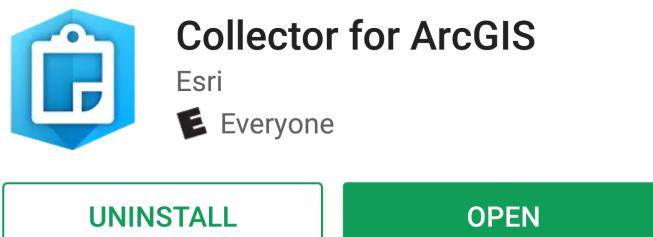

Accurate Data Collection Made Easy



#### WHAT'S NEW

- Various bug fixes and improvements

[READ MORE](#)

Figure 4.31: Download the App

## Configure Collector

for Organization Website, Type:

```
{\textcolor{HeaderOrangeC}{HeaderOrangeC}}
https://gis.allegancounty.org/
portal_webadaptor}
```

then:

Press Continue

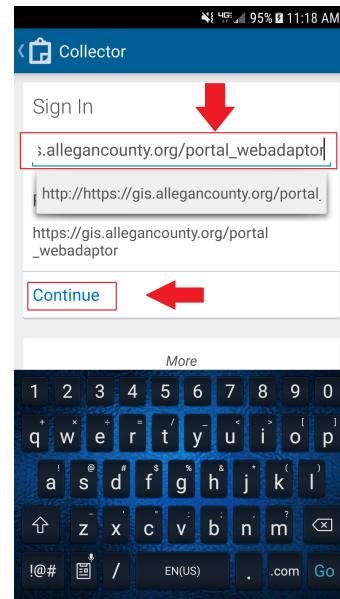


Figure 4.32: Collector Connection

## Enter Credentials

then:

Press SIGN IN

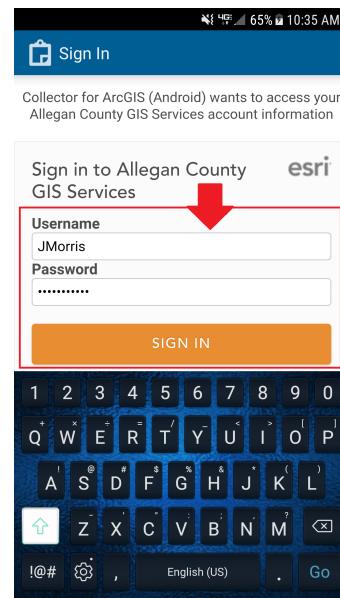


Figure 4.33: Enter Credentials

## Download the Forfeiture Field Map

There are 3 different versions of the map

- Forfeiture Field Map
- Forfeiture Field Map For Photos
- Forfeiture Field Map For Attributes

The Download option indicates it is not on the device but is available for offline use

Choose a Map

Press Download

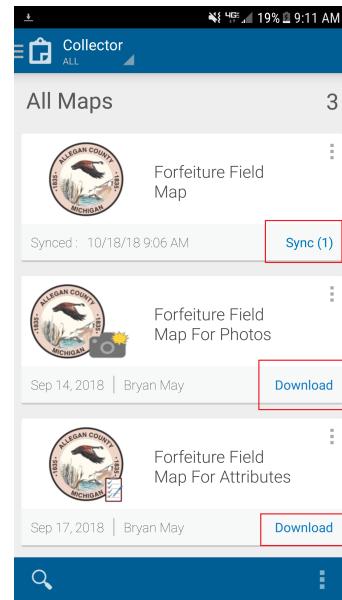


Figure 4.34: Collector Maps Menu

Specify work area

and press

map detail

Note that a larger area takes longer to download but the basemap only needs to be downloaded once

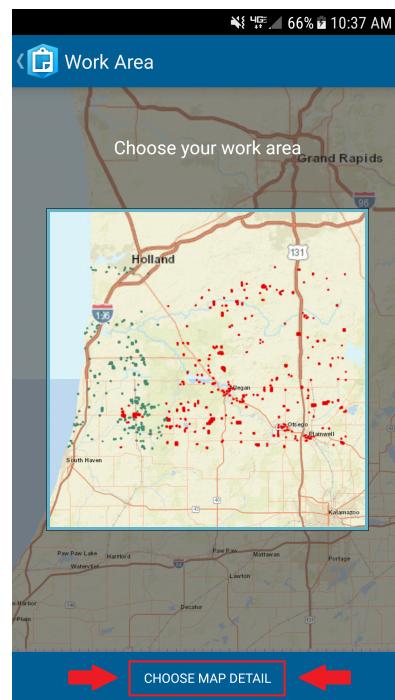


Figure 4.35: Choose Work Area (large)

## Choose Map Detail

Zoom into the level of detail desired.

Press Download

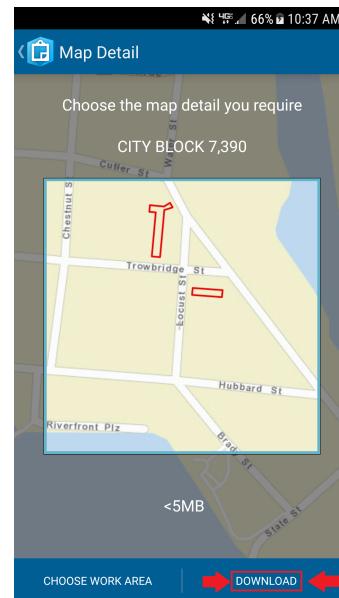


Figure 4.36: Choose Map Detail

---

This area is ready for field data collection.

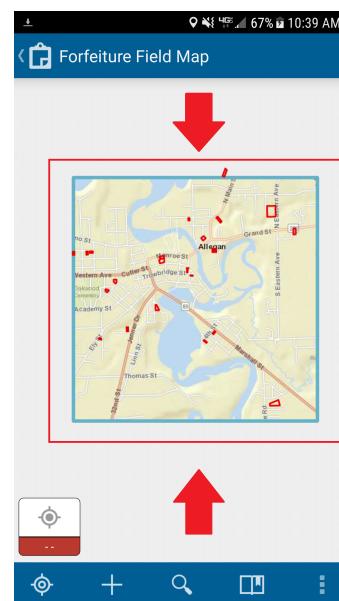


Figure 4.37: Map on Device

---

## Open Camera Application Setup Details

### Install Open Camera

- Available from the Google Play Store

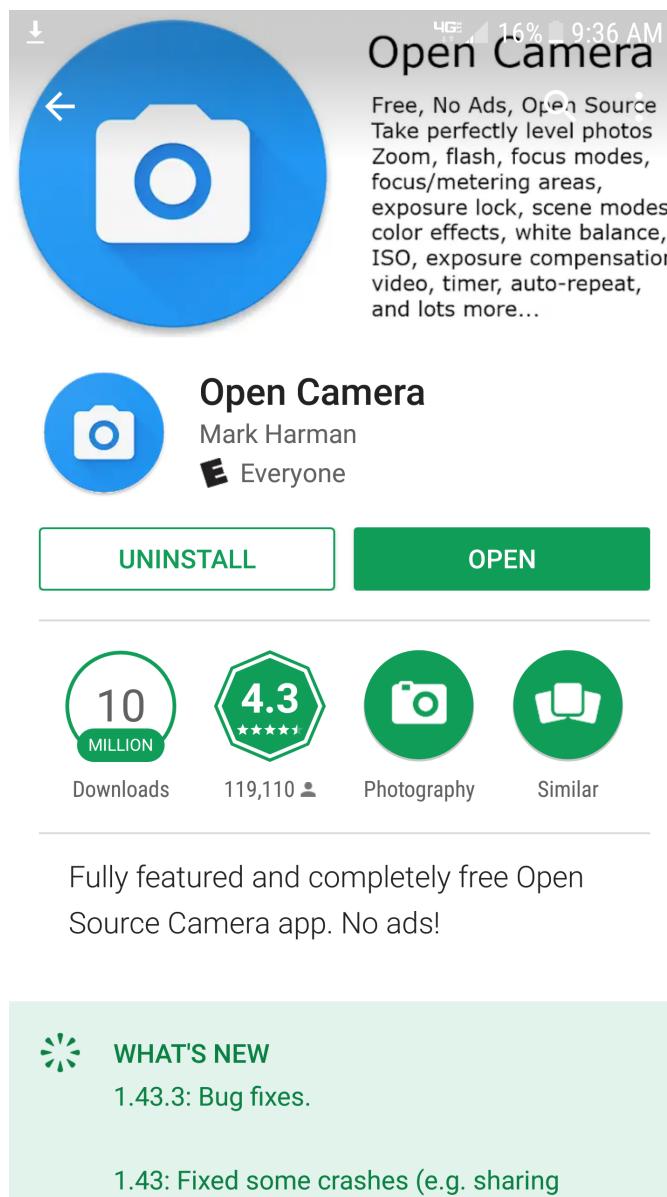


Figure 4.38: Open Camera from Google Play Store

## Configure Open Camera

In the Open Camera Application:

Press the gear shaped Settings button to go into the settings menu

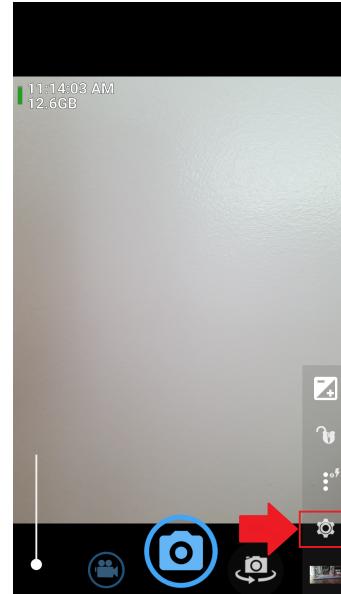


Figure 4.39: Find Settings Menu

---

Press the Photo Settings button

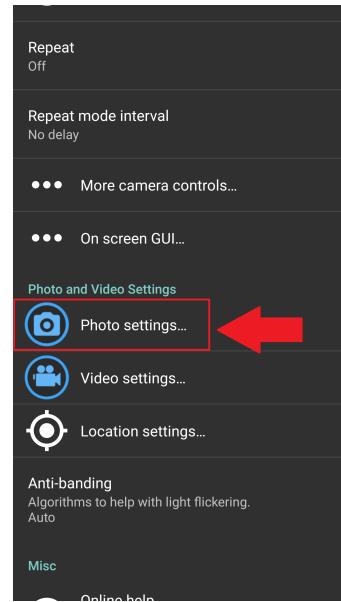


Figure 4.40: Setting Screen

## Set Photo Resolution

In photo settings:

Press the Camera resolution button

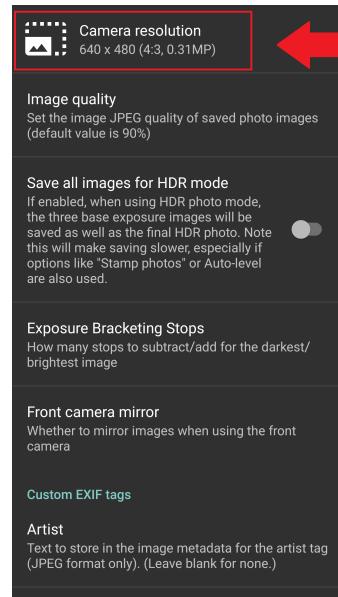


Figure 4.41: Photo Settings Menu

Select **640 x 480**

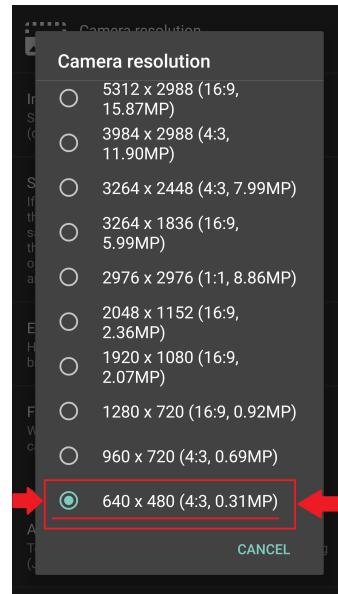


Figure 4.42: Camera Resolution Setting


## Daily Preprocessing Routine

### Execute Preprocessing Script

A tool in ArcGIS that:

- Exports current forfeiture list from BSA
- Updates webmap layers with results from BSA export

In Catalog:

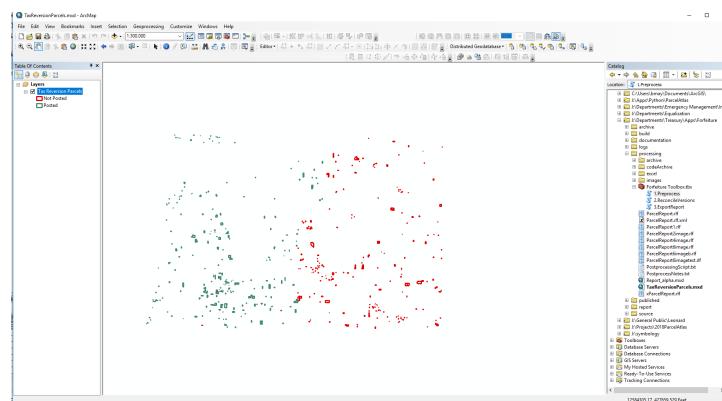

Open the tool-box

Figure 4.43: Processing Tools

Open tool 1

## Synchronize the Forfeiture Field Map

Note the date and time:

Press Sync

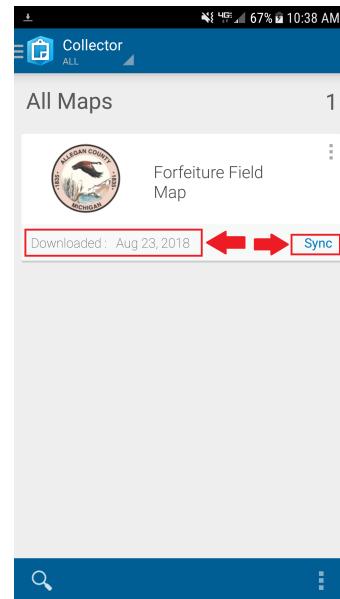


Figure 4.44: Map Downloaded

Note the date and time

---

Map is synchronized

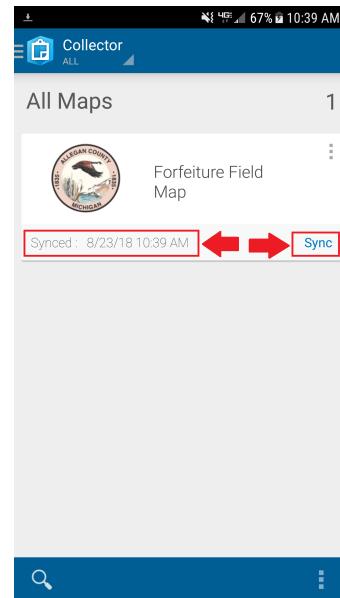


Figure 4.45: Map Synchronized

## Forfeiture Data Collection

### Forfeiture Parcels Data Details

Attributes are of four entry types:

- prefilled
- autofill
- dropdown
- text box

For each site visited, select the desired parcel, push the edit button and collect attributes.

## Device 1 Field Operation

Select a parcel

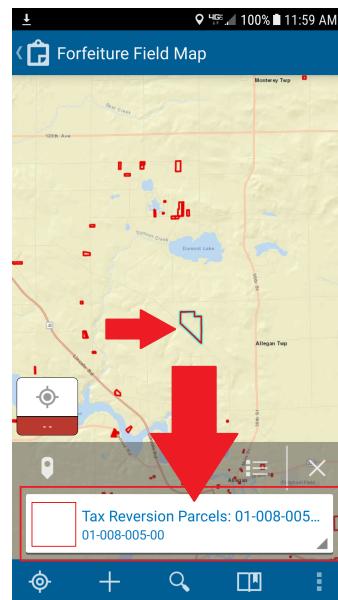


Figure 4.46: Select Parcel

---

Push the edit button

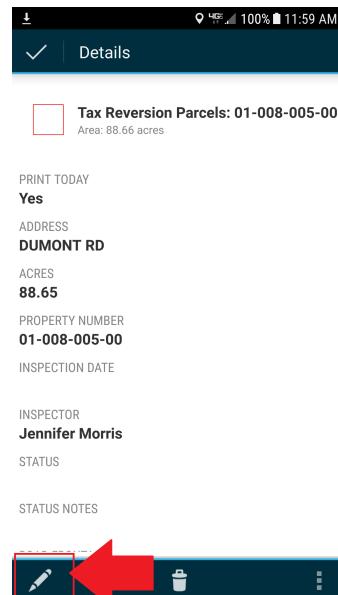


Figure 4.47: Parcel Details

## Device 1 Field Operation Cont.

Select Yes for Print Today

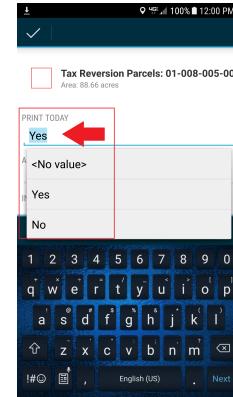


Figure 4.48: Yes or No

Select Use Current or enter any date

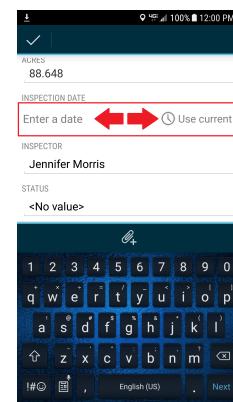


Figure 4.49: Enter Date

Select Inspector From Dropdown

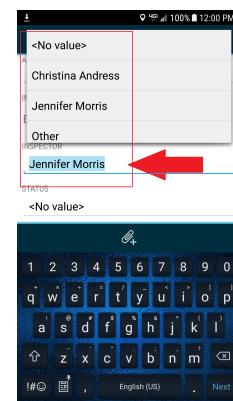


Figure 4.50: Select Inspector

## Device 1 Field Operation Cont.

Select Occupied or Not Occupied


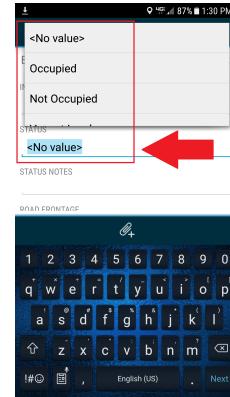


Figure 4.51: Status

Enter status notes up to 120 characters

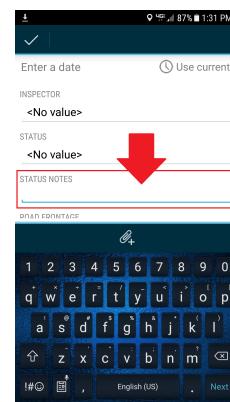

Select Yes or No for Road Frontage

Figure 4.52: Status Notes


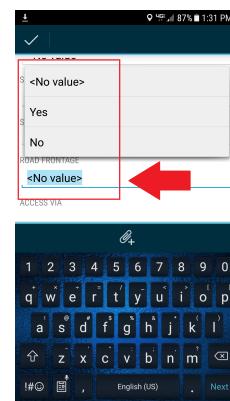


Figure 4.53: Road Frontage

## Device 1 Field Operation Cont.

Enter road used for access

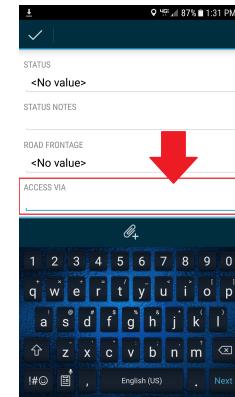

Enter Agent Name

Figure 4.54: Access Via

Enter Agent Contact Info

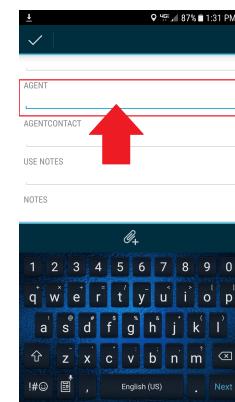


Figure 4.55: Agent

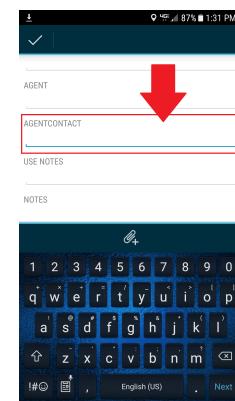


Figure 4.56: Agent Contact

## Device 1 Field Operation Cont.

Enter Use Notes up to 120 characters

Enter Notes up to 120 characters

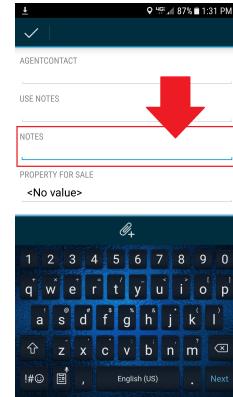


Figure 4.57: Use Notes

Enter property for sale yes or no

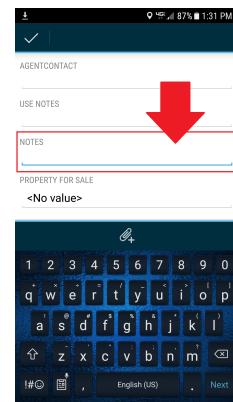


Figure 4.58: Notes


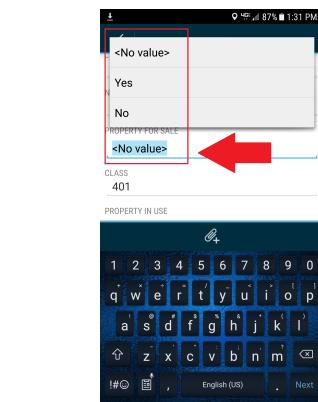


Figure 4.59: Property for Sale


## Device 1 Field Operation Cont.

Property in Use Yes or No

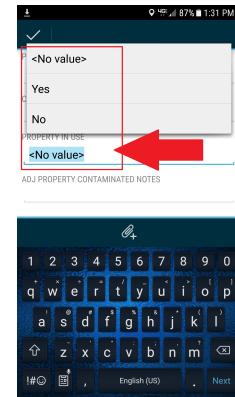

Placeholder  
Property in Use

Figure 4.60: Property in Use Placeholder

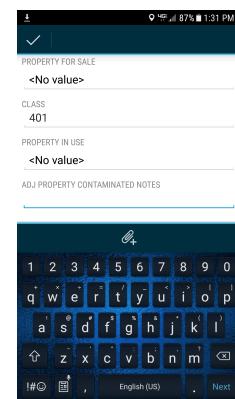

prefilled

Figure 4.61: Placeholder

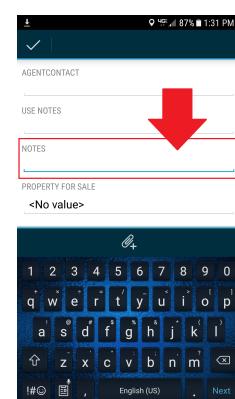


Figure 4.62: Property Contami-nated

## Device 1 Field Operation Cont.

Enter notes up to 120 characters

Adjacent Property Contaminated prefilled

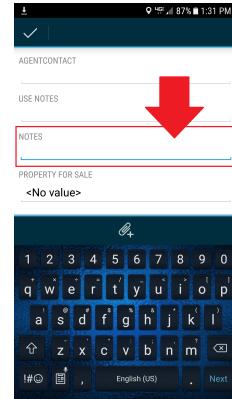


Figure 4.63: Notes up to 120 characters

Property Contaminated notes prefilled

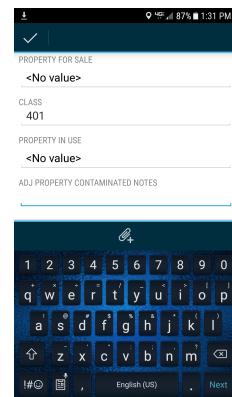


Figure 4.64: Adjacent Property Contaminated

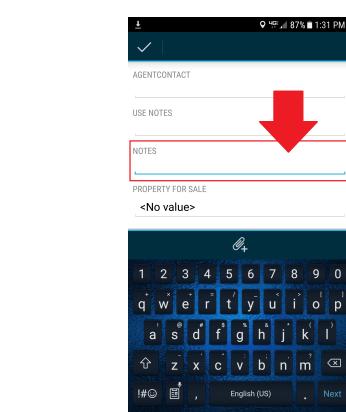


Figure 4.65: Property Contaminated

## Device 1 Field Operation Cont.

Property Maintained Yes or No

Picture Comments up to 120 characters

Placeholder

The screenshot shows a mobile application interface. At the top, there is a status bar with signal strength, battery level (96%), and time (1:32 PM). Below the status bar is a navigation bar with a checkmark icon. The main screen has a header 'PROPERTY MAINTAINED'. Underneath the header is a dropdown menu with three options: '<No value>', 'Yes', and 'No'. The option '<No value>' is highlighted with a red border. Below the dropdown is a section labeled 'ATTACHMENTS' with a small camera icon. At the bottom of the screen is a virtual keyboard with a dark blue background and white keys. The keyboard includes a numeric row (1-0), a standard QWERTY layout, and additional symbols like !, #, @, and punctuation marks. There are also buttons for 'Next' and 'English (US)'.

Figure 4.66: Property Maintained

The screenshot shows a mobile application interface. At the top, there is a status bar with signal strength, battery level (86%), and time (1:32 PM). Below the status bar is a navigation bar with a checkmark icon. The main screen has a header 'PROPERTY MAINTAINED' at the top, followed by a dropdown menu showing '<No value>'. Below the dropdown is a section labeled 'PICTURE COMMENTS' with a text input field containing the word 'No'. Above the text input field is a button labeled 'POSTED' with the value 'No'. Below the text input field is a section labeled 'ATTACHMENTS' with a note 'No attachments found'. At the bottom of the screen is a virtual keyboard with a dark blue background and white keys. The keyboard includes a numeric row (1-0), a standard QWERTY layout, and additional symbols like !, #, @, and punctuation marks. There are also buttons for 'Next' and 'English (US)'.

Figure 4.67: Picture Comments

The screenshot shows a mobile application interface. At the top, there is a status bar with signal strength, battery level (87%), and time (1:31 PM). Below the status bar is a navigation bar with a checkmark icon. The main screen has a header 'AGENT CONTACT' at the top. Below the header is a section labeled 'USE NOTES' with a text input field. A large red arrow points down to this text input field. Below the 'USE NOTES' section is another section labeled 'PROPERTY FOR SALE' with a dropdown menu showing '<No value>'. At the bottom of the screen is a virtual keyboard with a dark blue background and white keys. The keyboard includes a numeric row (1-0), a standard QWERTY layout, and additional symbols like !, #, @, and punctuation marks. There are also buttons for 'Next' and 'English (US)'.

Figure 4.68: Placeholder


## Device 2 Field Operation

Select a parcel from the map



Push Attachment Button

Figure 4.69: Select Parcel

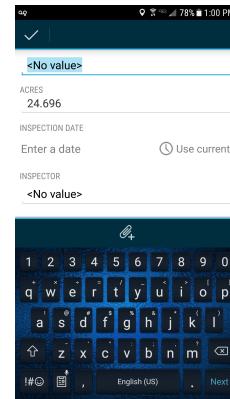

Select Gallery

Figure 4.70: Push Attachment Button

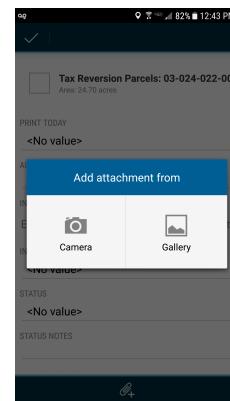


Figure 4.71: Add Attachment From Gallery

## Device 2 Field Operation Cont.

Navigate to the Open Camera Folder

Select the appropriate image

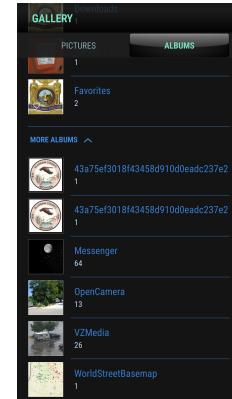


Figure 4.72: Open Camera Folder

Press the check button to save the image to the parcel

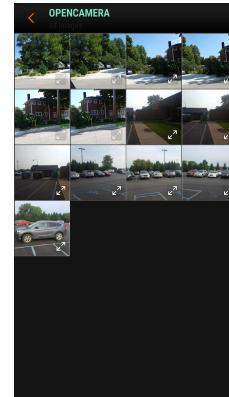


Figure 4.73: In the Open Camera Folder

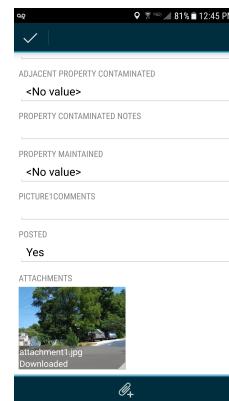


Figure 4.74: Image in the App

## Daily Postprocessing Routine

Back at the office

### Synchronize Webmap

In Collector for ArcGIS, push the sync button on the Forfeiture Field Map

### Execute Postprocessing Script

The Postprocessing Script is A tool in ArcGIS that:  
Reconciles geodatabase versions

Execute the Reconcile Versions  
and Compress Tool

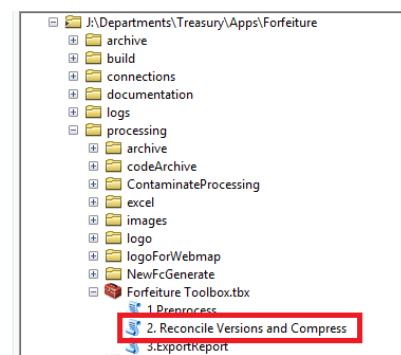


Figure 4.75: Reconcile Versions and Compress Tool

Generates forms for each site visited

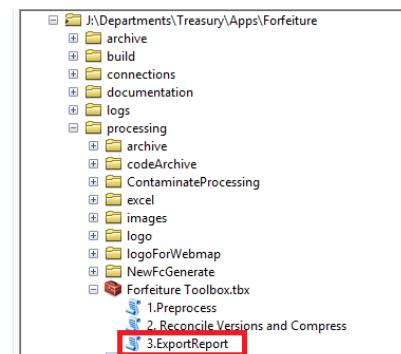


Figure 4.76: Export Report Tool

Execute the Export Report Tool

- Reconciles geodatabase versions
  - Execute the Reconcile Versions and Compress Tool

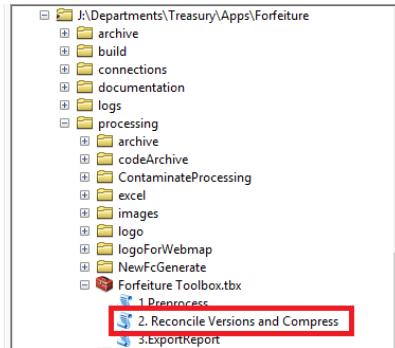


Figure 4.77: Reconcile Versions and Compress Tool

- Generates forms for each site visited
  - Execute the Export Report Tool

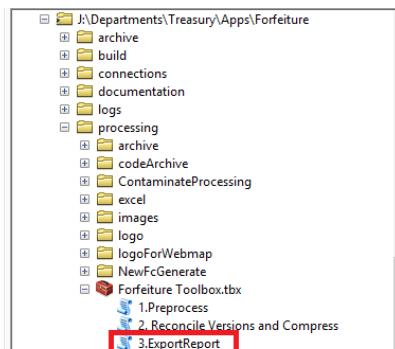


Figure 4.78: Export Report Tool

# SOFTWARE

## ESRI Licensed Products

### ArcDesktop

Users of this application need a license to ArcGIS Standard level.

### Enterprise ArcGIS Deployment

This app uses ArcGIS Server and ArcGIS Portal.

### Collector for ArcGIS

Developed and tested on Android(7.0). Collector is available at the Google Play Store.

## Other Software

### Open Camera for Android



Figure 4.79: Open Camera from Google Play Store



# 5

## Tools

### 5.1 BSA SUPPORT

#### ADDING A LAYER TO THE BSA GIS

#### ADD AN IMAGERY LAYER

#### BSA Program Setup

(BSA Settings)

In Program Setup ⇒ Select GIS Settings...

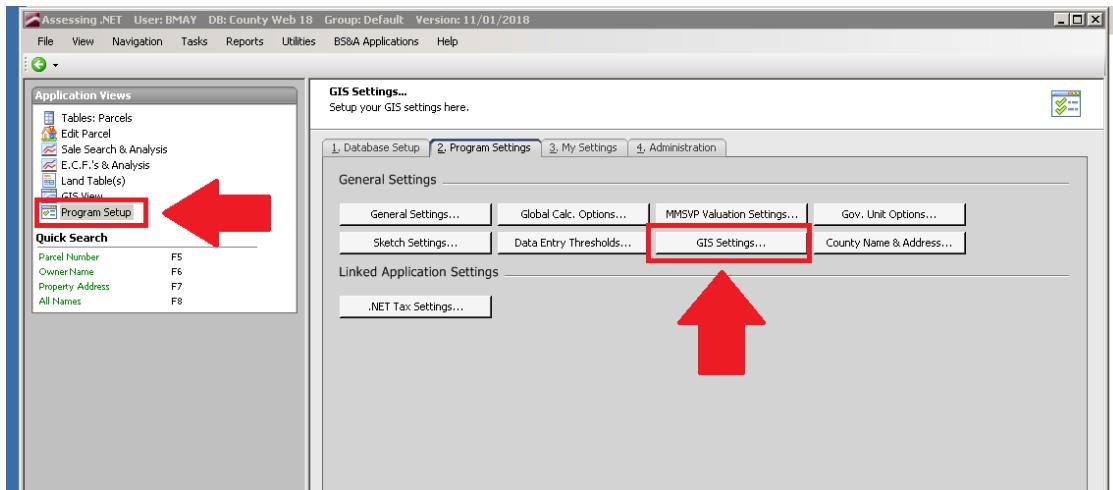


Figure 5.1: BSA Program Setup

## Setup Map Collections

(BSA Settings Cont.)

In GIS Settings ⇒ Map Collections ⇒

Double click on the map that you want to add a layer to

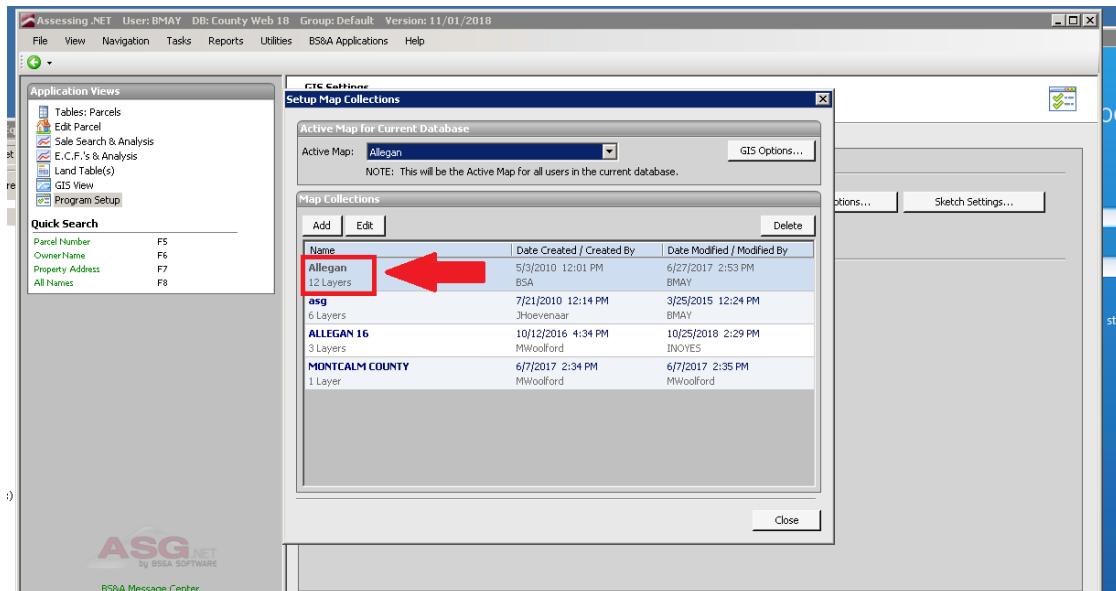


Figure 5.2: GIS Setup

## In Setup Layers

(BSA Settings Cont.)

Setup Layers ⇒ Add

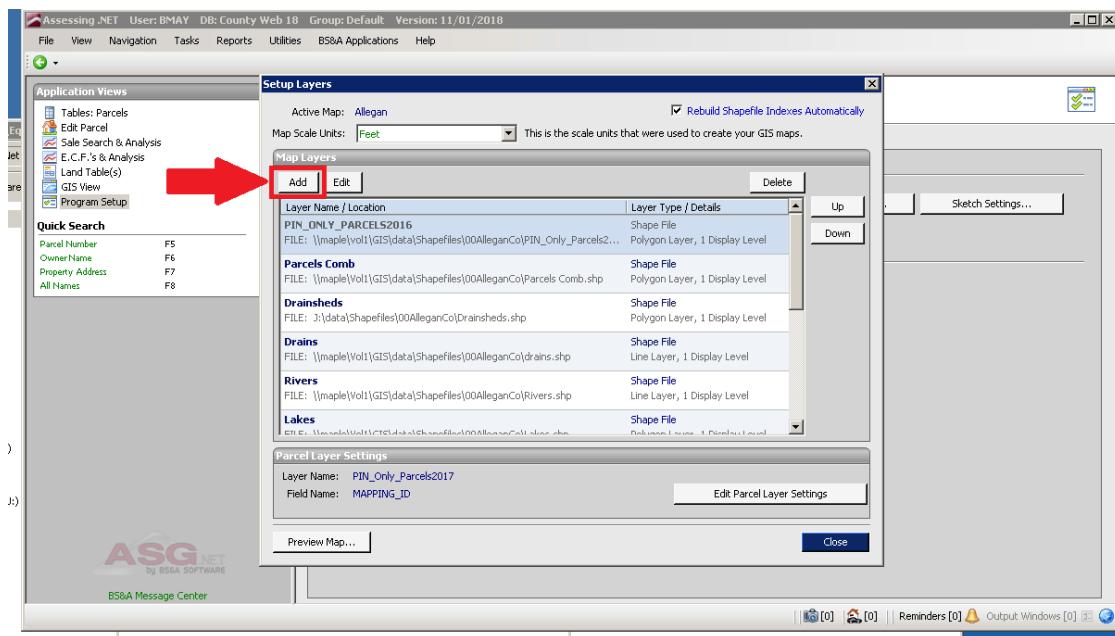


Figure 5.3: Layers Setup

## Select Layer Type

(BSA Settings Cont.)

Setup Layers ⇒ Select Image ⇒ OK

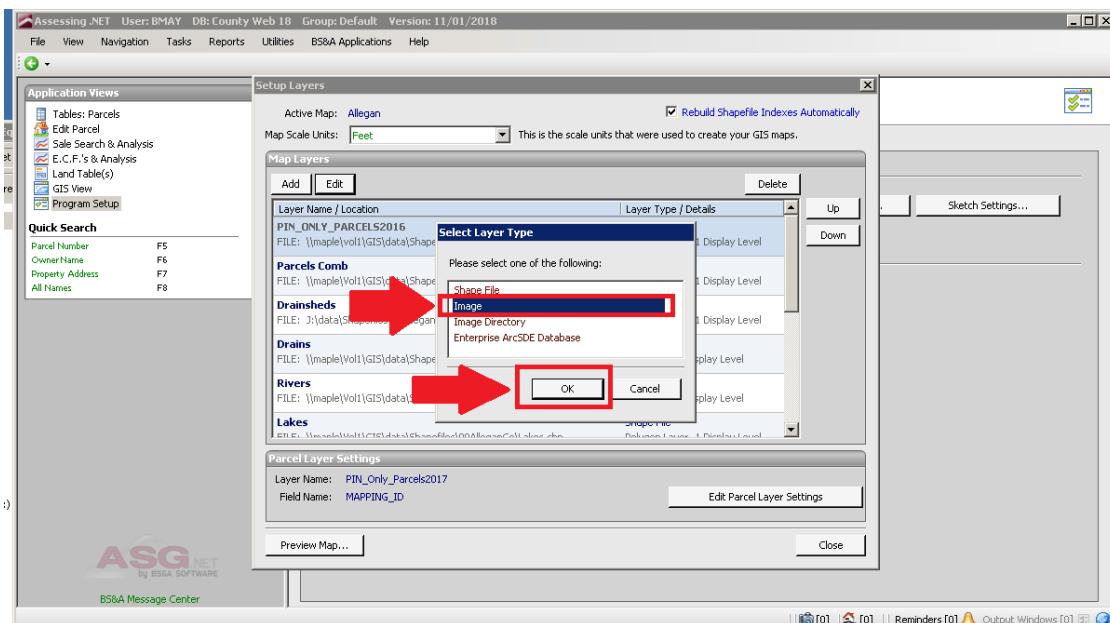


Figure 5.4: Select Layer Type

## Add Layer From Local Drive

(BSA Settings Cont.)

Navigate to Image File ⇒ Open

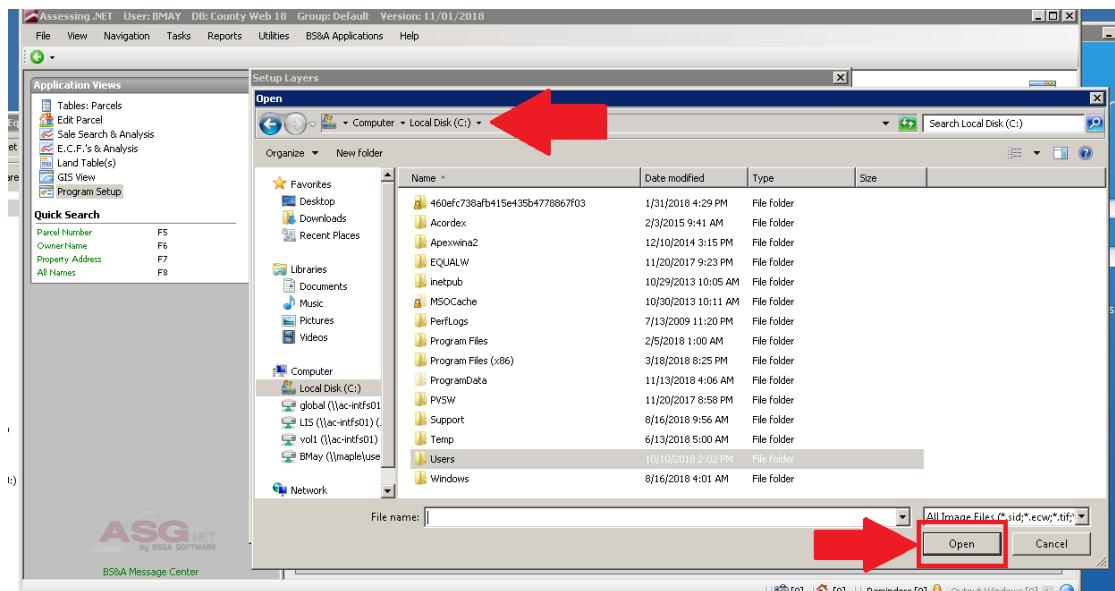


Figure 5.5: Add Layer From Drive

The new image is in the map

## 5.2 CORE DATA

### CONTROL POINTS

# MAINTAINING CADASTRAL CONTROL POINTS

## Install the Fabric Point Move to Feature Addin

⇒ Push the Configure Button

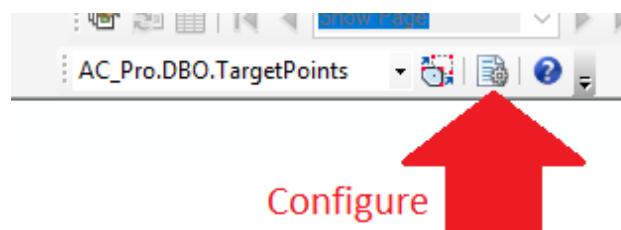


Figure 5.6: Fabric Point Move to Feature Addin

## Configure Addin

- Set Reference Feature Layer to TargetPoints
- Use point to point matching
- Use point layer field: PointID

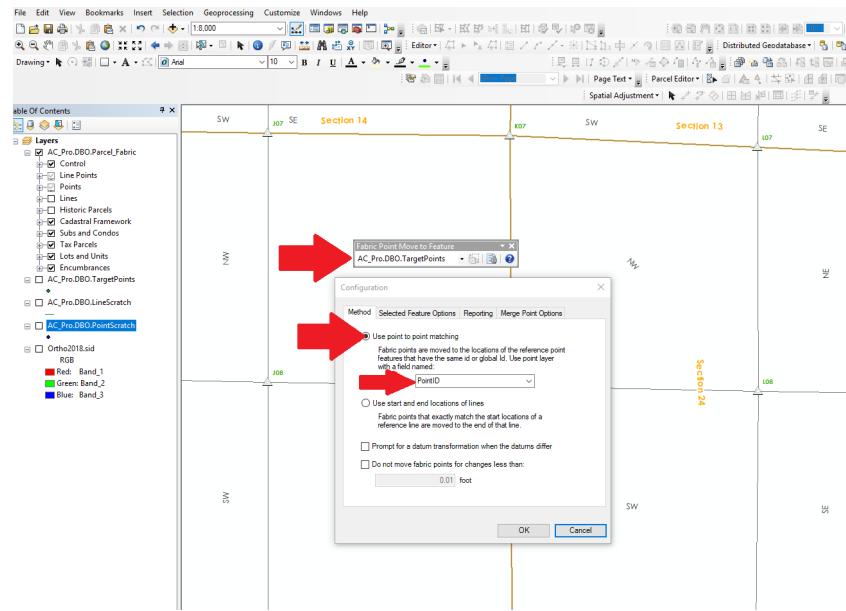


Figure 5.7: Addin Configuration Method

2

Configure Fabric Point Move to Feature addin Selected Feature Options  
Move Fabric Points of the Selected Parcels

Push OK

FabricPointMoveToFeatureConfigSelectedFeatures.png

3

Identify position of new control point

Select TargetPoints in Create Features Templates

Create Target Point at location for new Control Point

createTargetPoint.png

4

Use Identify tool to find ObjectId of Control Point that is to be moved

Select the Target point PointID of the point its moving to

Edit Target Point pointID attribute to match associated fabric control point OID

updateTargetPointPointID.png

4.5

Push move point button

moveControlPoint.png

5

Open maintain control point tool

Select control Point

push edit button

maintainControlPointTool.png

6

Use Identify Tool to View X and Y vals for the point

copy x and y value from point(attribute window) to Control (maintain control tool)

push update

Save Edits

transferCoordinates.png

Identify position of new control point

Place Target Point

Update Target Point attributes to associated fabric point OID

Push move point button

Zoom to Control point

Open maintain control point tool

---

Select control Point  
edit button  
copy x and y value from  
identify tool x and y of points  
update button

### 5.3 CORE DATA SCHEMA

## PROBLEM AND ANALYSIS

### Background

Allegan County GIS Services builds and maintains the geographic dataset used in workflows in and out of county government.

Equalization and GIS Services. Data is shared with EH, EQ, Dispatch and the public.

### Statement of Problem

Geographic data must be both maintained and shared. Data is maintained by

### Analysis

Here is where analysis of this problem goes

# DESIGN

## Overview

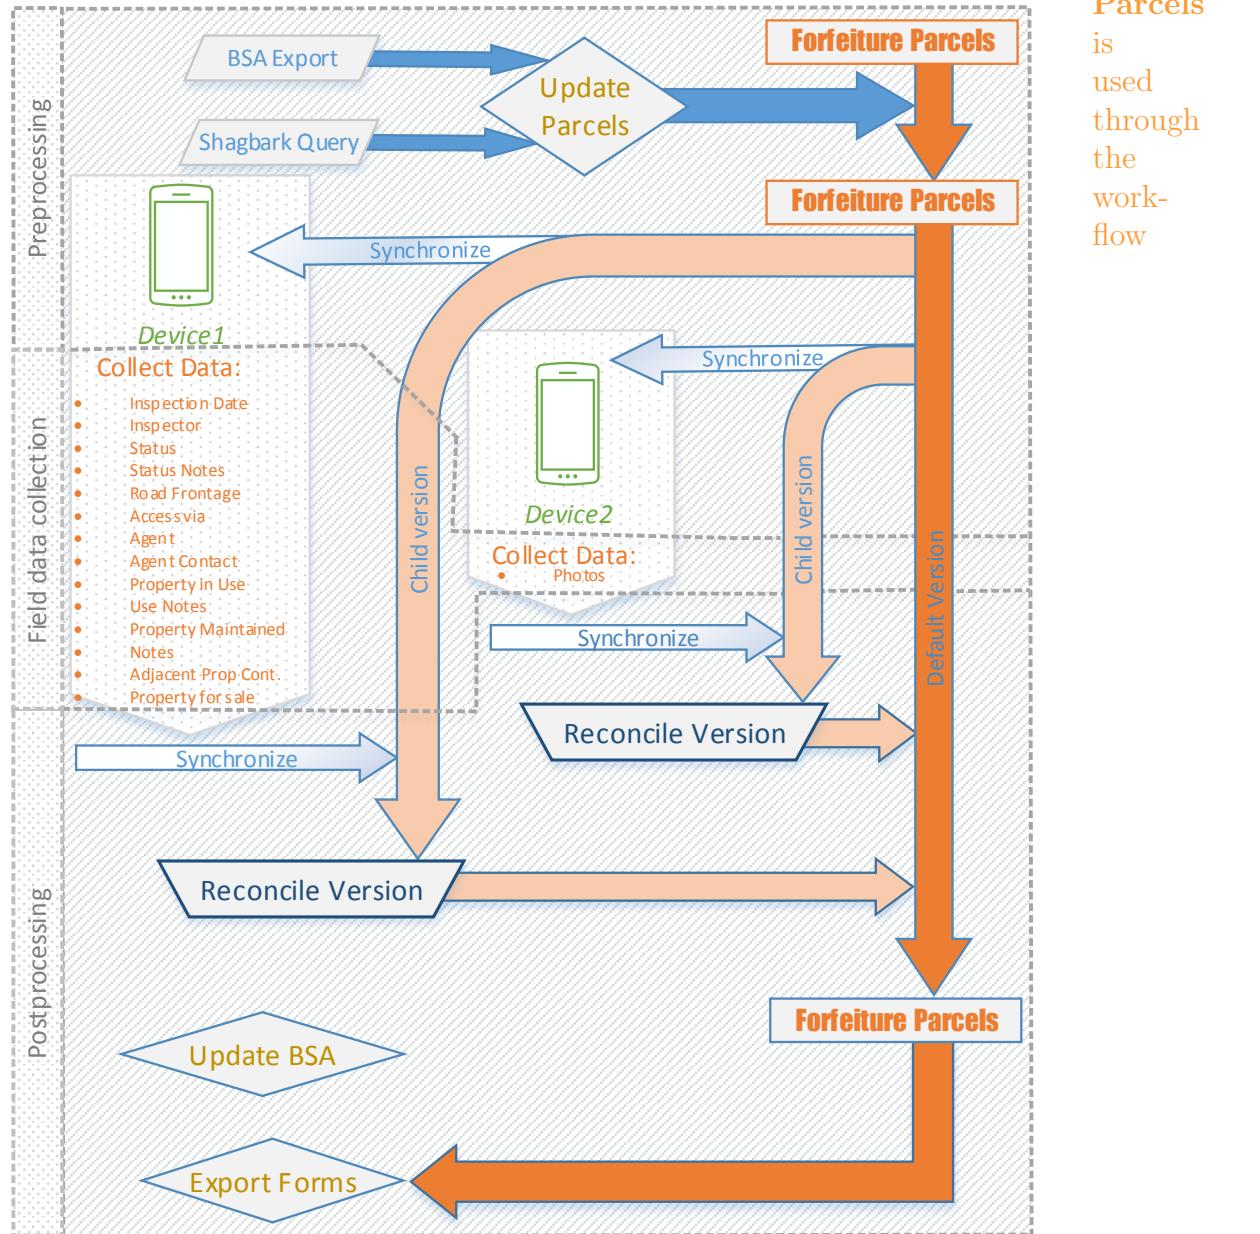


Figure 5.8: Project Design

## PRODUCTION DATA AC PRO

# DOMAINS

## Directory Location

Manged at this location:

Name	Date modified	Type
domainTables	1/22/2019 11:48 AM	File folder
DomainMaintenance.txt	1/22/2019 10:14 AM	Text Document
MasterStreetNamesDev.xlsx	1/16/2018 4:57 PM	Microsoft Excel
ProDomainsDev.xlsx	1/22/2019 11:23 AM	Microsoft Excel
README.txt	12/18/2017 8:37 AM	Text Document
roadTYPE.txt	12/29/2017 1:27 PM	Text Document

Figure 5.9: Directory Location of Workspace

## Domain Documentation

This is where...

⇒ Push the Configure Button

## 5.4 ESRI TOOLS

### COGO TOOLS IN ARCGIS

TEXT

---

## 5.5 GIS ADMINISTRATION


### NEW CONNECTIONS IN ARCCATALOG

#### INSTALL SQL SERVER ON CLIENT MACHINE

##### On client machine:

For any machine to connect to the Enterprise Geodatabase, SQL Server Native Client must be installed locally.

Search for sql server native client download on the internet

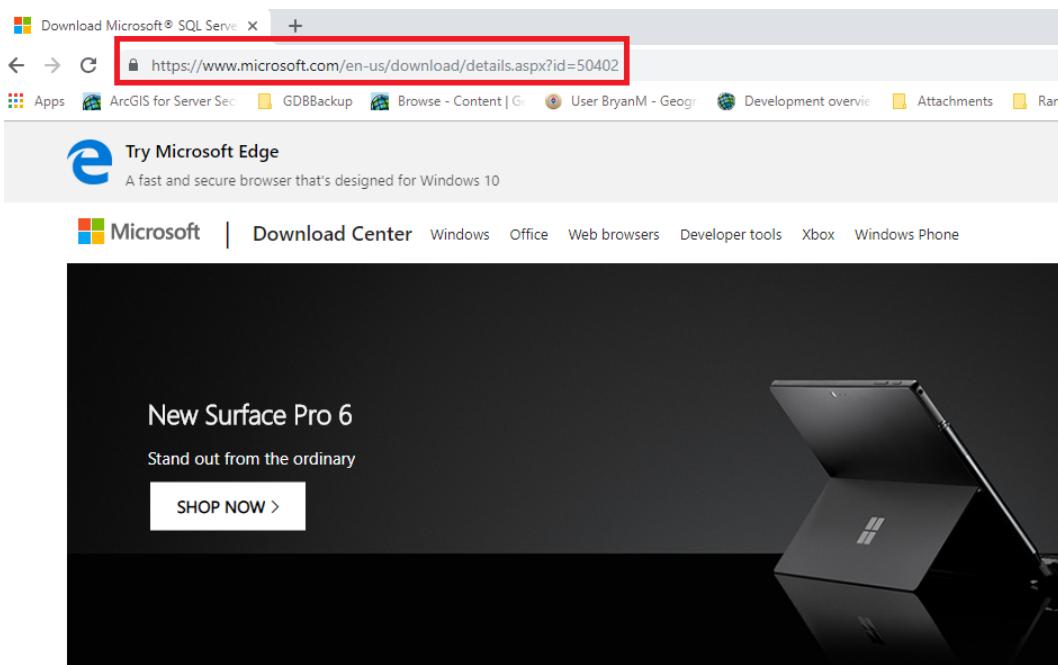

#### Microsoft® SQL Server® 2012 Native Client - QFE


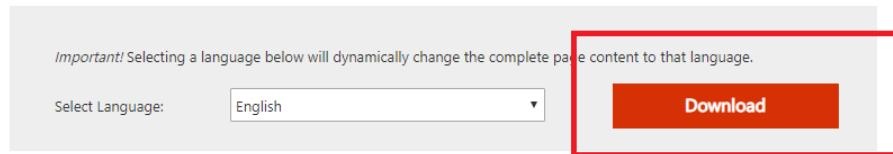


Figure 5.10: SQL Server Client Search

## Select appropriate Version

Decide whether to get the 32bit or 64bit version

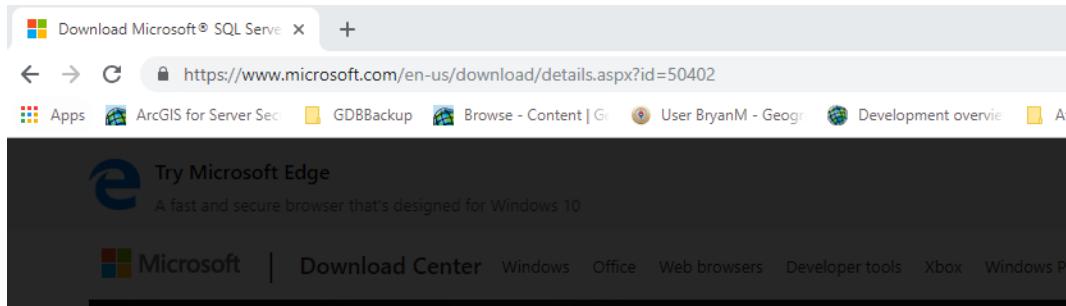

Choose the download you want

File Name		Size
ENU\x64\sqlcli.msi	For 64bit OS	4.8 MB
ENU\x86\sqlcli.msi	For 32 bit OS	3.0 MB

Figure 5.11: SQL Server Client Search Choose

Download and Install

## CONNECT ARCGIS TO A SQL SERVER DATABASE In Catalog:

Double click on add database connection

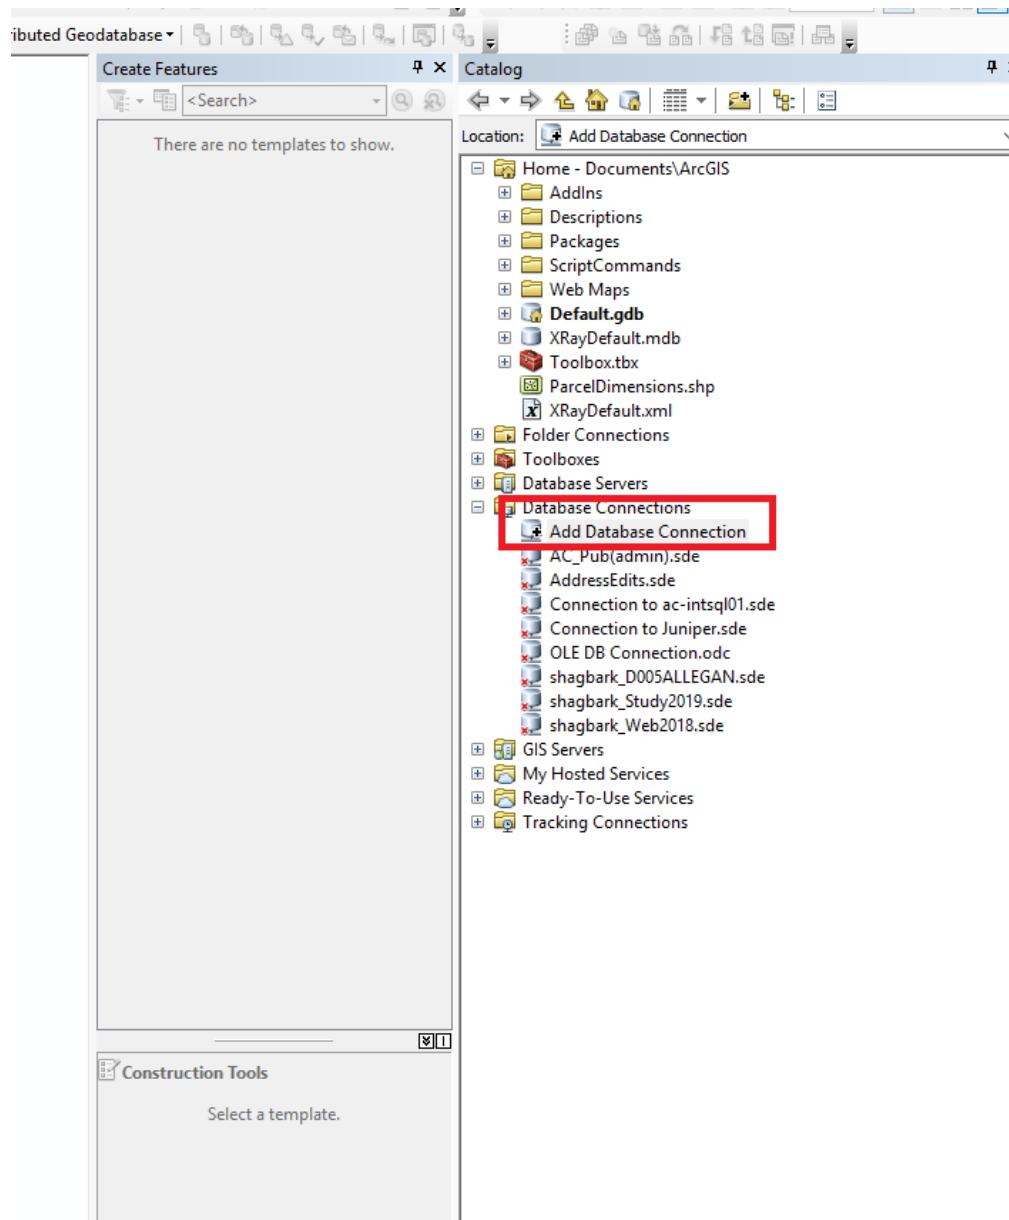


Figure 5.12: Catalog Add Db Connection

---

## NEW CONNECTION DIALOG

### Enter into the tool

- Select Database Platform
- Enter Instance Name
- Enter user name and password
- Check Save user name and password
- Select Database in dropdown

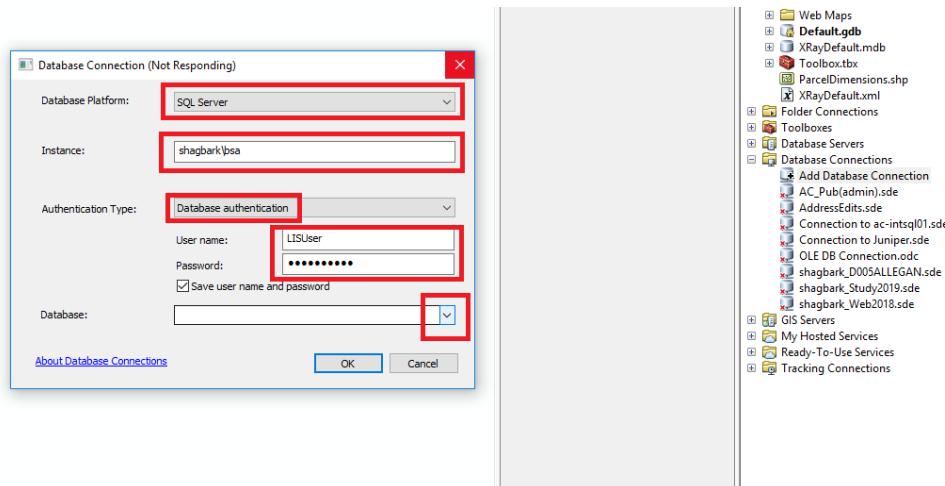


Figure 5.13: Catalog Add Database Connection

## CREATE QUERY IN ArcGIS TO SQL DATABASE

### ADD QUERY LAYER

#### In ArcMap:

Open the New Query Layer Dialog

Go to  $\Rightarrow$  File  $\Rightarrow$  Add Data  $\Rightarrow$  Add Query Layer In the connection dropdown select your connection

#### NOTE

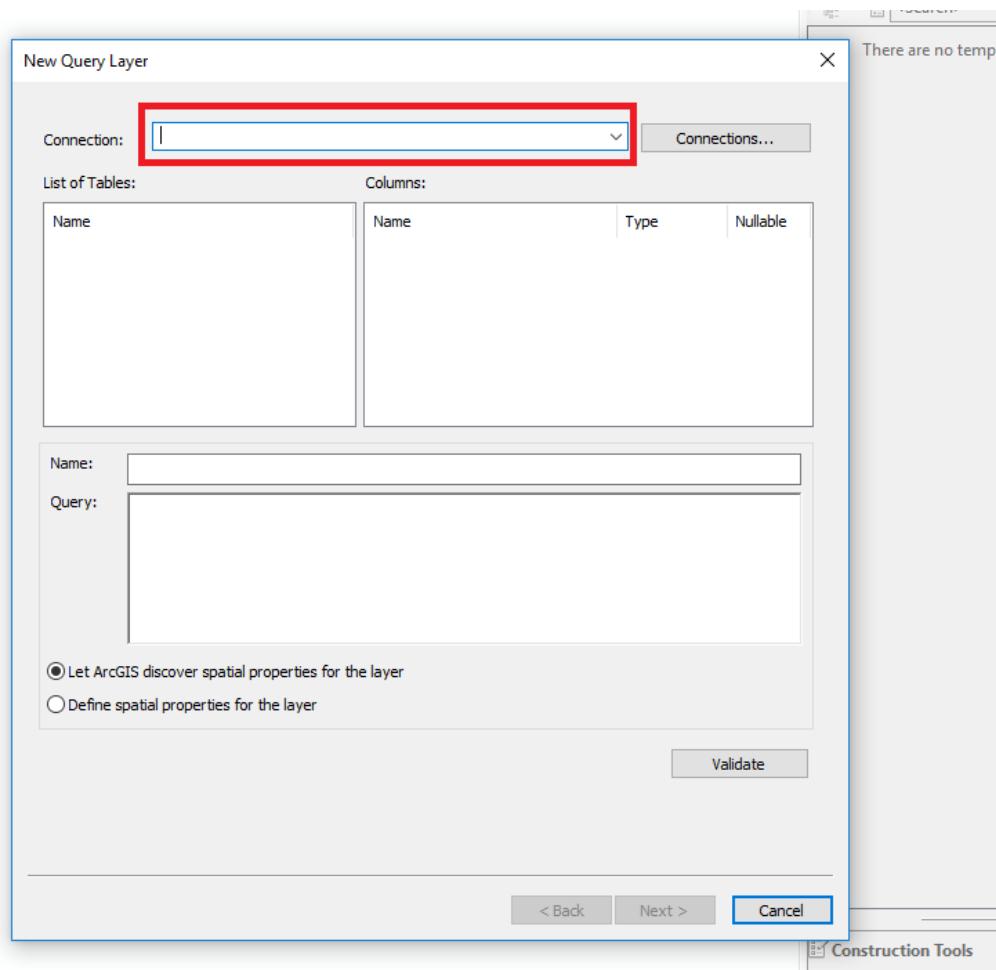


Figure 5.14: New Query Layer Dialog

---

## DETAILS OF THE QUERY LAYER

### Enter into the tool

- Choose connection
- Name the query
- Enter SQL query
- Press Next

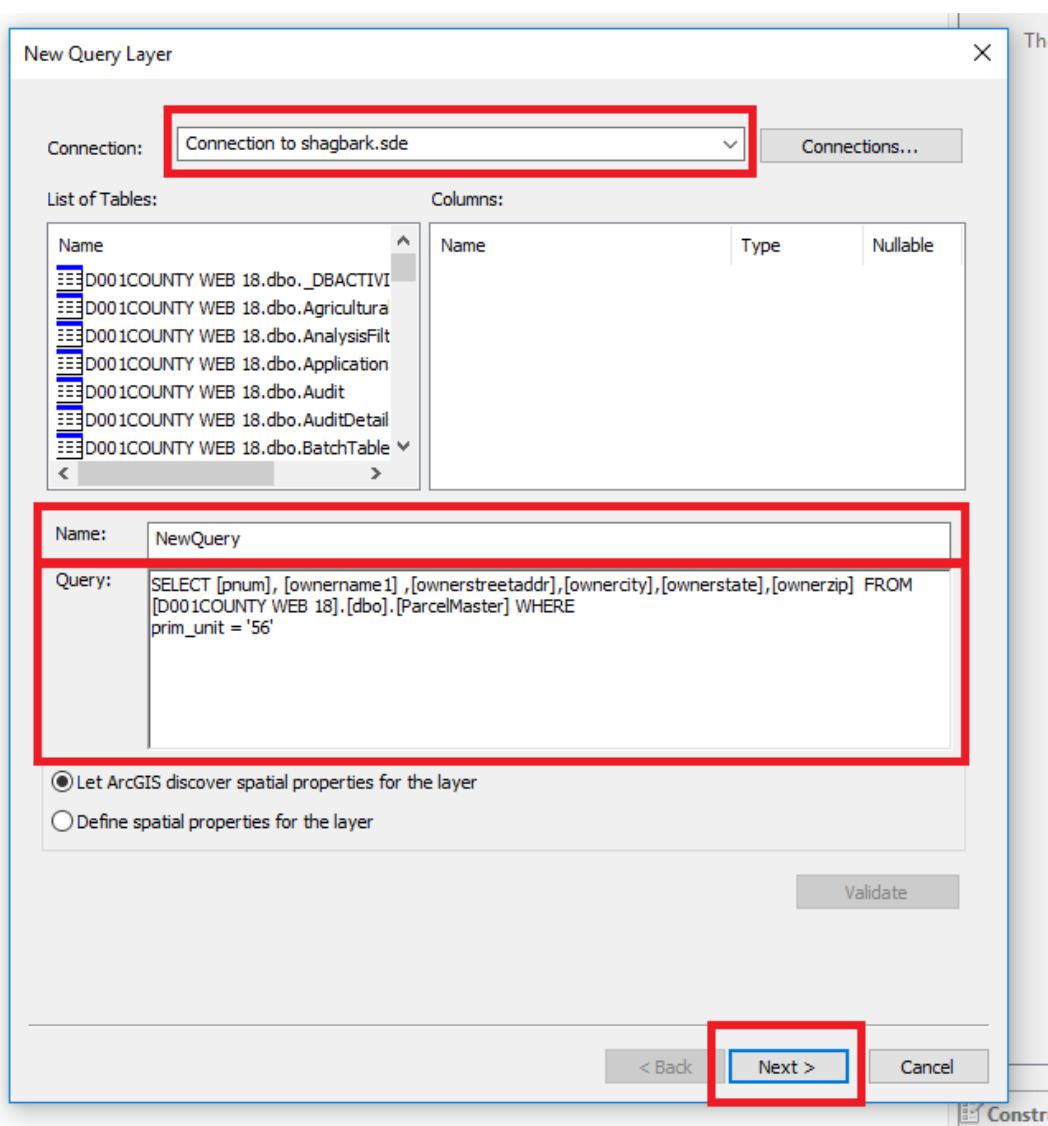


Figure 5.15: Query Layer Dialog Filled

## MORE DETAILS OF THE QUERY LAYER

### Enter into the tool

- Select unique identifier field
- Click Finish

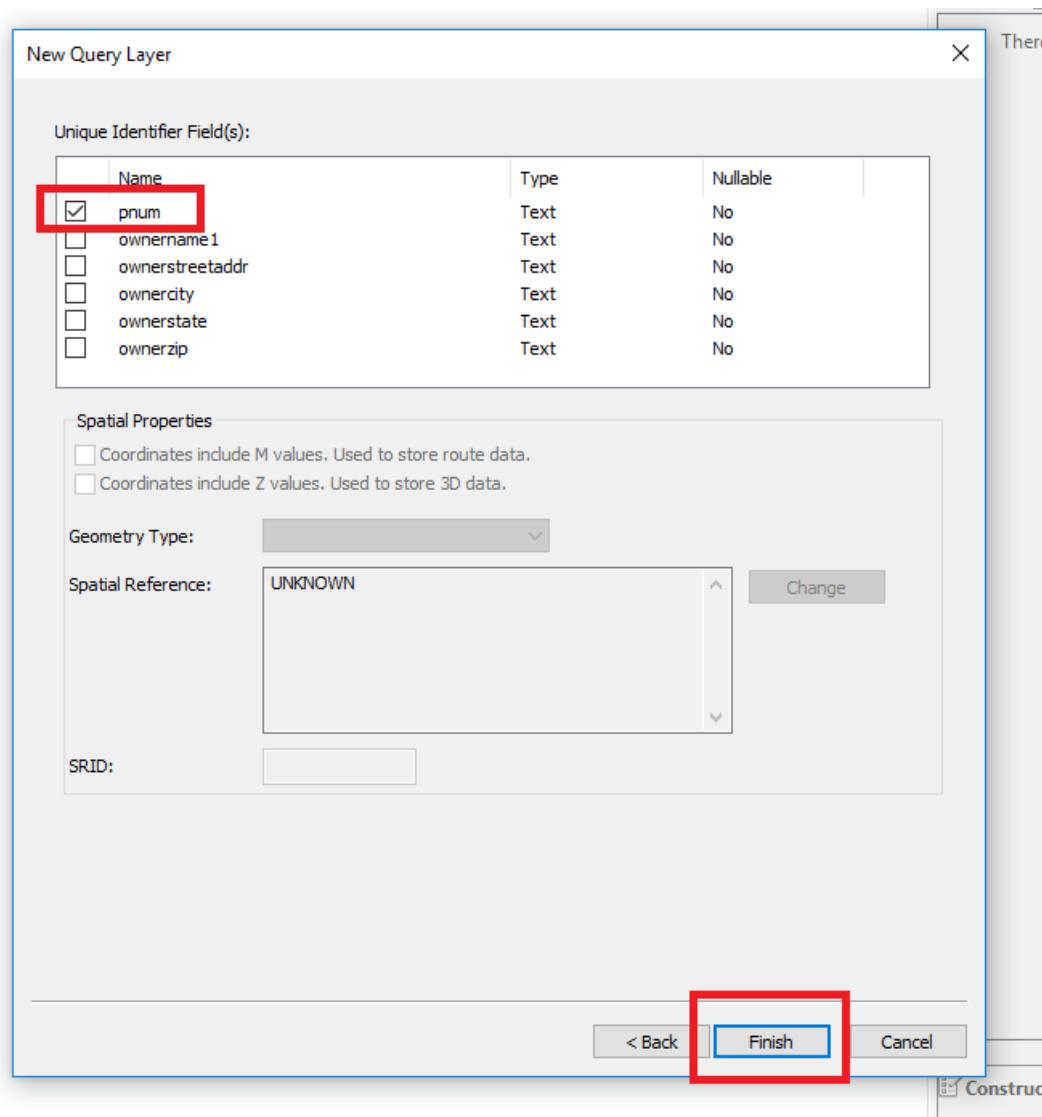


Figure 5.16: Select Unique Identifier

---

## OPEN RESULTS TABLE

### Verify the Query by Looking at the Table

The screenshot shows the ArcGIS Pro interface with the 'Table Of Contents' pane on the left and the 'Editor' pane on the right. In the Table Of Contents, a folder labeled 'Layers' contains a single item: 'D001COUNTY WEB 18.DBO.NewQuery'. This item is highlighted with a red rectangle. The Editor pane displays a results table titled 'D001COUNTY WEB 18.DBO.NewQuery'. The table has the following columns:

prnum	ownername1	ownerstreetaddr	ownercity	ownerstate	ownerzip	ESRI_OID
56-004-001-10	WAGNER LONNE J & EMMA	792 135TH AVE	WAYLAND	MI	49348	1
56-004-002-20	GUN LAKE COMMUNITY CHURCH	12200 WEST M-179	WAYLAND	MI	49348	2
56-004-003-30	WAYLAND UNION SCHOOLS	850 E SUPERIOR ST	WAYLAND	MI	49348	3
56-005-001-10	CITY OF WAYLAND	103 S MAIN ST	WAYLAND	MI	49348	4
56-005-002-20	CITY OF WAYLAND	103 S MAIN ST	WAYLAND	MI	49348	5
56-005-002-20	MAAS WAYLAND LLC	1845 BIRMINGHAM DR	LOWELL	MI	49331	6
56-005-002-20	ELLIOTT BAY HEALTHCARE REALTY II	6117 EASTLAKE AVE E	SEATTLE	WA	98109	7
56-005-002-20	CITY OF WAYLAND	103 S MAIN ST	WAYLAND	MI	49348	8
56-005-002-30	RIPARIAN PROPERTIES LLC	879 E SUPERIOR ST	WAYLAND	MI	49348	9
56-005-002-40	RIPARIAN PROPERTIES LLC	879 E SUPERIOR ST STE A	WAYLAND	MI	49348	10
56-005-002-41	VIS VENTURES WAYLAND LLC	235 140TH AVE	WAYLAND	MI	49348	11
56-005-002-40	CITY OF WAYLAND	103 S MAIN ST	WAYLAND	MI	49348	12
56-005-003-10	LAWRENCE ANDRE W & JUDITH	841 E SUPERIOR ST	WAYLAND	MI	49348	13
56-005-003-50	REINER SUZANNE M	841 E SUPERIOR ST	WAYLAND	MI	49348	14
56-005-006-00	STORA RODERICK M & MELISSA K	841 E SUPERIOR ST	WAYLAND	MI	49348	15
56-005-006-10	ARY DOUGLAS & JULE	104 MARLO LN	WAYLAND	MI	49348	16
56-005-006-20	DUBAY DOUGLAS	102 MARLO LN	WAYLAND	MI	49348	17
56-005-007-00	CONNOR MOLLY	815 EAST SUPERIOR	WAYLAND	MI	49348	18
56-005-007-10	BENNETT JILL & CARROB BIANCE	2514 BRIDGEPORT LN	GRAND RAPIDS	MI	49508	19
56-005-007-20	VILELLA MATTHEW	101 MARLO LN	WAYLAND	MI	49348	20
56-005-007-21	JENSEN KRISTEN S	103 MARLO LN	WAYLAND	MI	49348	21
56-005-008-00	WAYLAND CHRISTIAN REF CHURCH	303 E ELM STREET	WAYLAND	MI	49348	22
56-005-008-00	CITY OF WAYLAND	103 S MAIN ST	WAYLAND	MI	49348	23
56-005-010-00	FINANCING VI HEALTHCARE PROPERTY/LLC	8181 WORTHINGTON ROAD	WESTERVILLE	OH	43082	24
56-005-011-00	CITY OF WAYLAND	103 S MAIN ST	WAYLAND	MI	49348	25
56-005-011-10	FERGUSON ROBERT K	5770 VENTURE PARK	KALAMAZOO	MI	49009	26
56-005-012-00	REDSTONE LAND DEVELOPMENT LLC	3330 GRAND RIDGE DR NE	GRAND RAPIDS	MI	49525	27
56-005-012-10	VANDEROVORD JOHN C & NANCY L	542 FORREST ST	WAYLAND	MI	49348	28
56-005-013-10	L AND M LLC	2645 24TH AVE	HUDSONVILLE	MI	49426	29
56-005-013-10	JESTER LLC	137 124TH AVE	SHELBYVILLE	MI	49344	30
56-005-014-00	OPPERMAN JOHN C	125 OAK ST	WAYLAND	MI	49348	31
56-005-015-00	REDSTONE LAND DEVELOPMENT LLC	3330 GRAND RIDGE DR NE	GRAND RAPIDS	MI	49525	32
56-005-016-00	WALKER MICHAEL	131 OAK ST	WAYLAND	MI	49348	33
56-005-017-00	FLUIT MARK & MARYELLEN	137 OAK ST	WAYLAND	MI	49348	34
56-005-018-00	GUTTERREZ SAUL O & ORTIZ CHRISTINA	119 OAK ST	WAYLAND	MI	49348	35
56-005-019-00	MICHIGAN STATE POLICE #56	544 N MAIN ST	WAYLAND	MI	49348	36
56-005-020-00	WILLIAMS TERESA A	540 N MAIN ST	WAYLAND	MI	49348	37
56-005-021-00	KEMP HOLDINGS LLC	304 108TH ST	CALEDONIA	MI	49316	38
56-005-022-00	SLOAN JOHN L & AMY L	329 WILLOW RUN DR	WAYLAND	MI	49348	39

Below the table, status indicators show '(0 out of 1666 Selected)' and 'D001COUNTY WEB 18.DBO.NewQuery'.

Figure 5.17: Query Results Table

## ENTERPRISE GEODATABASE MAINTENANCE

# ENTERPRISE GEODATABASE COMPRESSION ROUTINE

## Disconnect All Users

To disconnect the GIS Server, stop all services

- In ArcGIS Server Manager ⇒ Site ⇒ GIS Server ⇒ Machines ⇒ Stop all Services

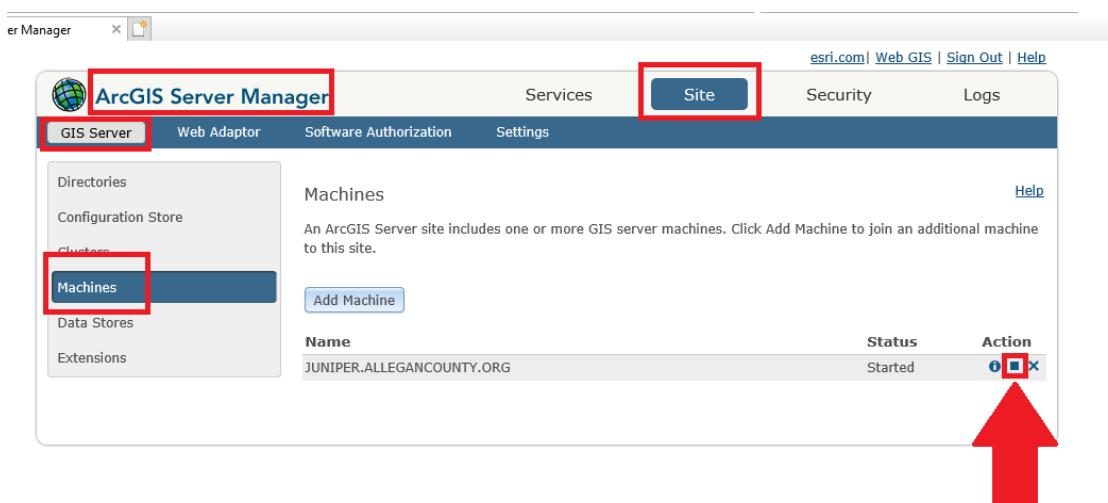


Figure 5.18: Stop ArcGIS Server

Use the Search tool to find the Rebuild Indexes Tool

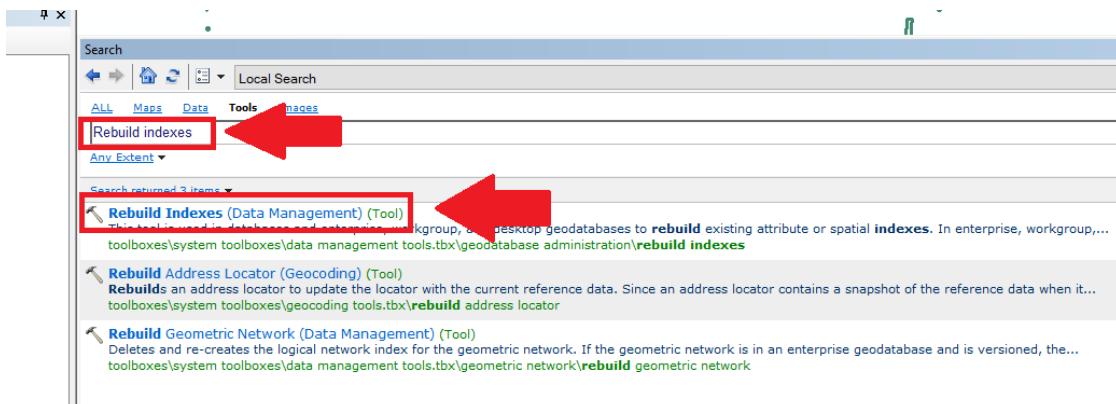


Figure 5.19: Find Rebuild Indexes Tool

## Rebuild Indexes

Select Connection ⇒ Include System Tables ⇒ Select All ⇒ Press OK

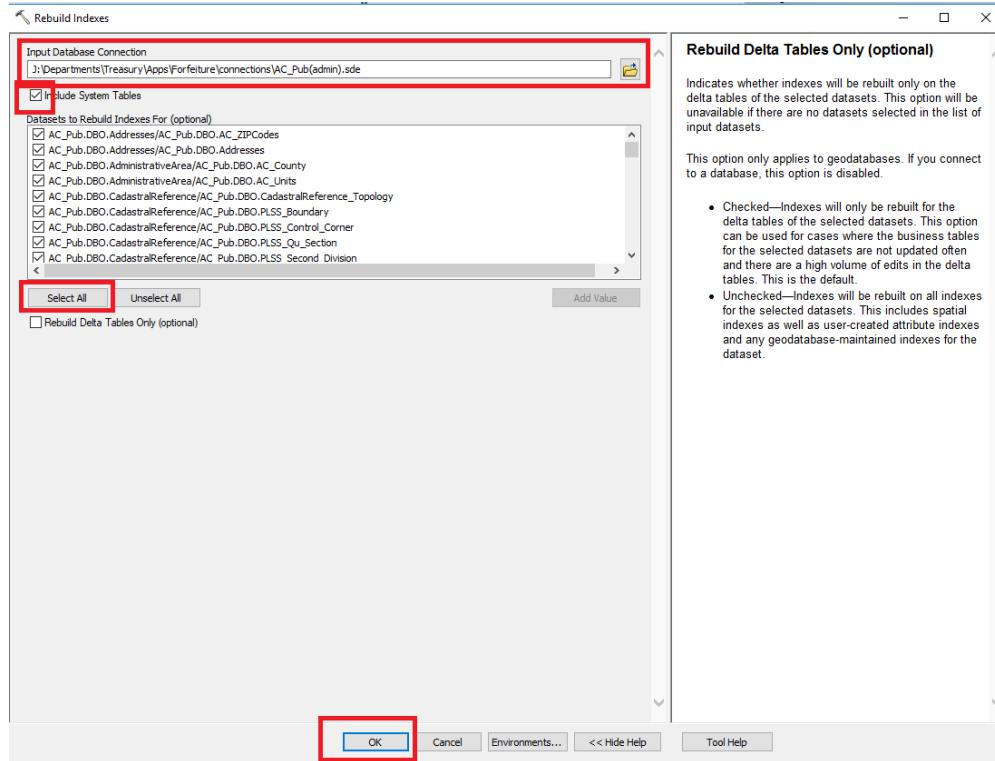


Figure 5.20: Rebuild Indexes Tool Operation

## Recalculate Statistics

In the Analyze Datasets Tool:

Select Connection ⇒ Include System Tables ⇒ Select All ⇒ Press OK

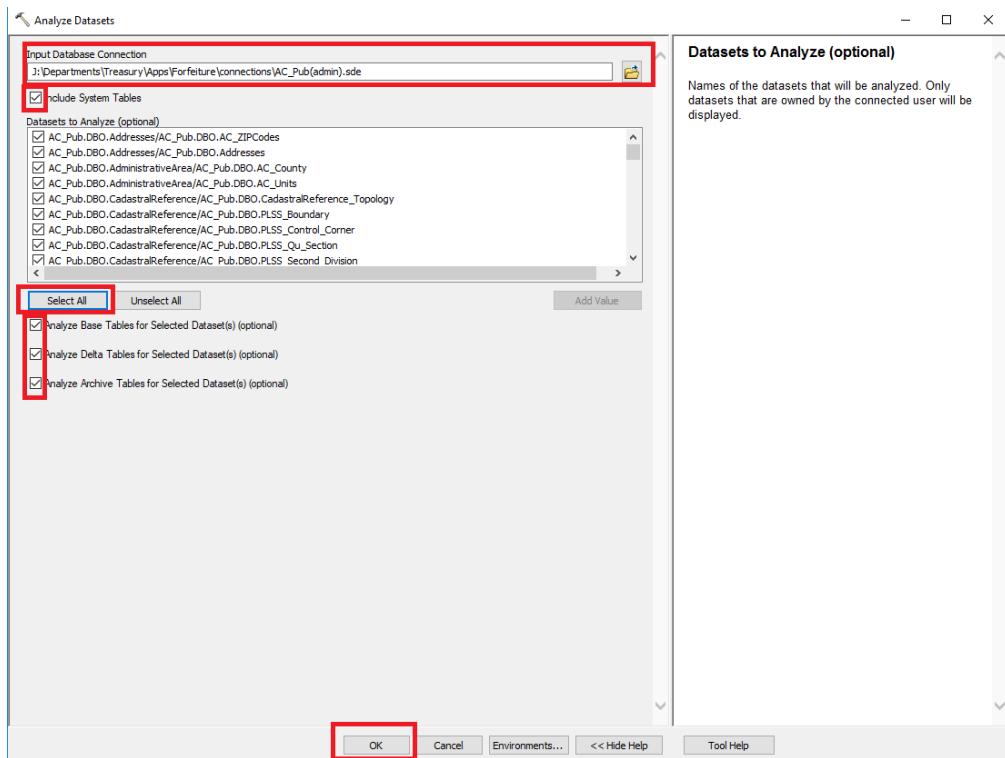


Figure 5.21: Recalculate Statistics

## Compress

Select Connection ⇒ Press OK

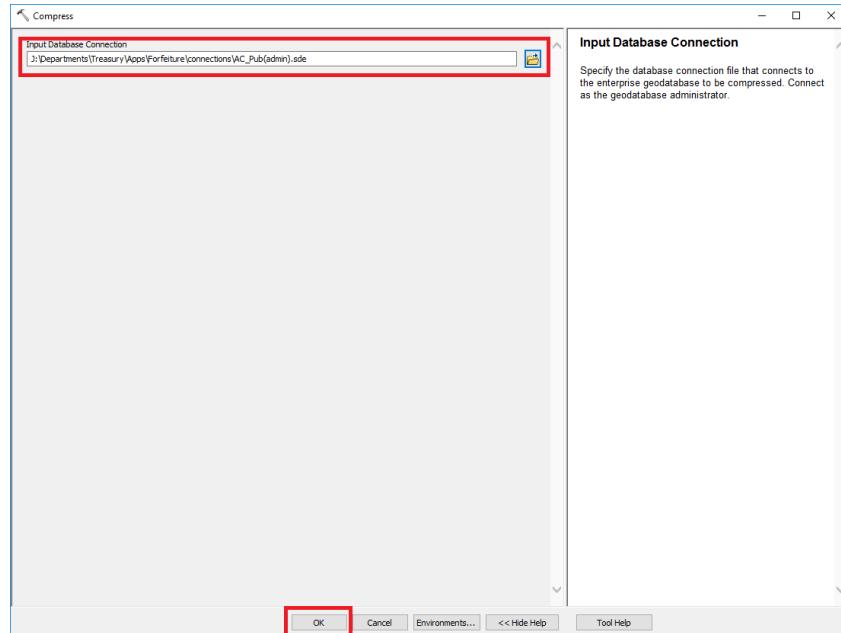


Figure 5.22: Compress

## Rebuild Indexes Again

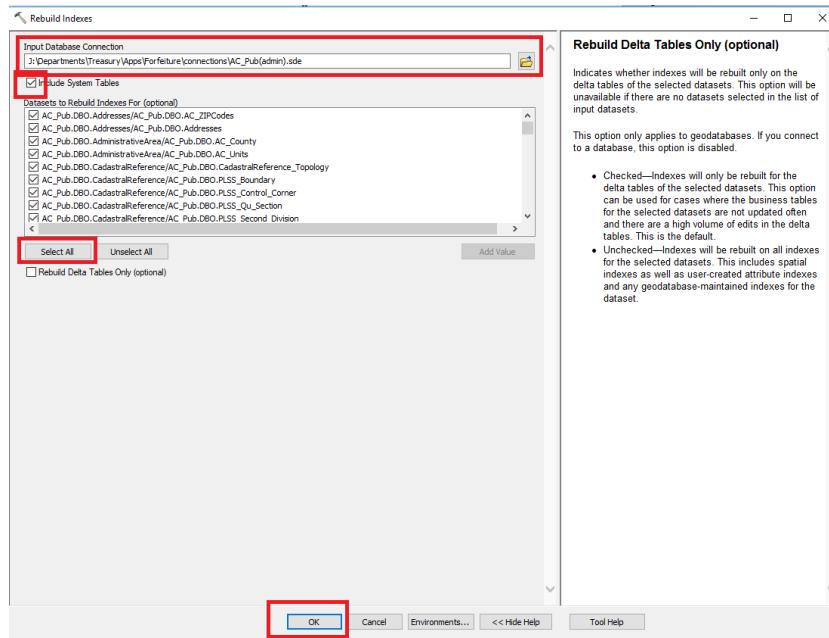


Figure 5.23: Rebuild Indexes Tool Operation

## Recalculate Statistics Again

In the Analyze Datasets Tool:

Select Connection ⇒ Include System Tables ⇒ Select All ⇒ Press OK

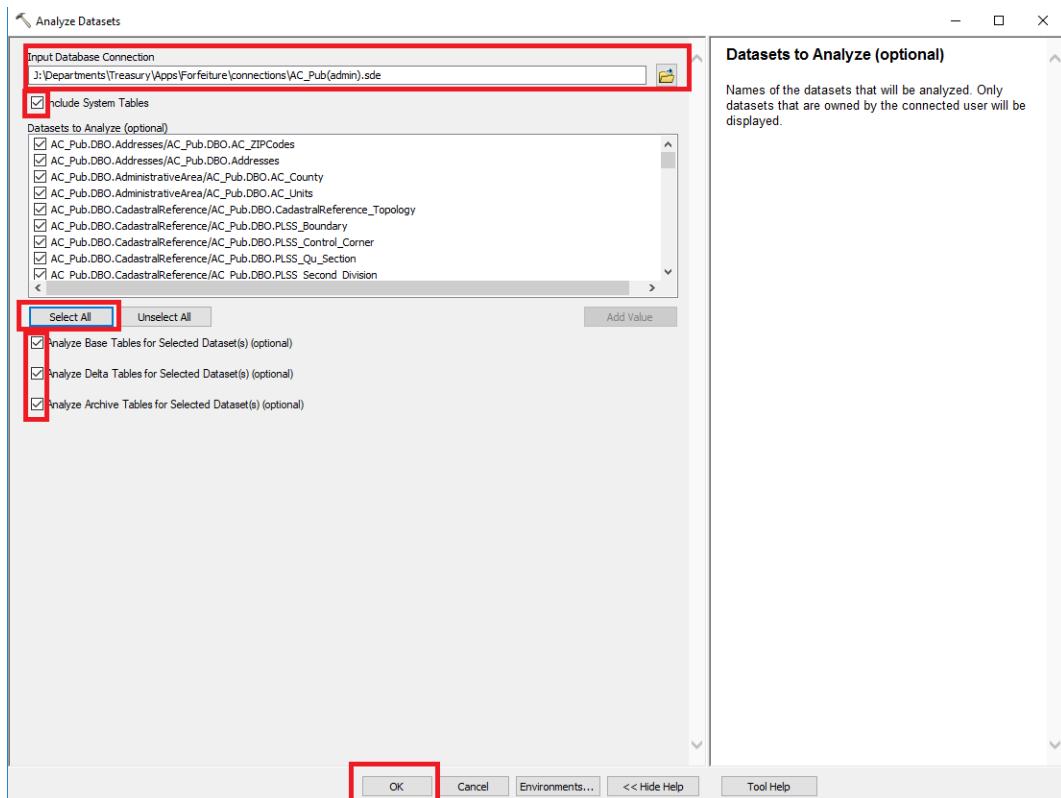


Figure 5.24: Recalculate Statistics

## MANAGING MAP SERVICES

# TO STOP ARCGIS SERVER

## Launch ArcGIS Server Manager

Site ⇒ GIS Server ⇒ Machines ⇒ Stop the Server

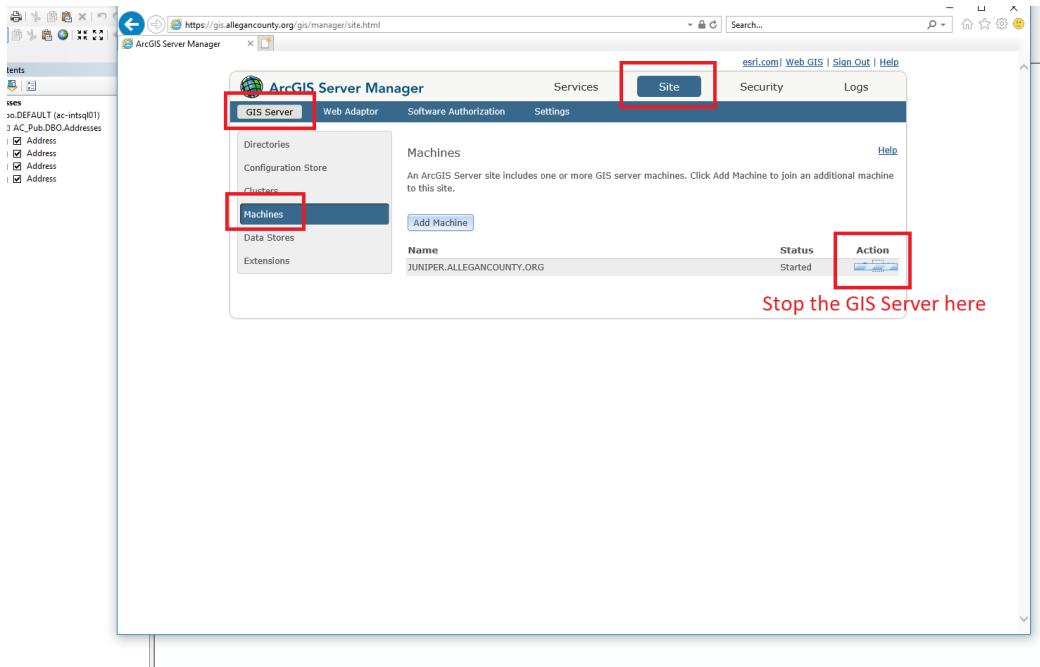


Figure 5.25: Stop the GIS Server

# FIXING DAMAGED SERVICES

## Error:

Service is currently being configured by another administrative operation

## Remedy:

This tech support article applies:

<https://support.esri.com/en/technical-article/000015549>

There are at least 2 ways to fix:

- Use the ArcGIS Server Account Utility
- Remove Lock Files

## Use the ArcGIS Server Account Utility

### Access the GIS Server

To Log in to Juniper

windows R ⇒ mstsc

⇒ juniper

Use personal network credentials

## On the GIS Server (Juniper)

In Windows Search, find:

Configure ArcGIS Server Account Utility

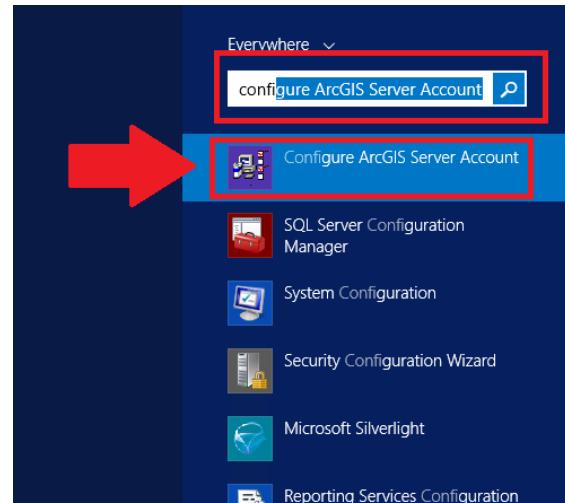


Figure 5.26: ArcGIS Server Account Utility

---

Use credentials:

PW: @lleganGxxxxxx

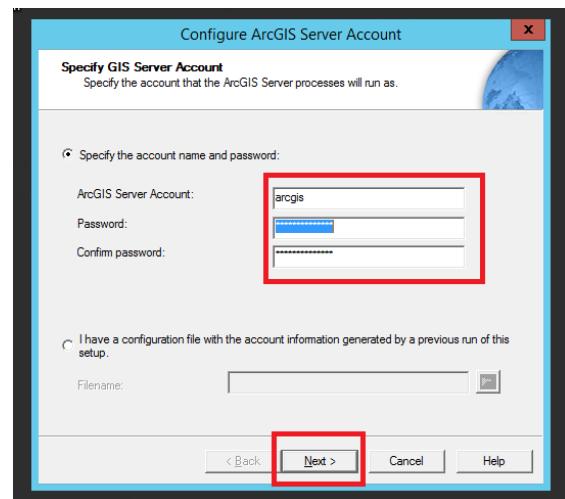


Figure 5.27: Account Utility Login

In the utility, paste these paths:

C:\arcgisserver\directories  
C:\arcgisserver\config-store  
C:\arcgisserver\logs

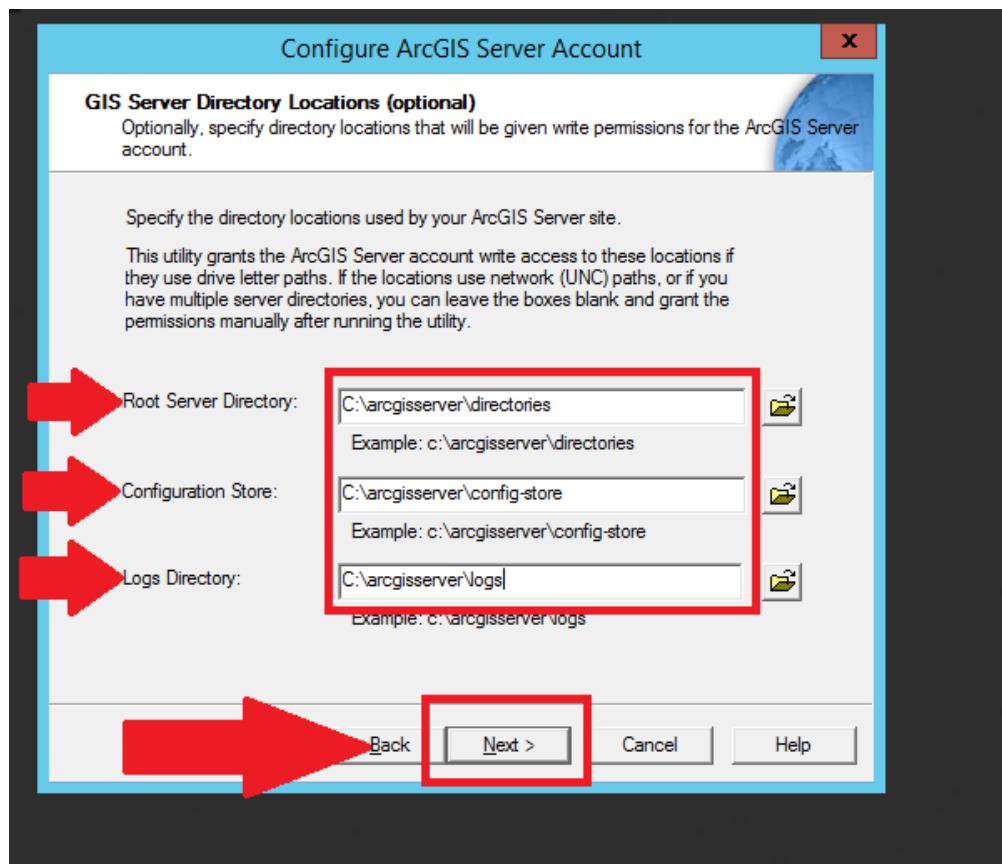


Figure 5.28: GIS Directory Locations Filled

**Push Next**

Select option **Do not export Configuration File**

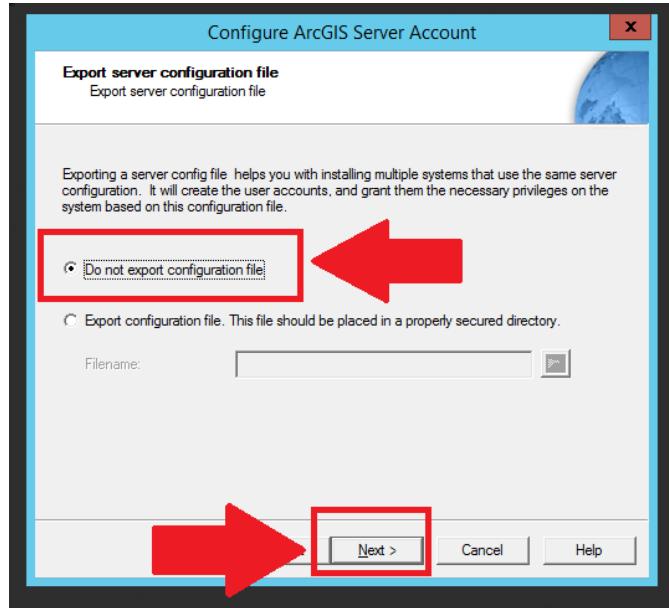


Figure 5.29: Do not Export Config File

**Push Next**

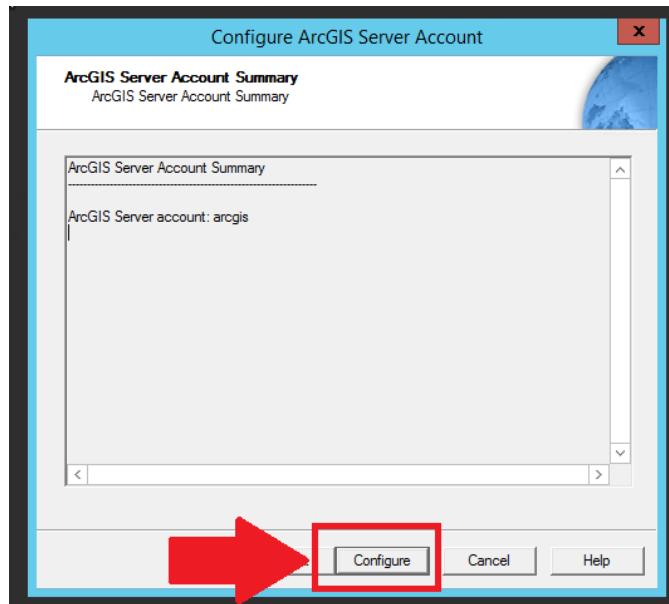


Figure 5.30: Configure Account

**Push Configure**

While the tool runs, open the service manager

In Windows Search, find: **Service Manger**

Launch **Service Manger**

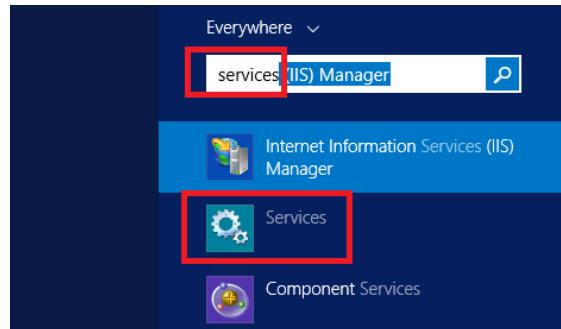


Figure 5.31: Search For Service Manager

When the tool completes, **Press Finish**

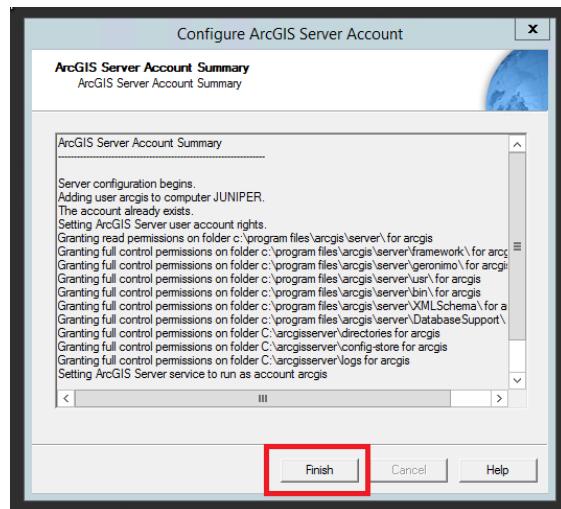


Figure 5.32: Finish On Configure

## Services Manager

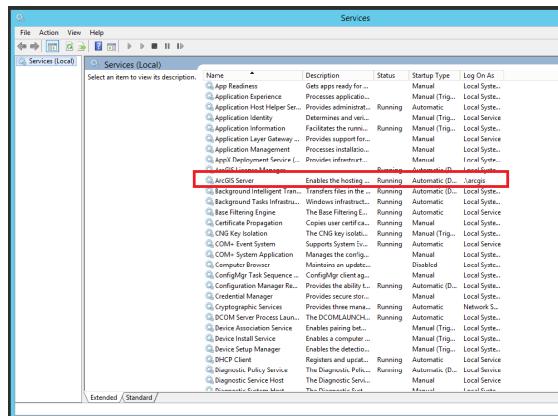


Figure 5.33: Open Services Manager

In services, select the ArcGIS Server service and restart the service. (Randy had to do this)

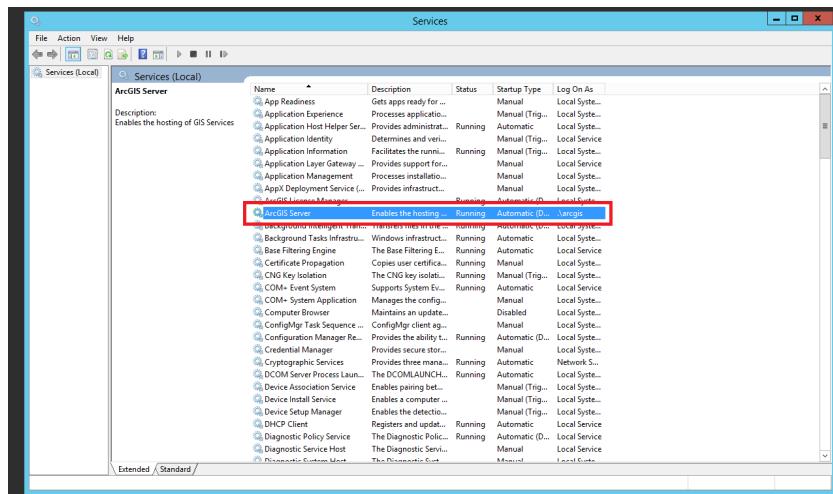


Figure 5.34: arcGis Service In Services Manager

## Quick and dirty fix

When a service get hung up in som admin process, you may get an error like:

### Error:

Service is currently being configured by another administrative operation

### Removing Lock Files

This may work, here is a blog about it

<https://community.esri.com/thread/103710> Network location for an example service

```
on juniper
C:\arcgisserver\config-store\services\ParcelViewer2\
PV2Adresses.MapServer\startup\JUNIPER.ALLEGANCOUNTY.ORG
```

Suggested Steps:

- 1) stop arcgis server services.
- 2) delete the lock files(\*.glock and \*.rlock )  
(in arcgisserver\config-store).
- 3) restart arcgis server service.
- 4) stop the pending stopping service and then start it.

mapservices would not stop so I try this:

<https://support.esri.com/en/technical-article/000012685>

Check permission levels for the arcGIS account ArcGisServerPermissions.PNG

If necessary, add the arcgis user to the permissions on the folders ArcGisServer-PermissionsAddUser.PNG

---

## MANAGING GEODATABASE REPLICAS

### ADDING A NEW FEATURE CLASS TO A REPLICA

Source: <https://support.esri.com/en/technical-article/000010345>

#### Summary

Currently, there is no out-of-the-box tool to add a feature class to an existing replica. With ArcGIS Desktop, one must either recreate the replica or if the workflow allows, replicate the new feature class as a separate replica.

#### Steps:

The steps below outline how to recreate the replica using the Register Existing Data option in Desktop. These steps can be applied to both one-way and two-way replicas.

- Synchronize the changes between parent and child replica geodatabases using the existing replica so that the data is identical in each database, then Unregister the replica in both geodatabases. For two-way replicas, ensure that changes are synchronized in both directions and there are no outstanding edits before unregistering the replica.
- Create or import the new feature class into the parent geodatabase, and add the GlobalID.
- Register the newly added data as versioned.
- Copy and paste the new feature class to the child geodatabase using ArcCatalog.
- Note: that the GlobalIDs must have already been added to the feature class.
- For two-way replica or one-way full model, register the newly added data in child geodatabase as versioned.
- Using the parent geodatabase, add all the data that is to be replicated to a map in ArcMap.
- Click the 'Create Replica' tool on the Distributed Geodatabase toolbar.
- Select 'One way replica' or 'Two way replica' and click Next.
- Select 'Register existing data only'.
- Select the child geodatabase and specify a replica name.
- Click Next and click Finish.
- A new replica is created that includes the new data.

## MANAGING GEODATABASE VERSIONS

### VERSION QUERIES

#### SQL Queries

Four queries of SDEversions, SDEstates, sdestatelineages, and SDEcompresslog

```
use AC_Pub
select name, owner, version_id, state_id, parent_name
, parent_owner from
[AC_Pub].[dbo].[SDE_versions]
select * from [AC_Pub].[dbo].[SDE_states] order by state_id
select * from [AC_Pub].[dbo].[sde_state_lineages] order
by lineage_name,
lineage_id
select TOP(5) * from [AC_Pub].[dbo].[SDE_compress_log] order by
compress_end DESC
```

Query of SDEversions and SDEstates

```
use AC_Pub
SELECT v.version_id,v.creation_time,v.creation_time,
s.state_id, s.creation_time
FROM SDE_versions v
INNER JOIN SDE_states s ON v.state_id = s.state_id
```

## FINDING ORPHANED VERSIONS

### Remove orphaned versions

Follow the procedure: [Link to source](#)

Use SQL Server Management Studio to execute two queries and compare the results.

#### Step 1:

Execute the query:

```
use AC_Pub
SELECT ObjectID, name from dbo.GDB_ITEMS where
TYPE='4ED4A58E-621F-4043-95ED-850FBA45FCBC';
```

#### Step 2:

Execute the query:

```
use AC_Pub
SELECT name from [dbo].[SDE_versions]
order by name
```

Compare the tables

This graphic summarizes elements of the queries. Note the items from step two

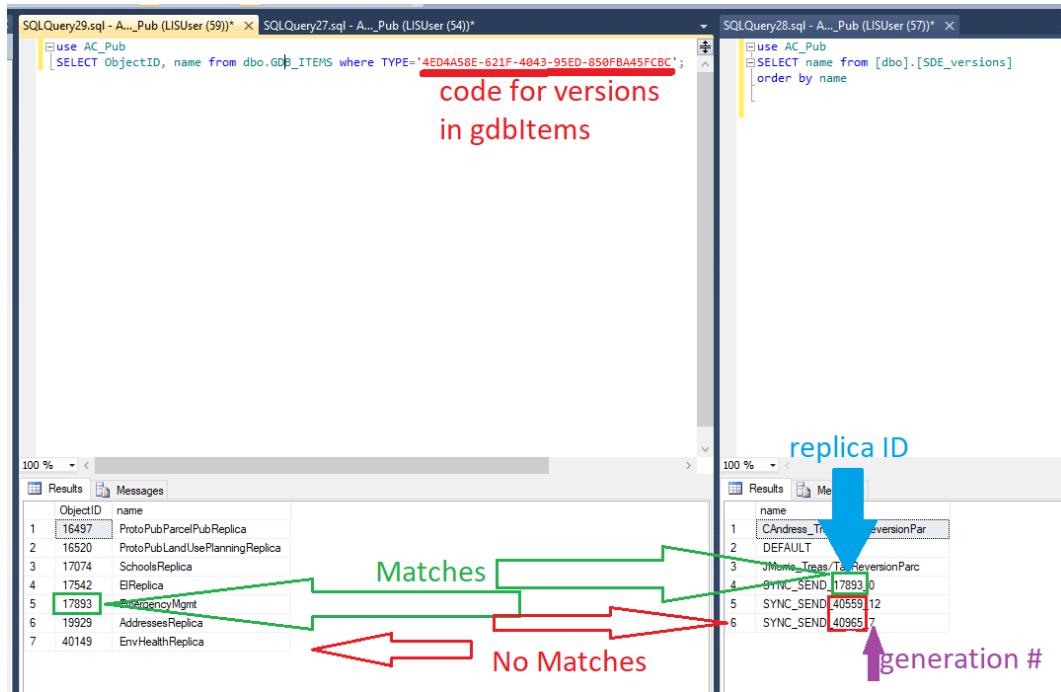


Figure 5.35: Find Orphan Versions

that have no match in step one.

Orphaned versions can be removed by name in ArcGIS

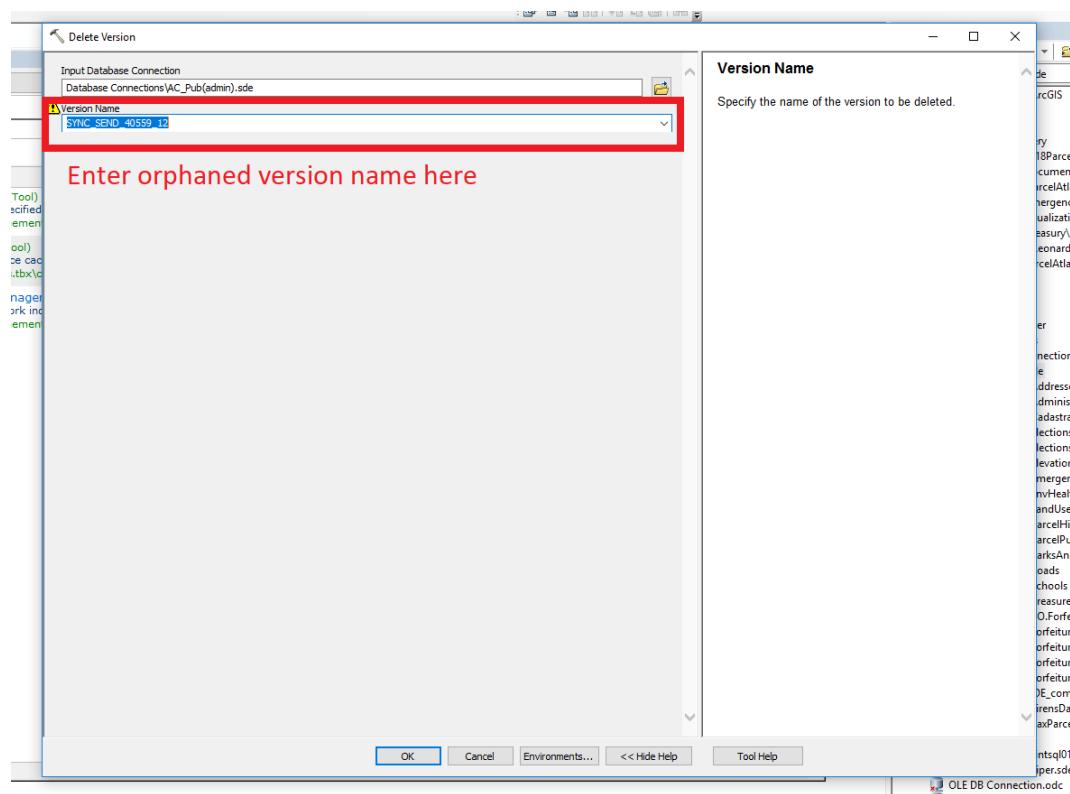


Figure 5.36: Delete Orphan Versions

## MXD MANAGEMENT

### FIND/REPLACE TEXT OBJECT

#### Python Code

Python Code for finding and replacing a text object in a ArcGIS .mxd file. A snippet of this code may be found in the LayerUpdates/Zoning/processing folder. It is used to edit the .mxd files located there.

```
import arcpy
from arcpy import env

env.workspace = r"J:\Apps\Python\LayerUpdates\zoning\processing"
for mxdname in arcpy.ListFiles("*.mxd"):
    print mxdname
    mxd = arcpy.mapping.MapDocument(r"J:\Apps\Python\
        LayerUpdates\zoning\processing\\\" + mxdname)
    for elm in arcpy.mapping.ListLayoutElements
        (mxd, "TEXT_ELEMENT"):
        if elm.text.startswith('As ammended'):
            elm.text = elm.text.replace('As ammended',
                'As amended')
            print elm.text
    mxd.save()
del mxd
```

## 5.6 L<sup>A</sup>T<sub>E</sub>X PACKAGES USED BY AC GIS

### COMMON ERRORS

Source:

<https://www.ocf.berkeley.edu/~latex/files/commonerrors.tex>

If you have every compiled a L<sup>A</sup>T<sub>E</sub>X document, chances are high you have received a few error messages. Sometimes they come from something as stupid and as easy to fix as forgetting a parenthesis or forgetting to end an environment. There are also a lot more cases where you have no idea what you have done wrong and it takes you a long time to find or even understand your error.

The purpose of this is to explain some of the common errors that may happen when compiling a L<sup>A</sup>T<sub>E</sub>X document and suggestions for what is probably going on and how to debug your document.

## THE FORM OF AN ERROR

There are two forms of errors: L<sup>A</sup>T<sub>E</sub>X errors and T<sub>E</sub>X errors. In both types of errors, the part after the error message will tell you where the error occurred. An example:

1.15 <offending text>

The 1.15 tells you what line the error occurred on and the text will tell you the text that caused the error.

## L<sup>A</sup>T<sub>E</sub>X ERRORS

The general form of an error in L<sup>A</sup>T<sub>E</sub>X is shown below:

! LaTeX error: <error message>

See the LaTeX manual or LaTeX Companion for explanation.

Type H <return> for immediate help.

...

The ! lets you know that the error has occurred. The error message will tell you what type of error you have committed. After the ellipses, you will find the line at which the error occurred and the text that caused the error (or at least the text where L<sup>A</sup>T<sub>E</sub>X found the error).

# TEX ERRORS

Errors may also have the following form:

```
! <error message>
```

These errors are formatted differently because they are error messages that came from TeX instead of L<sup>A</sup>T<sub>E</sub>X. After the error, you will still find the line that the error occurred in and the text of the error.

# WARNINGS

There are some error messages that are just warnings and will not stop or change the compilation of the document. Chances are you have seen them many times.

## UNDERFULL

The following error results when a line does not extend the width of the page, something L<sup>A</sup>T<sub>E</sub>X always tries to accomplish:

```
Underfull \hbox (badness 10000) in paragraph at lines
104--107
```

This error message is just a warning and is not something to worry about. For the most part, when a line does not span the width of the page, it is because you have written something that you want to only cover part of the page.

## OVERFULL

The following error results when a line extends beyond the width of the page:

```
Overfull \hbox (16.04988pt too wide) in paragraph at
lines 30--31 [] [] \OT1/cmtt/m/n/12 I'm trying to put
way too much text into a line in my document.
```

Usually this error comes from when you are using the `verbatim` package because it will not move to the next line if your text does not go to the next line. The easiest way to fix this is to find the place in your document where this is occurring and change the text so that it fits to the page.

This error will still show up if the text is still on the page but outside of the width of text that L<sup>A</sup>T<sub>E</sub>X has set. In this case, you are welcome to fix things so that the error does not show up or you can leave the text as it is.

---

## REFERENCES

The following warnings occur when references are changed when L<sup>A</sup>T<sub>E</sub>X was compiled:

```
LaTeX Warning: Label(s) may have changed. Rerun to get  
cross-references right.
```

```
LaTeX Warning: There were undefined references.
```

```
LaTeX Warning: Reference 'name' on page 1 undefined on  
input line 15.
```

The way to fix these errors is to recompile the document again to correct the page numbers. Sometimes it is necessary to recompile the document twice to fix this error. You also may have defined a reference wrong, so you should check to make sure your label is correct.

## BEGINNING AND ENDING BEGIN ENDED BY END

This type of error occurs when each environment is not correctly started and ended. When you are missing an `\end` command, the following error will show up:

```
! LaTeX Error: \begin{enumerate} on input line 23  
ended by \end{document}.
```

To fix this, you need to end the environment mentioned in the error with the appropriate command.

When you are missing a `\begin` command, the following will appear:

```
! LaTeX Error: \begin{document} ended by  
\end{itemize}.
```

To fix this, you basically do the same thing as before, correctly beginning the environment mentioned in the error with the appropriate command.

## END OCCURRED INSIDE A GROUP

The following error message will show up at the end of compiling a file if an environment is begun that is not ended:

---

(\end occurred inside a group at level <n>)

To fix this error, make sure you end the environment that was begun. The previous error is more helpful in finding the \begin statement.

## ENDED BY END OF LINE

The following error will occur when you try to place a command inside a section heading:

```
! LaTeX Error: \verb ended by end of line.
```

See the LaTeX manual or LaTeX Companion for explanation.

Type H <return> for immediate help.

...

There will be many errors of the same type for this mistake. In order to find where you put the command, look in the output file and find the last heading that shows up.

## MISSING BEGIN DOCUMENT

This error is self-explanatory:

```
! LaTeX Error: Missing \begin{document}
```

## ERRORS USUALLY CAUSED BY BAD SPELLING

## UNKNOWN CONTROL SEQUENCE

This error results when you use a command (something that starts with a \) that is not recognized by L<sup>A</sup>T<sub>E</sub>X:

```
! Undefined control sequence.
```

Usually this error results from spelling a command incorrectly. Go to the line that is indicated by the error and fix the command.

---

## ENVIRONMENT UNDEFINED

This error results when you begin an environment with a `\begin` command that is not recognized:

```
! LaTeX Error: Environment verbatim undefined.
```

Usually you have just spelled your environment incorrectly, so you just need to fix it.

## BAD FILE NAME

This error results when you have mistyped the command `latex` or do not have L<sup>A</sup>T<sub>E</sub>X installed on your computer:

```
Bad command or file name
```

To fix this, correctly spell the command to compile your file or make sure that L<sup>A</sup>T<sub>E</sub>X is correctly installed on your computer.

## CANNOT FIND FILE NAME

This error occurs when you try to compile a file that the computer cannot find:

```
! I can't find file 'sample'.
<*> sample
```

Please type another input file name:

To fix this error, make sure you have spelled the file name correctly. You also may be in the wrong directory to compile the file, so check to make sure you are in the same directory as your file.

## FATAL ERRORS

### RUNAWAY ARGUMENT

This error happens when a paragraph ends before a command's argument is done (i.e., L<sup>A</sup>T<sub>E</sub>X thinks that there is a missing `}`):

```
Runaway argument?
```

---

To fix this, you should use a different command to accomplish what you are trying to do. An example of this is to use `\bfseries` instead of `\bfseries` to make bold text in more than one paragraph.

This error can also be caused by a missing mandatory argument to a command.

## JUST AN \*

This error normally occurs when you do not end your document with `\end{document}`:

\*

If you are prompted to enter something in, it is best to enter `\end{document}` and hope it works. Be sure to end your document with the appropriate command.

## EMERGENCY STOP

This error happens when L<sup>A</sup>T<sub>E</sub>X will stop trying to compile your document due to a serious error:

`! Emergency stop.`

To fix this error, you will need to figure out what caused it to stop compiling. Chances are you forgot to end your document with `\end{document}`, but there might also be another reason for the emergency stop.

## PLEASE TYPE A COMMAND OR SAY END

This error happens when your file has ended prematurely:

(Please type a command or say '`\end`')

The best way to deal with this type of error is to type

`\end`

or

---

---

```
\end{document}
```

in the case that the absence of that command caused the error. Usually if you have ended your document correctly, the error will result from a missing } or forgetting to end a verbatim environment.

## GRAPHICS ERRORS

### TOO MANY UNPROCESSED FLOATS

This error occurs when figures or tables (i.e., floats) have not been typeset:

```
! LaTeX Error: Too many unprocessed floats.
```

LATEX can only have so many floats waiting to be typeset. In order to fix this error, make sure that you are placing your floats where you want them (with a [h] option) and not wanting too many on one page in sequence. Using the command `\clearpage` can be very useful in distributing floats correctly.

## UNKNOWN GRAPHICS EXTENSION

The following error occurs when you try to use a type of graphic that is not supported by the type of file that you are producing:

```
! LaTeX Error: Unknown graphics extension: .gif
```

In order to fix this error, you should change your graphics to the types that are supported by the type of file you are outputting or you will need to include the correct package to deal with that type of graphic. Sometimes you may have named the graphic poorly so that LATEX will not recognize it as a graphic file.

## DIVISION BY ZERO

The following error occurs when the height of a graphic object is zero:

```
! Package graphics Error: Division by 0.
```

This is usually caused when you rotate an object with zero depth so that its height becomes zero. The best way to fix this is to use the keyword `totalheight` instead of `height`.

---

## MATH ERRORS

### DISPLAY MATH SHOULD END WITH \$\$

This error occurs when the displaymath or equation mode is ended incorrectly:

```
! Display math should end with $$
```

To fix this error, make sure that you end the displaymath or equation mode correctly (ending them with a \$ is not acceptable).

## BAD MATH ENVIRONMENT DELIMITER

This error occurs when you do not have your delimiters correct in math mode:

```
! LaTeX Error: Bad math environment delimiter.
```

Usually this occurs when you forget to match a right delimiter with every left delimiter. This error may also happen when you forget to end an array.

## MISSING RIGHT

This error occurs when you have a missing right parenthesis:

```
! Extra \right.
```

To fix this, you either need to add a \right command or you need to end an array.

## MISSING DELIMITER

This error message occurs when a delimiter is missing:

```
! Missing delimiter (. inserted).
```

To fix this error, you need to make sure that you have a right delimiter for every left delimiter. If you do not want a right delimiter matching a left delimiter, you need to use “.” to not have an error message show up.

---

## MISSING \$ INSERTED

The following error occurs when you try to use a character that can only be used in math mode, like  $_$  or  $^$ :

```
! Missing $ inserted
```

To fix this error, make sure you change the character to what it should be in text mode.

## TABULAR ENVIRONMENT ERRORS

### MISPLACED ALIGNMENT TAB CHARACTER &

This error occurs when you use  $\&$  and when you are not in a tabular environment:

```
Misplaced alignment tab character &
```

To fix this error, you need to use  $\backslash\&$  to make a  $\&$ .

### EXTRA ALIGNMENT TAB

This error occurs when you use too many tabs for the number of columns in a table:

```
! Extra alignment tab has been changed to \cr
```

The result of this error is that a new row is formed where the extra tab was. You should go back and fix your table so that the correct number of items in each row would show up.

### ARGUMENT HAS AN EXTRA }

These errors happen when an incorrect number of arguments to a tabular environment have been specified:

```
! Argument of \cline has an extra }.
```

```
! Argument of \multicolumn has an extra }.
```

To fix this error, make sure your arguments to the tabular environment are correct.

## ERRORS WITH LISTS MISSING ITEM

This error occurs when there is plain text in an environment that takes items:

```
! LaTeX Error: Something's wrong--perhaps a missing
\item.
```

To fix this error, make sure the plain text is changed into an item.

## TOO DEEPLY NESTED

This error occurs when there are too many lists for  $\text{\LaTeX}$  to handle:

```
! LaTeX Error: Too deeply nested
```

$\text{\LaTeX}$  can only handle four levels of one type of list and six levels of different types of lists. To fix this, you need to use less levels of lists or define your own list environment.

## MISCELLANEOUS ERRORS ONLY USED IN THE PREAMBLE

This error occurs when you place a command in the body of a  $\text{\LaTeX}$  document that should be placed in the preamble:

```
! LaTeX Error: Can be used only in the preamble.
```

To fix this error, just move the command to the preamble.

---

## THERE IS NO LINE/PAGE HERE TO END

This error occurs when you incorrectly use the commands that make a new line or a new page:

```
! LaTeX Error: There's a no line here to end.
```

You may just leave the command that is making a new line in place or you can take it out. Here, L<sup>A</sup>T<sub>E</sub>X is just trying to make sure that everything looks nice.

## COMMAND ALREADY DEFINED

This error occurs when you try to define a command that already exists:

```
! LaTeX Error: Command ... already defined.
```

To fix this, you need to define your command differently.

## MISSING NUMBER

This error is made when a number is expected as an argument and one is not provided:

```
! Missing number, treated as zero.
```

To fix this error, you need to find where a number is expected so that you can provide the correct one.

## FLOAT PACKAGE

### USEPACKAGE

```
text
```

### SIMPLE USE

```
text
```

---

## OPTIONS

text

Add optional arguments to the usepackage line:

Useful options:

- **OPTION NAME**  
OPTION NOTE
- **OPTION NAME**  
OPTION NOTE

## USE WITH OPTIONS

text

## COMMANDS

### GRAPHICS EXAMPLES AND NOTES

## CURLYFRAME EXAMPLE

```
\documentclass[landscape]{article}
\usepackage{wallpaper}
\usepackage{niceframe}
\usepackage{xcolor}
\usepackage{ulem}
\usepackage{graphicx}
\usepackage{geometry}
\geometry{tmargin=.75cm,bmargin=.25cm,lmargin=.8cm,rmargin=.2cm}
\usepackage{multicol}

\begin{document}

\curlyframe[.9\columnwidth]{

TEXTTTTTTTTTTTTTTTTTT

}

\end{document}
```

---

## RECTFRAME EXAMPLE

```
\documentclass[landscape]{article}
\usepackage{wallpaper}
\usepackage{niceframe}
\usepackage{xcolor}
\usepackage{ulem}
\usepackage{graphicx}
\usepackage{geometry}
\geometry{tmargin=.75cm,bmargin=.25cm,lmargin=.8cm,rmargin=.2cm}
\usepackage{multicol}

\begin{document}
\begin{minipage}{.33\textwidth}
\centering
\scalebox{3}{\color{green!30!black!60}
\font\border=umrandb
\generalframe
{\border \char113} % up left
{\border \char109} % up
{\border \char112} % up right
{\border \char108} % left
{\border \char110} % right
{\border \char114} % lower left
{\border \char111} % bottom
{\border \char115} % lower right
\centering
\includegraphics[height=1.25cm]{GIS_Logo_better.jpg}}
\end{minipage}
%\vspace{-8mm}

\end{document}
```

## GRAPHICX PACKAGE

### USEPACKAGE

text

### SIMPLE USE

text

## OPTIONS

`text`

Add optional arguments to the `\usepackage` line:

Useful options:

- **OPTION NAME**  
OPTION NOTE
- **OPTION NAME**  
OPTION NOTE

## USE WITH OPTIONS

`text`

## COMMANDS

### HYPERREF PACKAGE

#### INTRODUCTION

Official *hyperref* package documentation

Notes:

- Add the *hyperref* package to the preamble **last** [2]
- To use Tex in a pdf bookmark: use

`\texorpdfstring{\\"}{}{}`

ie. `\paragraph{Sample Text}\texorpdfstring{\\"}{}{}`

Creates a new line without an error.

`\usepackage[options]{hyperref}`

## SIMPLE USE

Use `\href{URL}{DESCRIPTION}` to add a link with description

`\href{https://www.latex-tutorial.com}{Website with tutorials}`  
produces:

---

Website with tutorials

## OPTIONS

Add optional arguments to the usepackage line:

Useful options:

- **pdftex**

enables other options like breaklines

- **breaklinks**

allow links to be broken across several lines

eg. <https://lists.gnu.org/archive/html/emacs-orgmode/2013-06/msg00776.html>

- **colorlinks**

Colors the text of links and anchors.(default is false)

- **linkcolor**

Color for normal internal links(default is red).

- **anchorcolor**

Color for anchor text.

- **citecolor**

Color for bibliographic citations in text.

- **urlcolor**

Color for linked URLs

## USE WITH OPTIONS

```
\usepackage[breaklinks,colorlinks,citecolor=blue,
urlcolor=green]{hyperref}
```

## COMMANDS

`\href{URL}{text}` | Makes text a link to URL.

To put a file path in text:

eg:

[Official hyperref package documentation](#)

(documentation Pt.4 pg.15)

\href [options]{URL}{text}

Options:

➢ absolute

```
\href{C:/AC/jalapeno/documentation/packageDocs/hyperref2017.pdf}
    {Official hyperref doc}
```

➢ relative **Note: relative path must be from final pdf location**

```
\href{../../../../documentation/packageDocs/hyperref2017.pdf}
    {Official hyperref package doc}
```

This path works from main document

```
\href{../../../../documentation/packageDocs/hyperref2017.pdf}
    {Official hyperref package documentation}
```

This path works from subsection document

\hyperref [label]{text}

Makes text a link to where \ref{label} would point.

\hypertarget{name}{text}

Sets an anchor on text with the label name.

\hyperlink{name}{text}

Makes text a link that takes you to the anchor labeled name.  
Pair with \hypertarget.

\phantomsection

Used in conjunction with

\addcontentsline

to make the correct link in the Table of Contents.

## IMPORT PACKAGE

### USEPACKAGE

text

### SIMPLE USE

text

---

## OPTIONS

text

Add optional arguments to the usepackage line:

Useful options:

➢ **OPTION NAME**

OPTION NOTE

➢ **OPTION NAME**

OPTION NOTE

## USE WITH OPTIONS

text

## COMMANDS

### WRAPFIG PACKAGE

#### USEPACKAGE

text

#### SIMPLE USE

text

## OPTIONS

text

Add optional arguments to the usepackage line:

Useful options:

➢ **OPTION NAME**

OPTION NOTE

➢ **OPTION NAME**

OPTION NOTE

---

## USE WITH OPTIONS

text

## COMMANDS

## 5.7 LATEX TEMPLATES

### LATEX SECTION TEMPLATE

jjjj

### SUBSECTION TITLE

## PROBLEM AND ANALYSIS

### Background

The current Tax Forfeiture workflow is built on MapInfo software and MS Access and executed on a laptop pc. Both MapInfo and MS Access are no longer supported in county workflows. ESRI software can be used to rebuild the workflow. *Forfeiture Data Collector Application*, (**Forfeiture App**) must be recreated in the ESRI framework.

### Statement of Problem

The current Tax Forfeiture workflow is built on MapInfo software and MS Access and executed on a laptop pc. Both MapInfo and MS Access are no longer supported in county workflows. ESRI software can be used to rebuild the workflow. *Forfeiture Data Collector Application*, (**Forfeiture App**) must be recreated in the ESRI framework.

### Analysis

**Forfeiture App** will facilitate: *Mobile data collection on a handheld device*,: (**Mobile Interface**) and an *in office workflow to complete data processing*, (**Pre and PostProcessing**)

### Mobile Interface

- Synchronize with data in the office (online)
- Collect data and photos of forfeiture sites (offline)
- Synchronize the collected data with data in the office (online)

### Pre & Post Processing

- Produce and print a form for each site visited with required data and images

# DESIGN OVERVIEW

Forfeiture Parcels is used through the workflow

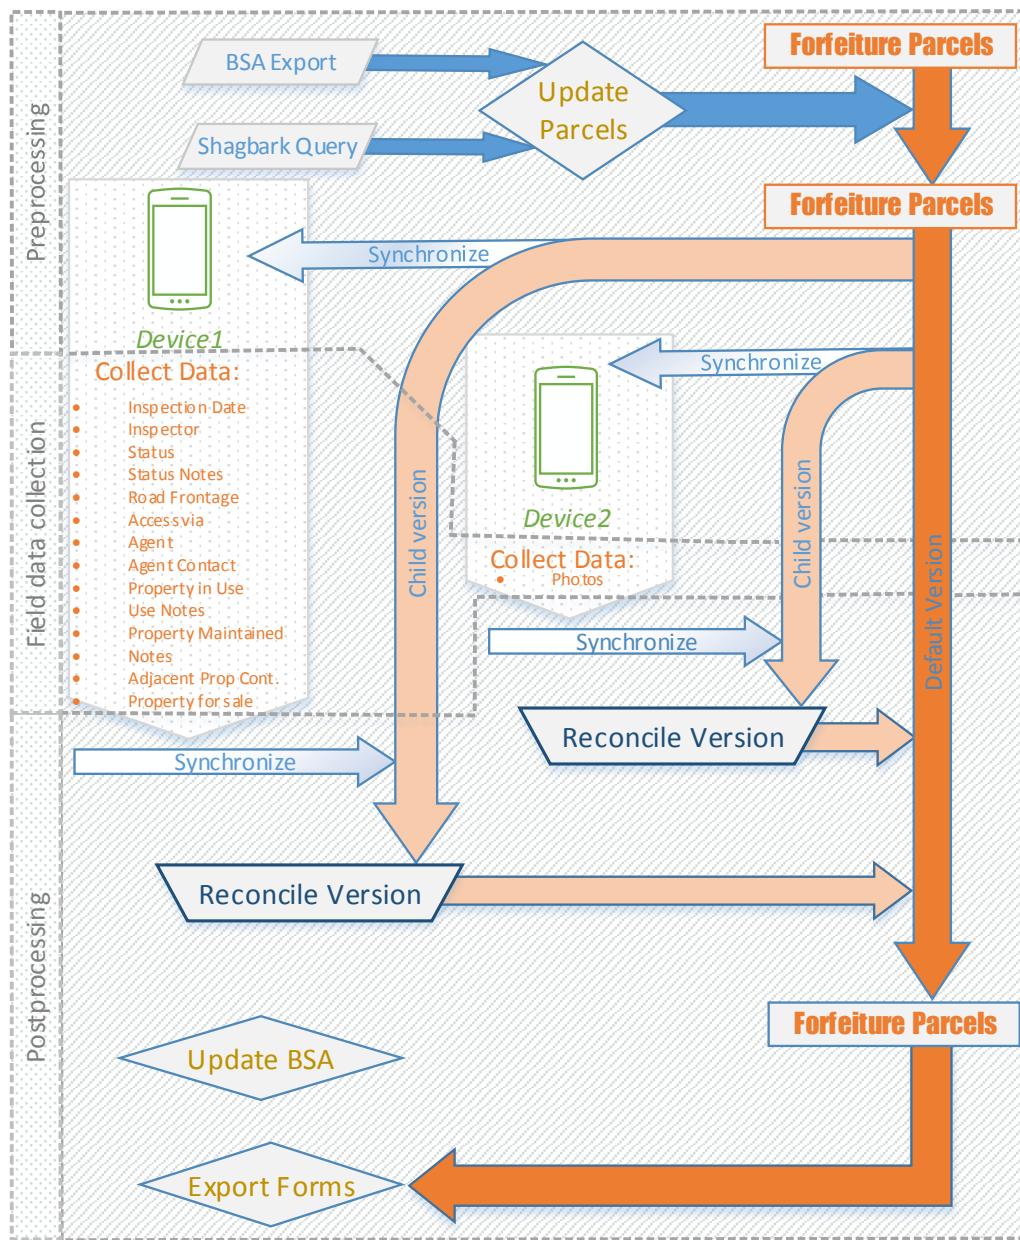


Figure 5.37: Design

## Summary

TEXT:

1. Preprocessing (in the office):

- v
- x
- y
- z

2. TEXT TEXT:

- A
- B
- C
- D

3. Post-processing (in the office)

- A
- B
- Print form for each site
- C

## Technologies Used in The Forfeiture App

### BSA Data

Details of parcels in the forfeiture process are managed in BSA Delinquent Tax.net. The Treasurer office does a BSA export of the parcels in need of a site visit in the pre-processing.

### ArcGIS Desktop

Tools are designed to preprocess and post-process forfeiture parcel data for fieldwork. The user will execute a preprocess script tool that prepares the data for field deployment. After fieldwork, a post process script tool syncronizes data from the fieldwork with the live data on the Allegan County network.

### ArcGIS Collector

A free mobile application developed and tested on Android is deployed to the field for data collection. The application is con-

figured to work offline (without an internet or cellular connection) by syncronizing before and after fieldwork. The user collects the necessary information on each forfeiture parcel in the field disconnected, and then uploads the changes when reconnected.

### Enterprise Geodatabase

Live data from a publishing geodatabase (ACPub), running on SQL Server database server (acintsql01) provides access to Forfeiture Parcels

### ArcGIS Portal

Forfeiture Parcels is served as a feature service (REST service) named TaxReversionParcels. A webmap on Portal, called the Forfeiture Field Map consumes the TaxReversionParcels exposing the data to editing. The Forfeiture Field Map is configured to work in the ArcGIS Collector App.

Figure 5.38: IMAGE NAME

---

## 5.8 PDF TOOLS USED BY AC GIS

### PDF OPTIMIZER

## PUPOSE AND SUMMARY

**Workflow Purpose:** Optimization of a large number of pdf docs.

**Workflow Summary:** Uses Python to create a list of .pdf docs in a folder and creates a batch file to optimize the pdfs in the list to another location. The batch process calls ghost script for the optimization.

## REQUIREMENTS

Opensource software:

- ghostscript
- python 2.7 and a Python IDE
- A text editor

paragraphPython(2.7)

### Note:

The output of this script is bdoc.txt, Save as a .bat to execute the optimize.

### Script that creates a batch file

```
import os, sys

project = os.path.dirname(os.path.dirname(__file__))
processing = os.path.join(project, 'processing')
#source = os.path.join(project, 'source')
build = os.path.join(project, 'build')
sourcepdf = os.path.join(build, '20180716')

inString1 = "gswin32 -sDEVICE=pdfwrite -dCompatibilityLevel=1.4
-dPDFSETTINGS=/ebook -dNOPAUSE -dQUIET -dBATCH
-sOutputFile=J:\\Projects\\2018ParcelAtlas\\build\\optimized\\"

inString2 = " J:\\Projects\\2018ParcelAtlas\\build\\20180716\\"

```

```
batchdoc = os.path.join(processing,"bDoc.txt")

# Main
#####
#####

if __name__ == "__main__":

    list1 = os.listdir(sourcepdf)
    l = open(batchdoc,'w')
    for i in list1:
        newi = i[1:]
        print newi
        t = inString1 + newi + inString2 + i + "\n"
        print t
        l.write(t)

    l.close()
```

## GHOSTSCRIPT

### About

ghostscript is used for the optimization. ghostscript is an interpreter for the PostScript language and for PDF [1].

### Licensing

ghostscript is available opensource under AGPL conditions. more information can be found [here](#).

### Download

ghostscript can be downloladed [here](#).

## WINDOWS BATCH FILES

A line from the batch file looks like:

---

```
gswin32 -sDEVICE=pdfwrite -dCompatibilityLevel=1.4  
-dPDFSETTINGS=/ebook -dNOPAUSE -dQUIET -dBATCH  
-sOutputFile=J:\Project\2018ParcelAtlas\build\optimized\  
02-001-001-00.pdf J:\Projects\2018ParcelAtlas\build\20180716  
\_02-001-001-00.pdf
```

## 5.9 QGIS TOOLS

### COGO TOOLS IN QGIS

# PROBLEM AND ANALYSIS

Transfers of real property typically involve a Metes and Bounds description:

**Commencing at Southeast corner of Section 1, Town 2 North, Range 11 West, Martin Township, Allegan County, Michigan; thence North 88 degrees 32 minutes 05 seconds West 1338.44 feet along the south line of said section to the point of beginning; thence North 01 degrees 27 minutes 55 seconds East 388 feet; thence South 88 degrees 32 minutes 05 seconds East 584 feet, more or less, to the centerline of the Gun River; thence southerly along said centerline to the south section line; thence West along said section line to the point of beginning.**

Figure 5.39: Description From Deed

## Background

*Coordinate Geometry* or COGO tools are GIS tools that assist the user in conversion of written descriptions of real property into digital map features. Users in several departments of the county use COGO tools in their regular workflow. In the past ACGIS provided COGO tools from the MapInfo Suite. ArcGIS provides COGO tools at the advanced license level.

## Statement of Problem

A tool is needed to convert between written descriptions of real property and digital map data. MapInfo is no longer supported within the county. Without purchasing an advanced license for ArcGIS some users need a COGO Tool.

## Analysis

QGIS is an open source software that provides a COGO toolset. QGIS works in shapefiles, a common GIS data type.

## General QGIS Setup

### Set Snapping Properties

To avoid errors in editing, Snap settings can be used.

Settings ⇒ Snapping Options

Enable snapping to:

- Sections
- Quarter Sections
- Parcels
- etc.

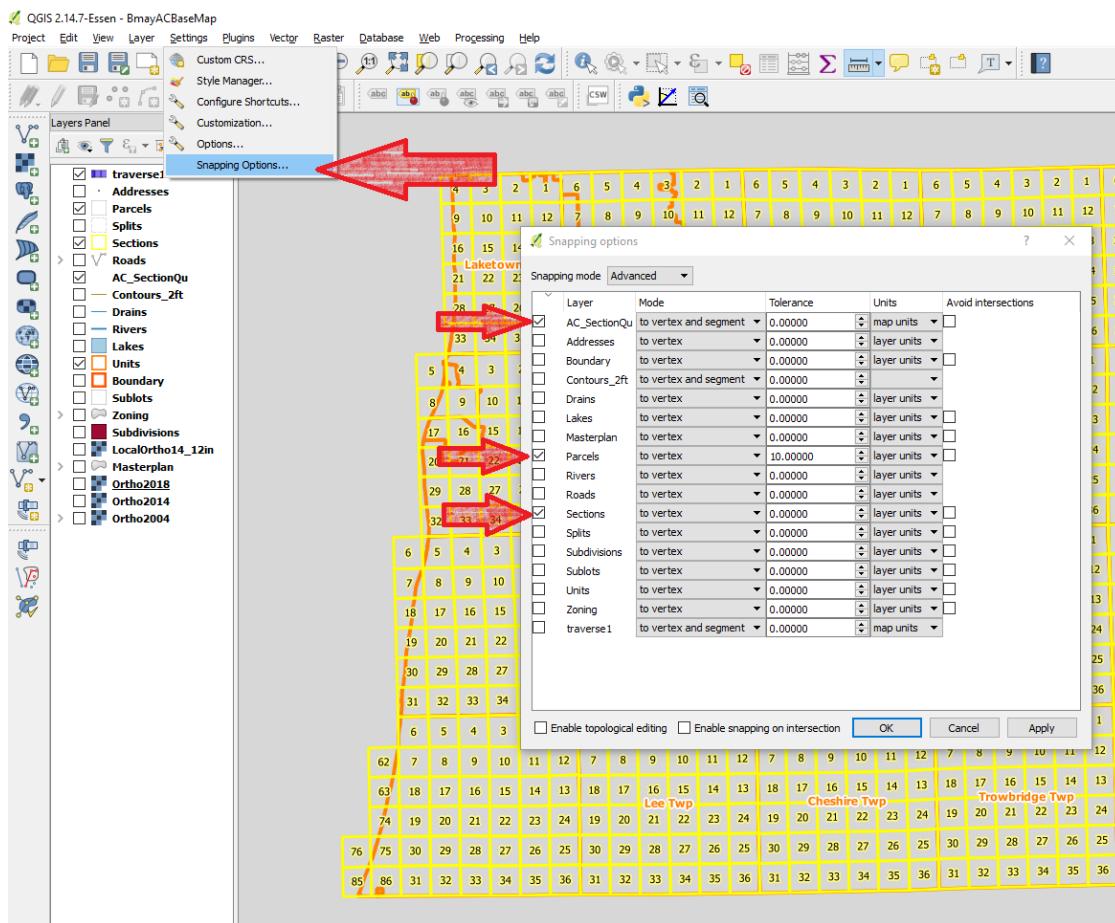


Figure 5.40: Configure Editing Environment

## Azimuth and Distance Plugin Setup

### Install Azimuth and Distance Plugin

Plugins (1) ⇒ Topography Group

Select the Azimuth and Distance Plugin (2)

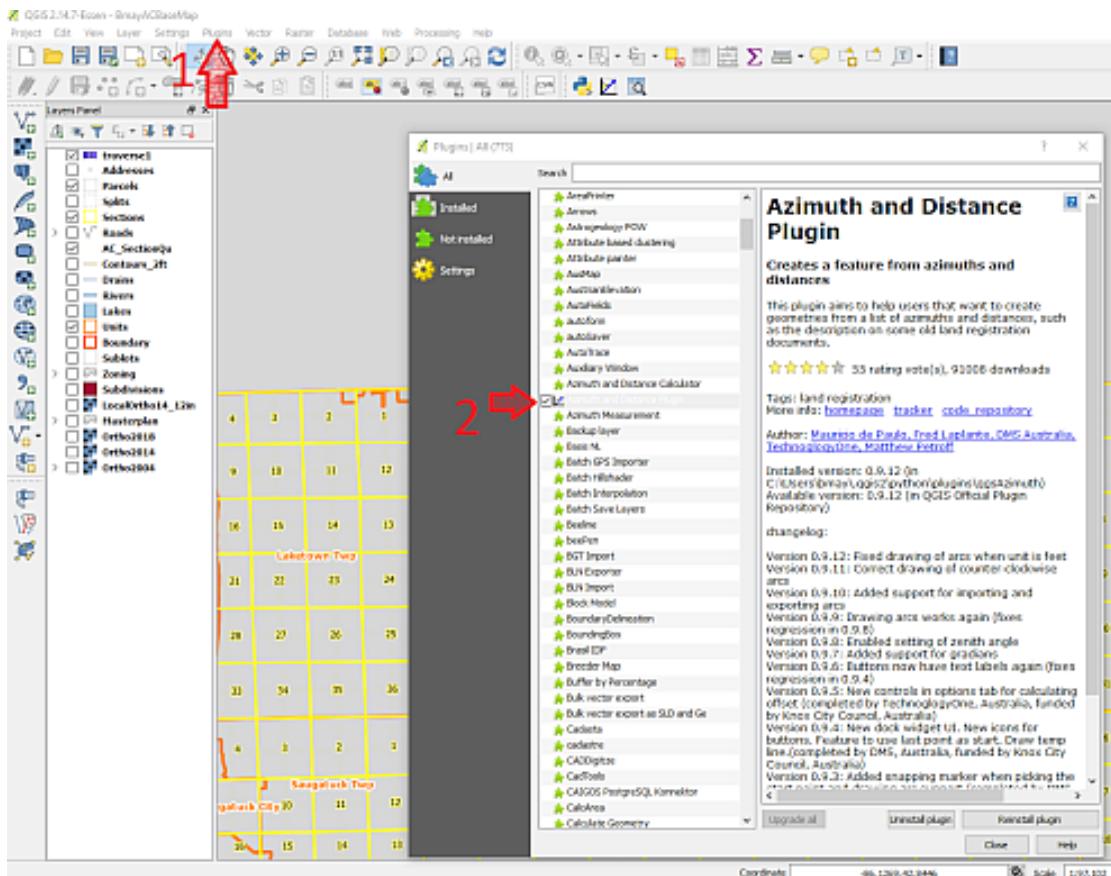


Figure 5.41: Launch Plugin

### Launch Azimuth and Distance Plugin



Figure 5.42: COGO Icon

## Note Active Layer in Plugin

This tool can be used to draw in a temporary layer or in an active map layer.

Select traverse1 as active layer in the tool.

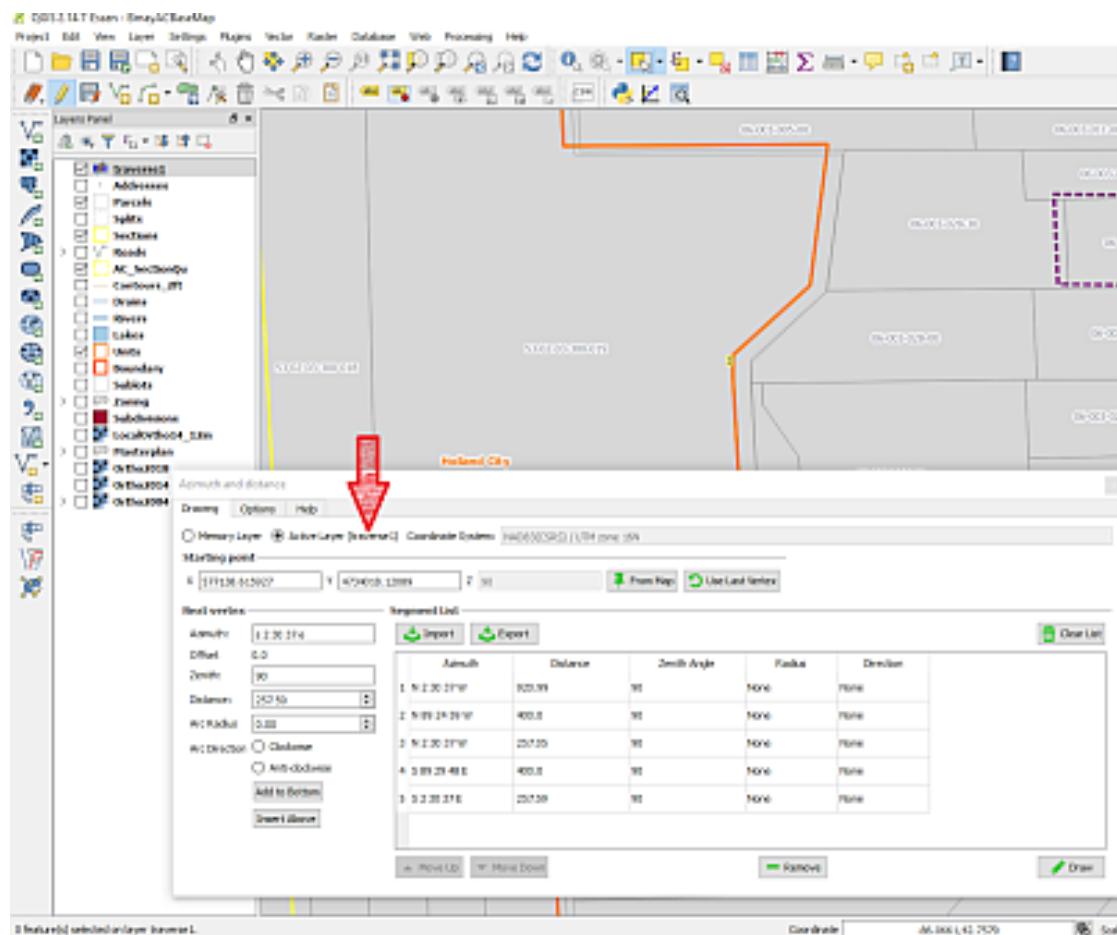


Figure 5.43: Check Active Layer

## Activate traverse layer in map

For a map layer to be editable, it must be activated in the Layers Panel.

(If necessary) left click the layer **traverse1** in Layer Panel to activate it.

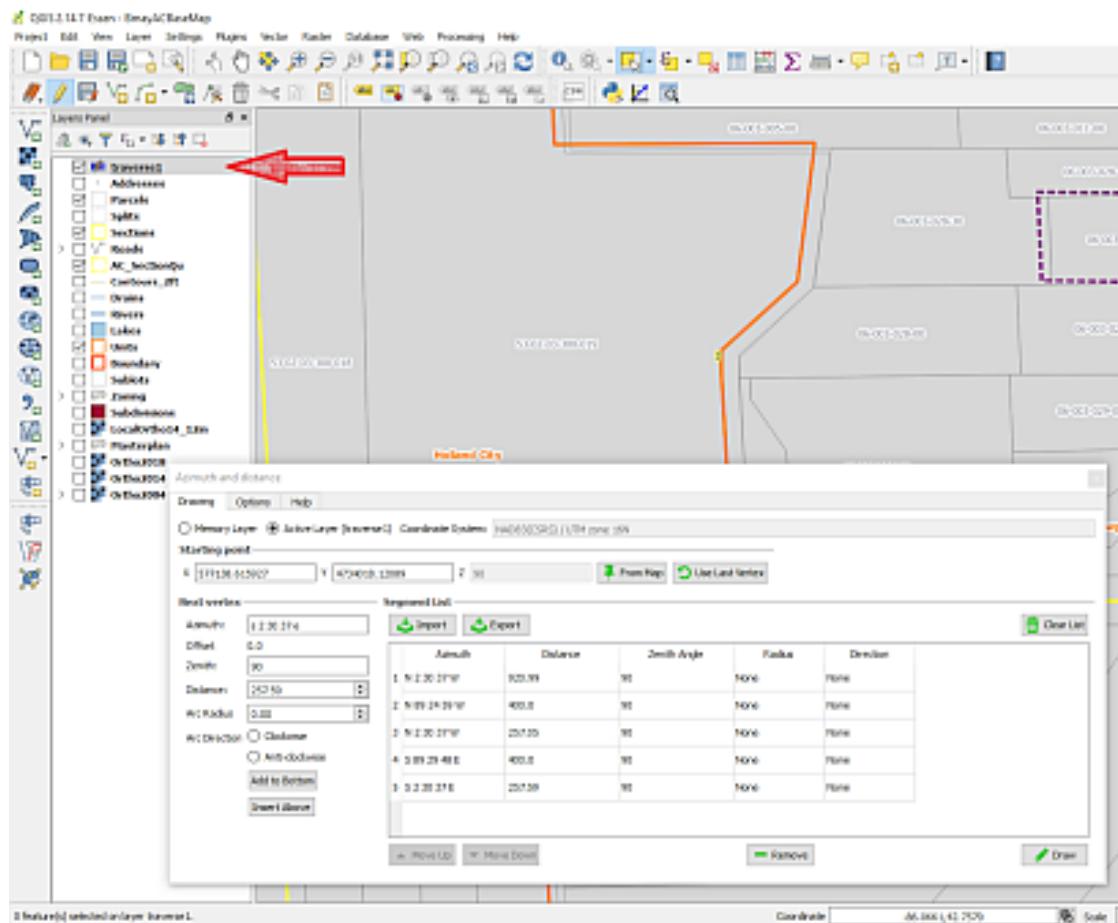


Figure 5.44: activate layer

## Configure Options in Plugin

On the **Options Tab**: Select these radio buttons;

- Boundary
- Bearing
- Feet
- Degree

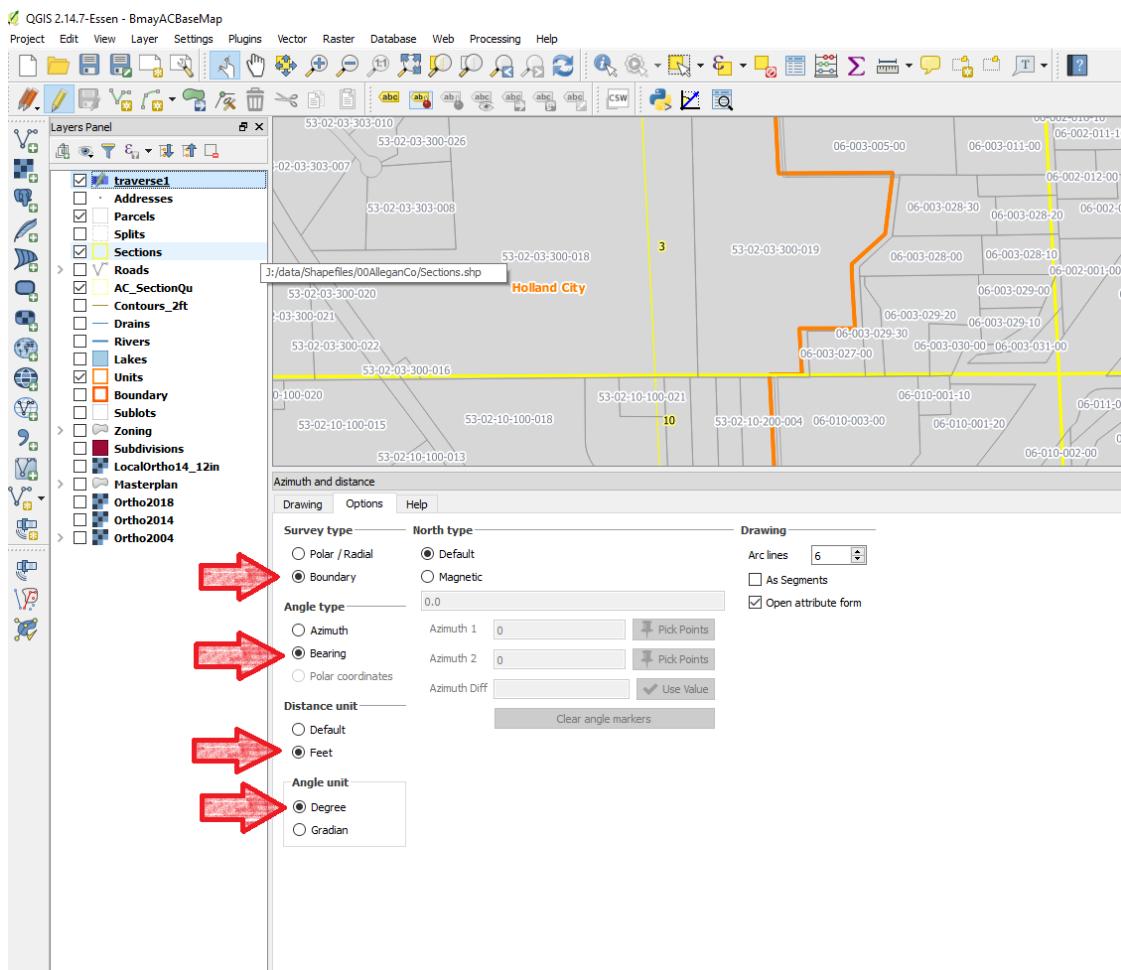


Figure 5.45: Plugin Options

## Using the AZ and D Plugin

On the Drawing Tab:

- Azimuth (bearing): Enter Bearing in format:  $N 23037W$
- Distance: Enter Distance
- Offset: Set to 0
- Zenith: Set to 90

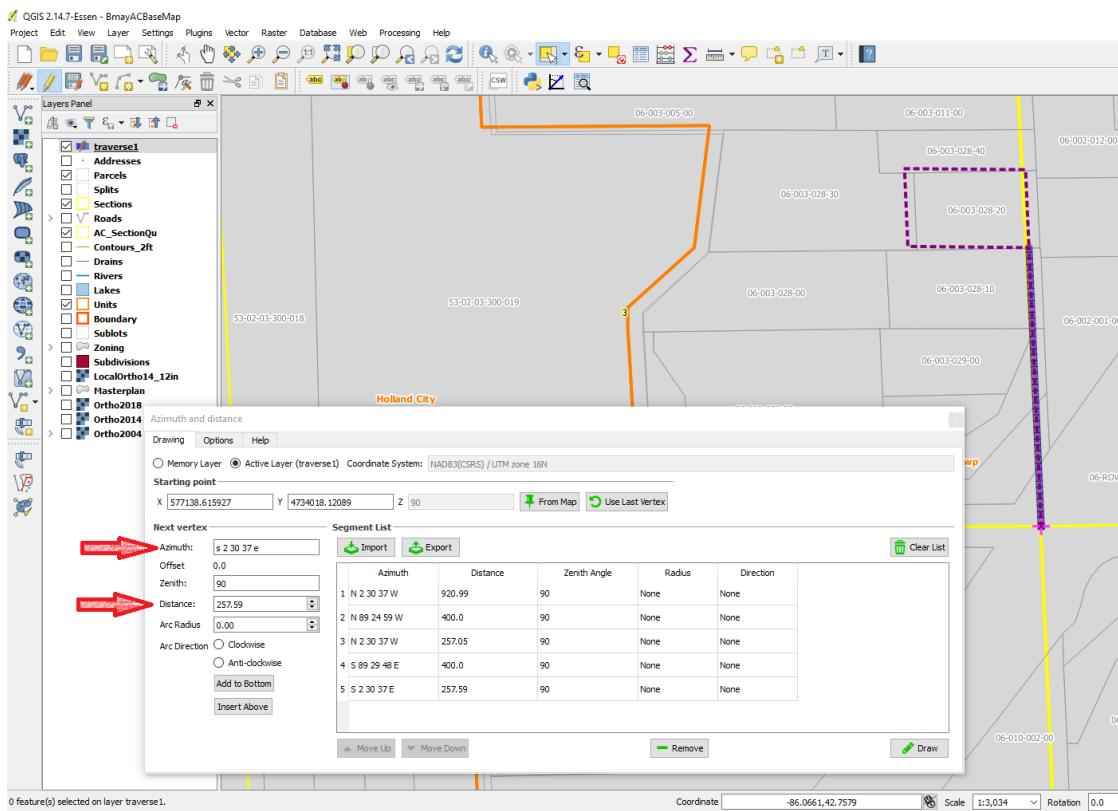


Figure 5.46: Entering Bounds

## Locate Point of Commencement

To get to the Point of Commencement,

Use **any combination** of the following methods:

- Using Reference Layers
- Using Measuring Tool
- Search by Parcel Number (Search Layers Plugin)
- Draw COGO lines (Azd Plugin)(as described earlier)

### Using Reference Layers

Use layers such as; Units, Quarter Sections, Sections, and Parcels. Toggle layers on and off in Layers Panel and zoom in and out with mouse wheel.

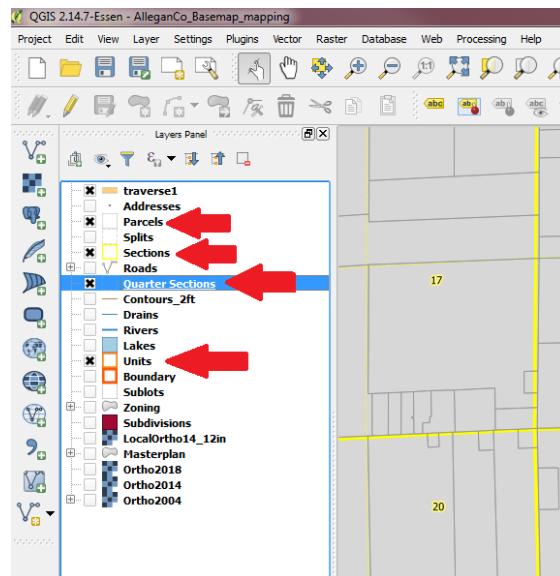


Figure 5.47: Select Reference Layers

## Using The Measuring Tool

Measuring can be used to estimate a point of beginning

- Use the Measure Line Tool
- Units must be in feet
- To exit current measurement, right click

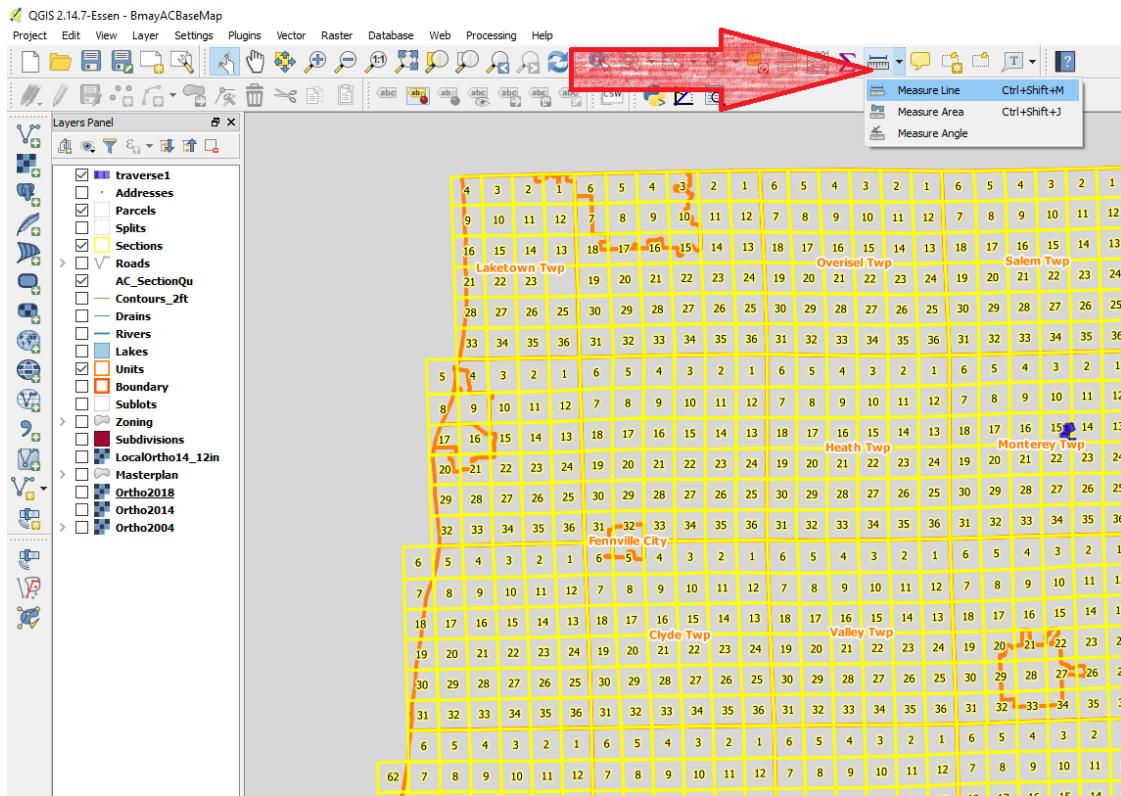


Figure 5.48: Measuring Tool

## Install Search Layers Plugin

To install: Plugins  $\Rightarrow$  Search Layers Plugin

- Install or open the **Search Layers** Plugin

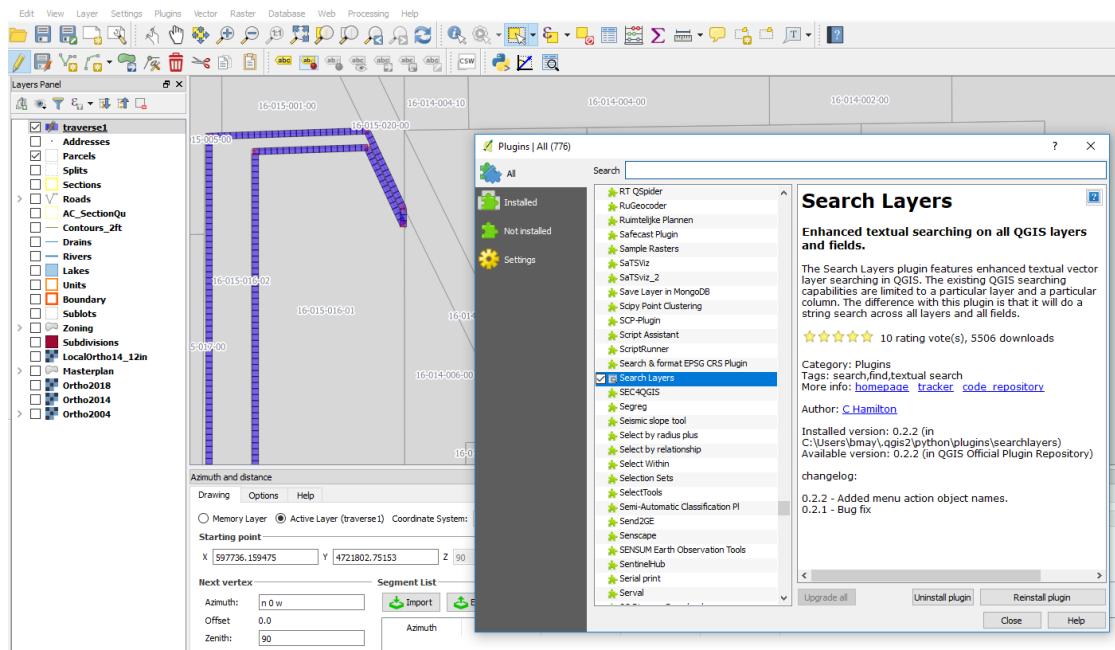


Figure 5.49: Search Layers Plugin

## Launch Search Layers Plugin



Figure 5.50: Search Layer Icon

## Enter Parcel Search Data

In The **Search Layers** Plugin:

- Enter **parcel number** (with dashes) into *Search String*
- Select **Parcels** in *Search Layers*
- Select **PARCELID** in *Search Fields*

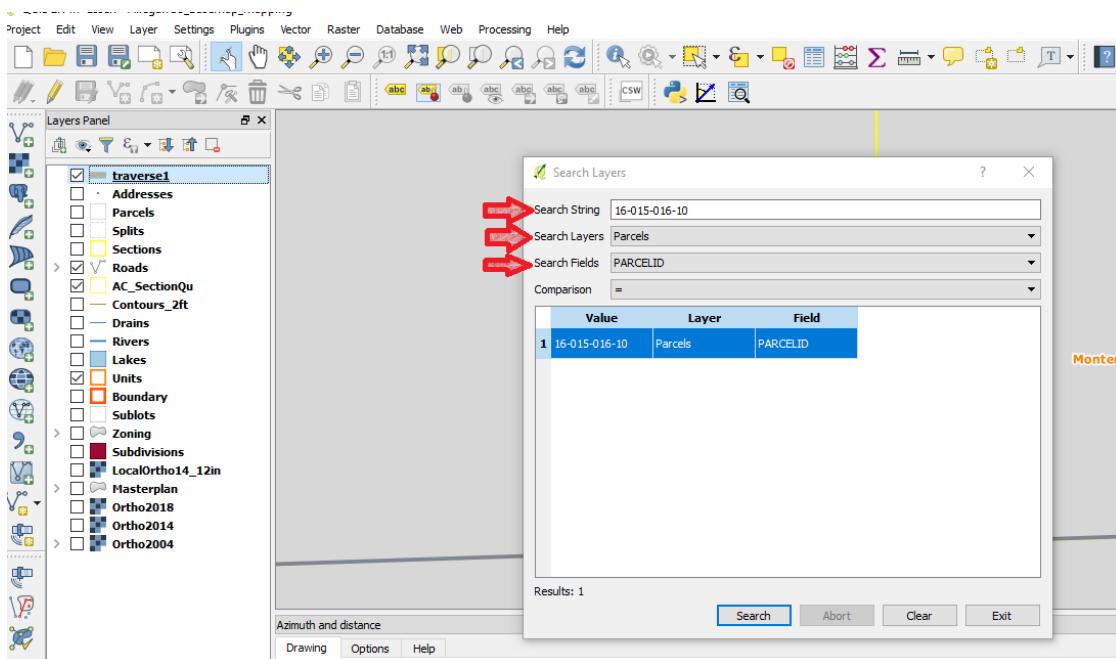


Figure 5.51: Search Layers Setup

- click on result in table

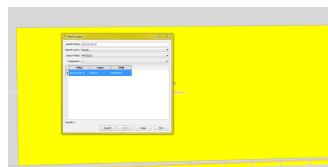


Figure 5.52: Search Results

## Zoom Out

Zoom out far enough to find a reference point.

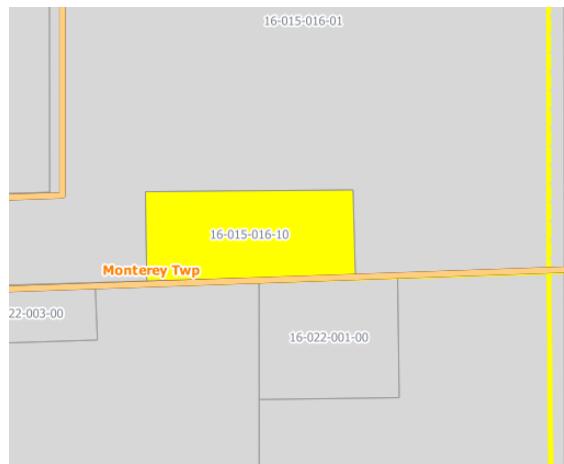


Figure 5.53: Search Results Zoomed Out



Part IV

## Resources



---

# Geography 101

---

## SURVEYS AND PLANS

### NORTHING AND EASTING

### HOW TO USE NORTHING AND EASTING

**Using a spreadsheet to convert the dimensions**

To use Northing and Easting from survey plans: In a spreadsheet, adjust the data to be relative to the 1st point

So if a survey gives you:

Pt	Northing	Easting
1	995.9952	9766.6
2	994.3049	9112
3	989.234	7150
4	1194.3099	9114
5	1193.266	8710.2059
6	1193.0954	8644.2016
...	...	...
32	1617.7856	8827.4296

Table 1: Survey Plan Northing and Easting

Calculate Relative North and Relative Easting of the points to Point 1 by subtracting the point 1 values from each of the other points.

Use formulas:

	A	B	C	D	E
1	Pt	Northing	Easting	Relative NS	Relative EW
2	1	995.9952	9766.6	0	0
3	2	994.3049	9112	=B3-B\$2	=C3-C\$2
4	3	989.234	7150	=B4-B\$2	=C4-C\$2
...	...	...	...	...	...
6	32	1617.7856	8827.4296	=B9-B\$2	=C9-C\$2

Table 2: Survey Plan Northing and Easting

Giving you:

	A	B	C	D	E
1	Pt	Northing	Easting	Relative NS	Relative EW
2	1	995.9952	9766.6	0	0
3	2	994.3049	9112	-1.6903	-654.6
4	3	989.234	7150	-6.7612	-2616.6
...	...	...	...	...	...
6	32	1617.7856	8827.4296	621.7904	-939.1704

Table 3: Relative Northing and Easting

So to place pt 32:

From pt 1:

Use distances 621.7904' N and 939.1704'W

## A PRIMER ON COORDINATE SYSTEMS COMMONLY USED IN MICHIGAN

[Document Link](#)

---

## ESRI Information

---

ESRI PRODUCT DOCUMENTATION



---

## References

---

- [1] Artiflex. [ghostscript.com](http://ghostscript.com), 2018. 142
- [2] na. *The hyperref Package*. CTAN, na edition, na na. 132



---

## Glossary

---

**IDE** Integrated Development Environment. 161

**map projection** Representing a sphere on a flat surface. 17, 161

**sample** an example. 161



---

## Index

---

coordinate systems, 160  
georef, 160  
map projections, 17  
Michigan, 160  
State Plane, 160